

## Description

The DIODES™ DML3006LFDS load switch provides a component and area-reducing solution for efficient power domain switching with inrush current limit via soft-start. In addition to integrated control functionality with ultra-low on-resistance, this device offers system safeguards and monitoring via fault protection and power good signaling. This cost effective solution is ideal for power management and hot-swap applications requiring low power consumption in a small footprint.

## Applications

- Portable electronics and systems
- Notebooks and tablet computers
- Telecom, networking, medical, and industrial equipment
- Set-top boxes, servers, and gateways
- Hot-swap devices and peripheral ports

## Mechanical Data

- Package: V-DFN2020-8
- Package Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish — NiPdAu over Copper Leadframe. Solderable per MIL-STD-202, Method 208 (e4)
- Weight: 0.011 grams (Approximate)

## Features and Benefits


- Advanced Controller with Charge Pump
- Integrated N-Channel MOSFET with Ultra-Low  $R_{ON}$
- Input Voltage Range: 0.5V to 13.5V
- Soft-Start via Controlled Slew Rate
- Power Good Signal
- Thermal Shutdown
- $V_{IN}$  Undervoltage Lockout
- Short-Circuit Protection
- Extremely Low Standby Current
- Load Bleed (Quick Discharge)
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/104/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please [contact us](mailto:contact@diodes.com) or your local Diodes representative.**

<https://www.diodes.com/quality/product-definitions/>


V-DFN2020-8 (Type F)



Top View

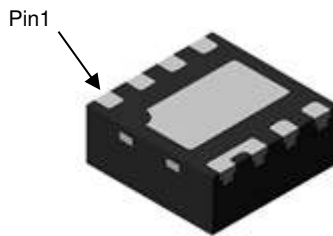

Bottom View

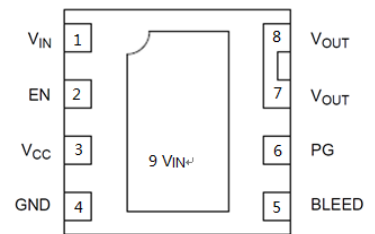

Top View

## Ordering Information (Note 4)


Part Number	Package	Packing	
		Qty.	Carrier
DML3006LFDS-7	V-DFN2020-8 (Type F)	3,000	Tape & Reel

- Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
  2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
  3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
  4. For packaging details, go to our website at <https://www.diodes.com/design/support/packaging/diodes-packaging/>.

## Marking Information

### Site 1


V-DFN2020-8 (Type F)



LS25P = Product Type Marking Code  
 YYWW = Date Code Marking  
 YY = Last Two Digits of Year (ex: 22 = 2022)  
 WW = Week Code (01 to 53)

### Site 2

V-DFN2020-8 (Type F)



LS25P = Product Type Marking Code  
 YWX = Date Code Marking  
 Y = Year (ex: 2 = 2022)  
 W = Week (ex: a = Week 27; z Represents Week 52 and 53)  
 X = Internal Code (ex: U = Monday)

### Date Code Key

Year	2017	....	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031
Code	7	....	2	3	4	5	6	7	8	9	0	1


  

Week	1-26	27-52	53
Code	A-Z	a-z	z

Internal Code	Sun	Mon	Tue	Wed	Thu	Fri	Sat
Code	T	U	V	W	X	Y	Z


## Typical Applications Circuit

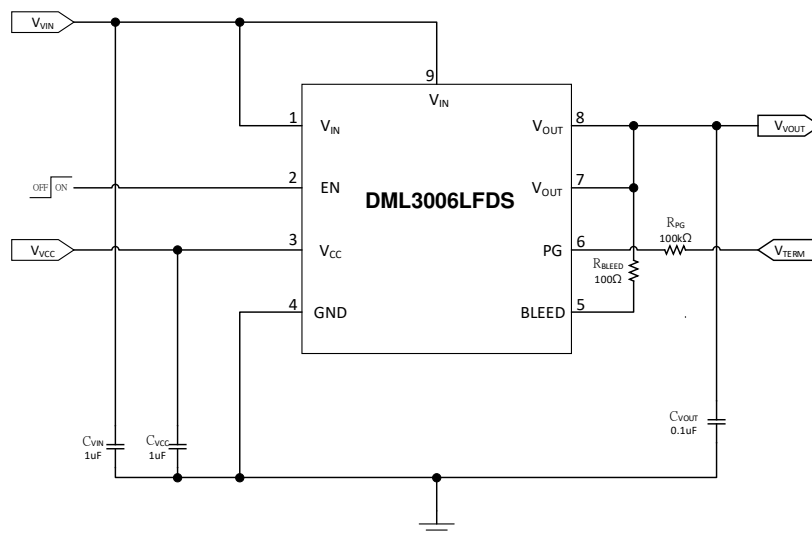

## Pin Description

Pin Number	Pin Name	Pin Function
1, 9	V <sub>IN</sub>	Drain of MOSFET (0.5V to 13.5V), Pin 1 must be connected to Pin 9.
2	EN	Active-high digital input used to turn on the MOSFET, pin has an internal pull down resistor to GND.
3	V <sub>CC</sub>	Supply voltage to controller (3.0V to 5.5V).
4	GND	Controller ground.
5	BLEED	Load bleed connection, must be tied to V <sub>OUT</sub> through a resistor $\leq 1k\Omega$ .
6	PG	Active-high, open-drain output that indicates when the gate of the MOSFET is fully charged, external pull up resistor $\geq 1k\Omega$ to an external voltage source required; tie to GND if not used.
7, 8	V <sub>OUT</sub>	Source of MOSFET connected to load.

## Function Block Diagram

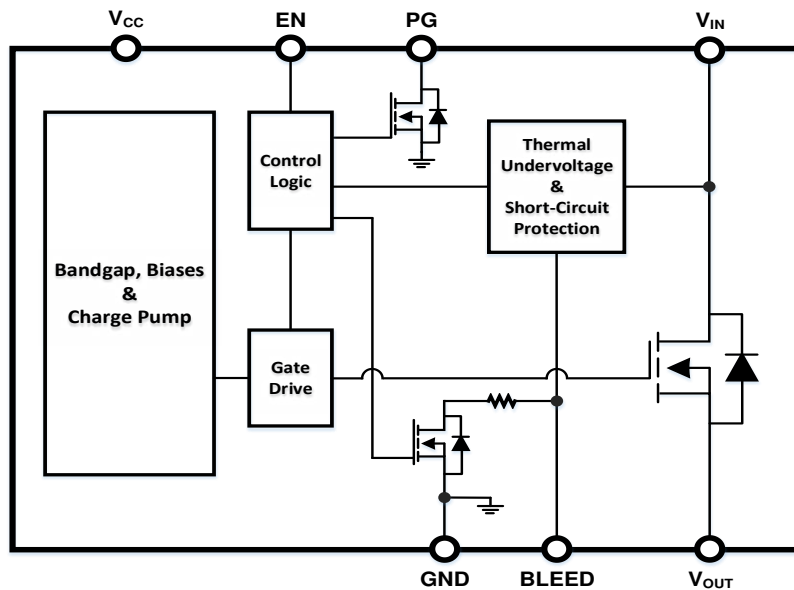

## Absolute Maximum Ratings

Parameter	Rating
V <sub>IN</sub> , BLEED, V <sub>OUT</sub> to GND	-0.3V to 18V
EN, V <sub>CC</sub> , PG to GND	-0.3V to 6V
I <sub>MAX_DC</sub> (Note 5)	11A
Junction Temperature (T <sub>J</sub> )	+150°C
Storage Temperature (T <sub>S</sub> )	-65°C to +150°C

Note: 5. I<sub>MAX\_DC</sub> is defined as the maximum steady state current the load switch can pass at room ambient temperature without entering thermal lockout.

## Recommended Operating Ranges


Parameter	Rating
Supply Voltage (V <sub>VCC</sub> )	3V to 5.5V
Input Voltage (V <sub>VIN</sub> )	0.5V to 13.5V
Ambient Temperature (T <sub>A</sub> )	-40°C to +85°C
Package Thermal Resistance ( $\theta_{JC}$ )	5.3°C/W
Package Thermal Resistance ( $\theta_{JA}$ )	40°C/W

**Electrical Characteristics** ( $T_A = +25^\circ\text{C}$ ,  $V_{VCC} = 3.3\text{V}$ ,  $V_{VIN} = 5\text{V} = V_{\text{TERM}}$ ,  $C_{VIN} = 1\mu\text{F}$ ,  $C_{VOUT} = 0.1\mu\text{F}$ ,  $C_{VCC} = 1\mu\text{F}$ ,  $C_{SR} = 1\text{nF}$ , unless otherwise specified.)






Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{VIN}$	Input Voltage	—	0.5	—	13.5	V
$V_{VCC}$	Supply Voltage	—	3.0	—	5.5	V
$I_{\text{DYN}}$	$V_{CC}$ Dynamic Supply Current	$V_{EN} = V_{VCC} = 3\text{V}$ , $V_{VIN} = 12\text{V}$	—	310	400	$\mu\text{A}$
		$V_{EN} = V_{VCC} = 5.5\text{V}$ , $V_{VIN} = 1.8\text{V}$	—	510	750	$\mu\text{A}$
$I_{\text{STBY}}$	$V_{CC}$ Shutdown Supply Current	$V_{VCC} = 3\text{V}$ , $V_{EN} = 0\text{V}$	—	0.1	1	$\mu\text{A}$
		$V_{VCC} = 5.5\text{V}$ , $V_{EN} = 0\text{V}$	—	0.1	2	$\mu\text{A}$
$V_{\text{ENH}}$	EN High Level Voltage	$V_{VCC} = 3\text{V}$ to $5.5\text{V}$	2.0	—	—	V
$V_{\text{ENL}}$	EN Low Level Voltage	$V_{VCC} = 3\text{V}$ to $5.5\text{V}$	—	—	0.8	V
$R_{\text{BLEED}}$	Bleed Resistance	$V_{VCC} = 3\text{V}$ , $V_{EN} = 0\text{V}$	86	108	130	$\Omega$
		$V_{VCC} = 5.5\text{V}$ , $V_{EN} = 0\text{V}$	64	80	100	$\Omega$
$I_{\text{BLEED}}$	Bleed Pin Leakage Current	$V_{VCC} = V_{EN} = 3\text{V}$ , $V_{VIN} = 1.8\text{V}$	—	20	—	$\mu\text{A}$
		$V_{VCC} = V_{EN} = 3\text{V}$ , $V_{VIN} = 12\text{V}$	—	50	—	$\mu\text{A}$
$V_{\text{PGL}}$	PG Output Low Voltage	$V_{VCC} = 3\text{V}$ , $I_{\text{SINK}} = 5\text{mA}$	—	—	0.2	V
$I_{\text{PG}}$	PG Output Leakage Current	$V_{VCC} = 3\text{V}$ , $V_{\text{TERM}} = 3.3\text{V}$	—	—	100	nA
<b>Switching Device</b>						
$R_{\text{ON}}$	Switch On-State Resistance	$V_{VCC} = 3.3\text{V}$ , $V_{VIN} = 1.8\text{V}$	—	10.8	12.5	m $\Omega$
		$V_{VCC} = 3.3\text{V}$ , $V_{VIN} = 5\text{V}$	—	10.8	12.5	m $\Omega$
		$V_{VCC} = 3.3\text{V}$ , $V_{VIN} = 12\text{V}$	—	10.8	12.5	m $\Omega$
		$V_{VCC} = 5\text{V}$ , $V_{VIN} = 1.8\text{V}$	—	8.6	10.5	m $\Omega$
		$V_{VCC} = 5\text{V}$ , $V_{VIN} = 5\text{V}$	—	8.6	10.5	m $\Omega$
		$V_{VCC} = 5\text{V}$ , $V_{VIN} = 12\text{V}$	—	8.6	10.5	m $\Omega$
$I_{\text{LEAK}}$	Input Shutdown Supply Current	$V_{EN} = 0\text{V}$ , $V_{VIN} = 13.5\text{V}$	—	—	1	$\mu\text{A}$
$R_{\text{PDEN}}$	EN Pull Down Resistance	—	76	100	124	k $\Omega$
<b>Fault Protection</b>						
OTP	Thermal Shutdown Threshold	$V_{VCC} = 3\text{V}$ to $5.5\text{V}$	—	+145	—	$^\circ\text{C}$
OTPHYS	Thermal Shutdown Hysteresis	$V_{VCC} = 3\text{V}$ to $5.5\text{V}$	—	+20	—	$^\circ\text{C}$
UVLO	$V_{\text{IN}}$ Lockout Threshold	$V_{VCC} = 3\text{V}$	0.25	0.35	0.45	V
UVLOHYS	$V_{\text{IN}}$ Lockout Hysteresis	$V_{VCC} = 3\text{V}$	20	40	70	mV
SCP	Short-Circuit Protection Threshold	$V_{VCC} = 3.3\text{V}$ , $V_{VIN} = 0.5\text{V}$	180	265	350	mV
		$V_{VCC} = 3.3\text{V}$ , $V_{VIN} = 13.5\text{V}$	100	285	500	mV

**Switching Characteristics** ( $T_A = +25^\circ\text{C}$ ,  $V_{\text{TERM}} = V_{\text{VCC}} = 5\text{V}$ ,  $R_{\text{PG}} = 100\text{k}\Omega$ ,  $R_{\text{VOUT}} = 10\Omega$ ,  $C_{\text{VIN}} = 1\mu\text{F}$ ,  $C_{\text{VOUT}} = 0.1\mu\text{F}$ ,  $C_{\text{VCC}} = 1\mu\text{F}$ , unless otherwise specified.)







Symbol	Parameter	Condition	Min	Typ	Max	Unit
<b><math>V_{\text{VIN}} = 1.8\text{V}</math></b>						
$t_{\text{ON}}$	Output Turn-On Delay Time	$V_{\text{VCC}} = 3.3\text{V}$	—	200	—	$\mu\text{s}$
		$V_{\text{VCC}} = 5\text{V}$	—	190	—	
$t_{\text{OFF}}$	Output Turn-Off Delay Time	$V_{\text{VCC}} = 3.3\text{V}$	—	0.4	—	$\mu\text{s}$
		$V_{\text{VCC}} = 5\text{V}$	—	0.4	—	
$t_{\text{PGON}}$	Power Good Turn-On Time	$V_{\text{VCC}} = 3.3\text{V}$	—	1.25	—	ms
		$V_{\text{VCC}} = 5\text{V}$	—	1.05	—	
$t_{\text{PGOFF}}$	Power Good Turn-Off Time	$V_{\text{VCC}} = 3.3\text{V}$	—	10	—	ns
		$V_{\text{VCC}} = 5\text{V}$	—	8	—	
SR	Output Slew Rate	$V_{\text{VCC}} = 3.3\text{V}$	—	23	—	kV/s
		$V_{\text{VCC}} = 5\text{V}$	—	24	—	
<b><math>V_{\text{VIN}} = 12\text{V}</math></b>						
$t_{\text{ON}}$	Output Turn-On Delay Time	$V_{\text{VCC}} = 3.3\text{V}$	—	190	—	$\mu\text{s}$
		$V_{\text{VCC}} = 5\text{V}$	—	180	—	
$t_{\text{OFF}}$	Output Turn-Off Delay Time	$V_{\text{VCC}} = 3.3\text{V}$	—	0.4	—	$\mu\text{s}$
		$V_{\text{VCC}} = 5\text{V}$	—	0.4	—	
$t_{\text{PGON}}$	Power Good Turn-On Time	$V_{\text{VCC}} = 3.3\text{V}$	—	1.3	—	ms
		$V_{\text{VCC}} = 5\text{V}$	—	1.25	—	
$t_{\text{PGOFF}}$	Power Good Turn-Off Time	$V_{\text{VCC}} = 3.3\text{V}$	—	10	—	ns
		$V_{\text{VCC}} = 5\text{V}$	—	8	—	
SR	Output Slew Rate	$V_{\text{VCC}} = 3.3\text{V}$	—	80	—	kV/s
		$V_{\text{VCC}} = 5\text{V}$	—	81	—	

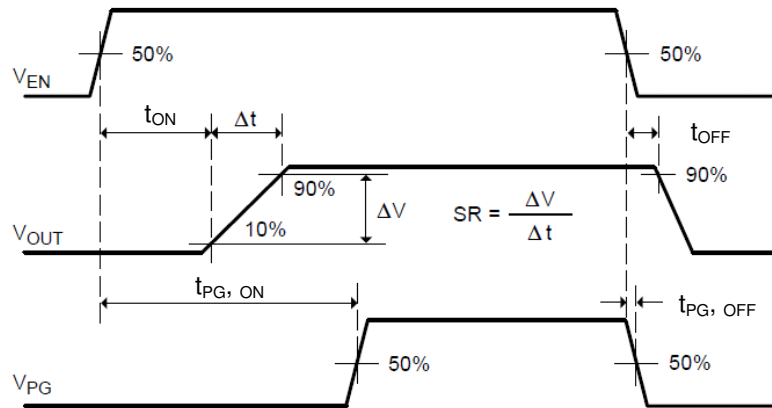
**Figure 1 Timing Diagram**

**Performance Characteristics** (@  $T_A = +25^\circ\text{C}$ , unless otherwise specified.)


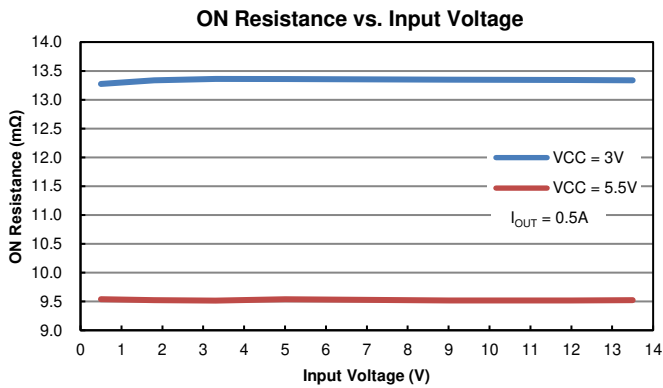
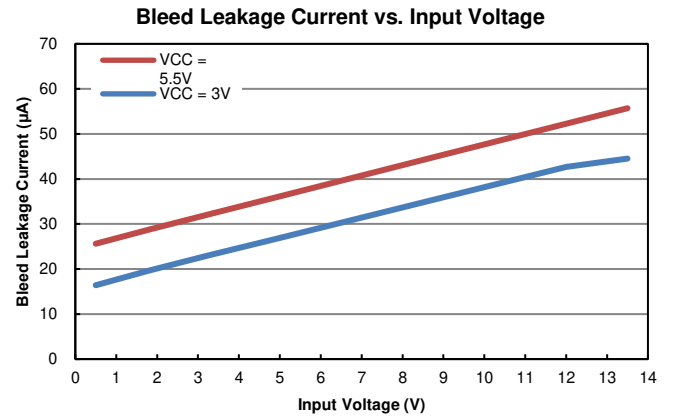
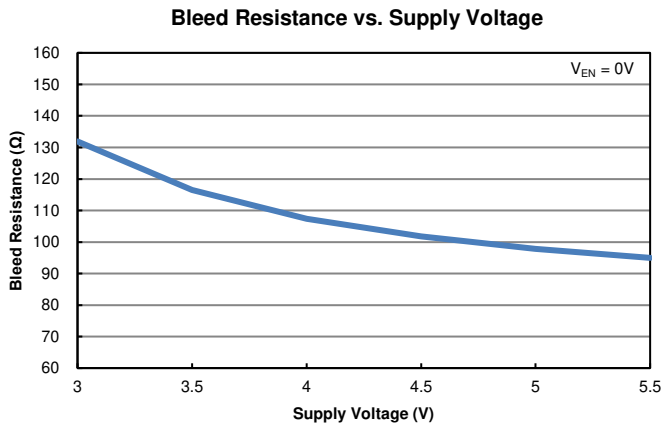
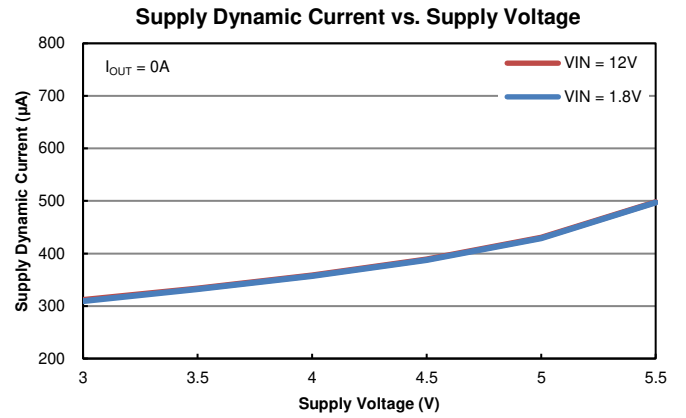
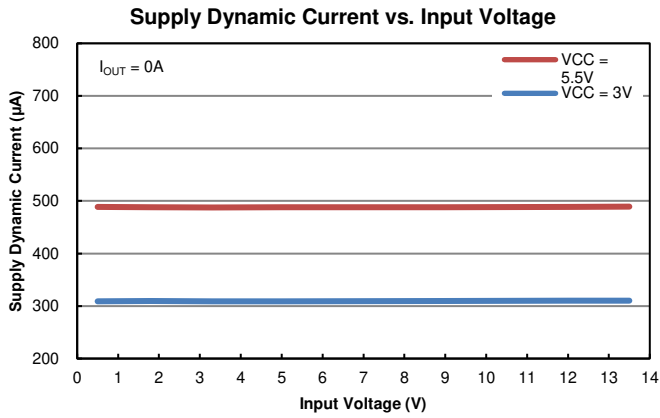


**Performance Characteristics** (@  $T_A = +25^\circ\text{C}$ , unless otherwise specified.) (continued)

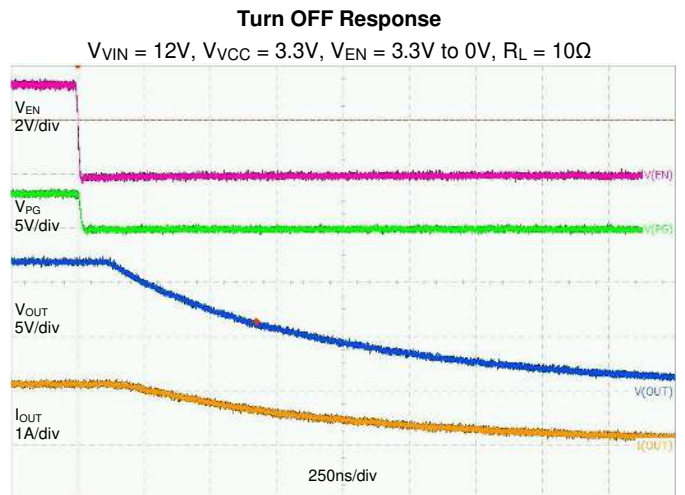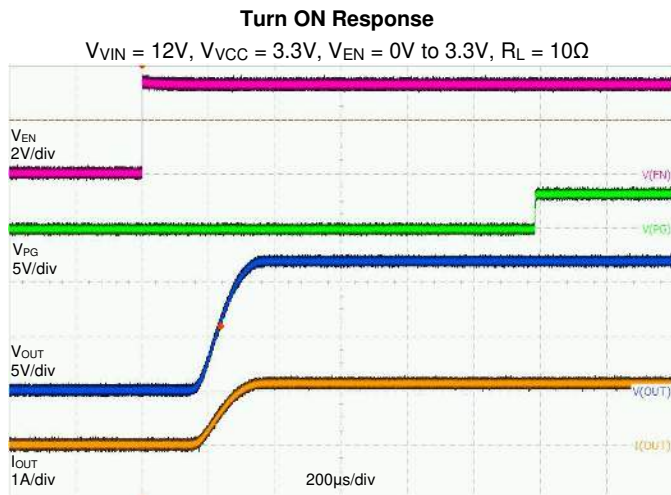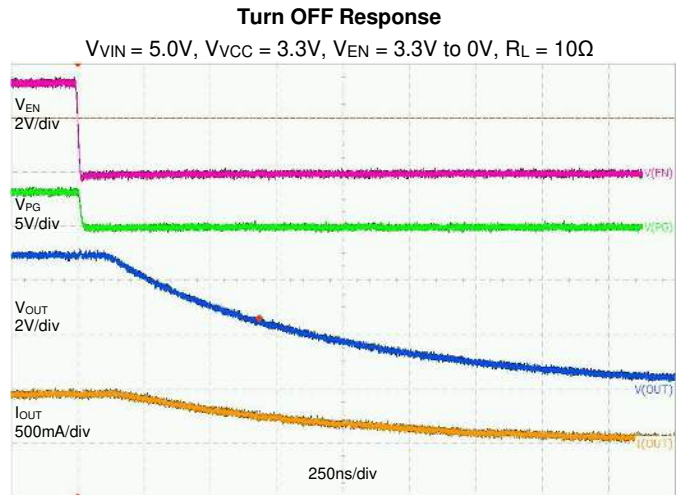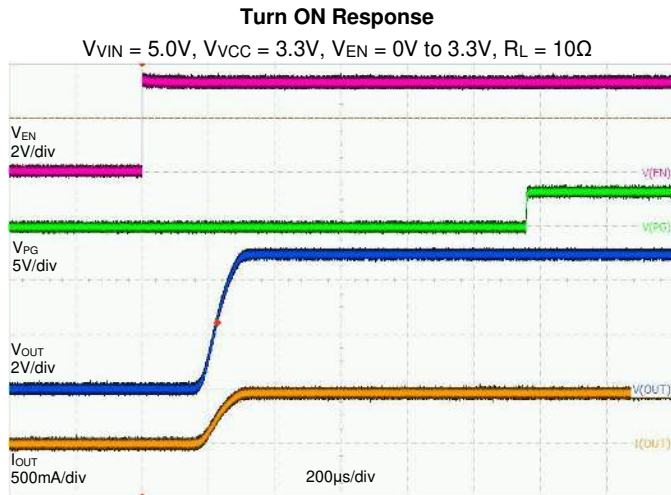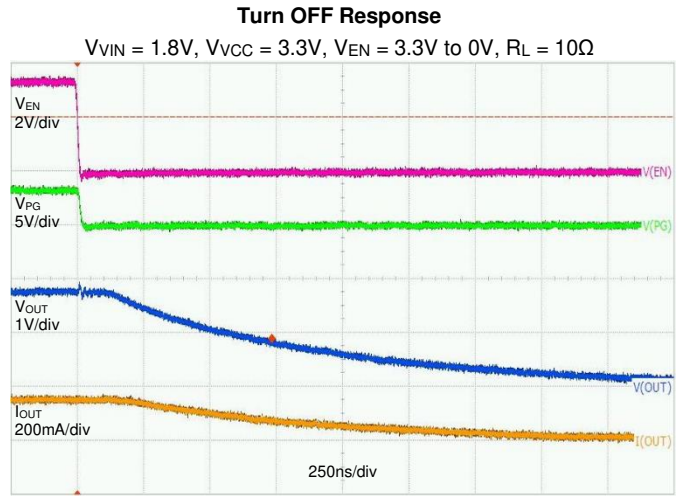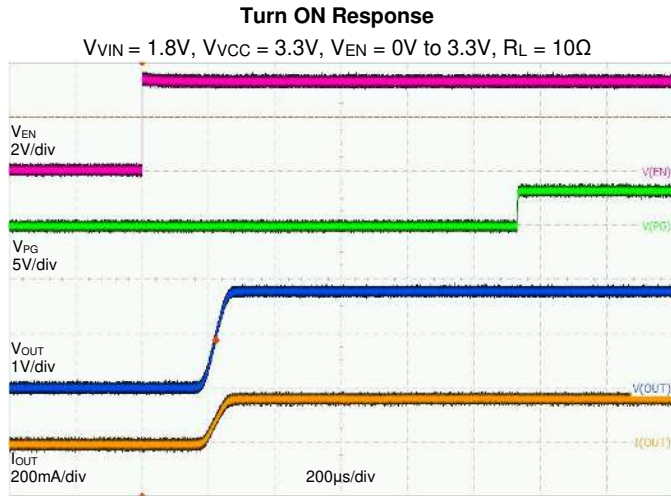



**Performance Characteristics** (@  $T_A = +25^\circ\text{C}$ , unless otherwise specified.) (continued)

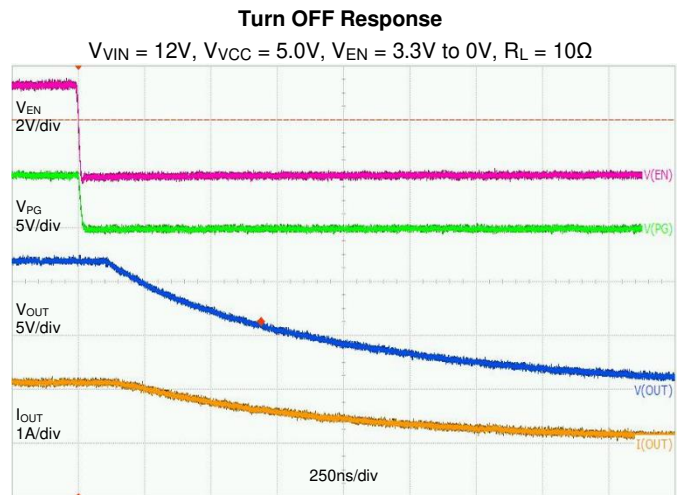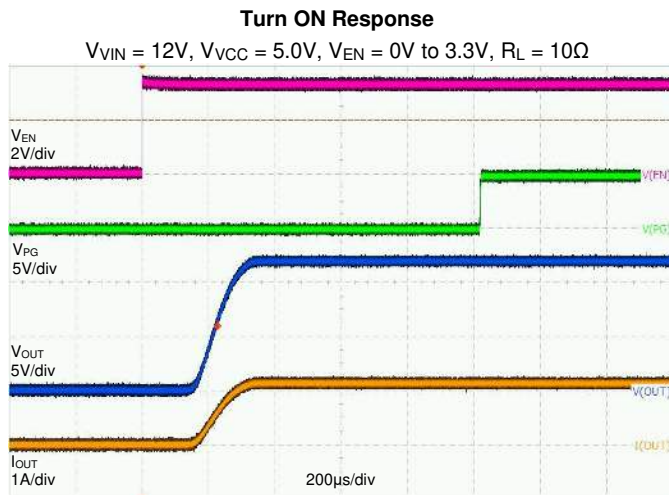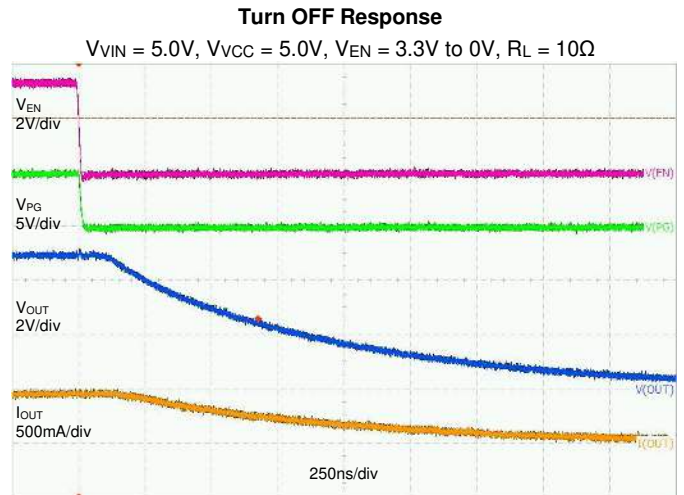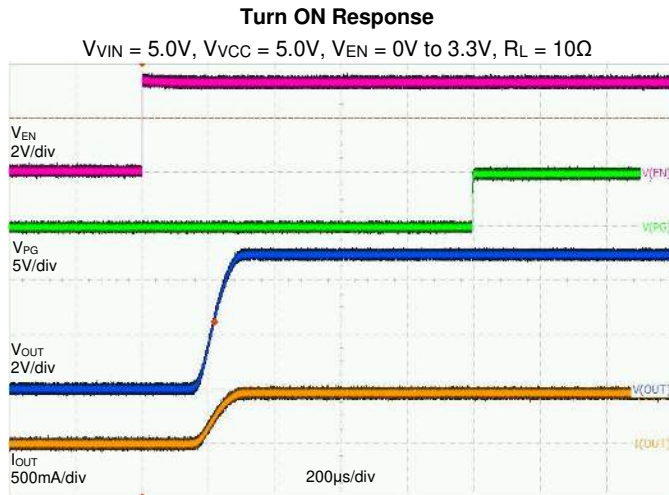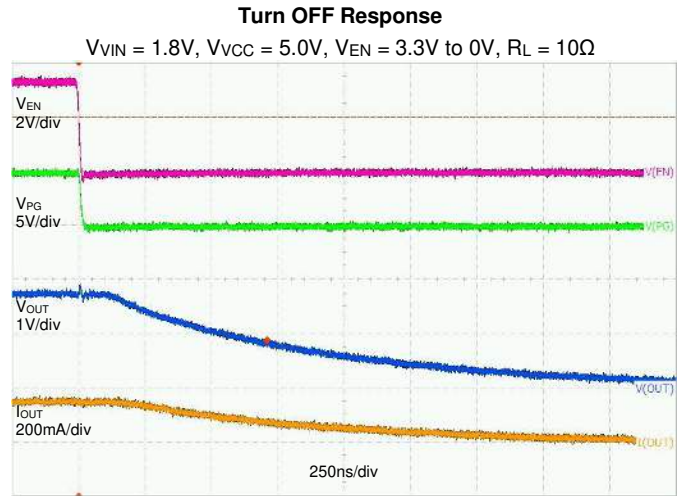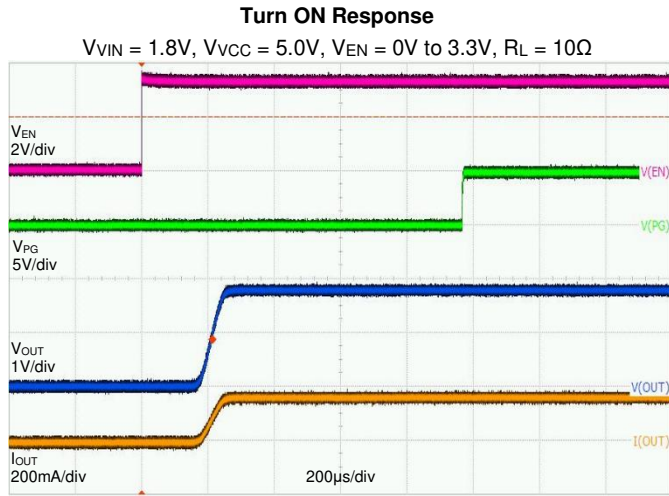



## Application Information

### General Description

The DML3006LFDS is a single channel load switch with a controlled adjustable turn-on and integrated PG indicator in an 8-pin V-DFN2020-8 (Type F) package. The device contains an N-channel MOSFET that can operate over an input voltage range of 0.5V to 13.5V and can support a maximum continuous current of 11A. The wide input voltage range and high current capability enable the device to be used across multiple designs and end equipment. 9mΩ on-resistance minimizes the voltage drop across the load switch and power loss from the load switch.

The controlled rise time for the device greatly reduces inrush current by large bulk load capacitances, thereby reducing or eliminating power supply droop. The adjustable slew rate through SR provides the design flexibility to trade off the inrush current and power up timing requirements. Integrated PG indicator notifies the system about the status of the load switch to facilitate seamless power sequencing. During shutdown, the device has very low leakage current, thereby reducing unnecessary leakages for downstream modules during standby. A 100Ω on-chip resistor is also embedded on the BLEED pin of DML3006LFDS for quick discharge of the output when switch is disabled.

### Enable Control

The DML3006LFDS device allows for enabling the MOSFET in an active-high configuration. When the V<sub>CC</sub> supply pin has an adequate voltage applied and the EN pin is at logic high level, the MOSFET is enabled. Similarly, when the EN pin is at logic low level, the MOSFET is disabled. An internal pull down resistor to ground on the EN pin ensures that the MOSFET is disabled when not being driven.

### Power Sequencing

The DML3006LFDS functions with power sequence, the performance of output turn-on delay may vary from what is specified. To achieve the specified performance that we recommended power sequence is:

1. V<sub>VCC</sub> → V<sub>VIN</sub> → V<sub>EN</sub>
2. V<sub>VCC</sub> = V<sub>VIN</sub> → V<sub>EN</sub>

### Load Bleed (Quick Discharge)

The DML3006LFDS has an internal bleed discharge device, which is used to bleed the charge off from the load to ground after the MOSFET was disabled. The bleed discharge device is enabled whenever the MOSFET is disabled. The MOSFET and the bleed device are never concurrently active.

The BLEED pin must connect to V<sub>OUT</sub> either directly or through an external resistor, R<sub>EXT</sub>. The R<sub>EXT</sub> must not exceed 1kΩ and can be used to increase the total bleed resistance.

Care must be taken to ensure that the power dissipated across R<sub>BLEED</sub> kept at safe level. The maximum continuous power that can be dissipates across R<sub>BLEED</sub> is 0.4W. R<sub>EXT</sub> can be used to decrease the amount of power dissipated across R<sub>BLEED</sub>.

### Power Good

The DML3006LFDS device has a power good output (PG) that can be used to indicate when the gate of the MOSFET is driven high and the switch is on with the on-resistance close to its final value (at the full load condition). The PG pin is an active-high, open-drain output that requires an external pull up resistor, R<sub>PG</sub>, greater than or equal to 1kΩ to an external voltage source, V<sub>TERM</sub>, compatible with input levels of those devices connected to this pin.

The power good output can be used as the enabling signal for other active-high devices in the system. This allows for guaranteed by design power sequencing and reduces the number of enabling signals needed from the system controller. If the power good feature is not used in the application, the PG pin must be tied to GND.

### Short Circuit Protection

The DML3006LFDS is equipped with short-circuit protection that is used to help protect the part and the system from a sudden high-current event, such as the output, V<sub>OUT</sub>, being shorted to ground. This circuitry is only active when the gate of MOSFET is fully charged.

Once active, the circuitry monitors the difference in the voltage on the V<sub>IN</sub> pin and the voltage on the BLEED pin. In order for the V<sub>OUT</sub> voltage to be monitored through the BLEED pin, it is required that BLEED pin be connected to V<sub>OUT</sub> either directly or through a resistor, R<sub>EXT</sub>, which should not exceed 1kΩ. Once the BLEED pin is connected to V<sub>OUT</sub>, the short-circuit protection will be activated to monitor the voltage drop across the MOSFET.

If the voltage drop across the MOSFET is greater than or equal to the short-circuit protection threshold voltage, the MOSFET is immediately turned off and the load bleed is activated. The part remains latched in this off state until EN is toggled or V<sub>CC</sub> supply voltage is cycled, at which point the MOSFET will be turn-on delay and slew rate. The current through the MOSFET that will cause a short-circuit event can be calculated by dividing the short-circuit protection threshold by expected on-resistance of the MOSFET.

## Application Information (continued)

### Thermal Shutdown

The DML3006LFDS is equipped with thermal shutdown protection for internally or externally generated excessive temperatures. This circuitry is disabled when EN is not active to reduce standby current. When an overtemperature condition is detected, the MOSFET is immediately turned off and the load bleed is active.

The part comes out of thermal shutdown when the junction temperature decreases to a safe operating temperature, as dictated by the thermal hysteresis. Upon exiting a thermal shutdown state and if EN remains active, the MOSFET will be turned on in a controlled fashion with the normal output turn-on delay and slew rate.


### Undervoltage Lockout

The DML3006LFDS is also equipped with undervoltage lockout protection. The DML3006LFDS turns the MOSFET off and activates the load bleed when the input voltage,  $V_{IN}$ , is less than or equal to the undervoltage lockout threshold. This circuitry is disabled when EN is not active to reduce standby current.

If the  $V_{IN}$  voltage rises above the undervoltage lockout threshold and EN remains active, the MOSFET will be turned on in a controlled fashion with the normal output turn-on delay and slew rate.

### PCB Layout Consideration


1. Place the input/output capacitors  $C_{VIN}$  and  $C_{VOUT}$  as close as possible to the  $V_{IN}$  and  $V_{OUT}$  pins.
2. The power traces which are  $V_{IN}$  trace,  $V_{OUT}$  trace and GND trace should be short, wide and direct for minimizing parasitic inductance.
3. Place feedback resistance  $R_{BLEED}$  as close as possible to BLEED pin.
4. Place  $C_{VCC}$  capacitor near the device pin.
5. Connect the signal ground to the GND pin, and keep a single connection from GND pin to the power ground behind the input or output capacitors.
6. For better power dissipation, via holes are recommended to connect the exposed pad's landing area to a large copper polygon on the other side of the printed circuit board. The copper polygons and exposed pad shall connect to  $V_{IN}$  pin on the printed circuit board.

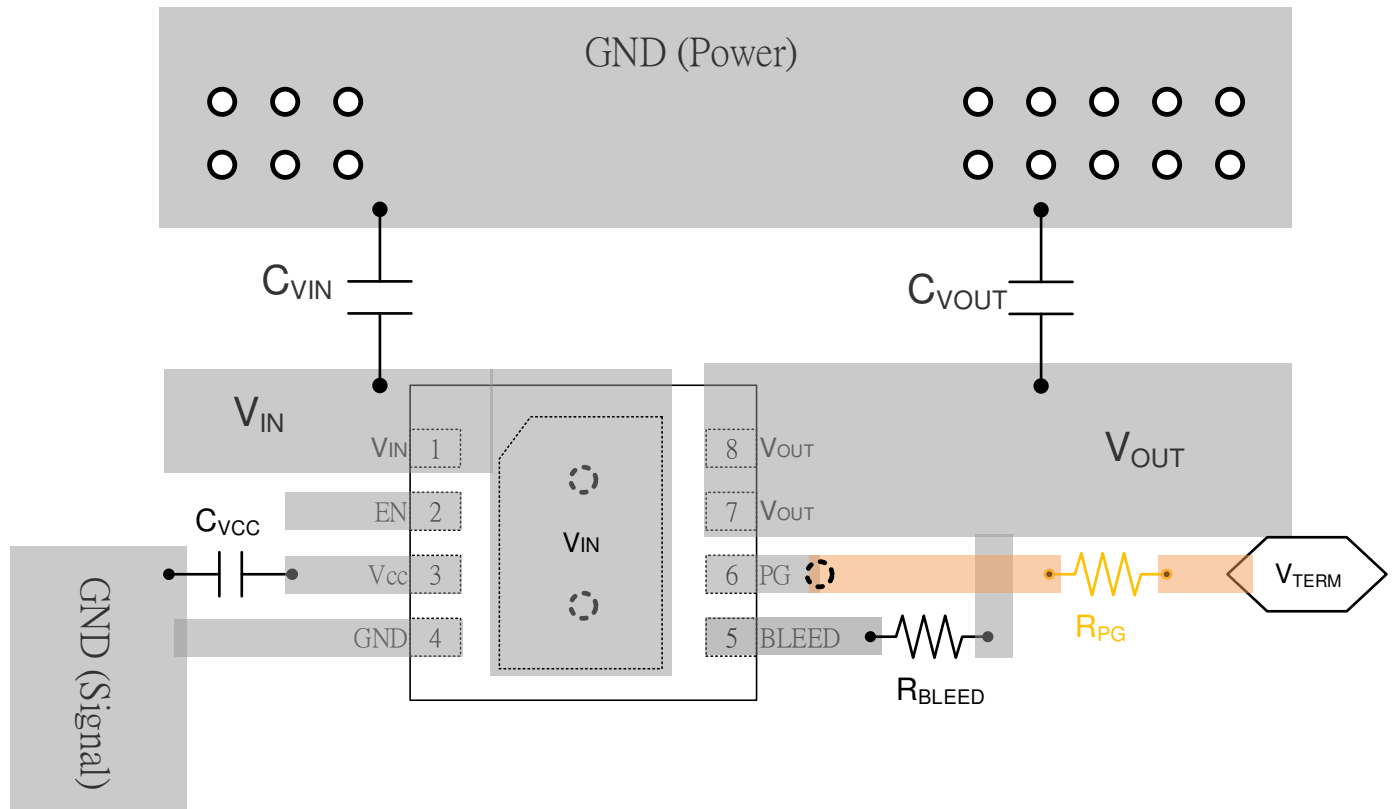

**Package Outline Dimensions**

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

**V-DFN2020-8 (Type F)**

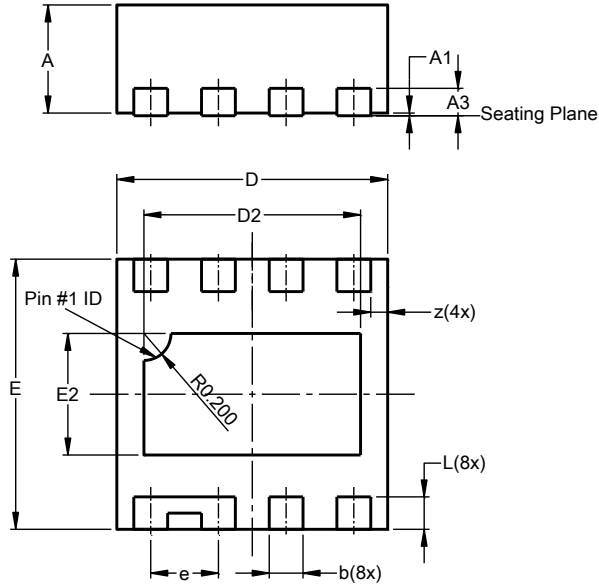


V-DFN2020-8 (Type F)			
Dim	Min	Max	Typ
A	0.77	0.85	0.80
A1	0.00	0.05	0.02
A3	--	--	0.203
b	0.20	0.30	0.25
D	1.95	2.05	2.00
D2	1.50	1.70	1.60
E	1.95	2.05	2.00
E2	0.80	1.00	0.90
e	--	--	0.50
L	0.19	0.29	0.24
z	--	--	0.125
All Dimensions in mm			

**Suggested Pad Layout**

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

**V-DFN2020-8 (Type F)**

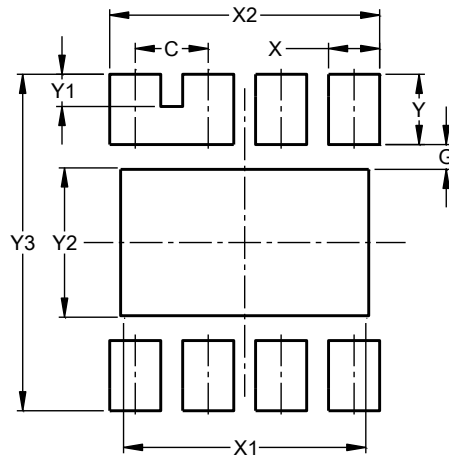

Dimensions	Value (in mm)
C	0.500
G	0.170
X	0.350
X1	1.660
X2	1.850
Y	0.480
Y1	0.220
Y2	1.020
Y3	2.300

**IMPORTANT NOTICE**

1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (<https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.
9. This Notice may be periodically updated with the most recent version available at <https://www.diodes.com/about/company/terms-and-conditions/important-notice>

The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries.  
DIODES is a trademark of Diodes Incorporated in the United States and other countries.  
All other trademarks are the property of their respective owners.  
© 2022 Diodes Incorporated. All Rights Reserved.

[www.diodes.com](http://www.diodes.com)