

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input 0.75 Vdc - 3.63 Vdc/6 A Output



Jan. 25, 2013


Bel Power, Inc. , a subsidiary of Bel Fuse, Inc.

VRBA-06F2Ax

RoHS Compliant

Rev.B

- Non-Isolated
- High Efficiency
- High Power Density
- Fixed Frequency (300 kHz)
- Flexible Output Voltage Sequencing
- Certificated to UL60950-1/CSA C22.2 No.60950-1, 2nd edition, am
- Under-voltage Lockout (UVLO)
- Wide Trim
- OCP/SCP
- Remote On/Off
- Active Low/High (option)
- Able to Sink & Source Current

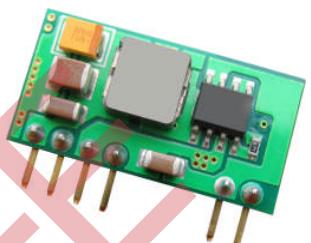

Applications

- Networking
- Computers and peripherals
- Telecommunications

Description

The Bel VRBA-06F2Ax modules are a series of non-isolated dc/dc converters that deliver up to 6 A of output current with full load efficiency of 93% at 3.3 Vdc output. These modules provide precisely regulated voltage programmable via external resistor from 0.75 Vdc to 3.63 Vdc over a wide range of input voltage (2.4 Vdc - 5.5 Vdc). These modules have a sequencing feature that enables designers to implement various types of output voltage sequencing when powering multiple voltages on a board. The open-frame construction and small footprint enable designers to develop cost and space-efficient solutions. Standard features include remote On/Off, over current protection, short circuit protection, wide input, and programmable output voltage.

Part Selection

| Output Voltage | Input Voltage | Max. Output Current | Max. Output Power | Typical Efficiency | Model Number Active Low | Model Number Active High |
|-----------------------------|---------------|---------------------|-------------------|--------------------|-------------------------|--------------------------|
| 0.75 V -3.63 V ¹ | 2.4 V - 5.5 V | 6 A | 21.8 W | 93% | VRBA-06F2AL | VRBA-06F2AO |

Notes: 1. These modules use a buck topology, so the output voltages must be 0.5 V less than the input voltage.
2. Add "G" suffix at the end of the model number to indicate Tray Packaging.

Part Number Explanation

V R BA - 06 F 2A x
1 2 3 4 5 6 7

1---Vertical mount

2---RoHS 6, change "R" to "7" means RoHS 5

3---Series name

4---Series code

5---Wide input range (2.4-5.5V)

6---Wide trim

7---Option, "x" of the model part number to be 0-9, A-Z, which will represent the special request of customer.

NON-ISOLATED DC/DC CONVERTERS
2.4 Vdc - 5.5 Vdc Input 0.75 Vdc - 3.63 Vdc/6 A Output



Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Absolute Maximum Ratings

| Parameter | Min | Typ | Max | Notes |
|---------------------------------|--------|-----|--------|-------|
| Input Voltage (continuous) | -0.3 V | - | 5.8 V | |
| Output Enable Terminal Voltage | -0.3 V | - | 5.5 V | |
| Sequencing Voltage ¹ | -0.3 V | - | Vin | |
| Ambient Temperature | -40 °C | - | 85 °C | |
| Storage Temperature | -55 °C | - | 125 °C | |

Notes: All specifications are typical at 25 °C unless otherwise stated.

1. VRBA-06F2Ax series of modules include a sequencing feature that enables users to implement various types of output voltage sequencing in their applications. This is accomplished via an additional sequencing pin. When not used sequencing feature, tie the SEQ pin to Vin or leave the SEQ pin floating.

Input Specifications

| Parameter | Min | Typ | Max | Notes |
|---|-------|--------|-----------------------|---|
| Input Voltage | | | | |
| Vo ≤ 1.5 V | 2.4 V | - | 5.5 V | |
| Vo = 1.8 V | 3.0 V | - | 5.5 V | |
| 2.5 V ≤ Vo ≤ 3.3 V | 4.5 V | - | 5.5 V | |
| Input Current (full load) | | | | |
| Vo = 3.3 V | - | - | 4.73 A | |
| Vo = 2.5 V | - | - | 3.66 A | |
| Vo = 1.8 V | - | - | 4.09 A | |
| Vo = 1.5 V | - | - | 4.31 A | |
| Vo = 1.2 V | - | - | 3.57 A | |
| Vo = 0.75 V | - | - | 2.40 A | |
| Input Current (no load) | | | | |
| Vo = 3.3 V | - | 50 mA | - | |
| Vo = 0.75 V | - | 25 mA | - | |
| Remote Off Input Current | - | 0.6 mA | - | |
| Input Reflected Ripple Current (pk-pk) | - | 120 mA | - | Tested with simulated source impedance of 1 uH, 5 Hz to 20 MHz, one 1000 uF/25 V AL capacitor and two 100 uF/ 10 V Tantalum capacitor at the input. |
| Input Reflected Ripple Current (rms) | - | 35 mA | - | |
| I ² t Inrush Current Transient | - | - | 0.04 A ² s | |
| Turn-on Voltage Threshold | - | 2.05 V | 2.4 V | |
| Turn-off Voltage Threshold | 1.8 V | 2.0 V | - | |

Output Specifications

| Parameter | Min | Typ | Max | Notes |
|---|------------|-----------------------|-----------|---|
| Output Voltage Set Point | -2% Vo,set | - | 2% Vo,set | Vin=5 V, 50% full load |
| Output Voltage Set Point | -3% Vo,set | - | 3% Vo,set | Over all operating input voltages, resistive loads and temperature conditions |
| Adjustment Range Selected by External Resistor or Voltage | 0.7525 V | - | 3.63 V | |
| Load Regulation | - | 0.4% Vo,set | - | Io=Iomin to 50% Iomax to 100% Iomax |
| Line Regulation | - | 0.3% Vo,set | - | Vin=Vinmin to 50% Vinmax to 100% Vinmax |
| Regulation Over Temperature (-40 °C to +85 °C) | - | 0.4% Vo,set | - | Tref=Tamin to Tamax |
| Output Current | 0 A | - | 6 A | |
| Current Limit Threshold | 9 A | - | 18 A | |
| Short Circuit Surge Transient | - | 0.32 A ² s | - | |

NON-ISOLATED DC/DC CONVERTERS
2.4 Vdc - 5.5 Vdc Input 0.75 Vdc - 3.63 Vdc/6 A Output



Jan. 25, 2013

Bel Power, Inc. , a subsidiary of Bel Fuse, Inc.

Output Specifications(continued)

| Parameter | Min | Typ | Max | Notes |
|---------------------------|----------------------|-------|---------|--|
| Ripple and Noise (pk-pk) | - | 40 mV | 70 mV | |
| Ripple and Noise (rms) | - | 10 mV | 30 mV | Tested with 0-20 MHz, with 10 uF Tantalum capacitor & 1 uF/10 V ceramic capacitor at the output. |
| Turn on Time | - | 6 mS | 10 mS | |
| Overshoot at Turn on | - | - | 3% | |
| Output Capacitance | | | | |
| Min ESR ≥ 1mohm | 0 uF | - | 1000 uF | |
| Max ESR ≥ 10mohm | 0 uF | - | 3000 uF | |
| Transient Response | | | | |
| 50% ~ 100% Max Load | Vo = 0.75 V - 3.63 V | - | 130 mV | |
| Settling Time | | - | 25 uS | |
| 100% ~ 50% Max Load | | - | 130 mV | |
| Settling Time | | - | 25 uS | di/dt=2.5 A/uS; Vin=5 V; and with 10 uF Tantalum capacitor & 1 uF/10 V TDK ceramic capacitor at the output |

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

General Specifications

| Parameter | Min | Typ | Max | Notes |
|---------------------------|--------------------|---------|---------|---|
| Efficiency | | | | |
| Vo=3.3 V | - | 93% | - | |
| Vo=2.5 V | - | 91% | - | |
| Vo=1.8 V | - | 88% | - | Measured at Vin=5 V, full load |
| Vo=1.5 V | - | 87% | - | |
| Vo=1.2 V | - | 84% | - | |
| Vo=0.75 V | - | 78% | - | |
| Switching Frequency | 250 kHz | 300 kHz | 350 kHz | |
| Over Temperature Shutdown | - | 135 °C | - | |
| Output Voltage Trim Range | 0.7525 V | - | 3.63 V | |
| MTBF | 7,142,646 hours | | | Calculated Per Bell Core SR-332 (Vin=5 V; Vo=0.75 V; Io = 4.8 A; Ta = 25°C) |
| Dimensions | | | | |
| Inches (L × W × H) | 1.0 x 0.5 x 0.243 | | | |
| Millimeters (L × W × H) | 25.4 x 12.7 x 6.16 | | | |
| Weight | - | 5 g | - | |

Note: All specifications are typical at 25 °C unless otherwise stated.

Control Specifications

| Parameter | Min | Typ | Max | Notes |
|---------------------------------|--------|--------|----------|---|
| Remote On/Off | | | | |
| Signal Low (Unit Off) | -0.2 V | - | 0.3 V | VRBA-06F2A0; Remote On/Off pin open, Unit on. |
| Signal High (Unit On) | - | - | Vin, max | |
| Signal Low (Unit On) | -0.2 V | - | 0.3 V | VRBA-06F2AL; Remote On/Off pin open, Unit on. |
| Signal High (Unit Off) | 1.5 V | - | Vin, max | |
| Sequencing Voltage | 0 V | - | Vin | Sequencing Voltage applied on SEQ pin should be higher than output voltage. |
| Sequencing Slew Rate Capability | - | - | 2 V/mS | |
| Sequencing Delay Time | 10 mS | - | - | Delay from Vin, min to application of voltage on SEQ pin |
| Tracking Accuracy | | | | |
| Power-Up | - | 100 mV | 200 mV | |
| Power-Down | - | 200 mV | 400 mV | |

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input

0.75 Vdc - 3.63 Vdc/6 A Output




Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Output Trim Equations


Equation for calculating the trim resistor (in kΩ) given the desired adjusted voltage (V_{adj}) is shown below. The Trim Up resistor should be connected between the Trim pin and Ground.

$$R_{trim} = \frac{21.07}{V_{adj} - 0.7525} - 5.11$$

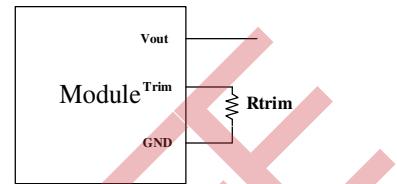

Equation for calculating the trim voltage (in V) given the desired adjusted voltage (V_{adj}) is shown below. The Trim Up voltage should be connected between the Trim pin and Ground.

$$V_{trim} = 0.7 - 0.1698 \times (V_{adj} - 0.7525)$$

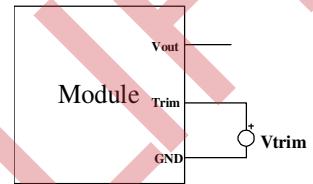

END OF

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input


0.75 Vdc - 3.63 Vdc/6 A Output




Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Efficiency Data

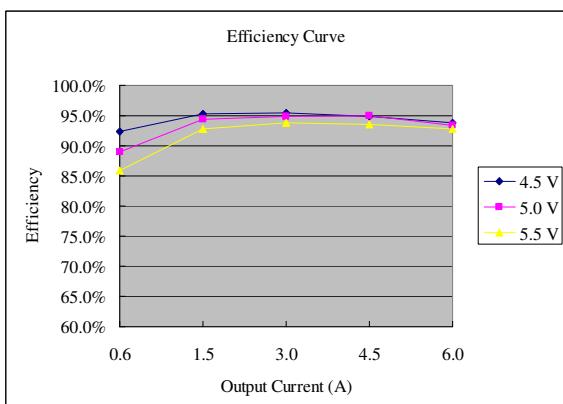


Vo=3.3 V

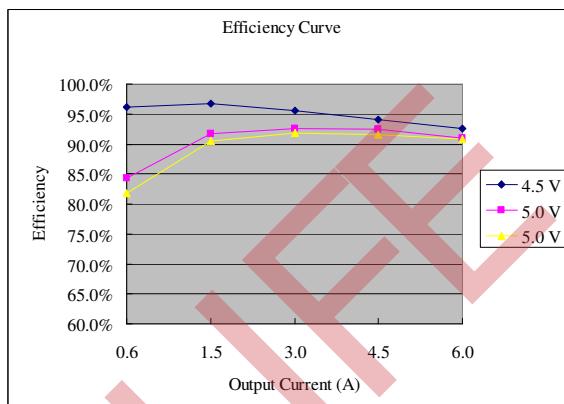


Vo=2.5 V

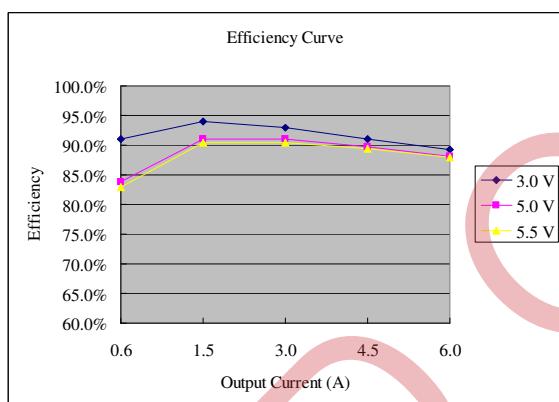


Vo=1.8 V

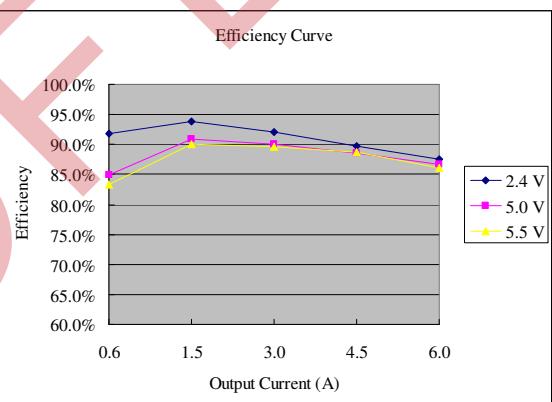

Vo=1.5 V

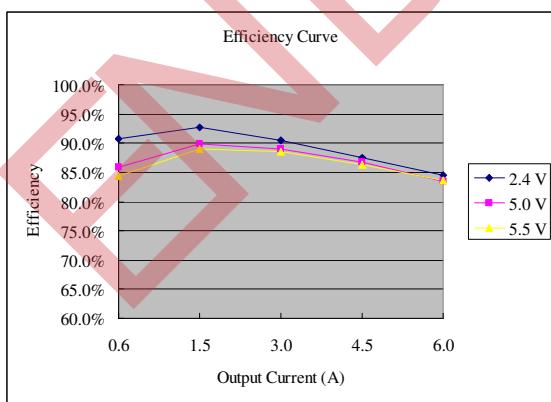

Vo=1.2 V

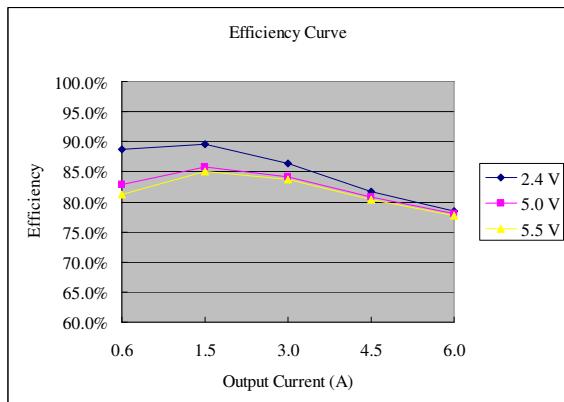

Vo=0.7525 V

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input


0.75 Vdc - 3.63 Vdc/6 A Output




Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Thermal Derating Curves

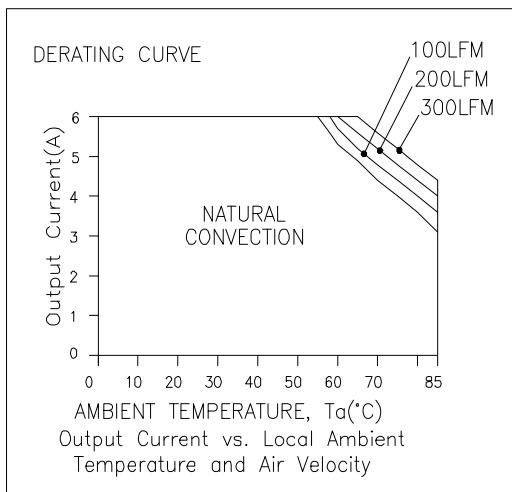


$V_{in}=5\text{ V}$, $V_o = 3.3\text{ V}$

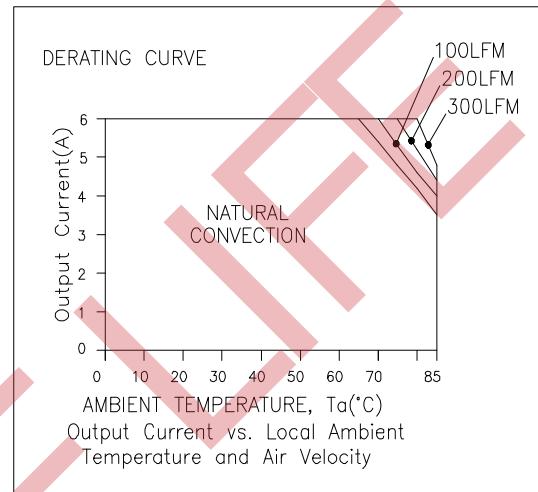

$V_{in}=5\text{ V}$, $V_o = 0.75\text{ V}$

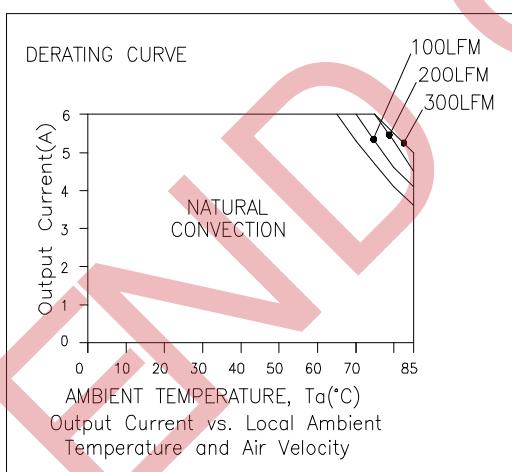

$V_{in}=4.5\text{ V}$, $V_o = 2.5\text{ V}$

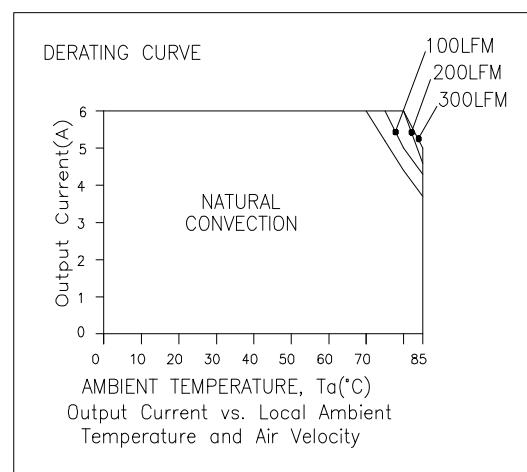

$V_{in}=3.3\text{ V}$, $V_o = 0.75\text{ V}$


NON-ISOLATED DC/DC CONVERTERS
2.4 Vdc - 5.5 Vdc Input 0.75 Vdc - 3.63 Vdc/6 A Output

bel


Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Ripple and Noise Waveforms

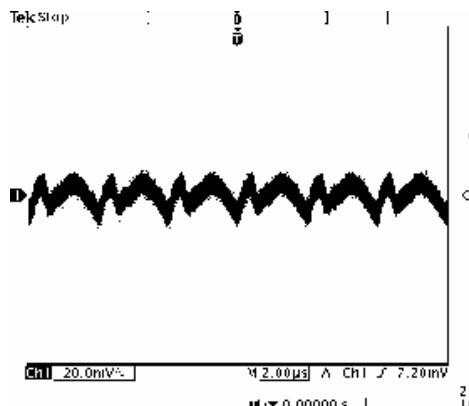


Ripple and noise at full load, Vin=5.0 V, Vo=0.7525 V

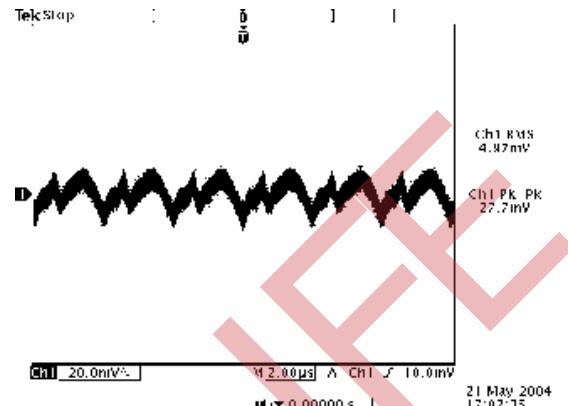


Ripple and noise at full load, Vin=5.0 V, Vo=1.2 V

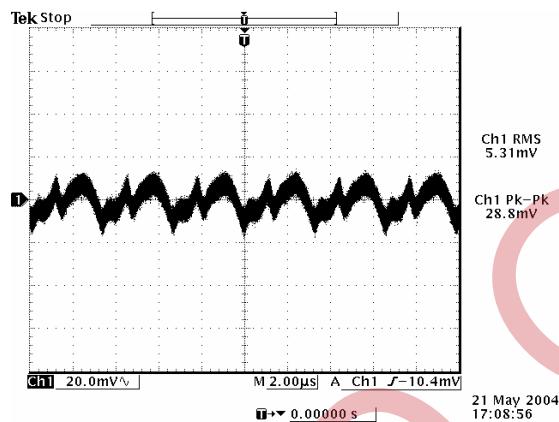


Ripple and noise at full load, Vin=5.0 V, Vo=1.5 V

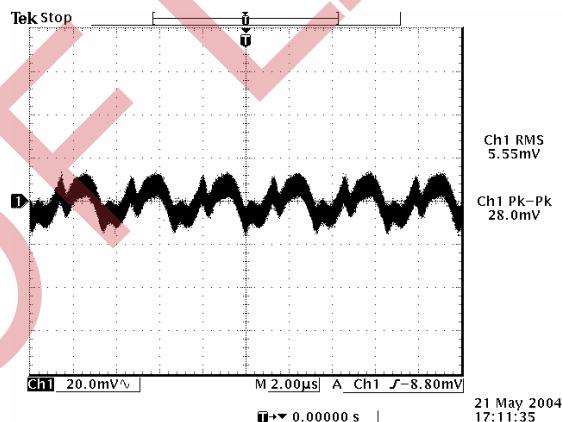

Ripple and noise at full load, Vin=5.0 V, Vo=1.8 V

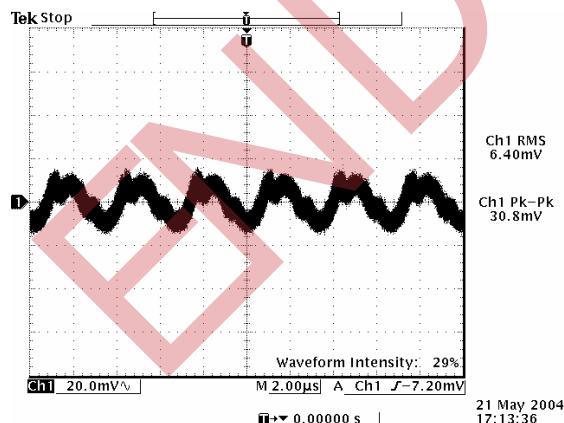

Ripple and noise at full load, Vin=5.0 V, Vo=2.5 V

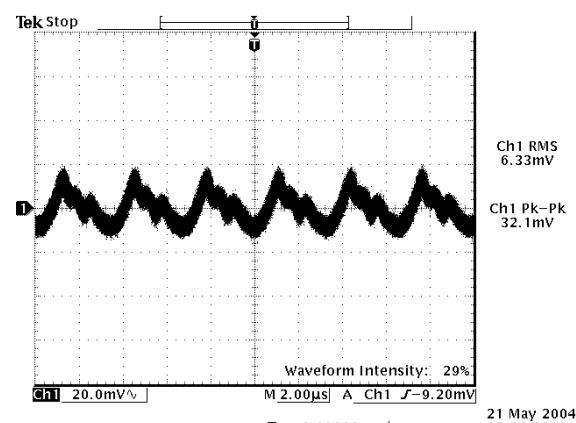

Ripple and noise at full load, Vin=5.0 V, Vo=3.3 V

Note: Ripple and noise is tested at 0-20 MHz BW, 10 uF/10 V tantalum capacitor and 1 uF/10 V ceramic capacitor, Ta=25 deg C.

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input


0.75 Vdc - 3.63 Vdc/6 A Output

bel


Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Transient Response Waveforms

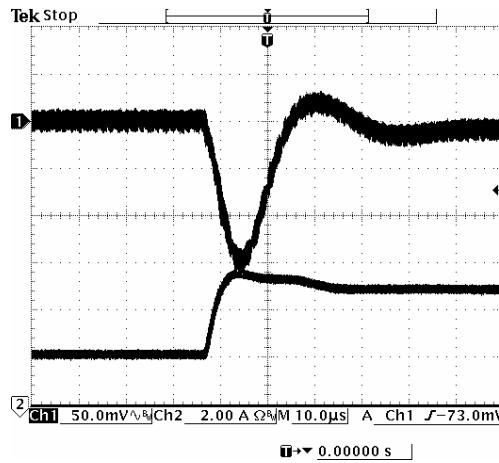


50% to 100% load step at Vin=5 V, Vo=0.75 V

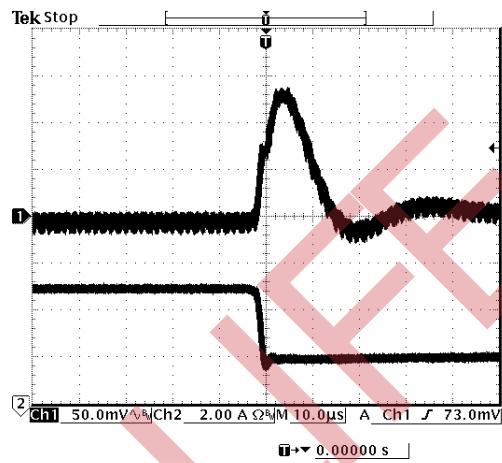


100% to 50% load step at Vin=5 V, Vo=0.75 V

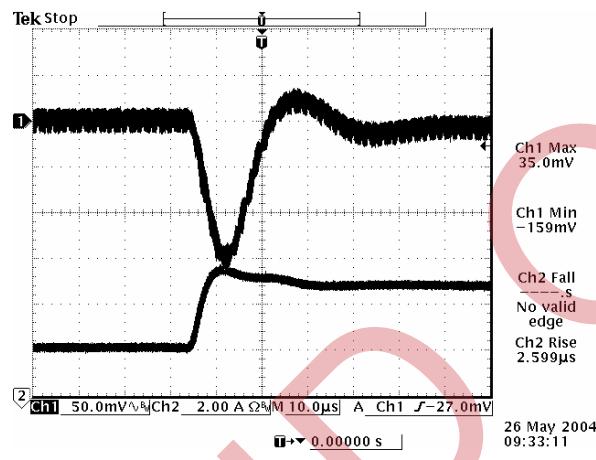


50% to 100% load step at Vin=5 V, Vo=1.2 V

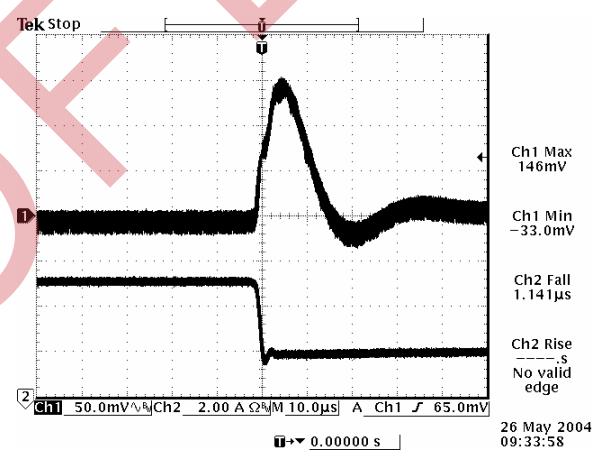

100% to 50% load step at Vin=5 V, Vo=1.2 V

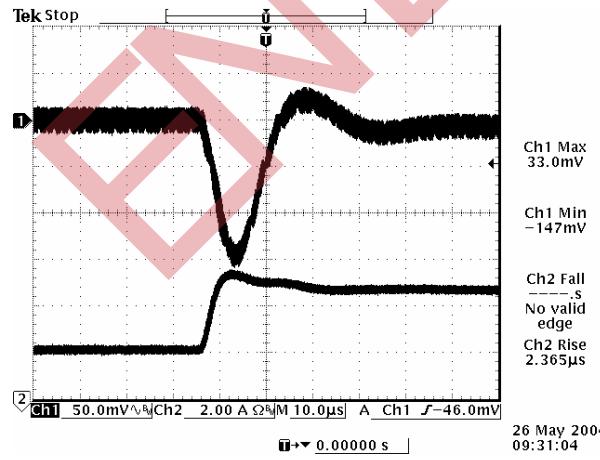

50% to 100% load step at Vin=5 V, Vo=1.5 V

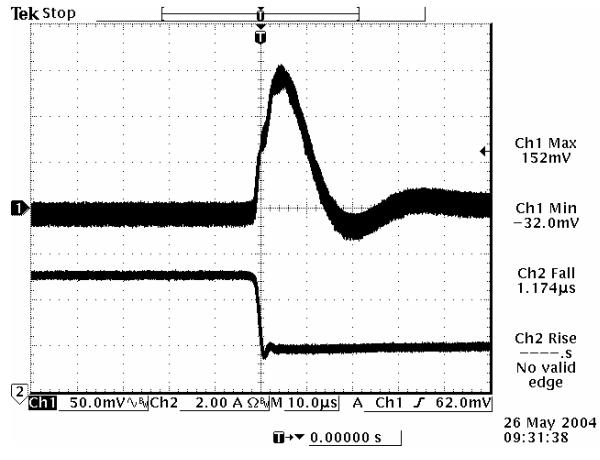

100% to 50% load step at Vin=5 V, Vo=1.5 V

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input


0.75 Vdc - 3.63 Vdc/6 A Output

bel


Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.


Transient Response Waveforms (continued)

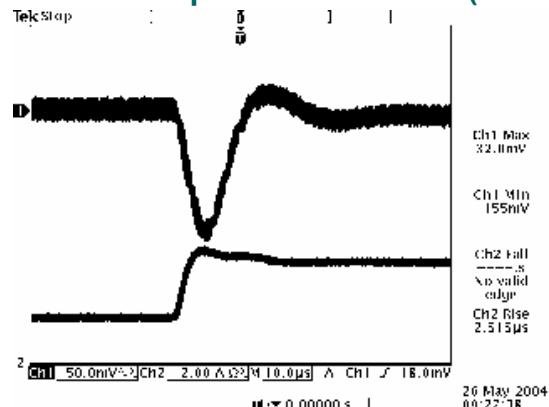


50% to 100% load step at Vin=5 V, Vo=1.8 V

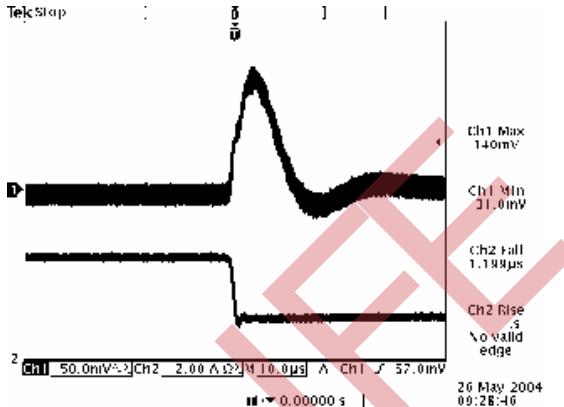


100% to 50% load step at Vin=5 V, Vo=1.8 V

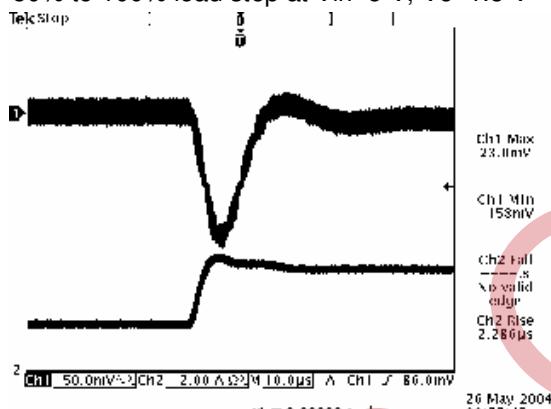


50% to 100% load step at Vin=5 V, Vo=2.5 V

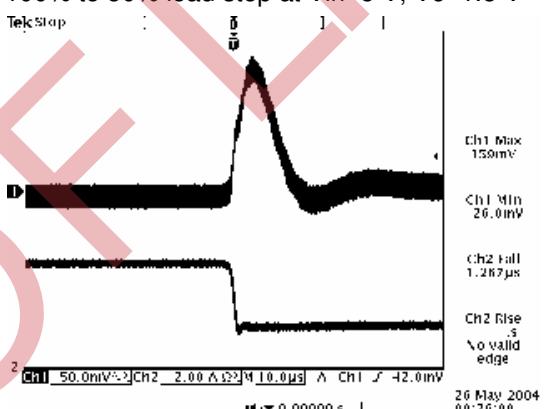

100% to 50% load step at Vin=5 V, Vo=2.5 V

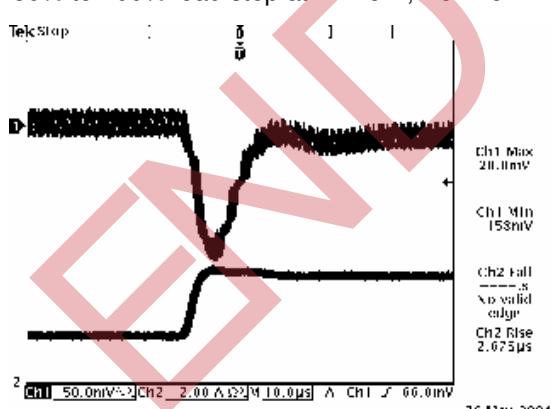

50% to 100% load step at Vin=5 V, Vo=3.3 V

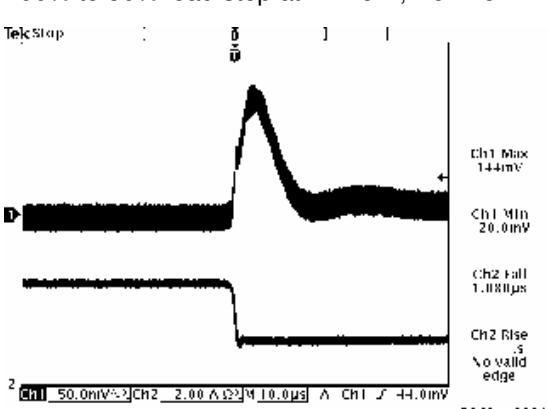

100% to 50% load step at Vin=5 V, Vo=3.3 V

Note: Transient response is tested at $di/dt=2.5 \text{ A/uS}$, with 10 $\mu\text{F}/10 \text{ V}$ tantalum capacitor and 1 $\mu\text{F}/10 \text{ V}$ ceramic capacitor, $T_a=25 \text{ deg C}$.

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input


0.75 Vdc - 3.63 Vdc/6 A Output



Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Mechanical Outline

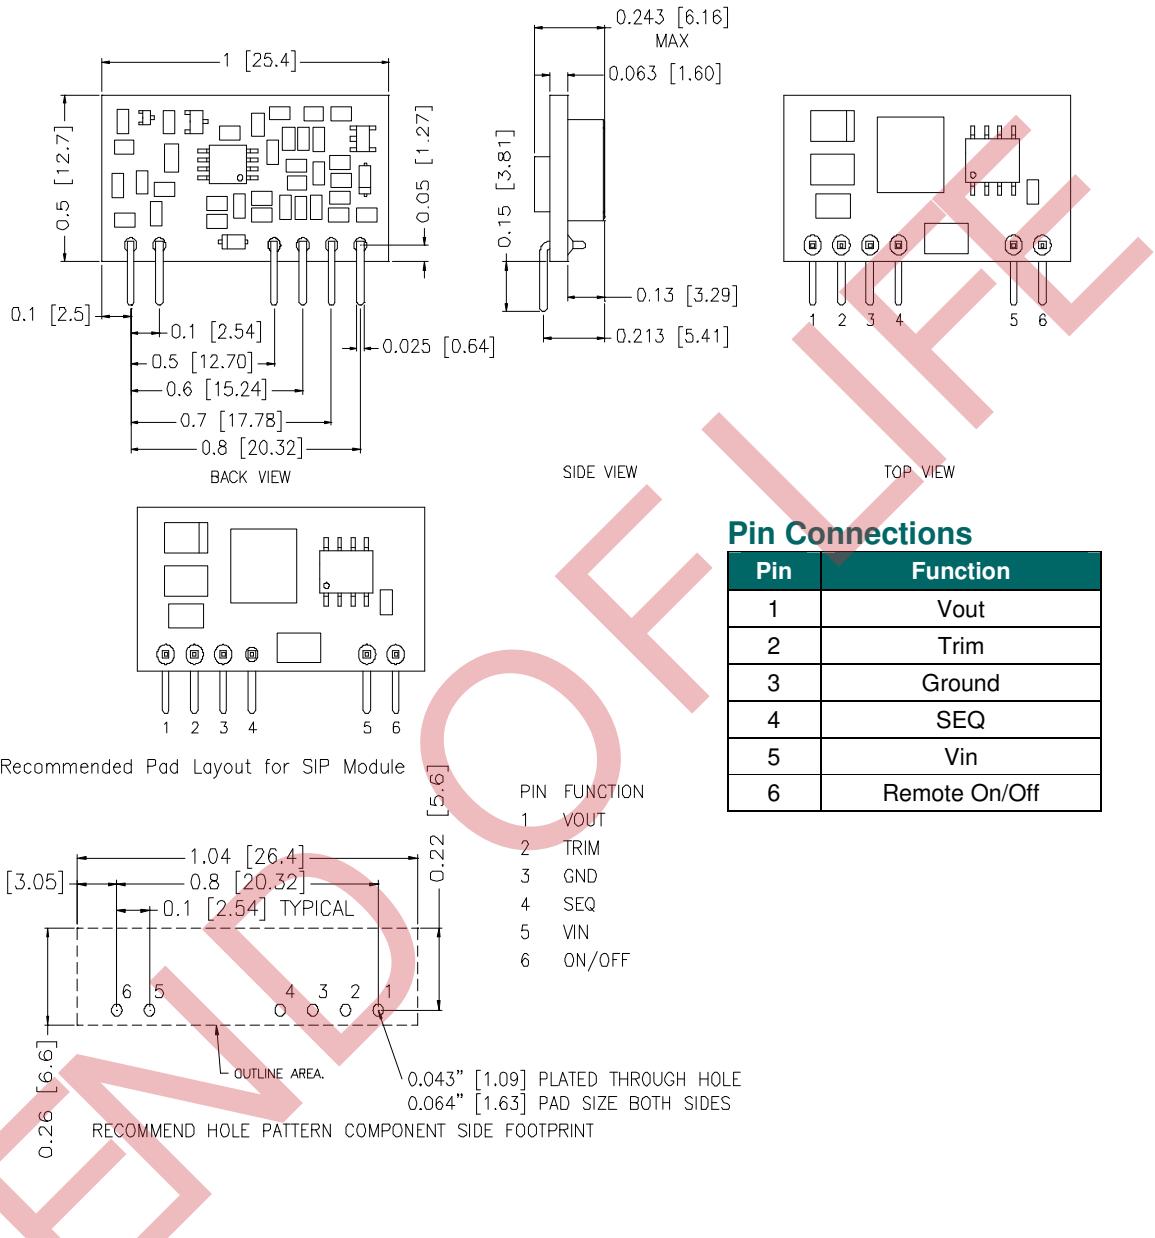

Note:

- 1) All Pins: Material - Copper Alloy;
Finish – 3 micro inches minimum Gold over 50 micro inches minimum Nickel plate.
- 2) Undimensioned components are shown for visual reference only.
- 3) All dimensions in inches (mm); Tolerances: x.xx +/-0.02 in. (x.x +/-0.5mm) x.xxx +/-0.010 in. (x.xx +/-0.25mm).

NON-ISOLATED DC/DC CONVERTERS
2.4 Vdc - 5.5 Vdc Input 0.75 Vdc - 3.63 Vdc/6 A Output



Jan. 25, 2013

Bel Power, Inc., a subsidiary of Bel Fuse, Inc.

Revision History

| Date | Revision | Changes Detail | Approval |
|------------|----------|---------------------|----------|
| 2007-01-12 | A | Change version to A | Lynn |
| 2013-01-25 | B | Add UL. | HL |

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2013 Bel Fuse Inc. Specifications subject to change without notice. 012513

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com