

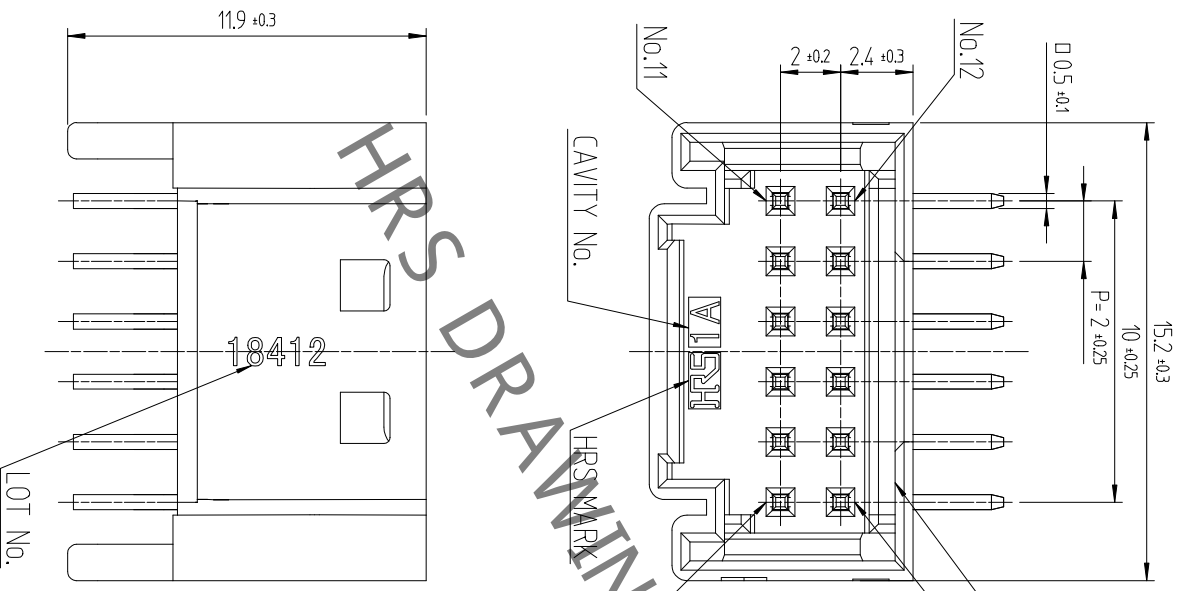
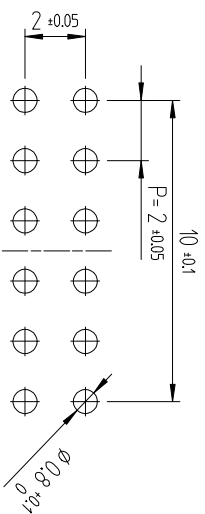
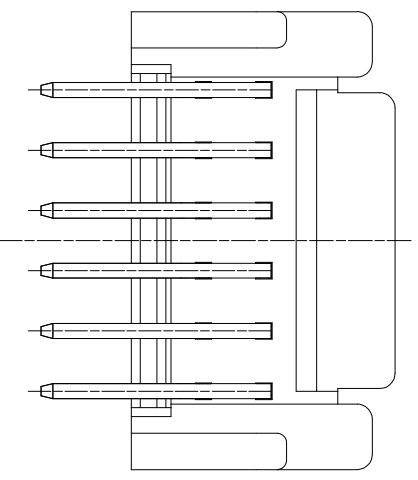


△数	訂正事項	検出	年月日	△数	訂正事項	検出	年月日
COUNT	DESCRIPTION OF REVISIONS	BY	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	DATE
1	RE-6-1150	K.I.Y	18. 07. 04				
1	RE-6-1579	K.I.Y	20. 01. 23				

△Design Change

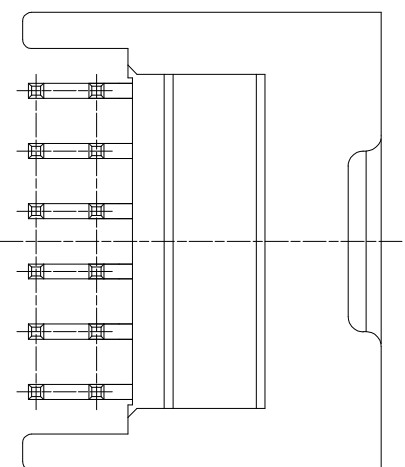


POLARIZATION MARK

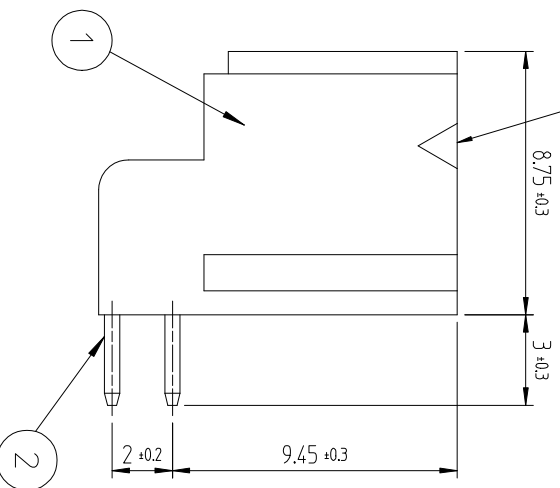

RECOMMENDED LAND PATTERN (FREE)
 (PCB THICKNESS t=1.6mm)

ENGAGEMENT FIGURE (2:1)

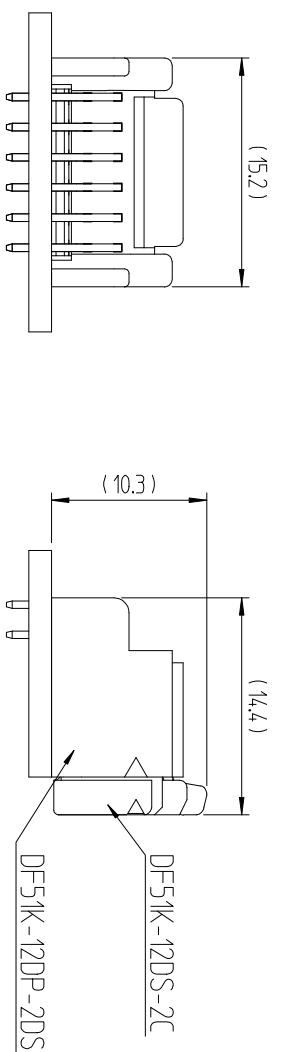

NOTE 1. 1PACK CONTAINS 200PCS.

2. () DIMENSIONS ARE ONLY REFERENCE.

△ 3. UL(UL File No. E132750) AUTHORIZATION ARTICLE.

C-UL(UL File No. E132750) AUTHORIZATION ARTICLE.



1	PBT	UL94V-0, BLACK	2	BRASS	TIN PLATING 1μm MIN, OVER NICKEL 0.5μm MIN
NO.	MATERIAL	FINISH/REMARKS	NO.	MATERIAL	FINISH/REMARKS
CODE NO. (OLD)		DRAWN	CODE NO.		RELEASED
		CHOI 18.03.02 J.S			ENG 20.02.12 DEPT
		DESIGNED			
		CHOI 18.03.02 J.S			
		CHECKED			
		LIM 18.03.02 S.M			
		APPROVED			
		KANG 18.03.02 T.S			
DRAWING NO.		PART NO.			
EDC3-632480		DF51K-12DP-2DS (800)			
SCALE		CODE NO			
4:1		CL 6652-0054-8-800			
UNITS					
mm					

1 2 3 4 5 6 7 8