



Electrical specifications

Center Frequency: 978 MHz
Bandwidth: FO +/- 5 MHz
Input / Output Impedance: 50 Ohms
Passband Insertion Loss: 3.0 dB max
Passband Ripple: 1.0 dB max
Passband Return Loss: 14 dB min
Rejection: 926 MHz 55 dB min
Rejection 2: 1030 MHz 55 db min
Power Handling: 3W

Mechanical


Mounting Method: SMT
Dimensions: 11 x 25 x 5 mm

Environmental



Operating Temperature: -30°C to +85°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

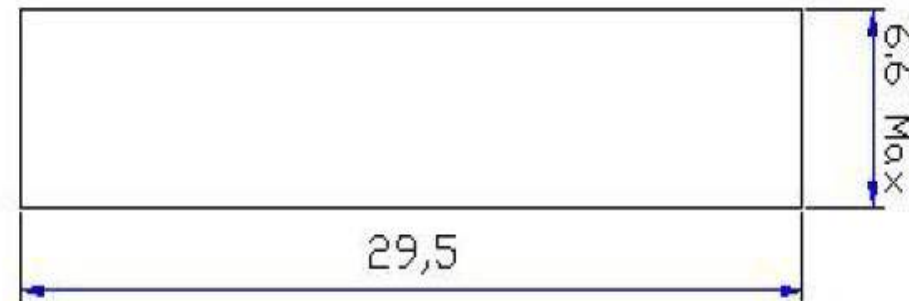

Soldering

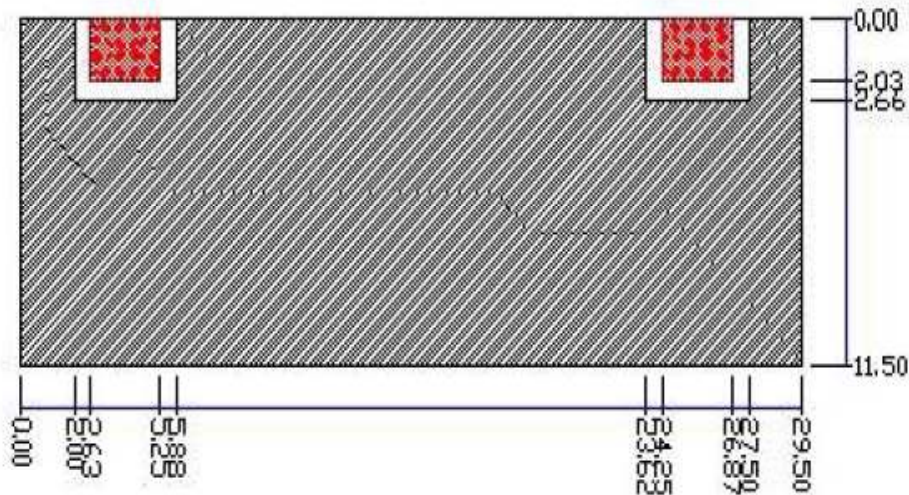



Response Plot:

