
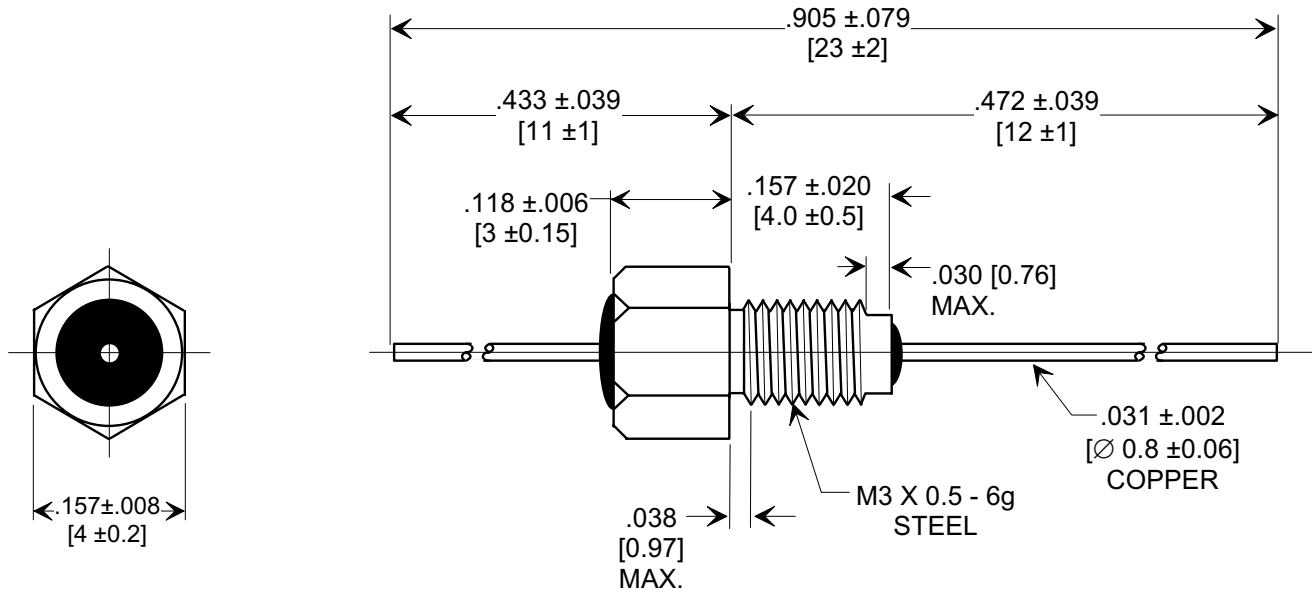



MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC []

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.



NOTES:

- TUSONIX STANDARD PART NUMBER: 4400-089.
TUSONIX RoHS COMPLIANT PART NUMBER: 4400-089 LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- MATERIALS: BUSHING; SILVER PLATED. LEAD; SILVER PLATED.
- PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS.
STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
- OPERATING TEMP. RANGE: -55°C TO +125°C.
- MAX. RECOMMENDED SOLDERING TEMPERATURE : 260° C.
- SUPPLIED WITHOUT NUT AND LOCK WASHER.
- MAX. RECOMMENDED MOUNTING TORQUE : 2.0 Lb. in [.226 Nm.].

CAP.(pf)		TOLERANCE	DC WORKING VOLTAGE		DC CURRENT (AMPS)	I.R. MIN. @ 100 (VDC)	DWV (VDC)	MIN. NO LOAD INSERTION LOSS (db) @ 25°C PER MIL-STD-220				
			85°C	125 °C				1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
10,000		Z (+80, -20%)	70	50	10	10 G Ω	150	4	21	35	50	60

REVISION RECORD	Original Release C.O. 19980908-3-02 ADDED IR. ADDED & REVISED NOTES. S.M. 12-01-05	0	1	20051128-1-09	--TOLERANCES-- Unless Otherwise Specified		Title BUSHING STYLE EMI FILTER	
					DECIMAL ± NOTED			
					ANGLES ± 		Drawn S.M. 09-11-98	
					TUSONIX TUCSON, ARIZONA		Approved J.Mc. 09-11-98	
							A	4400-089