

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT DC1043A-A HIGH DENSITY POWER MODULE

LTM4601EV

DESCRIPTION

Demonstration circuit DC1043A-A features the LTM[®]4601EV and LTM4601-1EV, the high efficiency, high density switch mode step-down power modules. The input voltage range is from 5.0V to 20V. The output voltage is programmable from 0.6V to 3.3V; refer to step down ratio curve in the LTM4601 datasheet. The rated load current is 20A, while de-rating is necessary for certain V_{IN} , V_{OUT} , and thermal conditions. 24A load current can be achieved by applying forced airflow convection or attaching heatsinks. Master module U1 provides differential remote sensing to accurately regulate output voltage independent of load current. Integrated input and output filters enable a simple PCB layout. Only bulk input and output capacitors are needed externally. The DC1043A-A has onboard 180 degree interleaving clock generator. The

default clock frequency is 750 KHz. The LTM4601 allows the user to program output ramp-up and ramp-down through the TRACK/SS pin. The output can be set to coincidentally or ratiometrically track with another supply's output. Margining function is provided for the user who wants to stress their system by varying supply voltages during testing; refer to data-sheet for functional diagram.

If desired, slave unit U2 could be substituted by LTM4601-1EV.

Design files for this circuit board are available. Call the LTC Factory.


 , LTC and LT are registered trademarks of Linear Technology Corporation.

Table 1. Performance Summary ($T_A = 25^\circ\text{C}$)

PARAMETER	CONDITION	VALUE
Minimum Input Voltage		5V
Maximum Input Voltage		20V
Output Voltage V_{OUT}	Jumper selectable (open for 0.6V)	1.2V, 1.5V, 1.8V, 2.5V, 3.3V
Maximum Continuous Output Current	De-rating is necessary for certain V_{IN} , V_{OUT} , and thermal conditions	$20A_{DC}$
Default Operating Frequency		750kHz
Efficiency	$V_{IN}=12V$, $V_{OUT}=1.5V$, $I_{OUT}=20A$	83.2%, See Figure 3
Load Transient	$V_{IN}=12V$, $V_{OUT}=1.5V$	See Figure 4

QUICK START PROCEDURE

Demonstration circuit DC1043A-A is easy to set up to evaluate the performance of the LTM4601EV. Please refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Place jumpers in the following positions for a typical $1.5V_{OUT}$ application:

Vout Select	RUN	MARGO	MARG1
1.5V	ON	LO	LO

2. With power off, connect the input power supply, load and meters as shown in Figure 1. Preset the load to 0A and V_{IN} supply to be less than 20V.
3. Turn on the power at the input. The output voltage should be $1.5V \pm 2\%$.
4. Once the proper output voltage is established, adjust the load within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other pa-

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT DC1043A-A HIGH DENSITY POWER MODULE

rameters. Output ripple should be measured across the output capacitors.

- For optional load transient test, apply adjustable pulse signal between IOSTEP CLK and GND pins. Pulse amplitude sets the current step. The pulse signal should have very small duty cycle (<15%) to limit the thermal stress on the transient load circuit. The output transient current can be monitored at BNC connector J5 (25mV/10A).

- For Margining function test, place jumper MARG0 and MARG1 in the configurations shown in the following table, measure the output voltage at Vo+ and Vo-.

MARG1	MARG0	Vout
LO	LO	0
LO	HI	+5%
HI	LO	-5%
HI	HI	0

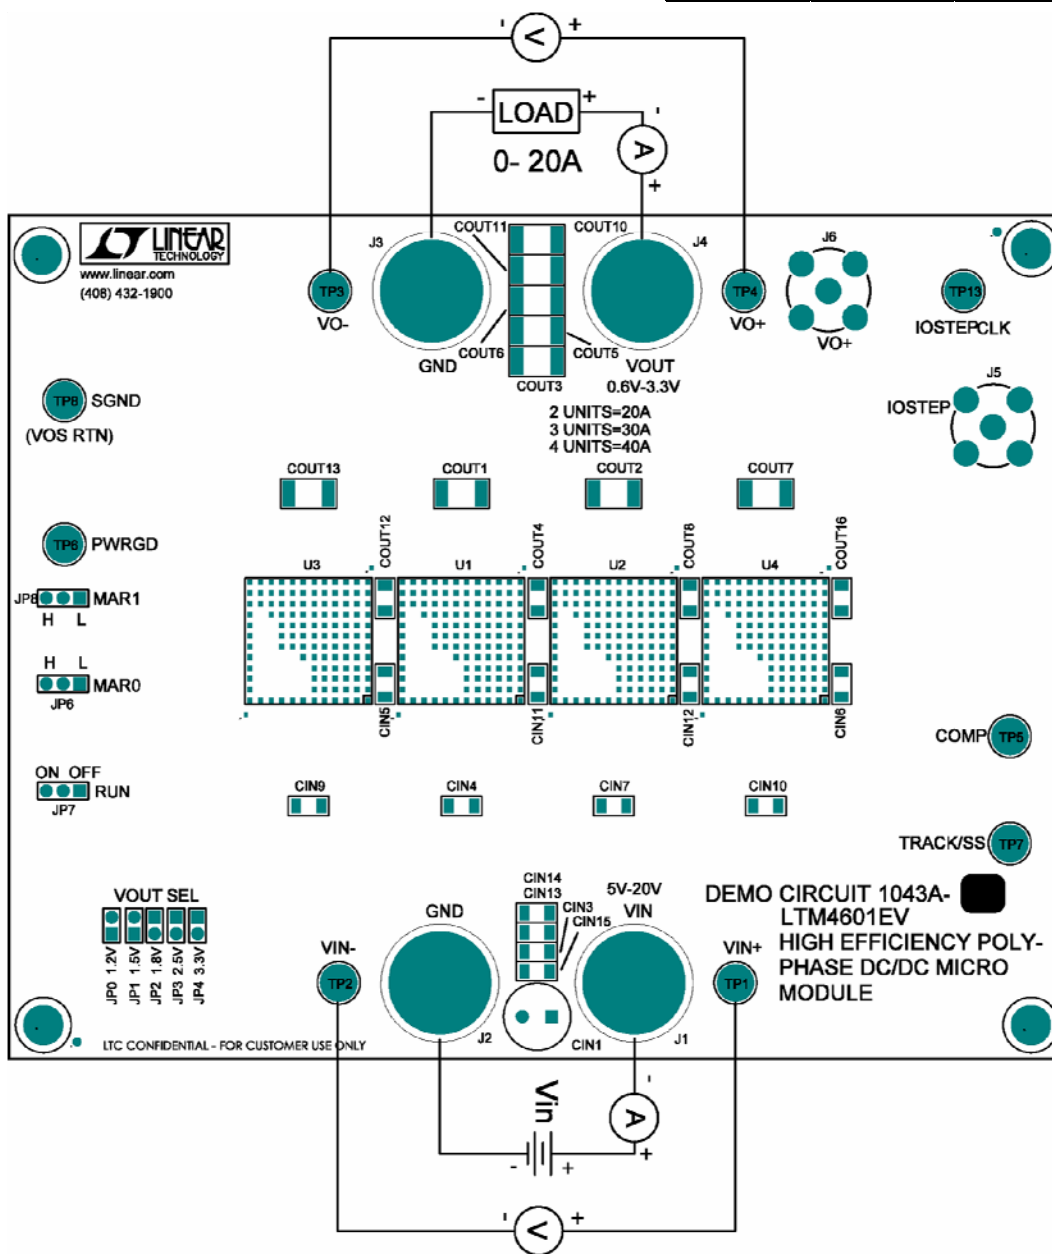


Figure 1. Test Setup of DC1043A-A

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT DC1043A-A HIGH DENSITY POWER MODULE

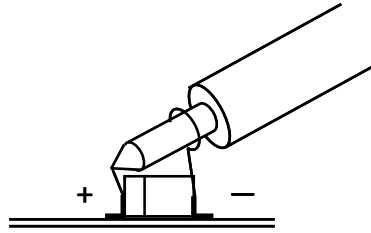


Figure 2. Scope Probe Placements for Measuring Input or Output Ripple.


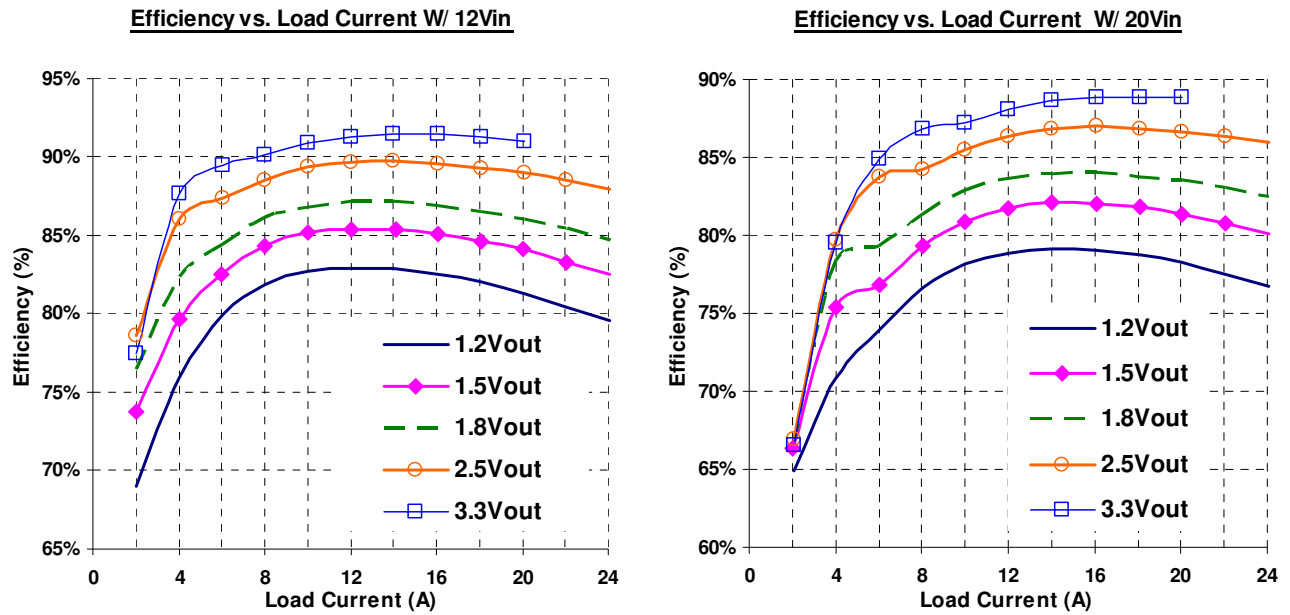


Figure 3. Measured Supply Efficiency with Different V_{IN} and V_{OUT}

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT DC1043A-A HIGH DENSITY POWER MODULE

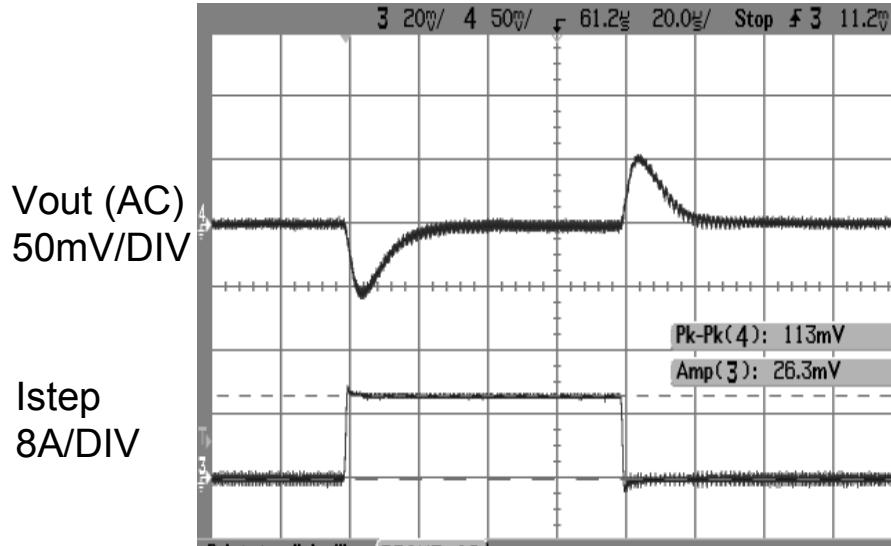


Vin = 12V

Vout = 1.5V

5A to 15A LOAD STEP (50%)

Cout = 2 X 22uF ceramic, 4X100uF ceramic; C12 = 47pF

Figure 4. Measured Load Transient Response (5-15A Step)

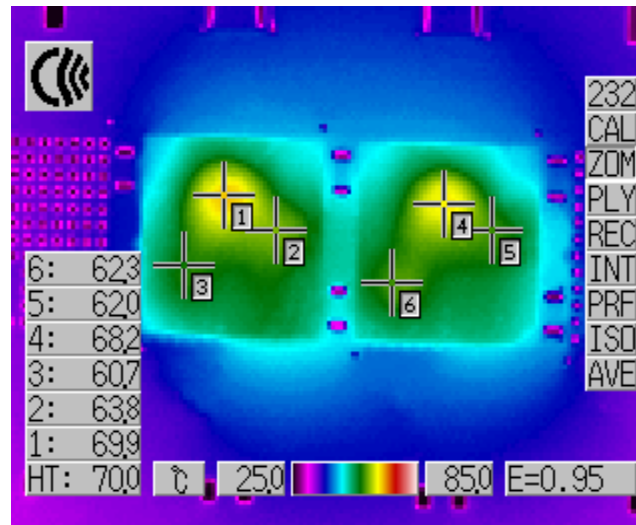

Vo = 1.5V@20A


Vin = 20V

Figure 5. Measured Thermal Performance

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT DC1043A-A HIGH DENSITY POWER MODULE

REVISION HISTORY

ECO	REV	DESCRIPTION	DATE	APPROVED
	1	PROTO	12/23/05	
	2	Change, Correction, Modifications 05/09/06 more chgs	04/04/06	
	3	Change 01, R7, R2a, 10/06/06: More Changes 11/09/06: More Changes	10/06/06	

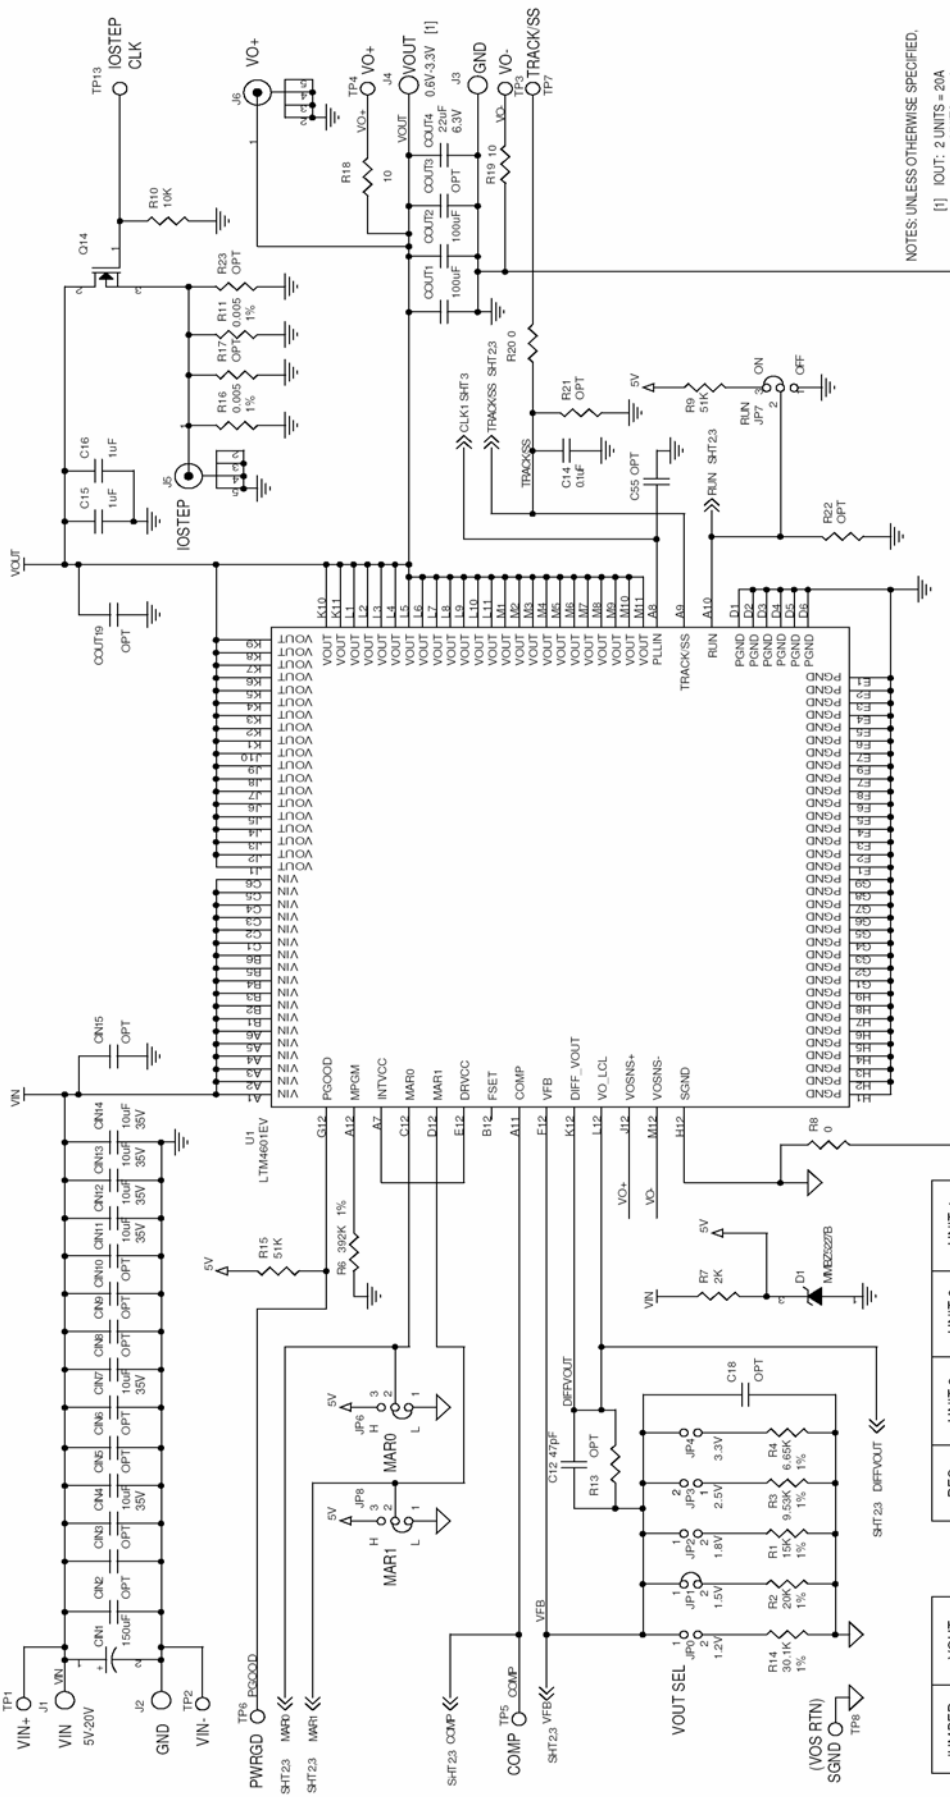

NOTES: UNLESS OTHERWISE SPECIFIED,
 [1] IOUT: 2 UNITS = 20A
 3 UNITS = 30A
 4 UNITS = 40A



1600 McCarthy Blvd.
 Fremont, CA 94535
 Phone: (925) 466-1000
 Fax: (925) 466-1007

SCH. LTM4601EV HIGH EFFICIENCY POLYPHASE
 DC/DC MICRO MODULE

CONTRACT NO.	DATE	TITLE
	12/23/05	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCE ON ANGLE ... 2 PLACES ... 3 PLACES ... INTERPRET DIM AND TOL PER ASME Y14.5M-1994		
THIRD ANGLE PROJECTION		
APPROVALS		
DRAWN IN/ENI		
CHECKED		
APPROVED		
ENGINEER		
DESIGNER		
SIZE	CAGE CODE	DWG NO
Custom		DC1043A-A
SCALE: NONE	FILENAME: 1043A-3.DSN	SHEET 1 OF 3


JUMPER	VOUT	RES	UNIT 2	UNIT 3	UNIT 4
JP0	1.2V	R14	30.1K	20K	15K
JP1	1.5V	R2	20K	13.3K	10K
JP2	1.8V	R1	15K	10K	7.5K
JP3	2.5V	R3	9.53K	6.34K	4.75K
JP4	3.3V	R4	6.65K	4.42K	3.32K

This circuit is proprietary to Linear Technology and supplied for use with Linear Technology parts.
Customer Notice: Linear Technology has made a best effort to design a circuit that meets customer-supplied specifications; however, it remains the customer's responsibility to verify proper and reliable operation in the actual application. Component substitution and printed circuit board layout may significantly affect circuit performance or reliability. Contact Linear Applications Engineering for assistance.



QUICK START GUIDE FOR DEMONSTRATION CIRCUIT DC1043A-A HIGH DENSITY POWER MODULE

REVISION HISTORY				
ECO	REV	DESCRIPTION	DATE	APPROVED
	1	PROTO	12/29/05	
	2	Change Connection Modifications 05/09/06 more chgs.	04/04/06	
	3	Change D1, R7, R26, 10/05/06, New Change	10/05/06	

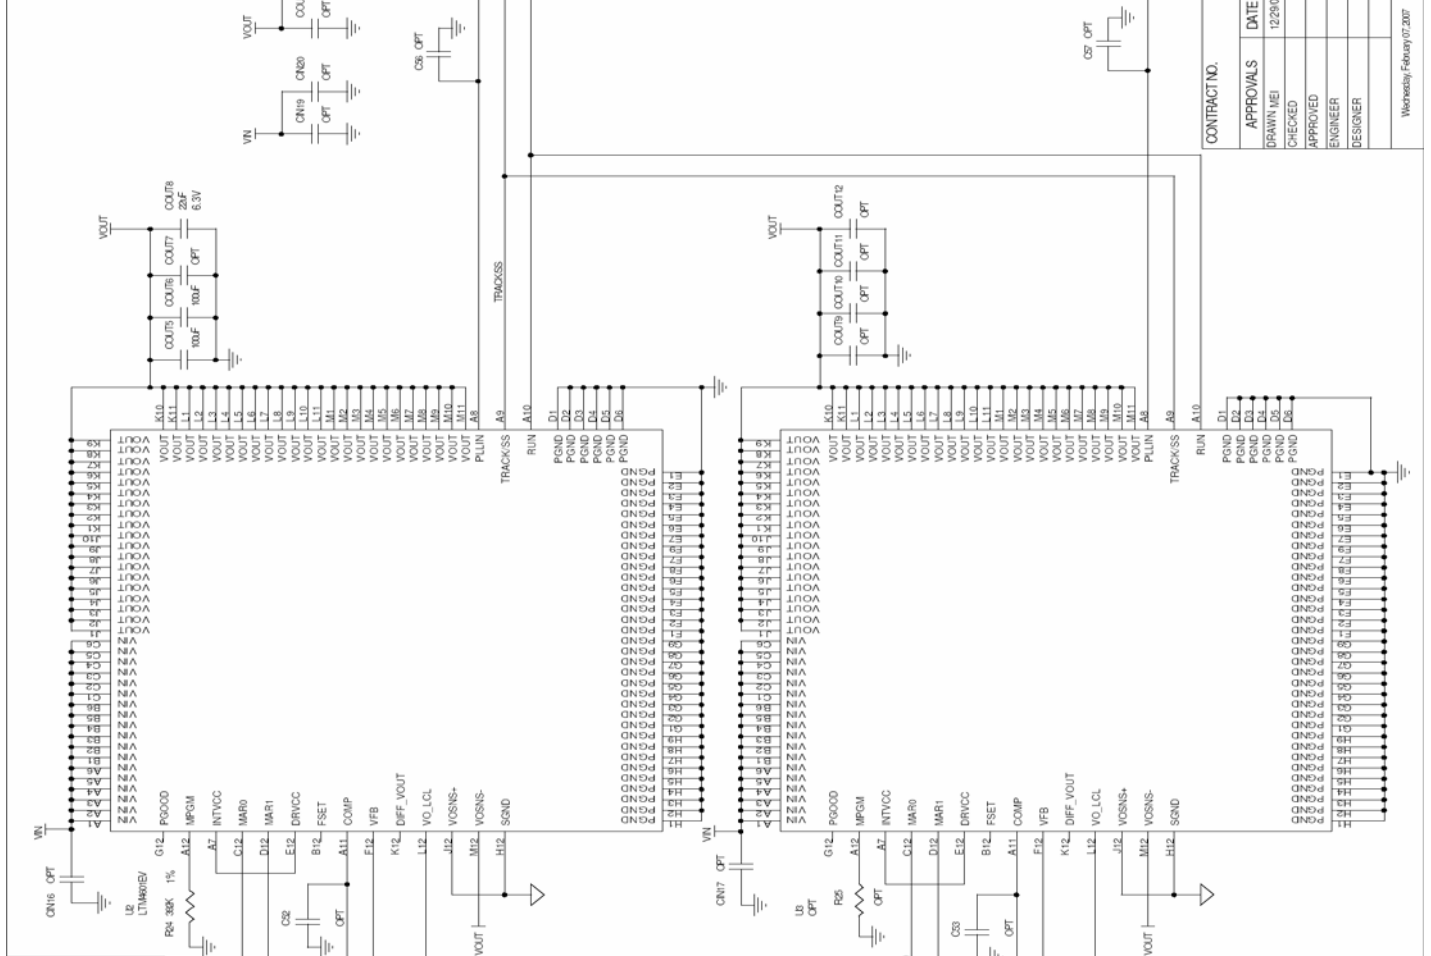

This circuit is proprietary to Linear Technology and supplied for use with Linear Technology parts.
Customer Notice: Linear Technology has made a best effort to design a circuit that meets customer-supplied specifications; however, it remains the customer's responsibility to verify proper and reliable operation in the actual application. Component substitution and printed circuit board layout may significantly affect circuit performance or reliability. Contact Linear Applications Engineering for assistance.

CONTRACT NO.	DATE	12/29/05
APPROVALS	DRAWN	MEI
CHECKED	APPROVED	
ENGINEER	DESIGNER	
SIZE	CAGE CODE	DWG NO
B		DC1043A-A
SCALE: NONE	FILENAME	1043A-3.DSN
SHEET	2	OF
		3

LINEAR TECHNOLOGY
 1600 McCarthy Blvd
 Milpitas, CA 95035
 Phone: 408.252.9000
 Fax: 408.252.9000

TITLE SCH, LTM601EV HIGH EFFICIENCY POLYPHASE
 DC/DC MICRO MODULE

Wednesday, February 07, 2007


QUICK START GUIDE FOR DEMONSTRATION CIRCUIT DC1043A-A HIGH DENSITY POWER MODULE

REVISION HISTORY

ECO	REV	DESCRIPTION	DATE	APPROVED
	1	PROTO	12/29/05	
	2	Change, Correction, Modifications, 05/08/06 More chgs.	04/04/06	
	3	Change D1, R7, R20, 1005068 New Changes	10/05/06	

PHASE No.	R26	R27	R29
2	0	OPT	267K
3	OPT	OPT	88.7K
4	OPT	OPT	66.5K

This circuit is proprietary to Linear Technology and supplied for use with Linear Technology parts.
Customer Notice: Linear Technology has made a best effort to design a circuit that meets customer-supplied specifications; however, it remains the customer's responsibility to verify proper and reliable operation in the actual application. Component substitution and printed circuit board layout may significantly affect circuit performance or reliability. Contact Linear Applications Engineering for assistance.

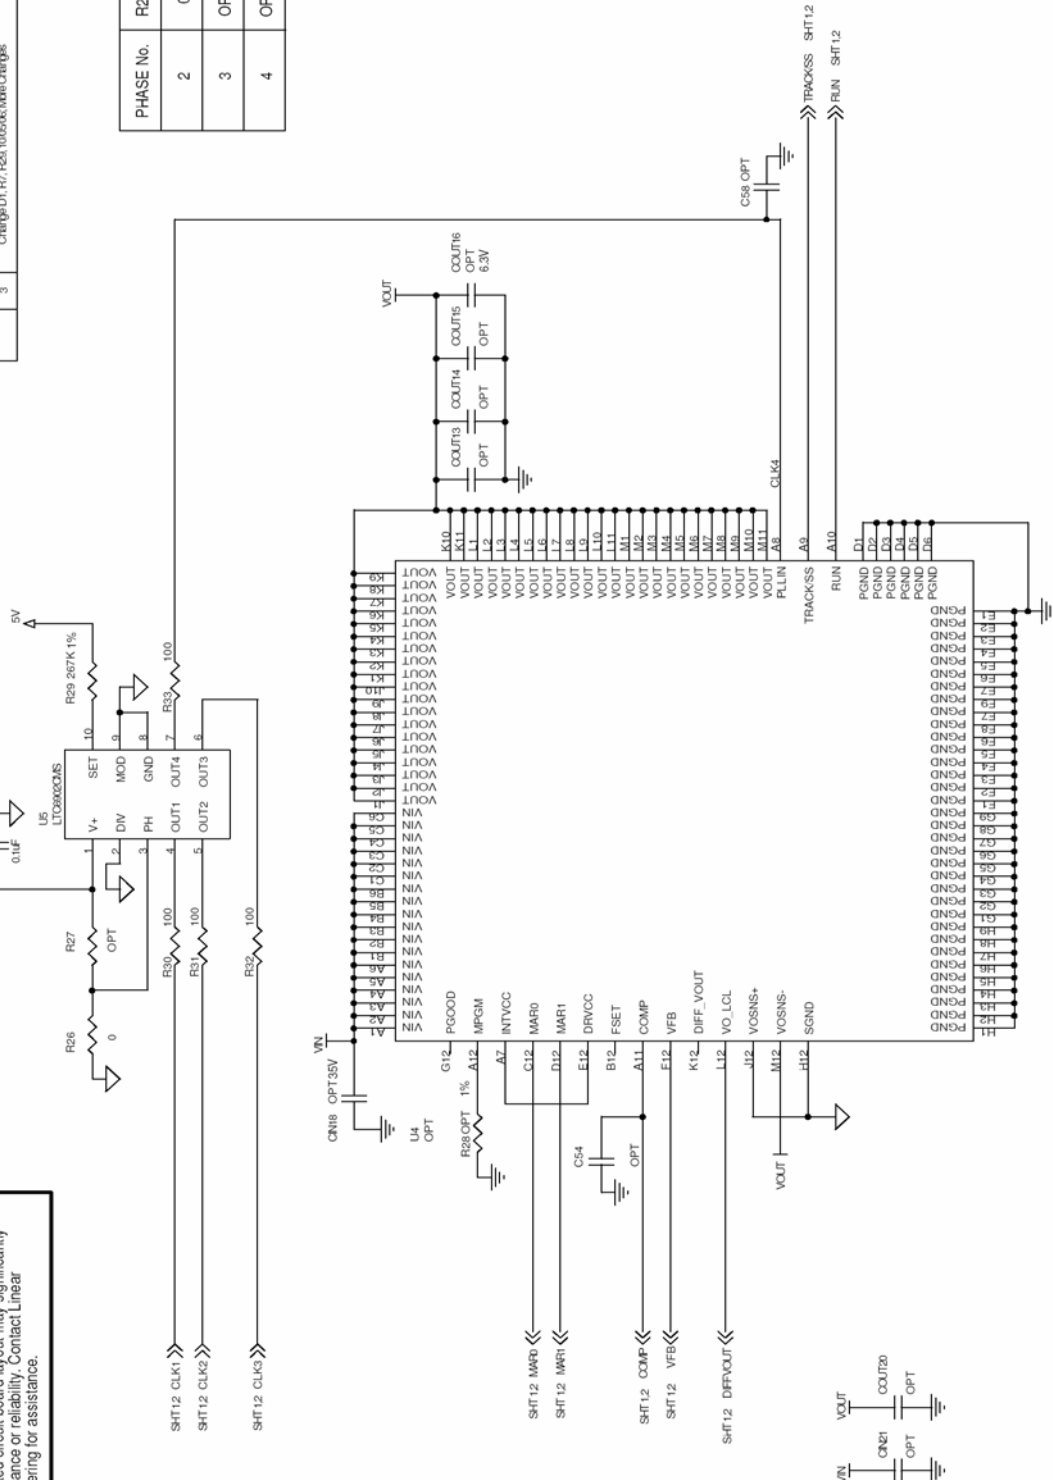

CONTRACT NO.	DATE	TITLE
	12/29/05	SCH, LTM4601EV HIGH EFFICIENCY POLYPHASE DC/DC MICRO MODULE
APPROVALS	DESIGNER	FILENAME: 1043A-3.DSN
APPROVED	ENGINEER	SHEET 3 OF 3
CHECKED	DESIGNER	
SIZE	CAGE CODE	DWG NO DC1043A-A
REV	3	

USED IN PCB MANUFACTURING

X1
 X2
 X3
 X4
 X5
 X6
 X7
 X8
 X9
 X10
 X11
 X12
 X13
 X14

F100C8A1

C1
 C2
 C3
 C4
 C5
 C6
 C7
 C8
 C9
 C10
 C11
 C12
 C13
 C14
 C15
 C16
 C17
 C18
 C19
 C20
 C21
 C22
 C23
 C24
 C25
 C26
 C27
 C28
 C29
 C30
 C31
 C32
 C33
 C34
 C35
 C36
 C37
 C38
 C39
 C40
 C41
 C42
 C43
 C44
 C45
 C46
 C47
 C48
 C49
 C50
 C51
 C52
 C53
 C54
 C55
 C56
 C57
 C58
 C59
 C60
 C61
 C62
 C63
 C64
 C65
 C66
 C67
 C68
 C69
 C70
 C71
 C72
 C73
 C74
 C75
 C76
 C77
 C78
 C79
 C80
 C81
 C82
 C83
 C84
 C85
 C86
 C87
 C88
 C89
 C90
 C91
 C92
 C93
 C94
 C95
 C96
 C97
 C98
 C99
 C100

