

# RF Filters for Cellular Phones

Series/Type: B7721

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product		Deadline Last Orders	Last Shipments
B39941B7721C910	B39941B9401K610	2007-09-21	2007-12-31	2008-03-31

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.



#### **SAW Components**

B7721

## **Low-Loss Filter for Mobile Communication**

942,5 MHz


#### **Data Sheet**




#### **Features**

- Low-loss RF filter for mobile telephone EGSM system, receive path
- Low amplitude ripple
- Usable passband 35 MHz
- Unbalanced to balanced operation
- Excellent symmetry
- $\blacksquare$  Impedance transformation from 50  $\Omega$  to 200  $\Omega$
- Suitable for GPRS class 1 to 12
- Ceramic package for Surface Mounted Technology (SMT)
- Pb-free

# Chip sized SAW package DCS6K






#### **Terminals**

■ Ni, gold-plated

#### Dimensions in mm

# Pin configuration

2	input, unbalanced
4, 6	Balanced outputs
1, 3, 5	To be grounded
1, 5	Case ground



Туре	Ordering code	Marking and Package	Packing			
		according to	according to			
B7721	B39941-B7721-C910	C61157-A7-A97	F61074-V8153-Z000			

Electrostatic Sensitive Device (ESD)

#### **Maximum ratings**

Operable temperature range	T	<b>- 25 / + 85</b>	°C	
Storage temperature range	$T_{stg}$	<b>- 40 / + 85</b>	°C	
DC voltage	$V_{\rm DC}$	5	V	
ESD voltage	$V_{ESD}$	100	V	
Input power at	$P_{IN}$	15	dBm	peak power of GSM signal,
GSM850, GSM900				duty cycle 4:8
GSM1800 and GSM1900				
Tx bands				



# SAW Components

B7721

# **Low-Loss Filter for Mobile Communication**

942,5 MHz

**Data Sheet** 



#### **Characteristics**

 $T = 25 \pm 2 \,^{\circ}\text{C}$ Operating temperature range: Terminating source impedance:

 $Z_{\rm S} = 50 \ \Omega$   $Z_{\rm L} = 200 \ \Omega \parallel 68 \ \rm nH$ Terminating load impedance:

		min.	typ.	max.	
Center frequency	$f_{\mathbb{C}}$	_	942,5	_	MHz
Maximum insertion attenuation	$\alpha_{\text{max}}$				
925,0 960,0 <b>N</b>	MHz	_	2,4	2,8	dB
Amenita de vincia (n. n.)	<b>A</b>				
<b>Amplitude ripple</b> (p-p) 925,0 960,0 M	Δα MHz		1,1	1,5	dB
923,0 900,0	IVII IZ	_	1,1	1,5	ub
Input VSWR					
•	MHz	_	2,2	2,4	
Output VSWR					
925,0 960,0 <b>N</b>	MHz	_	2,0	2,4	
Output phase balance $\phi(S_{31})-\phi(S_{21})$	N 41 I—	_		_	d = ====
925,0 960,0 N	MHz	-5	_	5	degree
Output amplitude balance $( S_{31}/S_{21} )$					
51 21	MHz	-0,5	_	0,5	dB
		,,,			
Diff. to common mode suppression	$S_{sc12}$				
925,0 960,0 M	MHz	20	38	_	dB
·	MHz	20	29	_	dB
	MHz	20	50	_	dB
·	MHz	20	31	_	dB
Attenuation	α	50	0.4		10
	MHz	50	64	_	dB
·	MHz MHz	30 20	39 26	_	dB dB
•	MHz	23	30		dВ
	MHz	50	70	_	dB
	MHz	50	72		dB
	MHz	50	64	_	dB
	MHz	40	66	_	dB
4000,06000,0 M	MHz	40	66	_	dB



# SAW Components

B7721

## **Low-Loss Filter for Mobile Communication**

942,5 MHz

**Data Sheet** 

#### **Characteristics**

 $T = -10 \text{ to } +80 \,^{\circ}\text{C}$ Operating temperature range:

Terminating source impedance:


 $Z_{\rm S} = 50 \,\Omega$   $Z_{\rm L} = 200 \,\Omega \parallel 68 \,\mathrm{nH}$ Terminating load impedance:

			min.	typ.	max.	
Center frequency		$f_{\mathbb{C}}$	_	942,5	_	MHz
Maximum insertion attenuation		$\alpha_{\text{max}}$		0.4	0.0	ID.
925,0 960,0	MHz		_	2,4	3,0	dB
Amplitude ripple (p-p)		Δα				
925,0 960,0	MHz		_	1,1	1,7	dB
,				,	,	
Input VSWR						
925,0 960,0	MHz		_	2,2	2,4	
Output VSWR	N 41 1-			0.0	0.4	
925,0 960,0	MHz		_	2,0	2,4	
Output phase balance $\phi(S_{31})-\phi(S_{21})$						
925,0 960,0	MHz		-5	_	5	degree
,						
Output amplitude balance ( $ S_{31}/S_{21} $ )						
925,0 960,0	MHz		-0,5	_	0,5	dB
		_				
Diff. to common mode suppression	N 41 1-	$S_{sc12}$	00	00		-ID
925,0 960,0	MHz		20	38	_	dB
824,0 995,0	MHz		20	29		dB
1648,0 1990,0	MHz		20	50	_	dB
3296,0 3980,0	MHz		20	31	_	dB
Attenuation	N 41 1—	α	50	0.4		4D
0,0 880,0	MHz		50	64	_	dB
880,0 905,0	MHz		30	37	_	dB
905,0 915,0	MHz		20	26	_	dB
980,01050,0	MHz		23	29	_	dB
1050,01850,0	MHz		50	70 70	_	dB
1850,01920,0	MHz		50	72	_	dB
1920,02880,0	MHz		50	64	_	dB
2880,04000,0	MHz		40	66	_	dB
4000,06000,0	MHz		40	66	_	dB




# SAW Components Low-Loss Filter for Mobile Communication 942,5 MHz Data Sheet

## Transfer function (measurement)

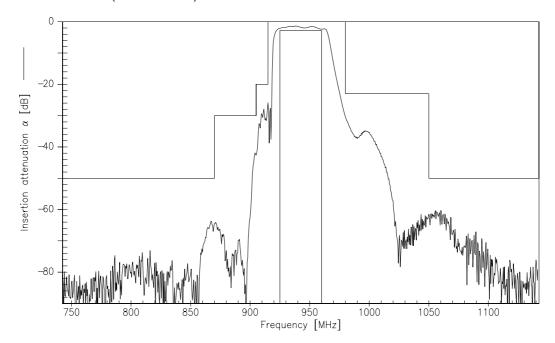

## Transfer function (wideband measurement)

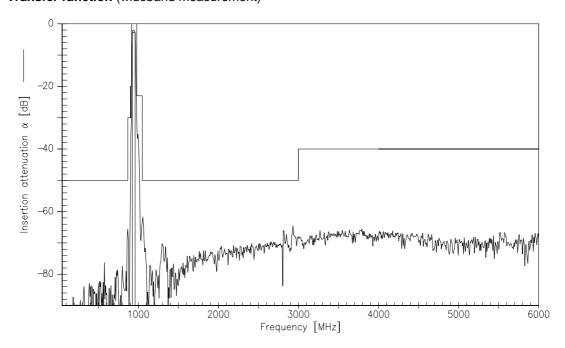



SAW Components B7721

**Low-Loss Filter for Mobile Communication** 

942,5 MHz

**Data Sheet** 



# Published by EPCOS AG Surface Acoustic Wave Components Division, SAW MC WT P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.