





PART NO.

RFD-4195F-SR2

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	02/25/15	JDMc

ASSEMBLY INSTRUCTIONS:

- Step 1: Cut end of cable evenly. Strip cable to dimensions as shown. All cuts are to be clean and square. Do not nick center conductor when cutting.
- Step 2: Place heat shrink tubing and connector body onto cable.
- Step 3: Slide spacer and contact subassembly onto cable center conductor until it yields against the cable dielectric. Solder contact in place.
- Step 4: Press subassembly into body until dielectric yields against the back of the connector. Solder connector and cable outer conductor in place.
- Step 5: Move tubing over until it yields against connector back end and heat shrink.

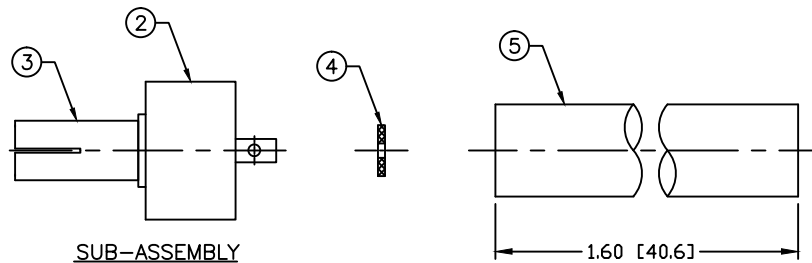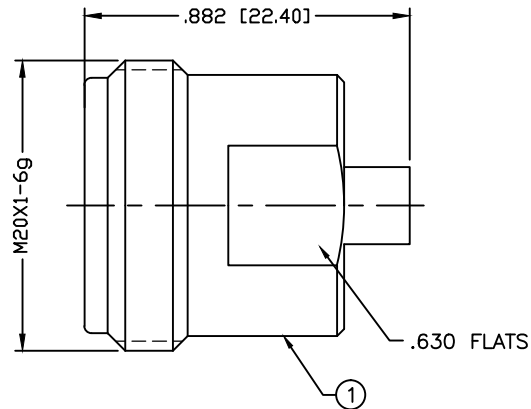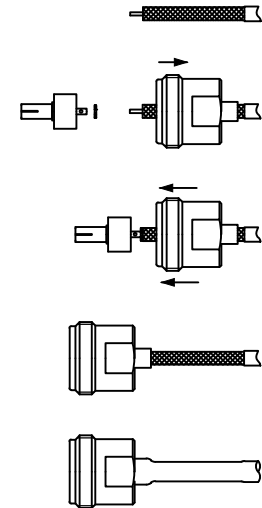

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-3 GHz
 VSWR: <1.15:1 THRU 3GHz
 DIELECTRIC WITHSTANDING VOLTAGE: 750V/AC
 PIM: ≤-155 dBc
 INSULATION RESISTANCE: 5000MΩ
 TEMPERATURE RANGE: -40°C TO 155°C
 MECHANICAL DURABILITY: 500 CYCLES
 FOR .141 SEMI RIGID, RG-402/U & BELDEN 1673A CABLE

5	TUBING	1	HEAT SHRINK	---
4	SPACER	1	PTFE	---
3	CONTACT	1	BeCu	SILVER
2	INSULATOR	1	PTFE	---
1	BODY	1	BRASS	WHITE BRONZE
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
DRAWN	C. ZUNIGA
CHECKED	02/25/15
ORJ DRAWN	C. ZUNIGA
	02/25/15

RoHS COMPLIANT

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

4.1-9.5 JACK SOLDER

SIZE	CABLE GROUP	DWG NO.	REV
A	SR2	RFD-4195F-SR2	---
SCALE: NTS		ENGINEERING ID: 000000	SHEET 1 OF 1