



# SAW filters for mobile communications

**Series/Type: B9815**

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39202B9815P810	B39202B9825P810	2015-11-20	2016-03-01	2016-06-30

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at [www.epcos.com/sales](http://www.epcos.com/sales).




Data sheet


**Application**


- Low-loss 2in1 RF filter for mobile telephone TD-SCDMA 1900 and TD-SCDMA 2100 systems
- Usable passband:  
 Filter 1 (TD-SCDMA 1900): 40 MHz  
 Filter 2 (TD-SCDMA 2100): 15 MHz
- Unbalanced to balanced operation for both filters
- Impedance transformation from 50 Ω to 200 Ω for both filters
- Low amplitude ripple
- No matching network required


**Features**

- Package size 1.5 x 1.1 x 0.4 mm<sup>3</sup>
- Moisture Sensitive Level 3
- RoHS compatible
- Approx. weight 0.003g.
- Package for Surface Mount Technology (SMT)
- Ni, gold-plated terminals
- Electrostatic Sensitive Device (ESD)

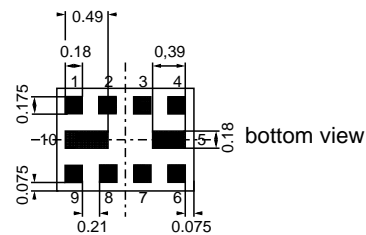
**Pin configuration**

- 1 Input [ Filter 1 ]
- 4 Input [ Filter 2 ]
- 6,7 Output balanced [ Filter 2 ]
- 8,9 Output balanced [ Filter 1 ]
- 2,3,5,10 Case ground



Data sheet


**Characteristics of Filter 1 (TD-SCDMA 1900)**

Temperature range for specification:  $T = -30\text{ °C to }+85\text{ °C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$   
 Terminating load impedance:  $Z_L = 200\ \Omega$

		B9815			
		min.	typ. @ 25 °C	max.	
<b>Center frequency</b>	$f_C$	—	1900.0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$	—	1.6	2.0	dB
	1880.0 ... 1920.0MHz				
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	0.5	1.0	dB
	1880.0 ... 1920.0MHz				
<b>Input VSWR</b>		—	1.6	2.0	
	1880.0 ... 1920.0MHz				
<b>Output VSWR</b>		—	1.7	2.0	
	1880.0 ... 1920.0MHz				
<b>Group delay ripple (p-p)</b>		—	8	18	ns
	1880.0 ... 1920.0MHz				
<b>Common mode rejection ratio</b>		20 <sup>1)</sup>	27	—	dB
	1880.0 ... 1920.0MHz				
<b>Attenuation</b>	$\alpha$				
	0.0 ... 925.0MHz	28	62	—	dB
	925.0 ... 960.0MHz	35	63	—	dB
	960.0 ... 1805.0MHz	28	41	—	dB
	1805.0 ... 1840.0MHz	30	35	—	dB
	1840.0 ... 1850.0MHz	32	44	—	dB
	1980.0 ... 2005.0MHz	15	29	—	dB
	2005.0 ... 6000.0MHz	28	37	—	dB

1) A CMRR of 19.6dB corresponds to a phase balance of 10° together with an amplitude balance of 1.0dB



**Maximum ratings of Filter 1 (TD-SCDMA 1900)**

Operable temperature range	T	-40/+85	°C	
Storage temperature range	T <sub>stg</sub>	-40/+85	°C	
DC voltage	V <sub>DC</sub>	5	V	
ESD voltage	V <sub>ESD</sub>	50 <sup>1)</sup>	V	machine model, 1 pulse
Input power at				
1880.0 ... 1920.0 MHz	P <sub>IN</sub>	10	dBm	effective power in the on-state, duty cycle 4:8, 2000hours
2010.0 ... 2025.0 MHz	P <sub>IN</sub>	10	dBm	


<sup>1)</sup> acc. to JESD22-A115A (machine model), 1 negative & 1 positive pulse.



Transfer function Filter 1 (TD-SCDMA 1900)

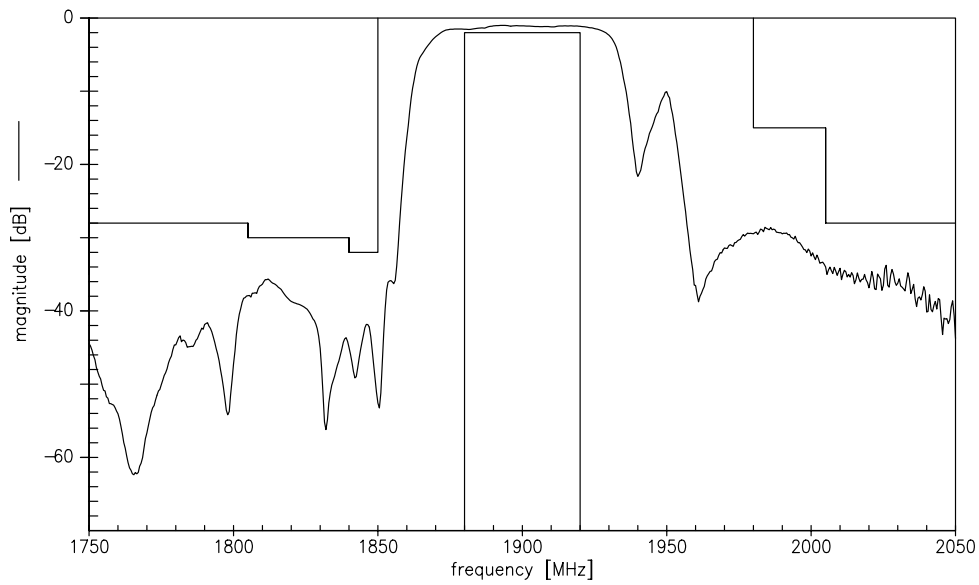

Transfer function Filter 1 (TD-SCDMA 1900) - Wideband


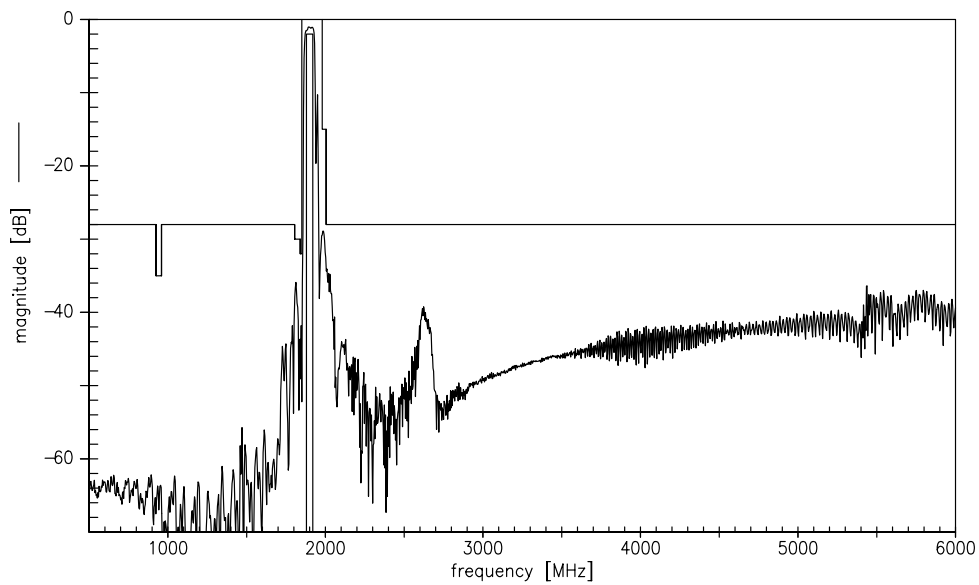


Data sheet





Smith charts Filter 1 (TD-SCDMA 1900)

$S_{11}$  function

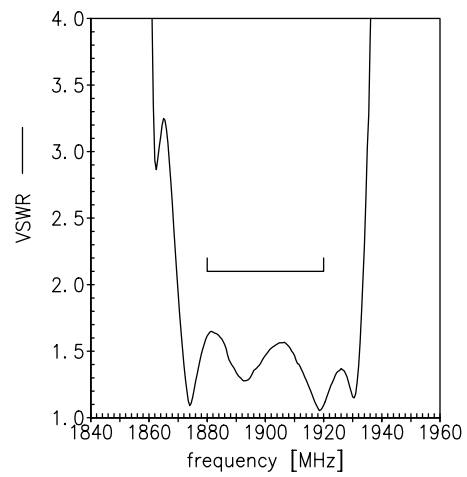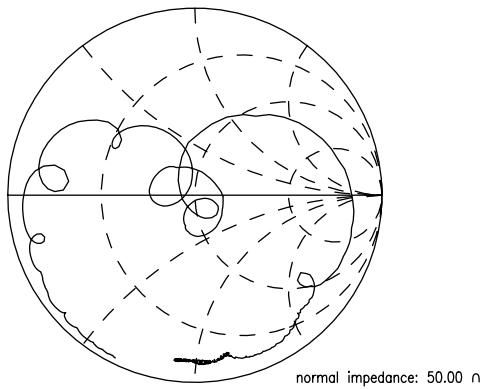

$S_{22}$  function

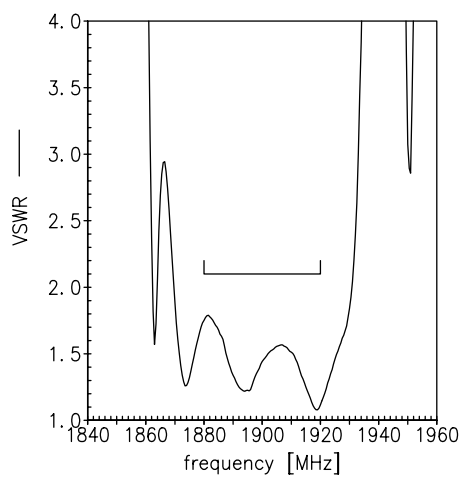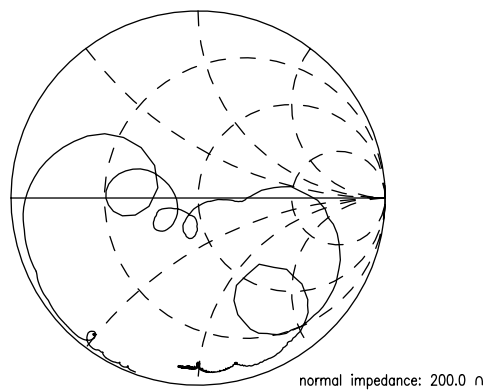

Data sheet


**Characteristics of Filter 2 (TD-SCDMA 2100)**

 Temperature range for specification:  $T = -30\text{ °C to }+85\text{ °C}$ 

 Terminating source impedance:  $Z_S = 50\ \Omega$ 

 Terminating load impedance:  $Z_L = 200\ \Omega$ 

		B9815			
		min.	typ. @ 25°C	max.	
<b>Center frequency</b>	$f_C$	—	2017.5	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$				
2010.0 ... 2025.0	MHz	—	1.7	2.6	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$				
2010.0 ... 2025.0	MHz	—	0.5	1.2	dB
<b>Input VSWR</b>					
2010.0 ... 2025.0	MHz	—	1.5	2.0	
<b>Output VSWR</b>					
2010.0 ... 2025.0	MHz	—	1.4	2.0	
<b>Group delay ripple (p-p)</b>					
2010.0 ... 2025.0	MHz	—	8	20	ns
<b>Common mode rejection ratio</b>					
2010.0 ... 2025.0	MHz	18 <sup>1)</sup>	22	—	dB
<b>Attenuation</b>	$\alpha$				
0 ... 1840.0	MHz	45	50	—	dB
1840.0 ... 1935.0	MHz	25	34	—	dB
1935.0 ... 1970.0	MHz	22	25	—	dB
1970.0 ... 1980.0	MHz	14	25	—	dB
1980.0 ... 1990.0	MHz	6	12	—	dB
2045.0 ... 2085.0	MHz	3	12	—	dB
2085.0 ... 2120.0	MHz	22	25	—	dB
2120.0 ... 2160.0	MHz	27	30	—	dB
2160.0 ... 2300.0	MHz	35	37	—	dB
2300.0 ... 2700.0	MHz	30	37	—	dB
2700.0 ... 2900.0	MHz	30	35	—	dB
2900.0 ... 6000.0	MHz	30	38	—	dB

<sup>1)</sup> A CMRR of 18.0dB corresponds to a phase balance of 12° together with an amplitude balance of 1.2dB


**Maximum ratings of Filter 2 (TD-SCDMA 2100)**


Operable temperature range	T	-40/+85	°C	
Storage temperature range	T <sub>stg</sub>	-40/+85	°C	
DC voltage	V <sub>DC</sub>	5	V	
ESD voltage	V <sub>ESD</sub>	50 <sup>1)</sup>	V	machine model, 1 pulse
Input power at				
1880.0 ... 1920.0 MHz	P <sub>IN</sub>	10	dBm	effective power in the on-state, duty cycle 4:8, 2000hours
2010.0 ... 2025.0 MHz	P <sub>IN</sub>	10	dBm	

<sup>1)</sup> acc. to JESD22-A115A (machine model), 1 negative & 1 positive pulse.






Transfer function Filter 1 (TD-SCDMA 2100)

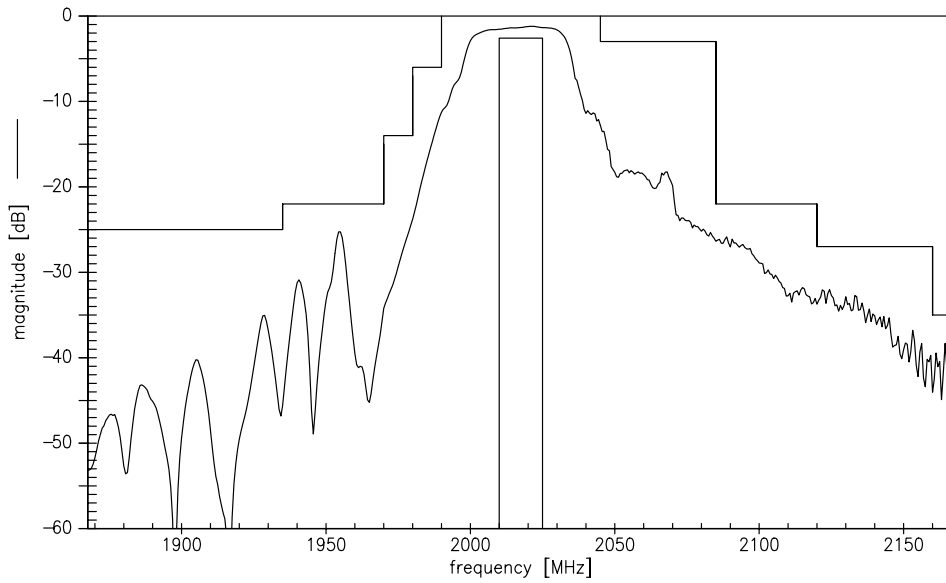

Transfer function Filter 1 (TD-SCDMA 2100) - Wideband


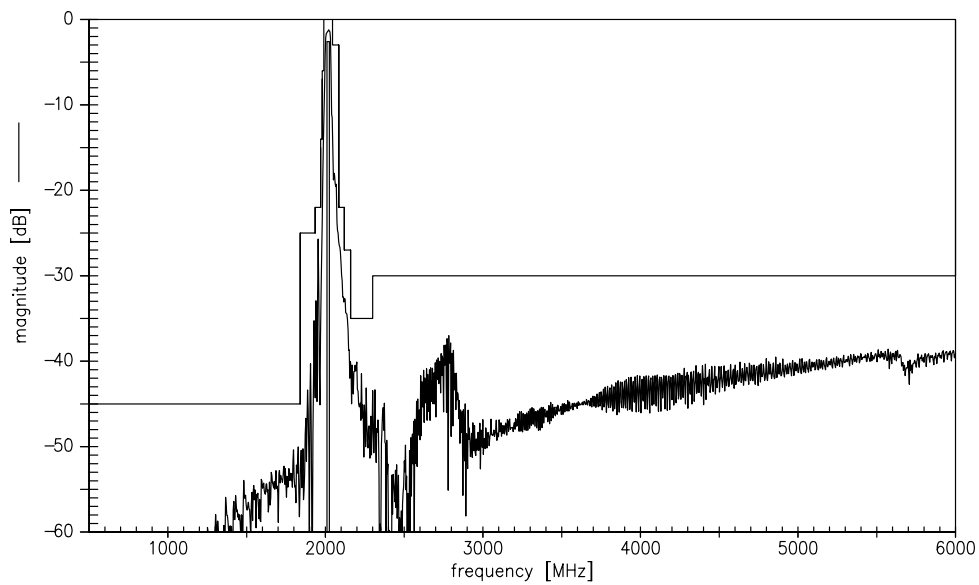


Data sheet





Smith charts Filter 1 (TD-SCDMA 2100)

$S_{11}$  function

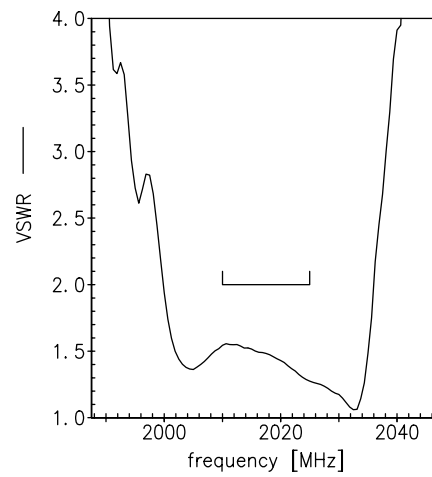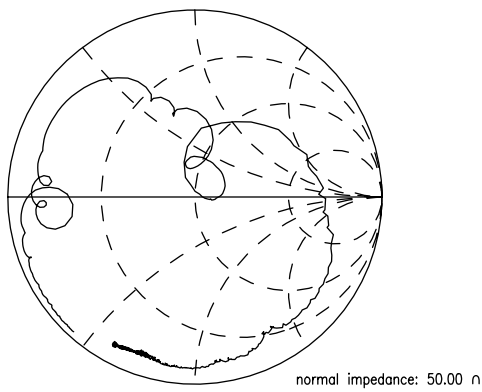

$S_{22}$  function

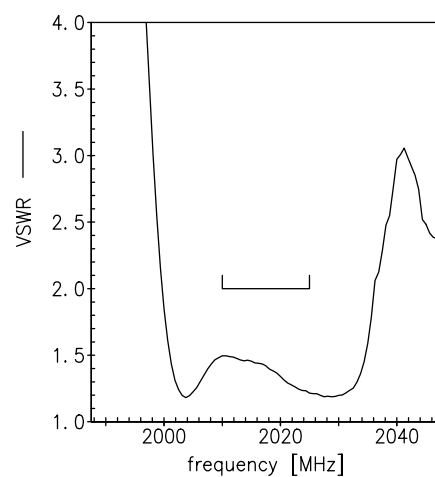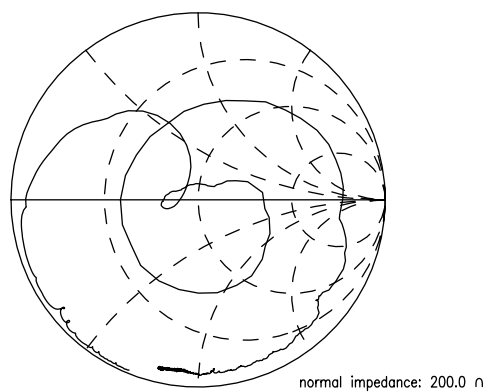


**References**

<b>Type</b>	B9815
<b>Ordering code</b>	B39202B9815P810
<b>Marking and package</b>	C61157-A8-A19
<b>Packaging</b>	F61074-V8227-Z000
<b>Date codes</b>	L_1126
<b>S-parameters</b>	B9815_LB_NB.s3p, B9815_LB_WB.s3p B9815_UB_NB.s3p, B9815_UB_WB.s3p see file header for port/pin assignment table
<b>Soldering profile</b>	S_6001
<b>RoHS compatible</b>	defined as compatible with the following documents: "DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. 2005/618/EC from April 18th, 2005, amending Directive 2002/95/EC of the European Parliament and of the Council for the purposes of establishing the maximum concentration values for certain hazardous substances in electrical and electronic equipment."
<b>Moldability</b>	Before using in overmolding environment, please contact your EPCOS sales office.
<b>Matching coils</b>	See Inductor pdf-catalog <a href="http://www.tdk.co.jp/tefe02/coil.htm#aname1">http://www.tdk.co.jp/tefe02/coil.htm#aname1</a> and Data Library for circuit simulation <a href="http://www.tdk.co.jp/etvcl/index.htm">http://www.tdk.co.jp/etvcl/index.htm</a>

For further information please contact your local EPCOS sales office or visit our webpage at [www.epcos.com](http://www.epcos.com).

**Published by EPCOS AG**  
**Systems, Acoustics, Waves Business Group**  
**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2011. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.



The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.epcos.com/material](http://www.epcos.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.epcos.com/trademarks](http://www.epcos.com/trademarks).