

S101N11/S101N12 S201N11/S201N12

■ Features

1. Built-in snubber circuit
2. Input side voltage operation type
3. Built-in zero-cross circuit (**S101N12/S201N12**)
4. RMS ON-state current I_r : MAX. 1.6Arms

■ Applications

1. Programmable controllers
2. Copiers
3. Air conditioners
4. Automatic vending machines

■ Model line-ups

	For 100V lines	For 200V lines
No zero-cross circuit	S101N11	S201N11
Built-in zero-cross circuit	S101N12	S201N12

■ Absolute Maximum Ratings (Ta=25°C)

Parameter		Symbol	Rating	Unit
Input	Input signal voltage	V_{IN}	3 to 6	V
	Reverse voltage	V_R	6	V
Output	Standard voltage	S101N11	120	V_{rms}
		S101N12		
		S201N11	240	
		S201N12		
	Operating frequency	f	47 to 63	Hz
	Output supply voltage	V_{out}	S101N11 S101N12	60 to 140
S201N11 S201N12			60 to 280	
RMS ON-state current	I_r	*1 1.6	A_{rms}	
*2 Peak one cycle surge current	I_{surge}	15	A	
Operating temperature	T_{opr}	-25 to +80	°C	
Storage temperature	T_{stg}	-30 to +85	°C	
*3 Isolation voltage	V_{iso}	3.0	kV_{rms}	
*4 Soldering temperature	T_{sol}	260	°C	

*1 Refer to Fig.1

*2 50Hz sine wave, start at $T_j=25^\circ\text{C}$

*3 Isolation voltage measuring method

(1) Dielectric withstand voltage tester with zero cross circuit shall be used.

(2) The applied voltage waveform shall be sine wave.

(3) Voltage shall be applied between input and output.

(Input and output terminals shall be shorted respectively.)


(4) AC 60Hz, 1min, 40 to 60%RH.

*4 For 5s

Voltage Input Type Solid State Relay with Built-in Snubber Circuit

■ Outline Dimensions

(Unit : mm)

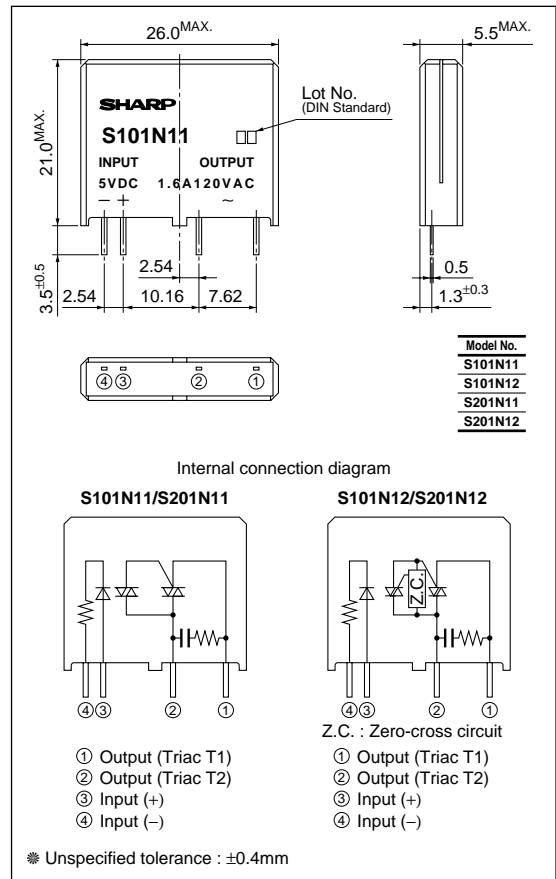

■ Recommended Operating Conditions

(Ta=25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Input voltage	V_{IN}	–	4	–	6	V
Output	Load supply voltage	S101N11	–	80	–	120	V_{rms}
		S101N12					
		S201N11				260	
	S201N12						
Load operating current	–	Refer to Fig.1	0.05	–	1.6	A_{rms}	
Operating frequency	f	–	–	47	–	63	Hz

■ Electrical Characteristics

(Ta=25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Input resistance	R_{IN}	–	–	160	–	Ω	
	Pickup voltage	S101N11/S101N12	V_{pu}	$V_D=120V_{rms}, R_L=500\Omega$	–	–	3	V
		S201N11/S201N12	V_{pu}	$V_D=240V_{rms}, R_L=500\Omega$	–	–	–	V
	Dropout voltage	S101N11/S101N12	V_{do}	$V_D=120V_{rms}, R_L=500\Omega$	1	–	–	V
S201N11/S201N12		V_{do}	$V_D=240V_{rms}, R_L=500\Omega$	–	–	–	V	
Output	ON-state voltage	V_T	$I_T=1.6A_{rms}$, Resistance load, $V_{IN}=3V$	–	–	1.6	V_{rms}	
Output	Open circuit leak current	S101N11/S101N12	I_{leak}	$V_D=120V_{rms}$	–	–	0.7	mA_{rms}
		S201N11/S201N12	I_{leak}	$V_D=240V_{rms}$	–	–	1.3	mA_{rms}
Output	Minimum operating current	S101N11/S101N12	I_{OP}	$V_D=60V$, Resistance load, $V_{IN}=3V$	–	–	10	mA_{rms}
		S201N11/S201N12	I_{OP}	$V_D=60V$, Resistance load, $V_{IN}=3V$	–	–	20	mA_{rms}
Output	Zero-cross voltage	V_{OX}	$V_{IN}=3V, R_L=400\Omega$	–	–	35	V	
Transfer characteristics	Turn-on time	S101N11	t_{on}	$V_D=120V_{rms}, AC50Hz, R_L=500\Omega, V_{IN}=3V$	–	–	0.5	ms
		S101N12					11	
		S201N11		$V_D=240V_{rms}, AC50Hz, R_L=500\Omega, V_{IN}=3V$			0.5	
		S201N12					11	
Transfer characteristics	Turn-off time	S101N11/S101N12	t_{off}	$V_D=120V_{rms}, AC50Hz, R_L=500\Omega, V_{IN}=3V$	–	–	11	ms
		S201N11/S201N12		$V_D=240V_{rms}, AC50Hz, R_L=500\Omega, V_{IN}=3V$	–	–	–	ms
Transfer characteristics	Isolation resistance	R_{iso}	DC500V, 40 to 60%RH	100	–	–	$M\Omega$	

Fig.1 RMS ON-state Current vs. Ambient Temperature

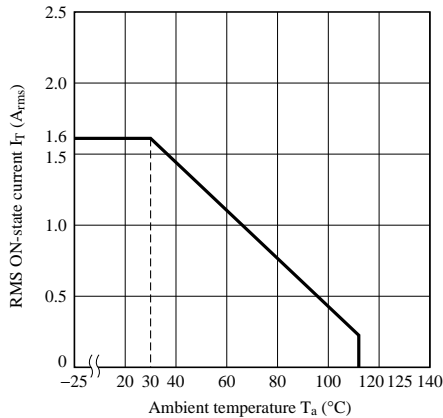


Fig.2 Open Circuit Leak Current vs. Ambient Temperature (Typical Value)

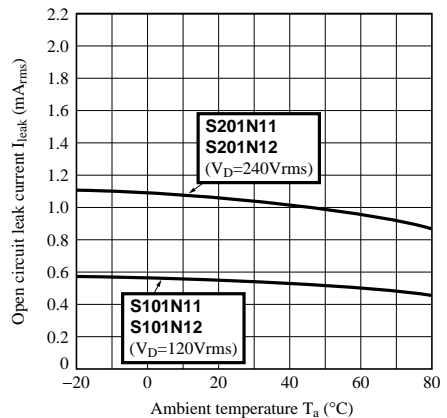


Fig.3 Input Current vs. Input Voltage (Typical Value)

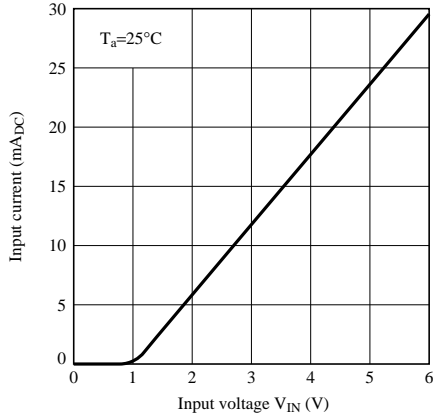


Fig.4 Non-repetitive Surge Current vs. Time

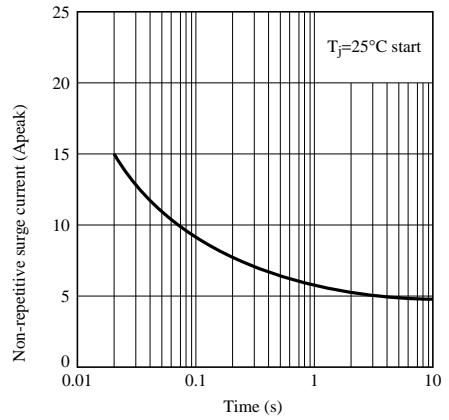


Fig.5 Pickup Voltage, Dropout Voltage vs. Ambient Temperature


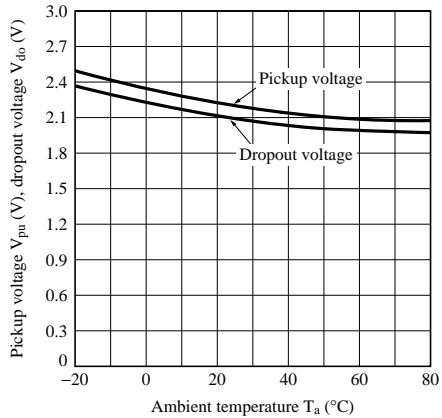


Fig.6 Maximum ON-state Power Dissipation vs. RMS ON-state Current

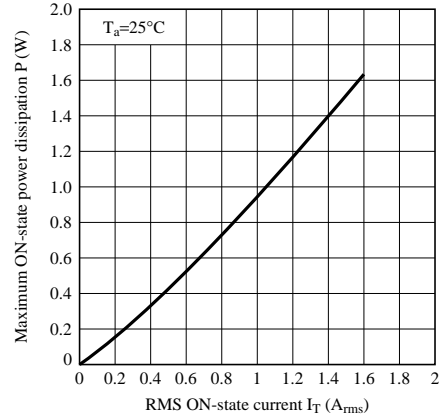

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.