




## ND20 - METER OF NETWORK PARAMETERS


- Measurement of power network parameters in 2,3 or 4- wire balanced and unbalanced systems.
- High accuracy class.
- Indications considering values of programmed ratios.
- Harmonics of voltages and currents (selectively).
- THD factors for currents and voltages.
- Profile of 15, 30, 60-minutes' power (9000 measurements).
- Watt-hour meter for the selected harmonic.
- Backlit LCD 3.5" screen.
- Protection grade from the frontal side: IP65.
- Digital transmission to the master system through the RS-485 interface (MODBUS).
- Configurable analog, alarm and pulse outputs (energy).
- Configuration of displayed pages.




### EXAMPLE OF APPLICATION

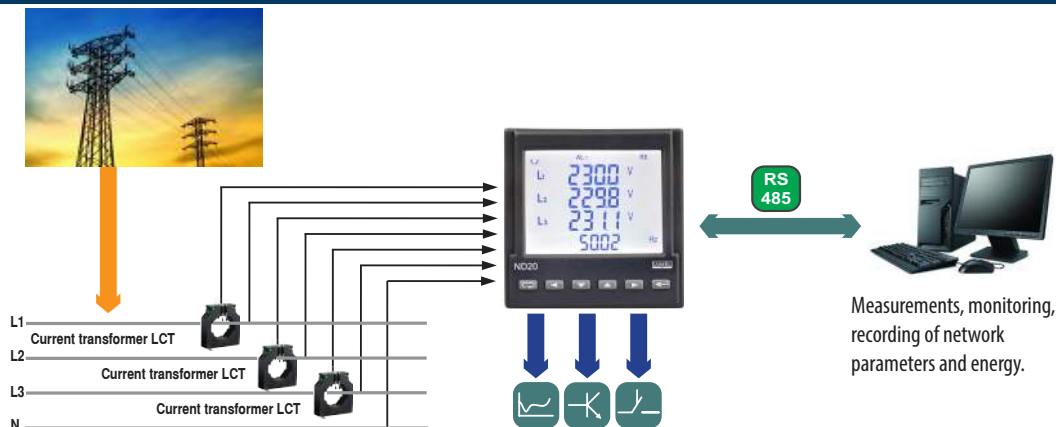


#### FEATURES

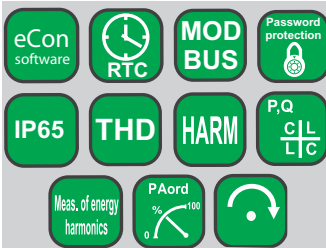


#### INPUT



#### OUTPUTS



#### GALVANIC ISOLATION



#### MEASURED QUANTITIES AND MEASURING RANGES

| Measured value                | Indication range*                     | Measuring range                          | L1 | L2 | L3 | Σ | Basic error |
|-------------------------------|---------------------------------------|------------------------------------------|----|----|----|---|-------------|
| Current In<br>1 A<br>5 A      | 0.00 ... 12 kA<br>0.00 ... 60 kA      | 0.002 ... 1.200 A~<br>0.010 ... 6.000 A~ | •  | •  | •  |   | ±0.2% r     |
| Voltage L-N<br>57,7V<br>230V  | 0.0 ... 280 kV<br>0.0 ... 1.104 MV    | 2.8 ... 70.0 V~<br>11.5 ... 276 V~       | •  | •  | •  |   | ±0.2% r     |
| Voltage L-L<br>100 V<br>400 V | 0.0 ... 480 kV<br>0.0 ... 1.92 MV     | 5 ... 120 V~<br>20 ... 480 V~            | •  | •  | •  |   | ±0.5% r     |
| Frequency                     | 47.0 ... 63.0 Hz                      | 47.0 ... 63.0 Hz                         | •  | •  | •  |   | ±0.2% mv    |
| Active power                  | -9999 MW ... 0.00W ... 9999 MW        | -1.65 kW ... 1.4 W ... 1.65 kW           | •  | •  | •  | • | ±0.5% r     |
| Reactive power                | -9999 Mvar ... 0.00 var ... 9999 Mvar | -1.65 kvar ... 1.4 var ... 1.65 kvar     | •  | •  | •  | • | ±0.5% r     |
| Apparent power                | 0.00 VA ... 9999 MVA                  | 1.4 VA ... 1.65 kVA                      | •  | •  | •  | • | ±0.5% r     |
| Power factor PF               | -1 ... 0 ... 1                        | -1 ... 0 ... 1                           | •  | •  | •  | • | ±1% r       |
| Tangent φ                     | -1.2...0...1.2                        | -1.2 ... 0 ... 1.2                       | •  | •  | •  | • | ±1% r       |
| Cosinus φ                     | -1... 1                               | -1 ... 1                                 | •  | •  | •  | • | ±1% r       |
| φ                             | -180 ... 180                          | -180 ... 180                             | •  | •  | •  |   | ±0.5% r     |
| Imported active energy        | 0 ... 99 999 999.9 kWh                |                                          |    |    |    | • | ±0.5% r     |
| Exported active energy        | 0 ... 99 999 999.9 kWh                |                                          |    |    |    | • | ±0.5% r     |
| Reactive inductive energy     | 0 ... 99 999 999.9 kvarh              |                                          |    |    |    | • | ±0.5%       |
| Reactive capacitive energy    | 0 ... 99 999 999.9 kvarh              |                                          |    |    |    | • | ±0.5%       |
| THD                           | 0 ... 100%                            | 0 ... 100%                               | •  | •  | •  |   | ±5%         |

\* Depending on the set tr\_U ratio (ratio of the voltage transformer: 0.1...4000.0) and tr\_I ratio (ratio of the current transformer: 1...10000)

r - of the range  
mv - of the measured value

# ND20 - METER OF NETWORK PARAMETERS



| OUTPUTS                                |                                                                              |
|----------------------------------------|------------------------------------------------------------------------------|
| Analog output                          | 1 programmable current output 0/4...20mA                                     |
| Relay output                           | programmable relay output, normally open voltageless contacts, 250 V~/0.5 A~ |
| Pulse output of active/reactive energy | 1 x OC type, passive                                                         |

| DIGITAL INTERFACE |                       |                    |                             |
|-------------------|-----------------------|--------------------|-----------------------------|
| Interface type    | Transmission protocol | Mode               | Baud rate                   |
| RS-485            | MODBUS RTU            | 8N2, 8E1, 8O1, 8N1 | 4.8; 9.6; 19.2; 38.4 kbit/s |

| EXTERNAL FEATURES                   |                                                            |
|-------------------------------------|------------------------------------------------------------|
| Readout field                       | LCD 3.5" screen, specialized, monochromatic with backlight |
| Weight                              | < 0.3 kg                                                   |
| Overall dimensions                  | 96 x 96 x 77 mm                                            |
| Protection grade (acc. to EN 60529) | from frontal side: IP65<br>from terminal side: IP20        |

| RATED OPERATING CONDITIONS    |                                                                                   |
|-------------------------------|-----------------------------------------------------------------------------------|
| Supply voltage                | 85...253 V a.c., 90...300 V d.c.,<br>20...40 V a.c., 20...60 V d.c.               |
| Temperature                   | ambient: -25...23...55°C<br>storage: -30...70°C                                   |
| Relative humidity             | 25...95%<br>inadmissible condensation                                             |
| Operating position            | any                                                                               |
| External magnetic field       | 0...40...400 A/m                                                                  |
| Short duration overload (1 s) | voltage input: 2Un (max. 1000 V)<br>current input: 10 In                          |
| Power consumption             | - in the supply circuit <6 VA,<br>- in the voltage and current circuits < 0.05 VA |

| SAFETY AND COMPATIBILITY REQUIREMENTS |                 |                      |
|---------------------------------------|-----------------|----------------------|
| Electromagnetic compatibility         | noise immunity  | acc. to EN 61000-6-2 |
|                                       | noise emissions | acc. to EN 61000-6-4 |
| Safety requirements                   |                 | acc. to EN 61010-1   |

| ELECTRIC CONNECTIONS |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                      | <p><b>Meter connection diagrams in a 4-wire network.</b></p> <p><b>Connections:</b></p> <ul style="list-style-type: none"> <li>- direct, semi-indirect and indirect one-phase measurement,</li> <li>- direct measurement in a 3-wire network,</li> <li>- semi-indirect measurement in a 3-wire network,</li> <li>- indirect measurement with the use of 3 current transformers and 2 or 3 voltage transformers in a 3-wire network,</li> <li>- direct measurement in a 4-wire network,</li> <li>- semi-indirect measurement in a 4-wire network,</li> <li>- indirect measurement with the use of 3 current transformers and 2 or 3 voltage transformers in a 4-wire network</li> </ul> |

| ORDERING                                         |   |   |   |   |    |    |   |
|--------------------------------------------------|---|---|---|---|----|----|---|
| ANALYSER OF NETWORK PARAMETER ND20 -             | X | X | X | X | XX | X  | X |
| <b>Current input In:</b>                         |   |   |   |   |    |    |   |
| 1 A (X/1)                                        |   | 1 |   |   |    |    |   |
| 5 A (X/5)                                        |   | 2 |   |   |    |    |   |
| <b>Voltage input (phase/ phase-to-phase) Un:</b> |   |   |   |   |    |    |   |
| 3 x 57.7/100 V                                   |   |   | 1 |   |    |    |   |
| 3 x 230/400 V                                    |   |   | 2 |   |    |    |   |
| <b>Analog current output:</b>                    |   |   |   |   |    |    |   |
| without analog output                            |   |   |   | 0 |    |    |   |
| with programmable output 0(4) ... 20 mA          |   |   |   | 1 |    |    |   |
| <b>Supply voltage:</b>                           |   |   |   |   |    |    |   |
| 85...253 V a.c., 90...300 V d.c.                 |   |   |   |   | 1  |    |   |
| 20...40 V a.c., 20...60 V d.c.                   |   |   |   |   | 2  |    |   |
| <b>Version:</b>                                  |   |   |   |   |    |    |   |
| standard                                         |   |   |   |   |    | 00 |   |
| custom-made*                                     |   |   |   |   |    | XX |   |
| <b>Language:</b>                                 |   |   |   |   |    |    |   |
| Spanish                                          |   |   |   |   |    |    | S |
| English                                          |   |   |   |   |    |    | E |
| French                                           |   |   |   |   |    |    | F |
| <b>Acceptance tests:</b>                         |   |   |   |   |    |    |   |
| without extra quality requirements               |   |   |   |   |    |    | 0 |
| with an extra quality inspection certificate     |   |   |   |   |    |    | 1 |
| acc. to customer's request*                      |   |   |   |   |    |    | X |

## SEE ALSO



Free eCON software



Current transformers.



P43 - three-phase transducer of power network parameters.

For more information about DITEL products please visit our website:

[www.ditel.es](http://www.ditel.es)



DISEÑOS Y TECNOLOGIA S.A.

Xarol, 6B P.I. Les Guixeres  
08915 Badalona - ESPAÑA  
tel.: +34 933 394 758,  
fax .: +34 934 903 145  
[www.ditel.es](http://www.ditel.es)

made in POLAND by:  
LUMEL S.A.  
[www.lumel.com.pl](http://www.lumel.com.pl)

30740002B

### EXAMPLE OF ORDER:

The code **ND20 - 22 1 1 00 E 0** means:  
ND20 - meter of network parameters of ND20 type  
2 - current input: 5A (X/5)  
2 - input voltage (phase/phase-to-phase)  
Un = 3 x 230 V/ 400 V  
1 - with programmable analog output  
1 - supply voltage: 85...253 V a.c./ 90...300 V d.c.  
00 - standard version  
E - all descriptions and user's manual in English  
0 - without extra quality requirements.

\* - after agreeing with the manufacturer