

CB 350M6918 A Series, Automotive, 0.5% Tolerance Operation Temperature -40°C~+105°C Shunt Based Current Sensor

1、Characteristics

- Current Measurement Range: -8000A~+8000A
 - Continuous Operating Range: -350A~+350A
 - Measurement Accuracy: $\pm 0.5\%$
- Temperature Measurement Range -50°C~+150°C
- Communication Protocol: CAN2.0 A/B
 - Selectable Data Format
 - Configurable CAN ID
 - Configurable CAN Speed: 250Kbps/500Kbps/1Mbps
 - CB350M6918A0/1XS: Configured 120Ω Terminal Resistor
 - CB350M6918A0/1XN: No Terminal Resistor
- Supply Voltage: 6V~18V
- Operation Temperature Range: -40°C~+105°C
- Power Consumption: $\leq 216\text{mW}$ @12VDC
- Galvanic Isolation: 3000VAC

3、Applications

- Automotive Current Monitor
- Grid Energy Storage
- UPS
- Charging Station

2、Introduction

CB350M6918A current sensor is an automotive current sensing module, which can be used to measure bidirectional DC current. Featuring high accuracy, low power consumption, wide operating temperature range, excellent response speed, temperature stability and anti-interference ability.


The sensor is designed based on low-TCR shunt, adopts 16-bit ADC, M0-architecture MCU core, communicates through CAN2.0 A/B protocol, and has static discharge protection, temperature compensation, current calibration and other functions.

The sensor meets the operating temperature range of -40°C~+105°C, can apply to the continuous operating current of -350A~+350A and the temperature measurement of -50°C~+150°C, and the current measurement accuracy is $\pm 0.5\%$ in the range of +20A~+350A or -350A~-20A, and the maximum temperature measurement offset error in the temperature operating range is $\pm 3^\circ\text{C}$.

CB350M6918A current sensor operates from 6V to 18V. Its power consumption is controlled below 216mW (12VDC), and it can realize complete high-low voltage isolation, which can be applied to the main positive electrode or the main negative electrode of the battery system.

Sensor Information

| Part # | Shunt Size | Connector |
|-------------|------------|------------|
| CB350M6918A | 69mm×18mm | 5600200420 |

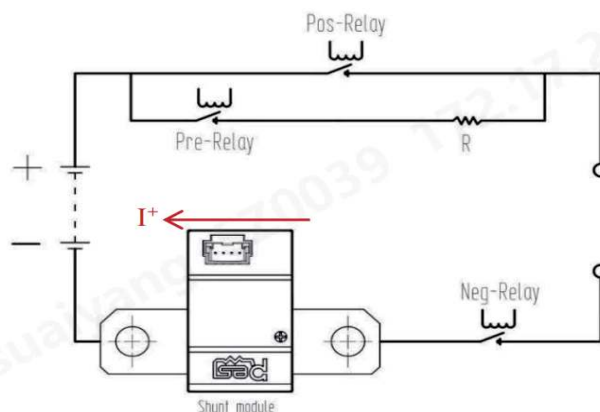

Typical Application

Content

| | |
|------------------------------------|----|
| 1、 Characteristics | 01 |
| 2、 Applications | 01 |
| 3、 Introduction | 01 |
| 4、 Revision | 02 |
| 5、 Specifications | 03 |
| 5.1 Limit Parameters | 03 |
| 5.2 General Parameters | 03 |
| 5.3 Typical Characteristic Curve | 05 |
| 6、 Test Standards | 09 |
| 7、 Communication | 11 |
| 7.1 CAN Protocol | 11 |
| 7.2 Data Frame | 12 |
| 7.3 Bus Topology | 16 |
| 7.4 Measuring Mode | 16 |
| 8、 Mechanical Structure | 17 |
| 8.1 Dimensions | 17 |
| 8.2 Copper Bar Connection | 17 |
| 8.3 Connector | 17 |
| 8.4 Connector Definition | 18 |
| 9、 Typical Applications | 18 |
| 10、 Storage & Packaging | 19 |
| 10.1 Storage | 19 |
| 10.2 Packaging | 19 |
| 11、 Part Number Information | 20 |

4、 Revision

| Date | Revised Content | Note |
|---------|-----------------|---------------|
| 2023.02 | - | Initial Issue |

5. Specifications

5.1 Limit Parameters

Note: Product will affect its reliability and cause unexpected permanent damage if operating under limit parameters for long time.

| Parameter | Condition | Min. | Typical | Max. | Unit |
|---------------------------|---|------|---------|------|------|
| Supply Voltage | | | | 30 | V |
| Current Measurement Range | ±1400A | | | 10 | s |
| | ±8000A | | | 50 | ms |
| CAN Interface | Configured 120Ω Terminal Resistor (Continuous Power Supply) | | | 6 | V |
| | ESD | | | 25 | KV |
| Operating Temperature | | -40 | | 105 | °C |
| Storage Temperature | | -40 | | 125 | °C |
| Humidity | | | | 95 | %RH |

5.2 General Parameters

Test Conditions: Ambient Temperature 25 °C (Unless Otherwise Noted)

| Parameter | Condition | Min. | Typical | Max. | Unit |
|---|--|------|------------|------|------------------|
| Power Supply | | | | | |
| Supply Voltage | | 6 | 12 | 18 | V |
| Operating Current | 6V | 10 | 14 | 18 | mA |
| | 12V | 10 | 14 | 18 | mA |
| | 18V | 10 | 14 | 18 | mA |
| Power Consumption | 6V | 60 | 80 | 108 | mW |
| | 12V | 120 | 170 | 216 | mW |
| | 18V | 180 | 250 | 324 | mW |
| Start-Up Time | Required time from power-on to sending the first frame valid message | 100 | 130 | 150 | ms |
| Current Measurement (-40°C~+105°C) | | | | | |
| Accuracy | -20A~+20A | | ±50 | ±100 | mA |
| | +20A~+350A or -350A~-50A | | | ±0.5 | % ⁽¹⁾ |
| | +350A~+1000A or -1000A~-350A | | ±0.5 | ±1 | % ⁽¹⁾ |
| | +1000A~+8000A or -8000A~-1000A | | ±1 | ±5 | % ⁽¹⁾ |
| Duration | -350A~+350A | | Continuous | | |
| | ±600A | | | 5 | min |
| | ±1400A | | | 5 | s |
| | ±8000A | | | 40 | ms |
| Resolution | -350A~+350A | | 10 | | mA |
| | >350A or <-350A | | 60 | | mA |
| Linearity | -350A~+350A | | ±0.02 | | % |
| | >350A or <-350A | | ±0.2 | | % |

Test Conditions: Ambient Temperature 25 °C (Unless Otherwise Noted)

| Parameter | Condition | Min. | Typical | Max. | Unit |
|-------------------------------------|--|------|---------|------|------|
| Temperature Measurement | | | | | |
| Measurement Range | | -50 | | +150 | °C |
| Measurement Error | -50°C ~ +150°C | -3 | | +3 | °C |
| Resolution | | | 0.1 | | °C |
| Power & Temperature Rise | | | | | |
| DC Impedance | | 45 | 50 | 55 | μΩ |
| Inductance | | | | 3 | nH |
| Temperature Rise | ±350A@25°C Copper Bus Bar 20 mm*3mm, 15Nm | | | 60 | °C |
| | ±350A@85°C Copper Bus Bar 20 mm*3mm, 15Nm | | | 60 | °C |
| Communication | | | | | |
| Protocol | CAN2.0 A/B | | | | |
| Communication Speed | | 250 | 500 | 1000 | Kbps |
| Terminal Resistor | With Terminal Resistor | 108 | 120 | 132 | Ω |
| | Without Terminal Resistor | | | | |
| Output Rate of Current Message | | 10 | 10 | 1000 | ms |
| Output Rate of Temperature Message | | 10 | 100 | 1000 | ms |
| Isolation | | | | | |
| Galvanic Isolation | | | 3000 | | VAC |
| Creepage Distance | | | 5.5 | | mm |
| Clearance | | | 4.1 | | mm |

[1] Accuracy is the error accuracy of current.

5.3 Typical Characteristic Curve

5.3.1 Start-Up Time Test Curve

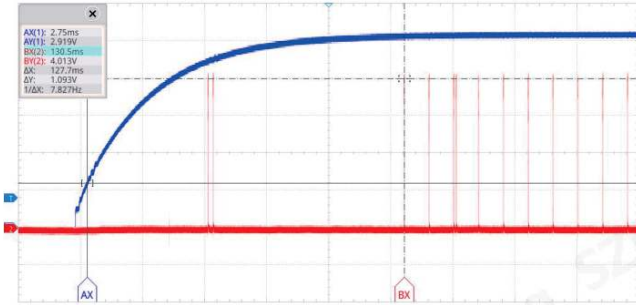


Figure 5-1 Sample1 Start-Up Time Test Curve

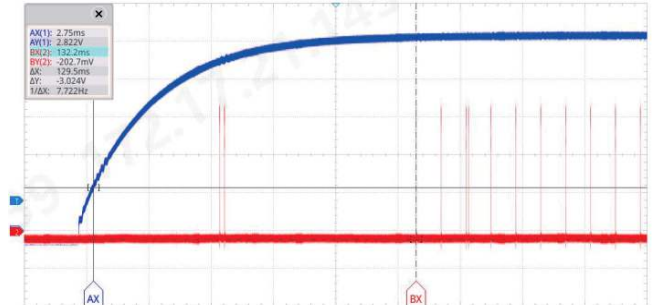


Figure 5-2 Sample2 Start-Up Time Test Curve

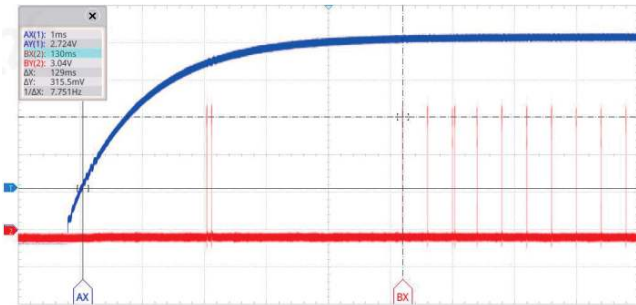


Figure 5-3 Sample3 Start-Up Time Test Curve



Figure 5-4 Sample4 Start-Up Time Test Curve



Figure 5-5 Sample5 Start-Up Time Test Curve

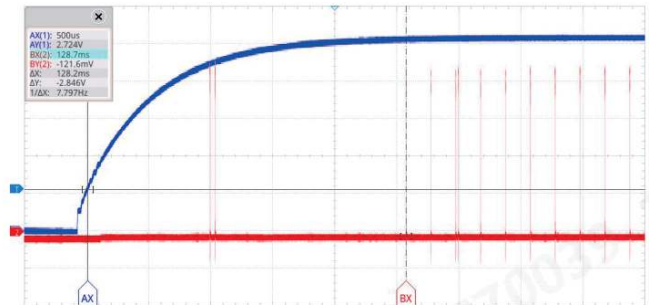


Figure 5-6 Sample6 Start-Up Time Test Curve



Figure 5-7 Sample7 Start-Up Time Test Curve



Figure 5-8 Sample8 Start-Up Time Test Curve

5.3.2 Current Consumption Test Curve



Figure 5-9 -40°C Current Consumption Test Curve

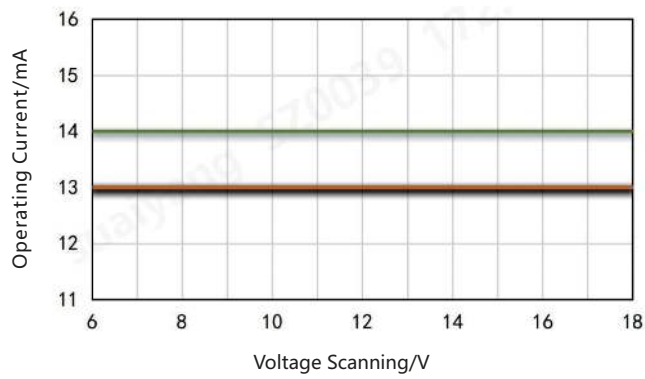


Figure 5-10 +25°C Current Consumption Curve

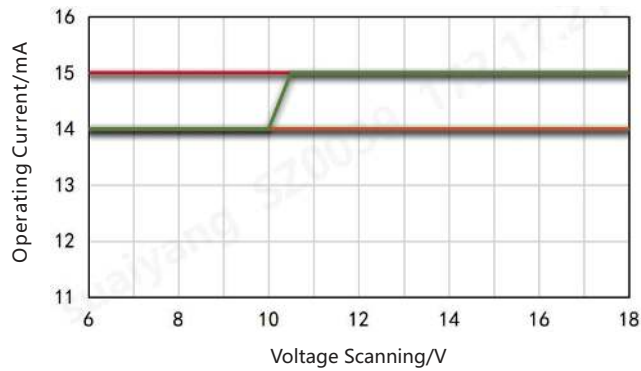


Figure 5-11 +105°C Current Consumption Curve

5.3.3 Low-Current Accuracy Test Curve

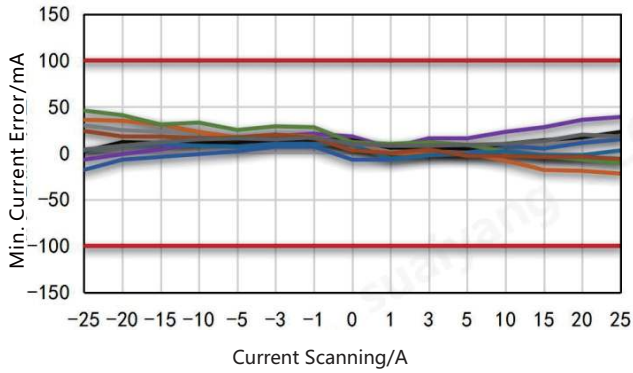


Figure 5-12 -40°C Low-Current Test Accuracy@Min. Current Error

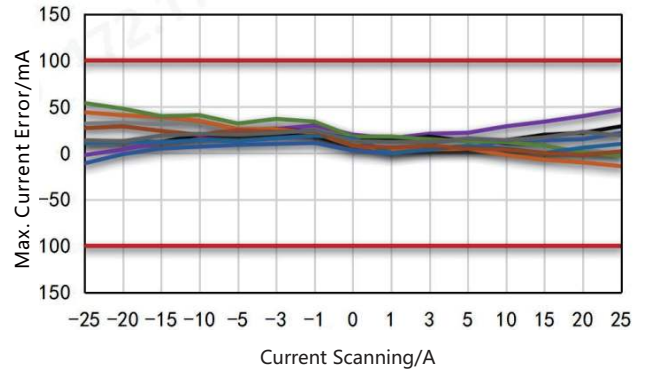


Figure 5-13 -40°C Low-Current Test Accuracy@Max. Current Error

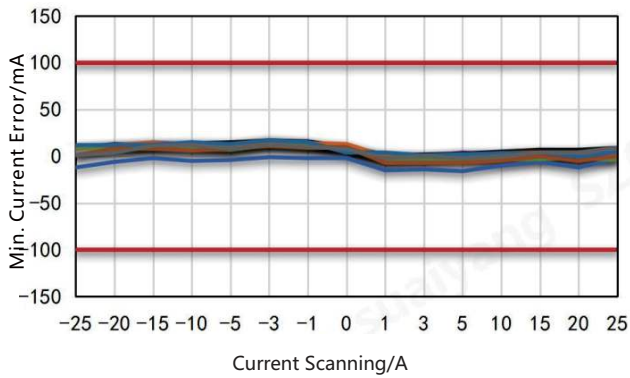


Figure 5-14 +25°C Low-Current Test Accuracy@Min. Current Error

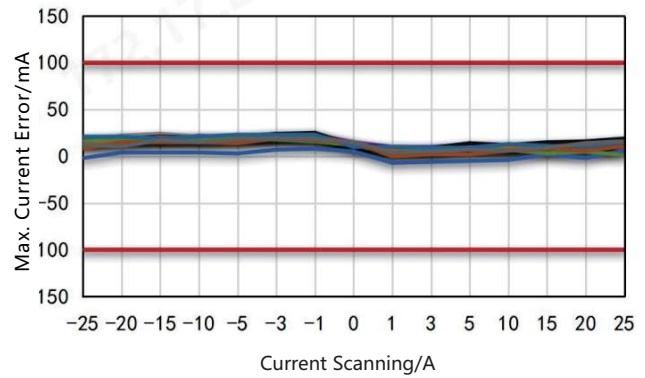


Figure 5-15 +25°C Low-Current Test Accuracy@Max. Current Error

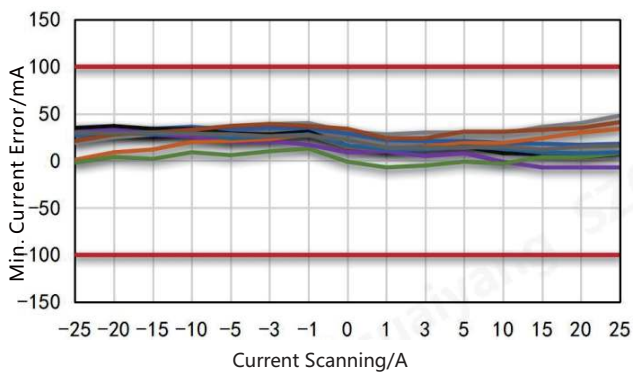


Figure 5-16 +105°C Low-Current Test Accuracy@Min. Current Error

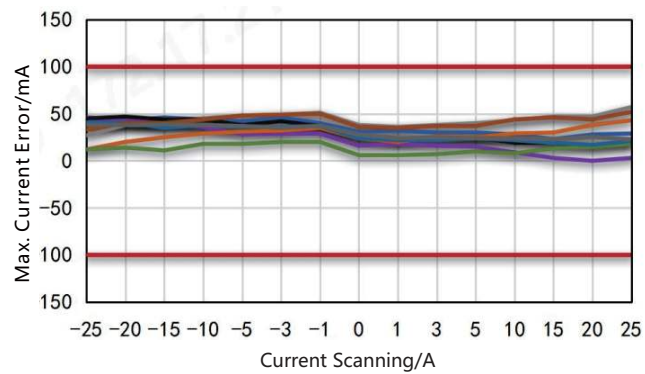


Figure 5-17 +105°C Low-Current Test Accuracy@Max. Current Error

5.3.4 High-Current Accuracy Test Curve

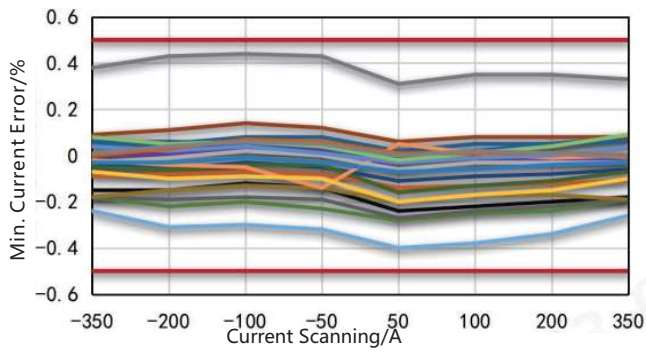


Figure 5-18 -40°C High-Current Test Accuracy@Min. Current Error

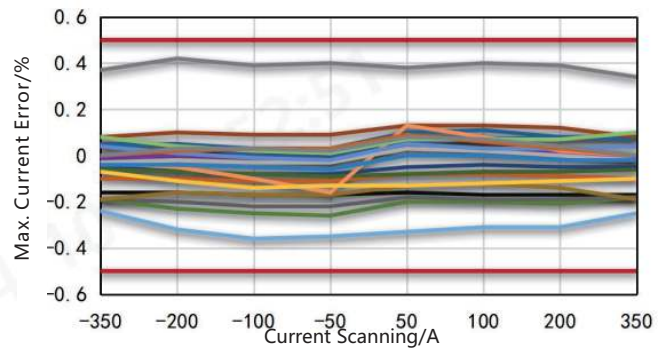


Figure 5-19 -40°C High-Current Test Accuracy@Max. Current Error

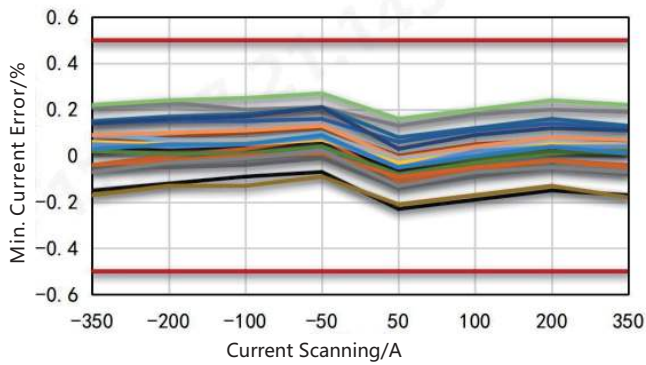


Figure 5-20 +25°C High-Current Test Accuracy@Min. Current Error

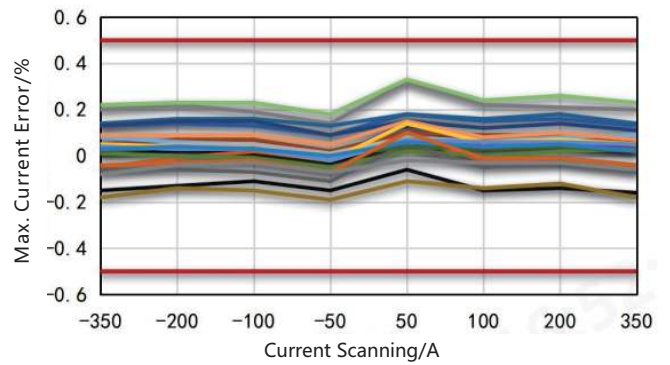


Figure 5-21 +25°C High-Current Test Accuracy@Max. Current Error

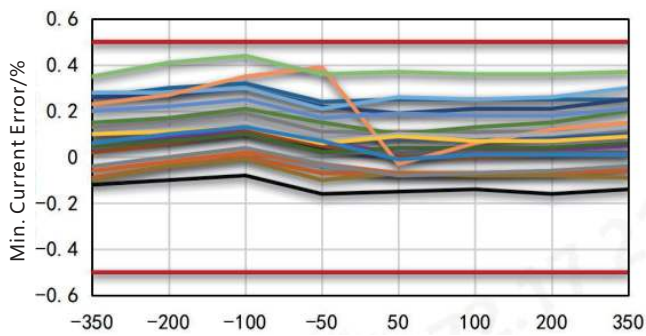


Figure 5-22 +85°C High-Current Test Accuracy@Min. Current Error

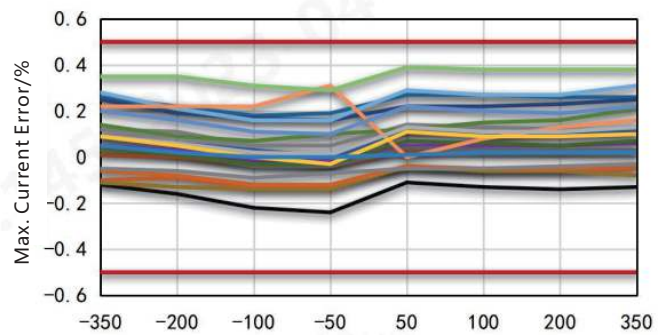


Figure 5-23 +85°C High-Current Test Accuracy@Max. Current Error

6、 Test Standards

| Test No. | Test Standards | Test Items |
|---------------------------|-----------------|---|
| General inspection | | |
| 1 | / | Appearance |
| 2 | / | Dimension |
| 3 | / | Weight |
| 4 | / | Function Check |
| Electrical loads | | |
| 5 | VW 80000 | E-01 Long-term overvoltage |
| 6 | VW 80000 | E-02 Transient overvoltage |
| 7 | VW 80000 | E-03 Transient undervoltage |
| 8 | VW 80000 | E-04 Jump start |
| 9 | VW 80000 | E-05 Load dump |
| 10 | VW 80000 | E-06 Ripple voltage |
| 11 | VW 80000 | E-07 Slow decrease and increase of the supply voltage |
| 12 | VW 80000 | E-08 Slow decrease, quick increase of the supply voltage |
| 13 | VW 80000 | E-09 Reset behavior |
| 14 | VW 80000 | E-10 Brief interruptions |
| 15 | VW 80000 | E-11 Start pulses |
| 16 | VW 80000 | E-12 Voltage curve with vehicle electrical system control |
| 17 | VW 80000 | E-13 Pin interruption |
| 18 | VW 80000 | E-14 Connector interruption |
| 19 | VW 80000 | E-15 Reverse polarity |
| 20 | VW 80000 | E-16 Ground potential difference |
| 21 | VW 80000 | E-17 Short circuit in signal cable and load circuits .. |
| 22 | VW 80000 | E-18 Insulation resistance |
| 23 | VW 80000 | E-19 Quiescent current |
| 24 | VW 80000 | E-20 Dielectric strength |
| 25 | / | Continuous power test |
| 26 | ISO 7637-2:2011 | CI pulse 1 |
| 27 | ISO 7637-2:2011 | CI pulse 2a / 2b |
| 28 | ISO 7637-2:2011 | CI pulse 3a / 3b |
| 29 | ISO 7637-2:2011 | CI pulse 4 |
| 30 | ISO 7637-2:2011 | CI pulse 5b |
| 31 | ISO 10605:2008 | ESD |
| 32 | CISRP 25 | Radiated emissions |
| 33 | CISRP 25 | Conducted emissions |
| 34 | ISO 11452-2 | Radiated immunity |
| 35 | ISO 11452-4 | Bulk current injection |

| Test No. | Test Standards | Test Items |
|------------------------------|-----------------|---|
| Climatic loads | | |
| 36 | VW 80000 | K-01 High-/low-temperature aging |
| 37 | VW 80000 | K-02 Incremental temperature test |
| 38 | VW 80000 | K-03 Low-temperature operation |
| 39 | VW 80000 | K-05 Thermal shock (component). |
| 40 | VW 80000 | K-14 Damp heat, constant |
| 41 | VW 80000 | L-02 Service life test - high-temperature durability testing |
| 42 | VW 80000 | L-03 Service life test – Temperature cycle durability testing |
| 43 | IEC 60068-2-30 | Dew test |
| 44 | GB/T 2423.34 | Composite temperature & humidity cyclic test |
| Mechanical loads | | |
| 45 | VW 80000 | M-01 Free fall |
| 46 | VW 80000 | M-04 Vibration test |
| 47 | VW 80000 | M-05 Mechanical shock |
| 48 | VW 80000 | M-08 Protection against foreign bodies - IP0x to IP4x, A, B, C, D |
| Regulation Validation | | |
| 49 | GB/T 30512-2014 | Requirements for prohibited substances on automobiles |
| 50 | UL-94:2016 | Vertical Burning Test |

7、Communication

7.1 CAN Protocol

CB350M6918A applies CAN2.0 A/B communication protocol and communicates through data frame. The data length of message frame is between 1-8 bytes. The default CAN speed is 500Kbps. 1Mbps/250Kbps are also available. There are two kinds of data frame, standard frame and extended frame, as shown in Figure 7-1 and Figure 7-2. Standard frame has an ID of 11 bytes, and the extended frame has an ID of 29 bytes. The defaulted data frame is standard frame, which can be adjusted to the extended frame. The defaulted data format is Motorola, which can be adjusted to Intel.

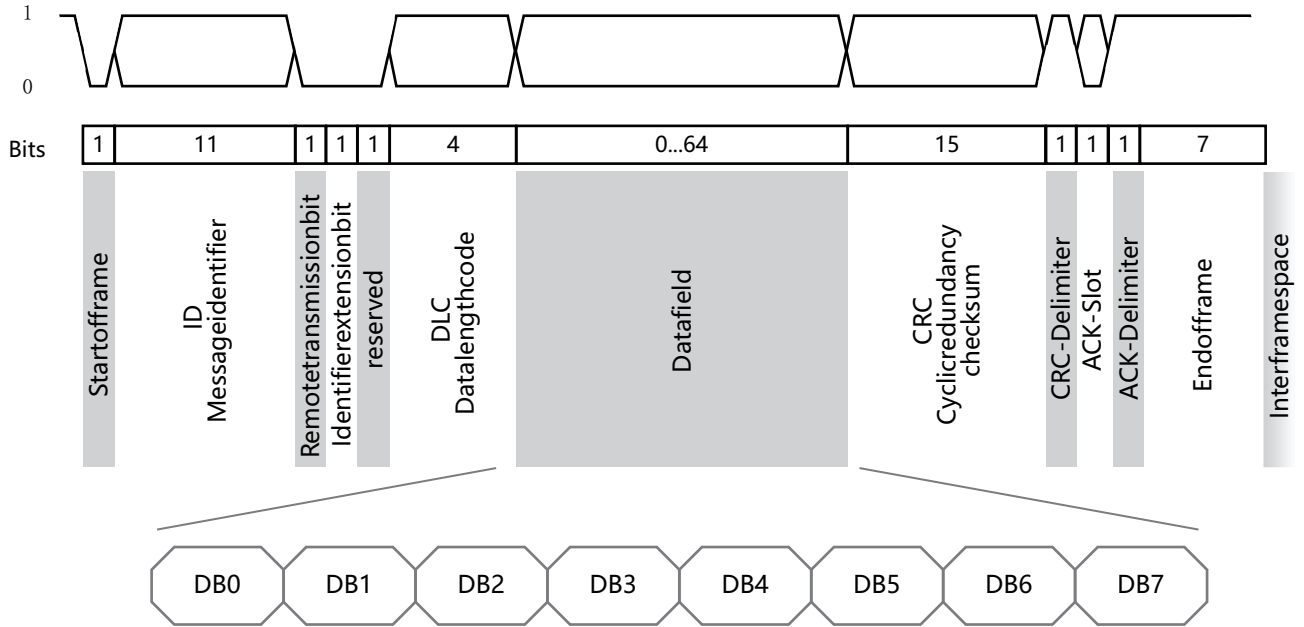


Figure 7-1 Standard Frame

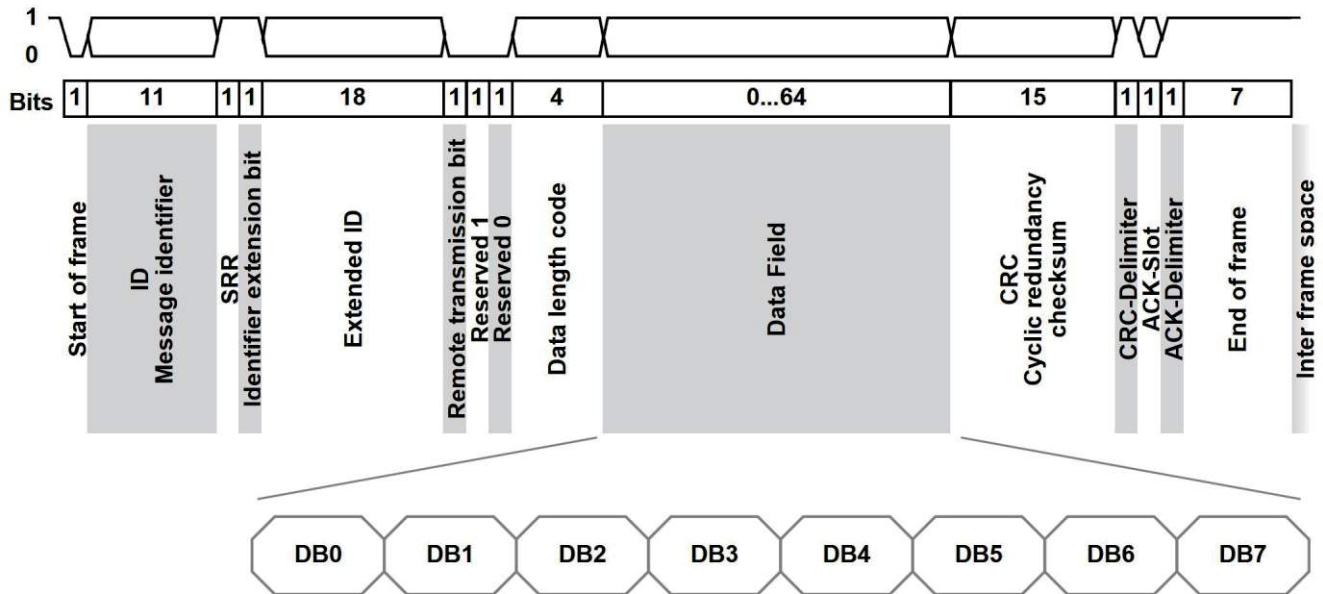


Figure 7-2 Extended Frame

7.2 Data Frame

The data frame of CB350M6918A can apply multiple data formats, as shown in Table 7-1. Among them, both formats A and B are composed of two frames of messages, which transmit real-time current and real-time temperature. Both formats C and D are composed of one frame of message. Format C transmits real-time current and real-time temperature in one frame of message. Format D only transmits real-time current. The data frame format defaults to format A.

Table 7-1. Message Frame Data Format

| Data Format Type | Data Frame Content | CANID ^[1] | Data Length | Characteristics |
|------------------|---------------------------------|----------------------|-------------|---|
| Format A | Real-Time Current | 0x0301 | 6 | 32-bit current value is a signed integer. Available Unit: mA/μA |
| | Real-Time Temperature | 0x0325 | 6 | 32-bit temperature value is a signed integer, in 0.1°C |
| Format B | Real-Time Current | 0x03C2 | 8 | 24-bit current value is an unsigned integer with offset 0x800000, in mA |
| | Real-Time Temperature | 0x06C2 | 8 | 8-bit NTC temperature value is a signed short integer, in °C 8-bit MCU temperature value is a signed short integer, in °C |
| Format C | Real-Time Current & Temperature | 0x03C2 | 8 | 24-bit current value is an unsigned integer with offset 0x800000, in mA 16-bit temperature value is a signed short integer. Unit: 0.1 °C |
| Format D | Real-Time Current | 0x03C0 | 8 | 32-bit current value is an unsigned integer with offset 0x80000000, in mA |

[1] The CANID in the above table are default and can be modified by commands (refer to the relevant application documents for details)

7.2.1 Format A

Format A consists of current data frame and temperature data frame, each with a 4-bit cyclic counter and a 2-bit module exception flag. In addition, the current data frame has an 8-bit current channel flag, a 32-bit current value, a 1-bit unit selection and a 1-bit reserved bit. The temperature data frame has an 8-bit temperature channel flag, a 32-bit temperature value and a 2-bit reserved bit. The details of the message are shown in Table 7-2, Examples of message and decoding information are shown in Table 7-3 and Table 7-4.

Table 7-2. Format A Message

| Frame Type | CANID | Length | byte0 | byte1 | byte2 | byte3 | byte4 | byte5 |
|---------------------|--------|--------|---------------------|---|---|-------|-------|-------|
| Current (mA/μA) | 0x0301 | 6 | 0x00 ^[1] | B[7]: Reserved Bit ^[2] B[6]: Current Unit ^[3] B[5]: Measurement Error Flag ^[4] B[4]: Overcurrent Flag ^[5] B[3:0]: Cyclic Counter ^[6] | 32-bit Signed Current Value ^[7] | | | |
| Temperature (0.1°C) | 0x0325 | 6 | 0x04 ^[8] | B[7:6]: Reserved Bit ^[2] B[5]: Overtemperature Flag of Shunt ^[9] B[4]: Overtemperature Flag of PCBA ^[10] B[3:0]: Cyclic Counter ^[6] | 32-bit Signed Temperature Value ^[11] | | | |

[1] Current Channel Flag.

[2] Reserved bit, default is 0.

[3] Current Unit, 0: mA; 1: μA

[4] Measurement error flag, active when the ADC fault is detected, indicates that the current value is invalid. When alarming, the current sensor still sends and receives data messages, but the current value in the message is invalid. The measurement deviation may exceed the range specified in the technical specification.

[5] Overcurrent error flag. Default is inactive. It can be defined by the user.

[6] Cyclic Counter, 0x0-0xF cycle count value.

[7] 32-bit current data uses big-endian by default. The high bit is followed by the low bit. It is a signed integer.

[8] Temperature Channel Flag.

[9] Overtemperature Flag of Shunt, active when the shunt temperature is detected to be more than 150 °C, indicates that the sensor may have no message output or low accuracy. When alarming, the current sensor can still send and receive data messages in a short time, and the current value in the message is valid. If overtemperature for a long time, the performance of current sensor can be damaged. At this time, it is recommended to limit the output power of BMS.

[10] Overtemperature Flag of PCBA, active when the board temperature is detected to be more than 125 °C, indicates that the sensor may have no message output or low accuracy. When alarming, the current sensor can still send and receive data messages in a short time, and the current value in the message is valid. If overtemperature lasts for a long time, the performance of current sensor can be damaged. Then, it is recommended to limit the output power of BMS.

[11] 32-bit temperature data uses big-endian by default. The high bit is followed by the low bit. It is a signed integer. Unit: 0.1 °C

Table 7-3. Examples of Format A Message Frame

| Example | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 |
|---------|------|------|------|------|------|------|
| 1 | 0x00 | 0x00 | 0x00 | 0x00 | 0x03 | 0xE8 |
| 2 | 0x00 | 0x00 | 0xFF | 0xFF | 0xFC | 0x18 |
| 3 | 0x04 | 0x00 | 0x00 | 0x00 | 0x01 | 0x0A |
| 4 | 0x04 | 0x00 | 0xFF | 0xFF | 0xFE | 0xF6 |

Table 7-4. Decoding Information of Table 7-3 Examples

| Example | Byte | Value | Message |
|---------|---------|------------|---|
| 1 | DB0 | 0x00 | Current Channel Flag. |
| | DB1 | 0x00 | Reserved bit 0, unit: mA, no measurement error, cycle sequence 0 |
| | DB2-DB5 | 0x000003E8 | Current: 1000mA, i.e. 1A |
| 2 | DB0 | 0x00 | Current Channel Flag. |
| | DB1 | 0x00 | Reserved bit 0, unit: mA, no measurement error, cycle sequence 0 |
| | DB2-DB5 | 0xFFFFFC18 | Current: -1000mA, i.e. -1A |
| 3 | DB0 | 0x04 | Temperature Channel Flag. |
| | DB1 | 0x00 | Reserved bit 0, Shunt temperature < 150 °C, PCBA temperature < 125 °C, cycle sequence 0 |
| | DB2-DB5 | 0x0000010A | The Temperature is +26.6 °C |
| 4 | DB0 | 0x04 | Temperature Channel Flag. |
| | DB1 | 0x00 | Reserved bit 0, Shunt temperature < 150 °C, PCBA temperature < 125 °C, cycle sequence 0 |
| | DB2-DB5 | 0xFFFFFEF6 | The Temperature is -26.6 °C |

7.2.2 Format B

Format B consists of current data frame and temperature data frame, each with a 4-bit cyclic counter. In addition, the current data frame has a 24-bit current value, a 1-bit flag bit, an 8-bit software version, an 8-bit check bit and a 19-bit reserved bit. The temperature data frame has an 8-bit temperature value, a 2-bit status bit, an 8-bit check bit and a 34-bit reserved bit. The details of the message are shown in Table 7-5, Examples of message and decoding information are shown in Table 7-6 and Table 7-7.

Table 7-5. Format B Message

| Frame Type | CANID | Length | byte0 | byte1 | byte2 | byte3 | byte4 | byte5 | byte6 | byte7 |
|------------------|--------|--------|---|---|-------------------------|-----------------------------|-----------------------------|------------------|--------------------------------------|-------|
| Current (mA) | 0x03C2 | 8 | B[7:4]: Cyclic Counter ^[1] B[3:2]: Reserved Bit ^[2] B[1]: Hardware Fault Flag ^[3] B[0]: Reserved Bit ^[2] | 24-bit Unsigned Current Value Offset 0x800000 ^[4] | | | Reserved Bit ^[2] | Software Version | CRC-8 Check SAE J1850 ^[5] | |
| Temperature (°C) | 0x06C2 | 8 | B[7:4]: Cyclic Counter ^[1] B[3:2]: Internal Temperature Status ^[6] B[1:0]: Reserved Bit ^[2] | NTC (°C) ^[7] | MCU (°C) ^[8] | Reserved Bit ^[2] | | | CRC-8 Check SAE J1850 ^[5] | |

[1] Cyclic Counter, 0x0-0xF cycle count value.

[2] Reserved bit, default is 0.

[3] Hardware Fault Flag, active when a hardware fault is detected, indicates that the ADC may have a fault.

[4] 24-bit current data uses big-endian by default. The high bit is followed by the low bit. It is an unsigned integer. Unit: mA
The actual value is expressed as $V=D-0x800000$. D is the value in the message.

[5] CRC-8 Check generates a check code for the first 7 bytes of data.

[6] Internal Temperature Status, '0': Normal; '1': Overtemperature; '2': Inactive; '3': Invalid.

[7] NTC Temperature, 8-bit temperature data uses big-endian by default. The high bit is followed by the low bit. It is a signed integer. Unit: °C

[8] MCU Temperature, 8-bit temperature data uses big-endian by default. The high bit is followed by the low bit. It is a signed integer. Unit: °C

Table 7-6. Examples of Format B Message Frame

| Example | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 |
|---------|------|------|------|------|------|------|------|------|
| 1 | 0x00 | 0x80 | 0x03 | 0xE8 | 0x00 | 0x00 | 0x64 | 0x83 |
| 2 | 0x00 | 0x7F | 0xFC | 0x18 | 0x00 | 0x00 | 0x64 | 0xAB |
| 3 | 0x00 | 0x1A | 0x1A | 0x00 | 0x00 | 0x00 | 0x00 | 0xD5 |
| 4 | 0x00 | 0xE6 | 0xE6 | 0x00 | 0x00 | 0x00 | 0x00 | 0x47 |

Table 7-7. Decoding Information of Table 7-6 Examples

| Example | Byte | Value | Message |
|---------|---------|------------|---|
| 1 | DB0 | 0x00 | Cycle sequence 0, reserved bit 0, no hardware fault, reserved bit 0 |
| | DB1-DB3 | 0x8003E8 | Current: 1000mA, i.e. +1A |
| | DB4-DB5 | 0x0000 | Reserved bit 0 |
| | DB6 | 0x64 | Software version is V1.00 |
| | DB7 | 0x83 | CRC-8 Check Value |
| 2 | DB0 | 0x00 | Cycle sequence 0, reserved bit 0, no hardware fault, reserved bit 0 |
| | DB1-DB3 | 0x7FFC18 | Current: -1000mA, i.e. -1A |
| | DB4-DB5 | 0x0000 | Reserved bit 0 |
| | DB6 | 0x64 | Software version is V1.00 |
| | DB7 | 0xAB | CRC-8 Check Value |
| 3 | DB0 | 0x00 | Cycle sequence 0, normal temperature, reserved bit 0 |
| | DB1 | 0x1A | NTC: +26°C |
| | DB2 | 0x1A | MCU: +26°C |
| | DB3-DB6 | 0x00000000 | Reserved bit 0 |
| | DB7 | 0xD5 | CRC-8 Check Value |
| 4 | DB0 | 0x00 | Cycle sequence 0, normal temperature, reserved bit 0 |
| | DB1 | 0xE6 | NTC: -26°C |
| | DB2 | 0xE6 | MCU: -26°C |
| | DB3-DB6 | 0x00000000 | Reserved bit 0 |
| | DB7 | 0x47 | CRC-8 Check Value |

7.2.3 Format C

Format C consists of one frame of message, including a 24-bit current value, an 16-bit temperature value, a 4-bit cyclic counter, a 2-bit status bit, a 1-bit flag bit, an 8-bit check bit and a 9-bit reserved bit. The details of the message are shown in Table 7-8, Examples of message and decoding information are shown in Table 7-9 and Table 7-10.

Table 7-8. Format C Message

| Frame Type | CANID | Length | byte0 | byte1 | byte2 | byte3 | byte4 | byte5 | byte6 | byte7 |
|-------------------------------------|--------|--------|---|---|-------|-------|--|-----------------------------|--------------------------------------|-------|
| Current (mA) Temperature (0.1°C) | 0x03C2 | 8 | B[7:4]: Cyclic Counter ^[1] B[3:2]: Malfunction Status ^[2] B[1]: Hardware Fault Flag ^[3] B[0]: Reserved Bit ^[4] | 24-bit Unsigned Current Value Offset 0x800000 ^[5] | | | 16-bit Signed Temperature Value ^[6] | Reserved Bit ^[4] | CRC-8 Check SAE J1850 ^[7] | |

- [1] Cyclic Counter, 0x0-0xF cycle count value.
 [2] Malfunction Status, '0': Normal; '1': ADC Conversion Error; '2': Current exceeds 1550A; '3': Shunt temperature exceeds 150 °C or PCBA temperature exceeds 125 °C.
 [3] Hardware Fault Flag, active when a hardware fault is detected, indicates that the ADC may have a fault. Reserved bit, default is 0.
 [4] 24-bit current data uses big-endian by default. The high bit is followed by the low bit. It is an unsigned integer. Unit: mA
 [5] The actual value is expressed as V=D-0x800000. D is the value in the message.
 [6] 16-bit temperature data uses big-endian by default. The high bit is followed by the low bit. It is a signed integer. Unit: °C.
 [7] CRC-8 Check generates a check code for the first 7 bytes of data.

Table 7-9. Examples of Format C Message Frame

| Example | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 |
|---------|------|------|------|------|------|------|------|------|
| 1 | 0x00 | 0x80 | 0x03 | 0xE8 | 0x01 | 0x0A | 0x00 | 0x2E |
| 2 | 0x00 | 0x7F | 0xFC | 0x18 | 0xFE | 0xF6 | 0x00 | 0x9D |

Table 7-10. Decoding Information of Table 7-9 Examples

| Example | Byte | Value | Message |
|---------|---------|----------|--|
| 1 | DB0 | 0x00 | Cycle sequence 0, normal function, no hardware fault, reserved bit 0 |
| | DB1-DB3 | 0x8003E8 | Current: 1000mA, i.e. +1A |
| | DB4-DB5 | 0x010A | The Temperature is +26.6 °C |
| | DB6 | 0x00 | Reserved bit 0 |
| | DB7 | 0x2E | CRC-8 Check Value |
| 2 | DB0 | 0x00 | Cycle sequence 0, normal function, no hardware fault, reserved bit 0 |
| | DB1-DB3 | 0x7FFC18 | Current: -1000mA, i.e. -1A |
| | DB4-DB5 | 0xFE6 | The Temperature is -26.6 °C |
| | DB6 | 0x00 | Reserved bit 0 |
| | DB7 | 0x9D | CRC-8 Check Value |

7.2.4 Format D

Format D consists of one frame of message, including a 32-bit current value, a 1-bit flag bit, a 7-bit status bit, an 8-bit software version, a 16-bit reserved byte and no temperature value. The details of the message are shown in Table 7-11, Examples of message and decoding information are shown in Table 7-12 and Table 7-13.

Table 7-11. Format D Message

| Frame Type | CANID | Length | byte0 | byte1 | byte2 | byte3 | byte4 | byte5 | byte6 | byte7 | |
|--------------|--------|--------|---|-------|-------|-------|--|-------|-----------------------------|-------|------------------|
| Current (mA) | 0x03C0 | 8 | 32-bit Unsigned Current Value Offset 0x80000000 ^[1] | | | | B[0]: Error Flag ^[2] B[7:1]: Error Status ^[3] | | Reserved Bit ^[4] | | Software Version |

- [1] 32-bit current data uses big-endian by default. The high bit is followed by the low bit. It is an unsigned integer. Unit: mA. The actual value is expressed as V=D-0x80000000. D is the value in the message.
 [2] Error Flag, '0': Normal; '1': Error;
 [3] Error Status, 0x64: no error; 0x50: ADC hardware error; 0x51: ADC conversion error; 0x60: Temperature exceeds the limit (current value remains measured).
 [4] Reserved bit, default is 0.

Table 7-12. Examples of Format D Message Frame

| Example | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 |
|---------|-------|------|------|------|------|------|------|------|
| 1 | 0x080 | 0x00 | 0x03 | 0xE8 | 0xC8 | 0x00 | 0x00 | 0x64 |
| 2 | 0x7F | 0xFF | 0xFC | 0x18 | 0xC8 | 0x00 | 0x00 | 0x64 |

Table 7-13. Decoding Information of Table 7-12 Examples

| Example | Byte | Value | Message |
|---------|---------|------------|----------------------------|
| 1 | DB0-DB3 | 0x800003E8 | Current: 1000mA, i.e. 1A |
| | DB4 | 0xC8 | Normal, no error |
| | DB5-DB6 | 0x0000 | Reserved bit 0 |
| | DB7 | 0x64 | Software version is V1.00 |
| 2 | DB0-DB3 | 0x7FFFC18 | Current: -1000mA, i.e. -1A |
| | DB4 | 0xC8 | Normal, no error |
| | DB5-DB6 | 0x0000 | Reserved byte 0 |
| | DB7 | 0x64 | Software version is V1.00 |

7.3 Bus Topology

CB350M6918A can be applied to a bus-type topology and transmits network information to each node through the bus, as shown in Figure 7-3.

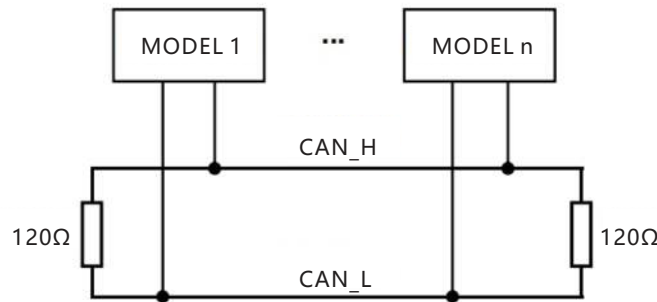


Figure 7-3 CAN Bus Topology

7.4 Measuring Mode

7.4.1 Time Interval + Command Trigger Mode

The sensor samples data at a fixed time interval set by the system and sends message to the CAN bus. At the same time, It can also respond to the trigger command. In the sampling period, the measurement will be active immediately when the trigger command is received and sends message to CAN bus. No need to wait for next sampling interval. As shown in Figure 7-4.

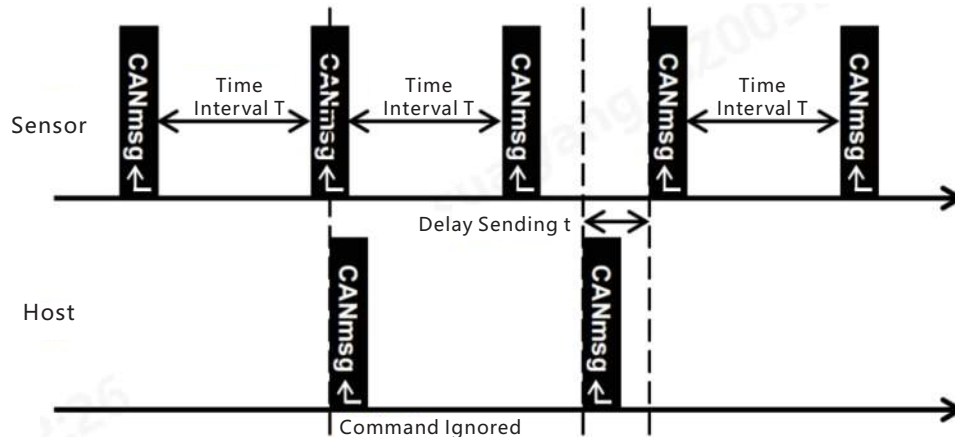


Figure 7-4. Time Interval + Command Trigger Mode

After the sensor receives the trigger command, if it is sampling or sending CAN message, the present trigger command will be ignored. When the command is valid, a sampling and sending process will be started, and the time interval T for the next sending will be automatically calculated from the moment of this trigger. As Figure 7-4 shown, there is a delay between the sensor receiving a valid trigger command and sending the CAN message, which is less than 1ms.

7.4.2 Command Triggered Mode

Under this mode, the sensor will not automatically send message, but keep sampling, calculating and filtering data at a fixed time interval. The sensor will send the recent sampling data to CAN bus and reset the start of time interval when a valid command is received from the host, as Figure 7-5 shown.

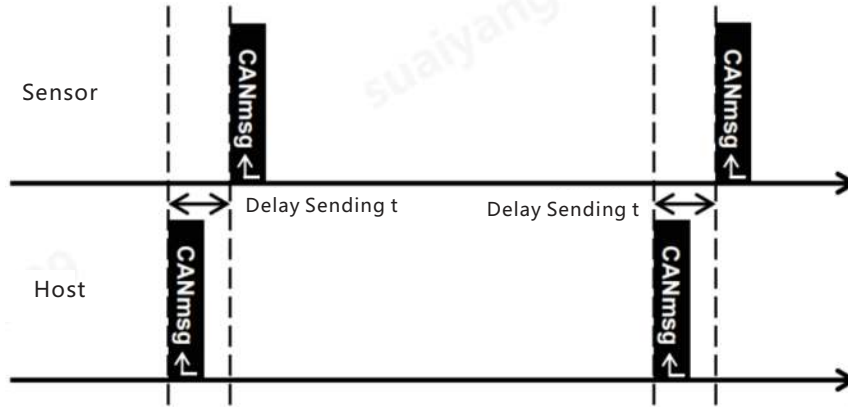


Figure 7-5. Command Trigger Mode

As Figure 7-5 shown, the sensor sends data to the CAN bus after receiving a trigger command from the host, with a delay of less than 1ms between receiving the command and sending the data.

8、Mechanical Structure

8.1 Dimensions

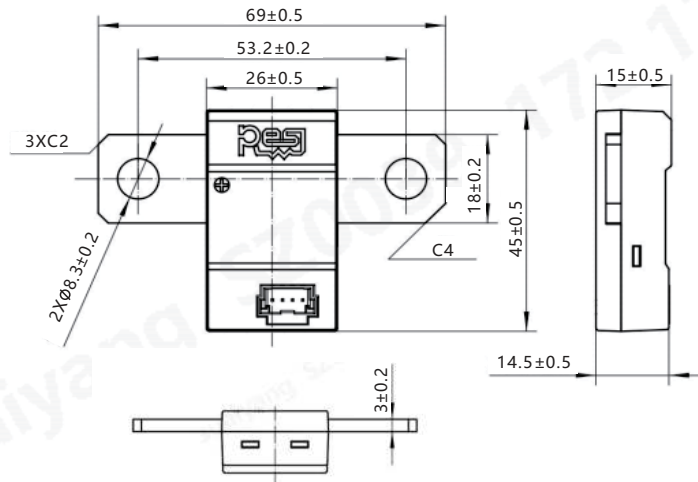


Figure 8.1 Structure Diagram

8.2 Copper Bar Connection

- Recommended Bolts: M8
- Recommended Torque: 15-20Nm
- Recommended Width * Thickness of Copper Bar: 24mm*3mm
- Recommended Length of Overlap between Shunt and Copper Bar: 20mm
- Do not use a flat washer between the copper bar and the shunt
- Keep the surface of shunt and copper bar clean and free of scratches

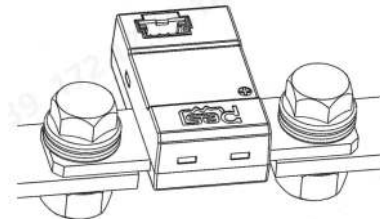


Figure 8-2. CB350M6918A Copper Bar Connection Diagram

8.3 Connector

| Connector | Manufacturer | Pin Count | Part # |
|---------------------------------|--------------|-----------|------------|
| Male Connector ^[1] | Molex | 4 | 5600200420 |
| Female Connector ^[2] | Molex | 4 | 5601230400 |




Figure 8-3. Male Connector




Figure 8-4. Female Connector

[1] For more information about male connector, please refer to Molex datasheet: https://www.molex.com/pdm_docs/sd/5600200420_sd.pdf
 [2] For more information about female connector, please refer to Molex datasheet: https://www.molex.com/pdm_docs/sd/5601230400_sd.pdf

8.4 Connector Definition

| NO. | Pin No. | Description |
|-----|---------|-------------|
| 1 | Pin1 | VCC |
| 2 | Pin2 | CAN_L |
| 3 | Pin3 | CAN_H |
| 4 | Pin4 | GND |

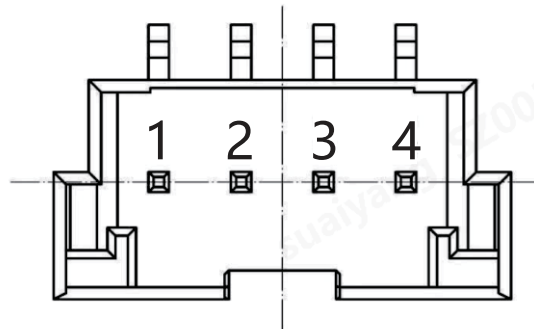


Figure 8-5. Male Connector Molex5600200420

9、Typical Applications

CB350M6918A^[1] is used for accurate current measurement in key system. It is recommended that the current sensor connects to the circuit of positive or negative electrode of high-voltage end^[2], as shown in Figure 9-1 and Figure 9-2, to sample the current in the main circuit. The high and low voltage ends are galvanic isolated inside the sensor. It is recommended that the low voltage end connects to the battery management system, as shown in Figure 9-3, for real-time and accurate reporting of current data in key system.

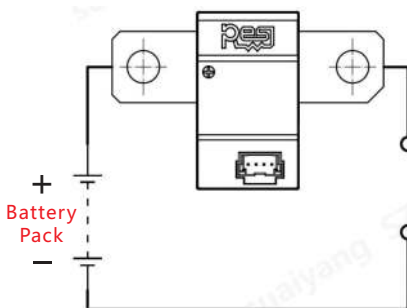


Figure 9-1. Recommended Use of Positive Electrode of High-Voltage End

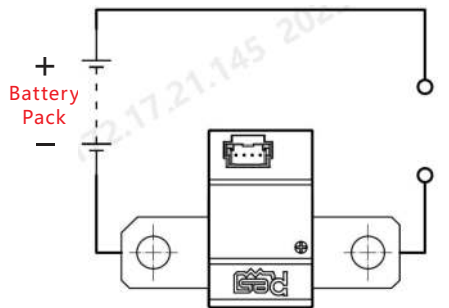


Figure 9-2. Recommended Use of Negative Electrode of High-Voltage End

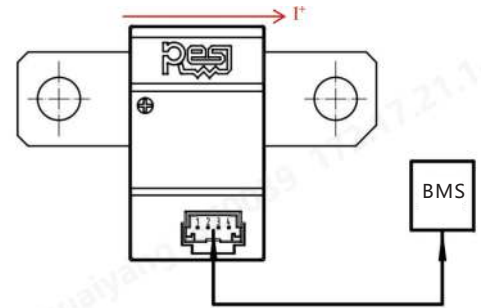


Figure 9-3. Recommended Use of Low-Voltage End

[1] The "+" on the CB350M8536A current sensor housing is the direction of current entry, that is, the positive current direction.
 [2]The high voltage electrode is installed as shown in the figure. The operating condition indicated by the sensor output value is:
 When the sensor outputs positive value, the battery pack is discharging;
 When the sensor outputs negative value, the battery pack is charging.

10、Storage & Packaging

10.1 Storage

- Storage temperature: 15°C~35°C. Storage humidity: 40% RH~60% RH. Storage height: H < 2m.
- The storage environment shall be clean, tidy, dry and free of harmful gases, and the packaging case shall be protected from direct sunlight.
- It is recommended that the storage time of finished products T≤12 months.
- Anti-static bracelet or anti-static gloves shall be worn during installation, storage and handling.

10.2 Packaging

10.2.1 General Information

| Packaging Element | Specifications | |
|---------------------------------|----------------|----|
| SNP ^[1] | 80 | |
| Container Name | Carton | |
| Container Size | 545*521*323 | mm |
| Unit Weight of Finished Product | 42±5 | g |

[1] SNP, Standard Number of Package

10.2.2 Auxiliary Materials Information

| No. | Materials | Size L*W*H(mm) | Quantity |
|-----|--------------------|----------------|----------|
| 1 | 40-Grid EPE Tray | 525*500*130 | 2 |
| 2 | EPE Tray Cover | 525*500*35 | 1 |
| 3 | Anti-Static PE bag | 200*150 | 80 |

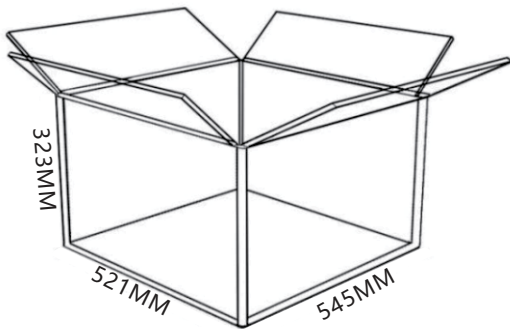


Figure 10-1. Carton Diagram

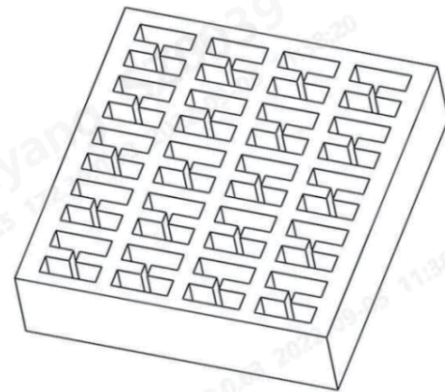


Figure 10-2. Structure Diagram of EPE

11、 Part Number Information

CB 350 M 6918 A 1 S S NN

Series

CB: C&B Current Sensor

Rated Current

350: 350A
 600: 600A
 1000: 1000A

Tolerance

B: 0.05%
 F: 0.1%
 L: 0.2%
 M: 0.5%
 K: 1%

Shunt Size

6918: 69mm×18mm
 8518: 85mm×18mm
 8436: 84mm×36mm
 8536: 85mm×36mm

Application Grade

A:Automotive
 I:Industrial

Type

0: Standard, Thickness 4mm
 1: Standard, Thickness 3mm
 2: Customized

Special Byte

Standard

K:25μΩ
 S:50μΩ
 P:100μΩ
 J:150μΩ

Customized

Custom Byte, 0~9, A~Z

Special Byte

Standard

S:CAN Terminal Resistor 120Ω
 N:No CAN Terminal Resistor

Customized

Custom Byte, 0~9, A~Z

Code

NN: 00~99 or Blank

For more performance options and other relevant information, please refer to the official website: <https://en.resistor.today/>

Disclaimer

This disclaimer is applicable to the purchaser or user (hereinafter referred to as "user") of electronic products produced by Shenzhen C&B Electronic Co., Ltd. and its affiliated companies (hereinafter referred to as "C&B") or produced by a third party.

Unless individually stated in writing, the technical and reliability data (including datasheets), design resources (including reference designs), application or other design suggestions, network tools, security information and other resources related to this document provided by C&B are subject to change without notice. Users should check and obtain the latest relevant information before ordering C&B products, and verify whether the information is latest and complete.

C&B provides the information of this document "according to original product". C&B does not guarantee that there is no defect and does not make any express or implied warranty, including but not limited to merchantability, examples, implied meaning and typical value.

The information contained in this document is based on laboratory conditions, and the statement that the product is suitable for specific applications is based on the understanding of the typical requirements of C&B for general use. The characteristics and parameters of C&B Products in the user application may be different from those in the datasheet due to (i) the combination of C&B Products with other components in the user application, or (ii) the user application environment. The characteristics and parameters of C&B products may and do vary in different applications, and the actual performance may change over time. Users should always verify the actual performance of C&B products in their specific equipment and applications, and independently determine how many additional test margins should be added to their equipment or applications to fill the gap between the laboratory and the actual conditions.

The maximum value written in this document is that this product can withstand without damaging the product. However, due to approaching the maximum value or exceeding the maximum value, C&B cannot guarantee the electrical and mechanical characteristics of the product, and cannot ensure that the product can work normally under the absolute maximum rated value. Users of C&B shall run all necessary tests on the product and its application to avoid potential defects or failures of the product and application, or the product or application of the customer's third party customers. C&B shall not be liable for this.

This document does not convey or imply any license of trademarks, patents and any other intellectual properties. C&B shall not be liable for any infringement of intellectual property or other rights of third parties that may result from the application of this document and the use of the company's products.

To the maximum extent permitted by law, C&B will not assume (i) any and all liabilities for any special, punitive, consequential, incidental or indirect damages or loss of income or profit (including but not limited to savings losses, business interruption and other costs or rework costs related to the disassembly or replacement of any product), or (ii) any and all implied warranties, including implied warranties of fitness for a particular purpose, non-infringement and merchantability. Whether such loss is based on tort (including negligence) warranty, it can be used as the theoretical basis for breach of contract or any other law.

For any loss of customers caused by any reason, the total and cumulative liability of C&B to customers for the products described in this document is limited by the terms of the contract or agreement signed between C&B and users.

For any update of this document, please pay attention to the official website(www.resistor.today).