


NOTES:

- 1) LABELS ARE M23053/5 ,WHITE. ACCEPTABLE SUBSTITUTION IS DAT-38-292 OR TRANSVINYL (DAT-63-292-2.5).
- 2) TERMINUS ENFACE REQUIREMENTS SHALL MEET GR-326 AND IEC 61300-3-35.
- 3) MAX IL @ 850 nm SHALL BE 0.5 dB PER CONNECTION.

REVISION HISTORY - ALL SHEETS ARE AT THE SAME REVISION			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2017/11/03	

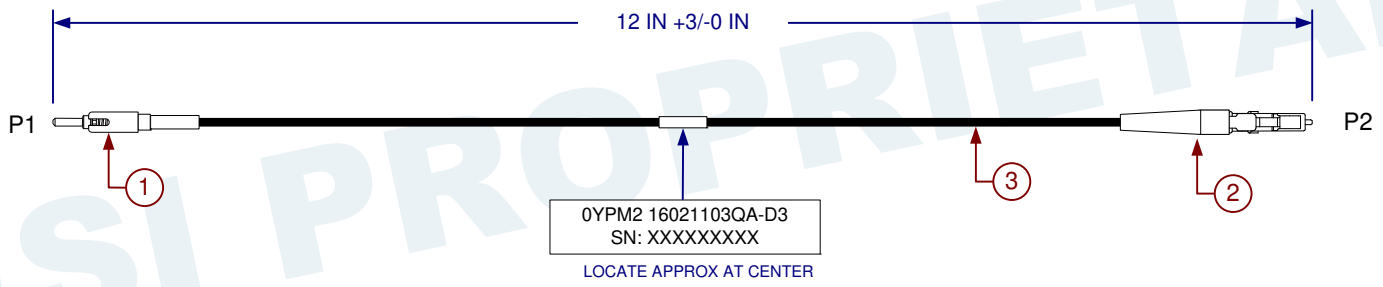

4	AFSI-PRE T BOX	BOX, SMALL FIBER CABLE 10X10X2 W/AFSI GRAPHICS	1
3	C24712	FLIGHT LINK 50/125 OM3 SIMPLEX	1.25 FEET
2	961-251-2C1	SIMPLEX LC, MM, BEIGE HOUSING, 2MM MINI BOOT	1
1	M801-MS1N	ARINC 801 TERMINI, MM127, NON-PULL PROOF	1
ITEM NO.	PART NO.	DESCRIPTION	QTY/ LENGTH

MATERIAL:		DFTR/Designer: C. Hoang 2017/10/20	<b>Amphenol FSI</b>
		Check By: B. Waite 2017/10/24	
		Manufacturing: B. Waite 2017/10/24	
		Market Manager/PLM: Q. Abraham 2017/10/27	
		Configuration Management: L. Brown 2017/11/03	TITLE: ARINC 801 TERMINI TO LC ASSEMBLY, MM
DRILLED HOLE DIAMETER TOLERANCE			
0.000 TO 0.125 <sup>+0.001</sup> / <sub>-0.001</sub> 0.251 TO 0.500 <sup>+0.002</sup> / <sub>-0.001</sub> 0.126 TO 0.250 <sup>+0.002</sup> / <sub>-0.001</sub> 0.501 TO 0.750 <sup>+0.002</sup> / <sub>-0.001</sub>			
DO NOT SCALE DRAWING			
UNLESS OTHERWISE SPECIFIED		This Document contains proprietary information and such information is prohibited from disclosure to others, publication or duplication in whole or in part without written permission from Amphenol Fiber Systems International.	
DIMENSIONS ARE IN INCHES		Copyright © 2017 Amphenol Fiber Systems International. Non-published work. All rights reserved.	
TOL ON ANGLES 13°		SIZE A	CAGE CODE OYPM2
1 PL ±.1    2 PL ±.02    3 PL ±.010		DWG NO 16021103QA-D3	REV -
INTERPRET DIM AND TOL PER ASME 14.5M-1994		SCALE: NONE	SHEET 1 OF 1
NEXT ASSY	USED ON	APPLICATION	