

## FEATURES

- Superior upgrade for MAX811/MAX812
- Specified over temperature
- Low power consumption: 5  $\mu$ A typical
- Precision voltage monitor: 2.5 V, 3 V, 3.3 V, 5 V options
- Reset assertion down to 1  $V_{CC}$
- Power-on reset: 140 ms minimum
- Logic low  $\overline{\text{RESET}}$  output (**ADM811**)
- Logic high  $\text{RESET}$  output (**ADM812**)
- Built-in manual reset

## APPLICATIONS

- Microprocessor systems
- Controllers
- Intelligent instruments
- Automotive systems
- Safety systems
- Portable instruments

## GENERAL DESCRIPTION

The **ADM811/ADM812** are reliable voltage monitoring devices suitable for use in most voltage monitoring applications. The **ADM811/ADM812** are designed to monitor six different voltages, each allowing a 5% or 10% degradation of standard PSU voltages before a reset occurs. These voltages have been selected for the effective monitoring of 2.5 V, 3 V, 3.3 V, and 5 V supply voltage levels.

Included in this circuit is a debounced manual reset input. Reset can be activated using an electrical switch (or an input from another digital device) or by a degradation of the supply voltage. The manual reset function is very useful, especially if the circuit in which the **ADM811/ADM812** are operating enters

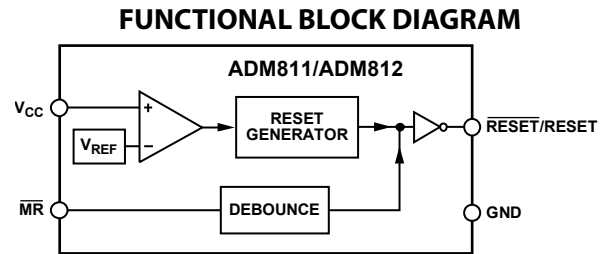
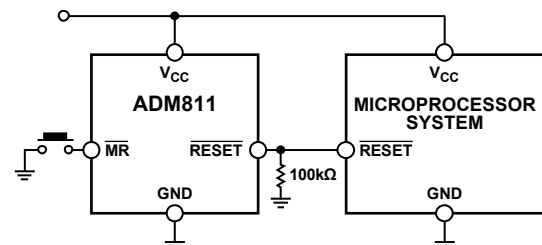


Figure 1.

00082-001

into a state that can only be detected by the user. Allowing the user to reset a system manually can reduce the damage or danger that could otherwise be caused by an out-of-control or locked system.


 Figure 2. Typical **ADM811** Operating Circuit

00082-002

## TABLE OF CONTENTS

Features .....	1
Applications.....	1
Functional Block Diagram .....	1
General Description .....	1
Revision History .....	2
Specifications.....	3
Absolute Maximum Ratings.....	5
ESD Caution.....	5
Pin Configuration and Function Descriptions.....	6
Typical Performance Characteristics .....	7
Circuit Information.....	8

## REVISION HISTORY

### 3/16—Rev. G to Rev. H

Changed ADM81x to ADM811/ADM812.....	Throughout
Change RESET/RESET Output Voltage Parameter, Table 1 .....	3
Changes to Ordering Guide .....	10

### 3/13—Rev. F to Rev. G

Changes to Pin 4 Description; Table 3.....	5
Updated Outline Dimensions .....	9
Changes to Ordering Guide .....	10

### 8/09—Rev. E to Rev. F

Changes to Ordering Guide .....	10
---------------------------------	----

### 5/08—Rev. D to Rev. E

Changes to Table 2.....	4
Updated Outline Dimensions .....	9
Changes to Ordering Guide .....	10

### 5/06—Rev. C to Rev. D

Changes to Ordering Guide .....	9
---------------------------------	---

Reset Thresholds .....	8
Reset Output .....	8
Manual Reset.....	8
Glitch Immunity.....	8
Interfacing to Other Devices.....	9
Output.....	9
Benefits of a Very Accurate Reset Threshold .....	9
Ensuring a Valid RESET/Reset Output Down to $V_{CC} = 0 V$ .....	9
Outline Dimensions .....	10
Ordering Guide .....	10

### 2/03—Rev. B to Rev. C

Changes to Features Section .....	1
Changes to General Description Section .....	1
Changes to Specifications Section.....	2
Removed Note 2 from Ordering Guide.....	3
Changes to Pin Function Descriptions.....	4
Removed Note from Table I .....	6

### 1/03—Rev. A to Rev. B

Added ADM812 .....	Universal
Changes to Specifications.....	2
Changes to Ordering Guide .....	3
Changes to Pin Configuration .....	4
Changes to Pin Function Description .....	4
Additions to Table I.....	6
Changes to Manual Reset section.....	6

### 5/02—Rev. 0 to Rev. A

Deleted ADM812.....	Universal
---------------------	-----------

### 4/99—Revision 0: Initial Version

## SPECIFICATIONS

$V_{CC}$  = full operating range;  $T_A = T_{MIN}$  to  $T_{MAX}$ ;  $V_{CC}$  typical = 5 V for L/M models, 3.3 V for T/S models, 3 V for R model, 2.5 V for Z models, unless otherwise noted.

Table 1.

Parameter	Min	Typ	Max	Unit	Test Conditions/Comments
SUPPLY					
Voltage	1.0		5.5	V	$T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$
	1.2			V	$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$
Current		8	15	$\mu\text{A}$	$V_{CC} < 5.5\text{ V}$ , ADM811L/ADM812L/ADM811M/ADM812M, $I_{OUT} = 0\text{ mA}$
		5	10	$\mu\text{A}$	$V_{CC} < 3.6\text{ V}$ , ADM811R/ADM812R/ADM811S/ADM812S/ ADM811T/ADM812T/ADM811Z/ADM812Z, $I_{OUT} = 0\text{ mA}$
RESET VOLTAGE THRESHOLD					
ADM811L/ADM812L	4.54	4.63	4.72	V	$T_A = 25^\circ\text{C}$
ADM811L/ADM812L	4.50		4.75	V	$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$
ADM811M/ADM812M	4.30	4.38	4.46	V	$T_A = 25^\circ\text{C}$
ADM811M/ADM812M	4.25		4.50	V	$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$
ADM811T/ADM812T	3.03	3.08	3.14	V	$T_A = 25^\circ\text{C}$
ADM811T/ADM812T	3.00		3.15	V	$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$
ADM811S/ADM812S	2.88	2.93	2.98	V	$T_A = 25^\circ\text{C}$
ADM811S/ADM812S	2.85		3.00	V	$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$
ADM811R/ADM812R	2.58	2.63	2.68	V	$T_A = 25^\circ\text{C}$
ADM811R/ADM812R	2.55		2.70	V	$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$
ADM811Z/ADM812Z	2.28	2.32	2.35	V	$T_A = 25^\circ\text{C}$
ADM811Z/ADM812Z	2.25		2.38	V	$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$
RESET THRESHOLD TEMPERATURE COEFFICIENT		30		ppm/ $^\circ\text{C}$	
$V_{CC}$ TO RESET/ $\overline{\text{RESET}}$ DELAY		40		$\mu\text{s}$	$V_{OD} = 125\text{ mV}$ , ADM811L/ADM812L/ADM811M/ADM812M
		20		$\mu\text{s}$	$V_{OD} = 125\text{ mV}$ , ADM811R/ADM812R/ADM811S/ADM812S/ ADM811T/ADM812T/ADM811Z/ADM812Z
RESET ACTIVE TIMEOUT PERIOD	140		560	ms	$V_{CC} = V_{TH(MAX)}$
	300		700	ms	ADM811-3T only
MANUAL RESET					
Minimum Pulse Width	10			$\mu\text{s}$	
Glitch Immunity		100		ns	
RESET/ $\overline{\text{RESET}}$ Propagation Delay		0.5		$\mu\text{s}$	
Pull-Up Resistance	10	20	30	k $\Omega$	
The Manual Reset Circuit Acts On					
An Input Rising Above	2.3			V	$V_{CC} > V_{TH(MAX)}$ , ADM811L/ADM812L/ADM811M/ADM812M
An Input Falling Below			0.8	V	$V_{CC} > V_{TH(MAX)}$ , ADM811L/ADM812L/ADM811M/ADM812M
An Input Rising Above	$0.7 \times V_{CC}$			V	$V_{CC} > V_{TH(MAX)}$ , ADM811R/ADM812R/ADM811S/ADM812S/ ADM811T/ADM812T/ADM811Z/ADM812Z
An Input Falling Below			$0.25 \times V_{CC}$	V	$V_{CC} > V_{TH(MAX)}$ , ADM811R/ADM812R/ADM811S/ADM812S/ ADM811T/ADM812T/ADM811Z/ADM812Z

Parameter	Min	Typ	Max	Unit	Test Conditions/Comments
RESET/RESET Output Voltage					
Low (ADM812R/ADM812S/ ADM812T/ADM812Z)			0.3	V	$V_{CC} = V_{TH(MAX)}$ , $I_{SINK} = 1.2 \text{ mA}$
Low (ADM812L/ADM812M)			0.4	V	$V_{CC} = V_{TH(MAX)}$ , $I_{SINK} = 3.2 \text{ mA}$
High (ADM812R/ADM812S/ ADM812T/ADM812Z/ADM812L/ ADM812M)	$0.8 \times V_{CC}$			V	$1.8 \text{ V} < V_{CC} < V_{TH(MIN)}$ , $I_{SOURCE} = 150 \mu\text{A}$
Low (ADM811R/ADM811S/ ADM811T/ADM811Z)			0.3	V	$V_{CC} = V_{TH(MIN)}$ , $I_{SINK} = 1.2 \text{ mA}$
Low (ADM811L/ADM811M)			0.4	V	$V_{CC} = V_{TH(MIN)}$ , $I_{SINK} = 3.2 \text{ mA}$
Low (ADM811R/ADM811S/ ADM811T/ADM811Z/ ADM811L/ADM811M)			0.3	V	$V_{CC} > 1.0 \text{ V}$ , $I_{SINK} = 50 \mu\text{A}$
High (ADM811R/ADM811S/ ADM811T/ADM811Z)	$0.8 \times V_{CC}$			V	$V_{CC} > V_{TH(MAX)}$ , $I_{SOURCE} = 500 \mu\text{A}$
High (ADM811L/ADM811M)	$V_{CC} - 1.5$			V	$V_{CC} > V_{TH(MAX)}$ , $I_{SOURCE} = 800 \mu\text{A}$

## ABSOLUTE MAXIMUM RATINGS

Typical values are at  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

Table 2.

Parameter	Rating
Terminal Voltage (With Respect to Ground)	
$V_{CC}$	-0.3 V to +6 V
All Other Inputs	-0.3 V to $V_{CC} + 0.3$ V
Input Current	
$V_{CC}$	20 mA
$\overline{MR}$	20 mA
Output Current	
$\overline{RESET}$	20 mA
Power Dissipation ( $T_A = 70^\circ\text{C}$ )	
RA-4 (SOT-143)	200 mW
Derate by 4 mW/ $^\circ\text{C}$ Above $70^\circ\text{C}$	
$\theta_{JA}$ Thermal Impedance	330 $^\circ\text{C}/\text{W}$
Operating Temperature Range	-40 $^\circ\text{C}$ to +85 $^\circ\text{C}$
Storage Temperature Range	-65 $^\circ\text{C}$ to +160 $^\circ\text{C}$
Lead Temperature (Soldering, 10 sec)	300 $^\circ\text{C}$
Vapor Phase (60 sec)	215 $^\circ\text{C}$
Infrared (15 sec)	220 $^\circ\text{C}$
ESD Rating	3 kV

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

### ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## PIN CONFIGURATION AND FUNCTION DESCRIPTIONS




Figure 3. Pin Configuration

Table 3. Pin Function Descriptions

Pin No.	Mnemonic	Description
1	GND	Ground Reference For All Signals, 0 V.
2	$\overline{\text{RESET}}$ (ADM811)	Active Low Logic Output. $\overline{\text{RESET}}$ remains low while $V_{CC}$ is below the reset threshold or when $\overline{\text{MR}}$ is low; $\overline{\text{RESET}}$ then remains low for at least 140 ms (at least 300 ms for the ADM811-3T) after $V_{CC}$ rises above the reset threshold.
	RESET (ADM812)	Active High Logic Output. RESET remains high while $V_{CC}$ is below the reset threshold or when $\overline{\text{MR}}$ is low; RESET then remains high for 240 ms (typical) after $V_{CC}$ rises above the reset threshold.
3	$\overline{\text{MR}}$	Manual Reset. This active low debounced input ignores input pulses of 100 ns or less (typical) and is guaranteed to accept input pulses of greater than 10 $\mu\text{s}$ . Leave floating when not used.
4	$V_{CC}$	Monitored Supply Voltage of 2.5 V, 3 V, 3.3 V, or 5 V. A 0.1 $\mu\text{F}$ decoupling capacitor between $V_{CC}$ and the GND pin is recommended.

### TYPICAL PERFORMANCE CHARACTERISTICS

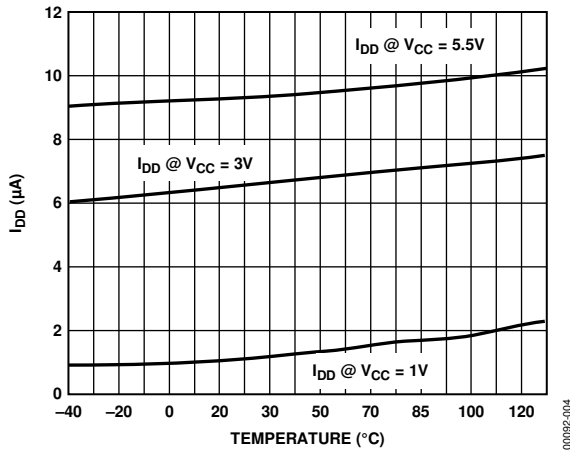


Figure 4. Supply Current vs. Temperature (ADM811R/ADM812R/ADM811S/ADM812S/ADM811T/ADM812T/ADM811Z/ADM812Z)

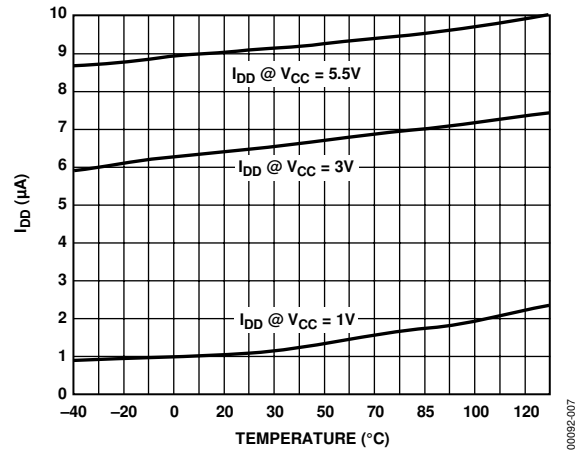


Figure 7. Supply Current vs. Temperature (ADM811L/ADM812L/ADM811M/ADM812M)

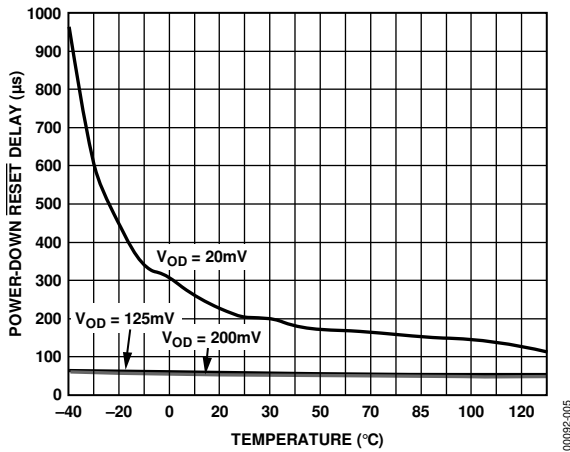


Figure 5. Power-Down RESET Delay vs. Temperature (ADM811R/ADM812R/ADM811S/ADM812S/ADM811T/ADM812T/ADM811Z/ADM812Z)

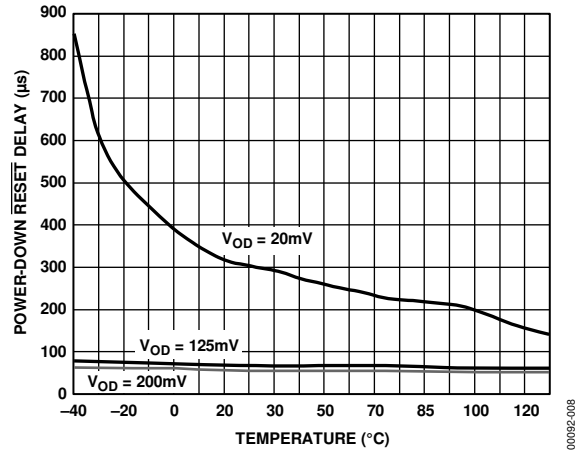


Figure 8. Power-Down RESET Delay vs. Temperature (ADM811L/ADM812L/ADM811M/ADM812M)

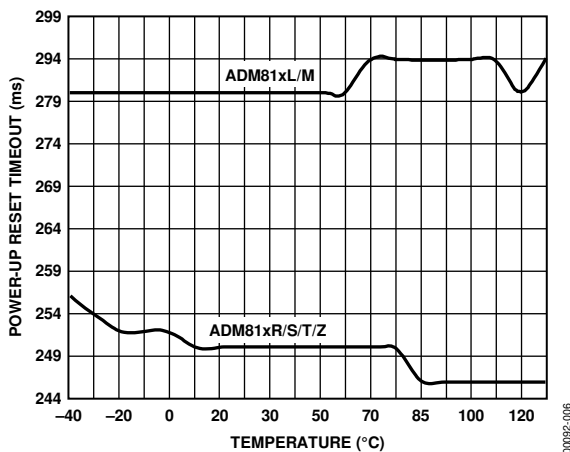


Figure 6. Power-Up RESET Timeout vs. Temperature

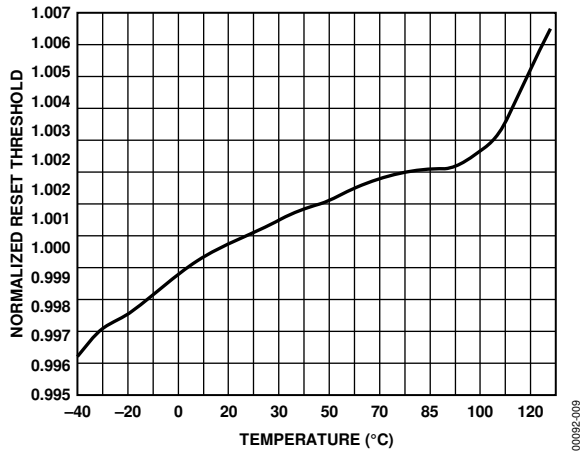


Figure 9. RESET Threshold Deviation vs. Temperature

## CIRCUIT INFORMATION

### RESET THRESHOLDS

A reset output is provided to the microprocessor whenever the  $V_{CC}$  input is below the reset threshold. The actual reset threshold depends on whether an L, M, T, S, R, or Z suffix is used (see Table 4).

Table 4. Reset Threshold Options

Model	Reset Threshold (V)
ADM811LART	4.63
ADM811MART	4.38
ADM811TART	3.08
ADM811-3TART	3.08
ADM811SART	2.93
ADM811RART	2.63
ADM811ZART	2.32
ADM812LART	4.63
ADM812MART	4.38
ADM812TART	3.08
ADM812SART	2.93
ADM812RART	2.63
ADM812ZART	2.32

### RESET OUTPUT

On power-up and after  $V_{CC}$  rises above the reset threshold, an internal timer holds the reset output active for 240 ms (typical). This is intended as a power-on reset signal for the processor. It allows time for both the power supply and the microprocessor to stabilize after power-up. If a power supply brownout or interruption occurs, the reset output is similarly activated and remains active for 240 ms (typical) after the supply recovers. This allows time for the power supply and microprocessor to stabilize.

The ADM811 provides an active low reset output ( $\overline{\text{RESET}}$ ) while the ADM812 provides an active high output (RESET).

During power-down of the ADM811, the  $\overline{\text{RESET}}$  output remains valid (low) with  $V_{CC}$  as low as 1 V. This ensures that the microprocessor is held in a stable shutdown condition as the supply falls and also ensures that no spurious activity can occur via the microprocessor as it powers up.

### MANUAL RESET

The ADM811/ADM812 are equipped with a manual reset input. This input is designed to operate in a noisy environment where unwanted glitches could be induced. These glitches could be produced by the bouncing action of a switch contact, or where a manual reset switch may be located some distance away from the circuit (the cabling of which can pick up noise).

The manual reset input is guaranteed to ignore logically valid inputs that are faster than 100 ns and to accept inputs longer in duration than 10  $\mu\text{s}$ .

### GLITCH IMMUNITY

The ADM811/ADM812 contain internal filtering circuitry providing glitch immunity from fast transient glitches on the power supply line.

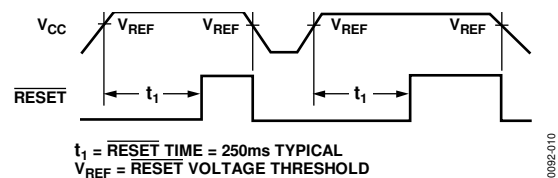


Figure 10. Power Fall  $\overline{\text{RESET}}$  Timing

000092-010



## INTERFACING TO OTHER DEVICES

### OUTPUT

The ADM811/ADM812 are designed to integrate with as many devices as possible. One feature of the ADM811/ADM812 is the reset output, which is directly proportional to  $V_{CC}$  (this is guaranteed only while  $V_{CC}$  is greater than 1 V). This enables the part to be used with both 3 V and 5 V, or any nominal voltage within the minimum and maximum specifications for  $V_{CC}$ .

### BENEFITS OF A VERY ACCURATE RESET THRESHOLD

Because the ADM811/ADM812 can operate effectively even when there are large degradations of the supply voltages, the possibility of a malfunction during a power failure is greatly reduced. Another advantage of the ADM811/ADM812 are the very accurate internal voltage reference circuits. Combined, these benefits produce an exceptionally reliable microprocessor supervisory circuit.





Figure 11. Ensuring a Valid  $\overline{\text{RESET}}$  Output Down to  $V_{CC} = 0\text{ V}$

### ENSURING A VALID $\overline{\text{RESET}}$ /RESET OUTPUT DOWN TO $V_{CC} = 0\text{ V}$

When  $V_{CC}$  falls below 0.8 V, the  $\overline{\text{RESET}}$ /RESET of the ADM811/ADM812 no longer sinks current. Therefore, a high impedance CMOS logic input connected to  $\overline{\text{RESET}}$ /RESET can drift to undetermined logic levels. To eliminate this problem, a 100 k $\Omega$  resistor should be connected from  $\overline{\text{RESET}}$ /RESET to ground.

OUTLINE DIMENSIONS

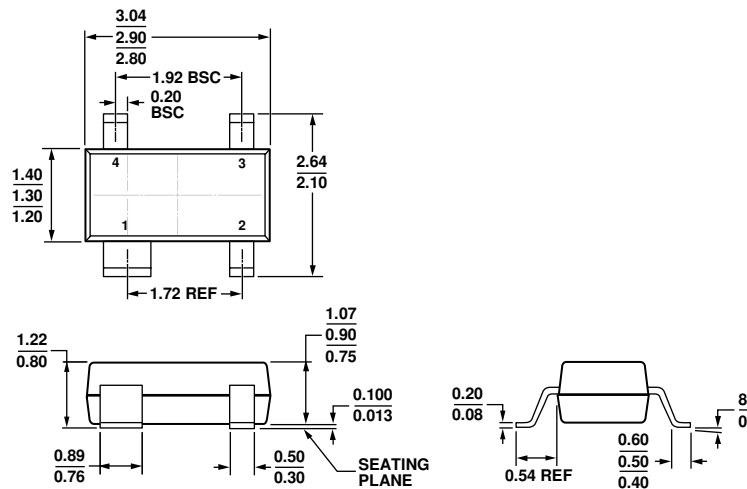

COMPLIANT TO JEDEC STANDARDS TO-253-AA

Figure 12. 4-Lead Small Outline Transistor Package [SOT-143] (RA-4)

Dimensions shown in millimeters

00-13-2012-B

ORDERING GUIDE

Model <sup>1, 2</sup>	Reset Threshold (V)	Temperature Range	Ordering Quantity	Package Description	Package Option	Branding
ADM811LART-REEL7	4.63	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	MBV
ADM811LARTZ-REEL7	4.63	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	M4J
ADM811MARTZ-REEL	4.38	-40°C to +85°C	10,000	4-Lead SOT-143	RA-4	MBT #
ADM811MARTZ-REEL7	4.38	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	MBT #
ADM811TARTZ-REEL7	3.08	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	MBG
ADM811TARTZ-REEL	3.08	-40°C to +85°C	10,000	4-Lead SOT-143	RA-4	MBG #
ADM811TARTZ-REEL7	3.08	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	MBG #
ADM811-3TARTZ-REEL7	3.08	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	MB3
ADM811-3TARTZ-RL7	3.08	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	M4E
ADM811SARTZ-REEL7	2.93	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	MBE
ADM811SARTZ-REEL	2.93	-40°C to +85°C	10,000	4-Lead SOT-143	RA-4	MBE #
ADM811SARTZ-REEL7	2.93	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	MBE #
ADM811RARTZ-REEL7	2.63	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	M4N
ADM811ZARTZ-REEL7	2.32	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	MBZ
ADM811ZARTZ-REEL7	2.32	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	M6G
ADM812LARTZ-REEL7	4.63	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	M5D
ADM812MARTZ-REEL7	4.38	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	M6D
ADM812TARTZ-REEL7	3.08	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	M68
ADM812SARTZ-REEL	2.93	-40°C to +85°C	10,000	4-Lead SOT-143	RA-4	M67
ADM812SARTZ-REEL7	2.93	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	M67
ADM812RARTZ-REEL7	2.63	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	M6F
ADM812ZARTZ-REEL7	2.32	-40°C to +85°C	3,000	4-Lead SOT-143	RA-4	M69

<sup>1</sup> Available only in reels.

<sup>2</sup> Z = RoHS Compliant Part. RoHS-compliant parts may have # branded on either the top or bottom of the device.

**NOTES**

**NOTES**