



The Future of Analog IC Technology®

EVM3695-25-RF-02A

16V, 20A, Scalable
DC/DC Power Module with PMBus

DESCRIPTION

MPM3695-25 is a scalable and fully integrated power module with PMBus interface. MPM3695-25 offers a complete power solution that achieves up to 25A peak of output current with excellent load and line regulation over a wide input voltage range. MPM3695-25 operates at a high efficiency over a wide load range and can be paralleled to deliver up to 150A of peak current.

The MPM3695-25 adopts MPS's proprietary, multi-phase constant-on-time (MCOT) control, which provides ultra-fast transient response and simple loop compensation. The PMBus interface provides module configurations and monitoring of key parameters.

MPM3695-25 features full protection functions including over-current protection (OCP), over-voltage protection (OVP), under-voltage protection (UVP), and over-temperature protection (OTP).

MPM3695-25 requires a minimal number of readily available external components and is available in a QFN-59 (10mmx12mmx4mm) package.

FEATURES

- Wide Input Voltage Range from 3V
 - 3V-16V Input Voltage with External V_{CC}
 - 4V-16V Input Voltage with Internal V_{CC}
- 0.5V to 6V Output Voltage Range
- 20A Continuous Output Current, Peak 25A, Parallel Up to 150A Peak
- Auto-Interleaving for Multi-Phase Operation
- Auto-Compensation with Adaptive MCOT for Ultra-Fast Transient Response
- 0.5% Reference Voltage Over 0°C to +70°C Junction Temperature Range
- True Remote Sense of Output Voltage
- PMBus 1.3 Compliant
- Programmable via PMBus
 - Current Limit
 - Selection of Pulse-Skip Mode or Continuous Conduction Mode (CCM)
 - Soft-Start Time
 - Switching Frequency
 - Fault Limits
- Available in a QFN-59 (10mmx12mmx4mm) Package

APPLICATIONS

- Telecom and Networking Systems
- Industrial Equipment
- Servers and Computing

All MPS parts are lead-free, halogen free, and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance. "MPS" and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.


EVM3695-25-RF-02A DEMO BOARD




(L x W) 8.9cm x 8.9cm

| Board Number | MPS IC Number |
|-------------------|---------------|
| EVM3695-25-RF-02A | MPM3695-25 |

Efficiency vs. Load Current

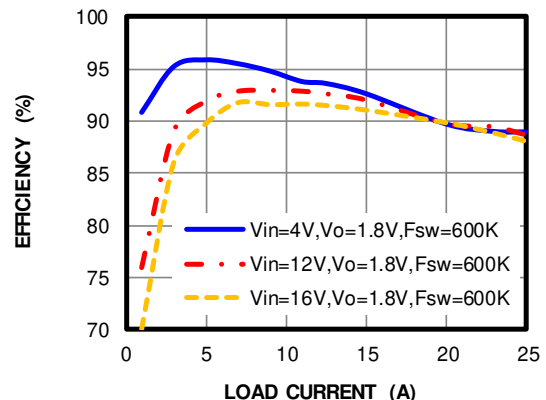

EVM3695-25-RF-02A SCHEMATIC

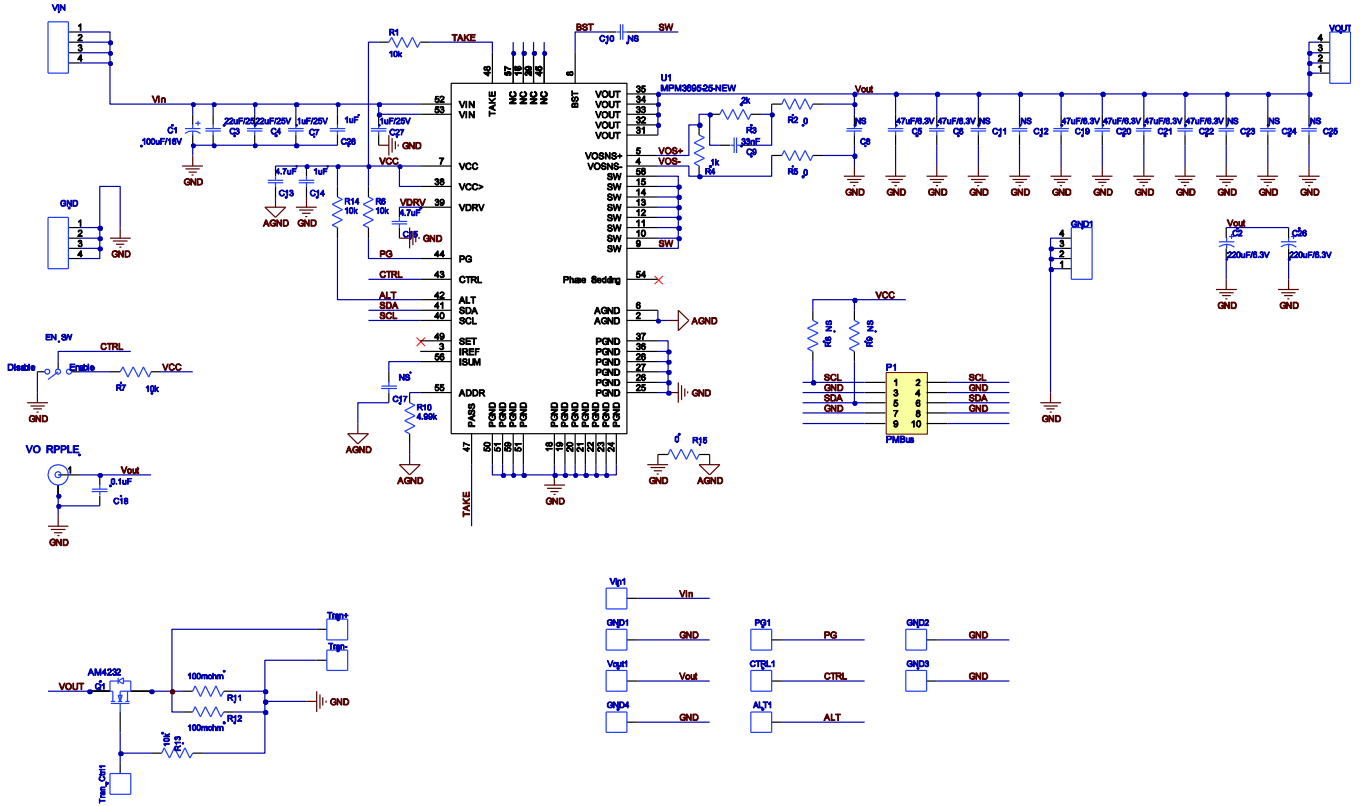

Vin=12V, Vout=1.8V@20A


EVM3695-25-RF-02A BOM

| Qty | RefDes | Value | Description | Package | Manufacturer | Manufacturer_P/N |
|-----|-------------------------------|-------------|---|---------|---------------------|-----------------------|
| 2 | C3,C4 | 22 μ F | Ceramic Cap., 25V,X7R | 1210 | Murata | GRM32ER71E226KE15L |
| 2 | C7,C27 | 1 μ F | Ceramic Cap., 25V,X5R | 0402 | Murata | GRM155R61E105KA12D |
| 2 | C28,C14 | 1 μ F | Ceramic Cap., 25V,X7R | 0603 | Murata | GRM188R71E105KA12D |
| 2 | C13,C15 | 4.7 μ F | Ceramic Cap., 25V,X5R | 0603 | Murata | GRM188R61E475KE11D |
| 1 | C18 | 100nF | Ceramic Cap., 25V,X7R | 0603 | Murata | GRM188R71E104KA01D |
| 1 | C9 | 33nF | Ceramic Cap., 25V,X7R | 0603 | Murata | GRM188R71E333KA01D |
| 6 | C5.C6. C19.C20. C21.C22 | 47 μ F | Ceramic Cap., 6.3V,X5R | 1206 | Murata | GRM31CR60J476ME19L |
| 2 | C2.C26 | 220 μ F | Tantalum cap., 6.3V | D2 | Panasonic | EEFCX0J221R |
| 1 | C1 | 100 μ F | 100 μ F/35V | SMD | NIPPON CHEMI-CON | EMZJ350ADA101MF80G |
| 5 | R1.R6 R14.R7. R13 | 10k | Film Res,1%, 0603,10K | 0603 | YAGEO | RC0603FR-0710KL |
| 1 | R10 | 4K99 | Film Res,1%, 0603,4K99 | 0603 | YAGEO | RC0603FR-074K99L |
| 3 | R2.R5. R15 | 0R | Film Res,1%, 0603,0R | 0603 | YAGEO | RC0603FR-070RL |
| 1 | R3 | 2k | Film Res,1%, 0603,2K | 0603 | YAGEO | RC0603FR-072KL |
| 1 | R4 | 1k | Film Res,1%, 0603,1K | 0603 | YAGEO | RC0603FR-071KL |
| 4 | VIN,GND | N/A | N/A | N/A | Keystone | KEYSTONE7697-75 |
| 6 | ALT | ϕ 1.0 | ϕ 1.0 copper pin | DIP | N/A | ϕ 1.0 copper pin |
| 1 | Vo Ripple | N/A | 4pin | DIP | N/A | SMA 射频座 |
| 1 | CN6 | SWITCH | Tact Switch, push type,white actuator | SMD | WE | 450301014042 |
| 1 | P1 | | 10pin 双排直插 针 | | | |
| 1 | U1 | MPM3695-25 | 20A power module | QFN | MPS | MPM3695GRF-25-0022 |
| 2 | R11. R12 | 0R1 | Film Res,1%, 2512,0R1 | 2512 | YAGEO | RC2512FR-070R1L |
| 1 | Q1 | N-MOS | 20A MOSFET | D-PARK2 | Analog | AM4342N |


TYPICAL PERFORMANCE CHARACTERISTICS

$V_{IN} = 12V$, $V_{OUT} = 1.8V$, $T_A = 25^\circ C$, unless otherwise noted.


Efficiency vs. Current Load

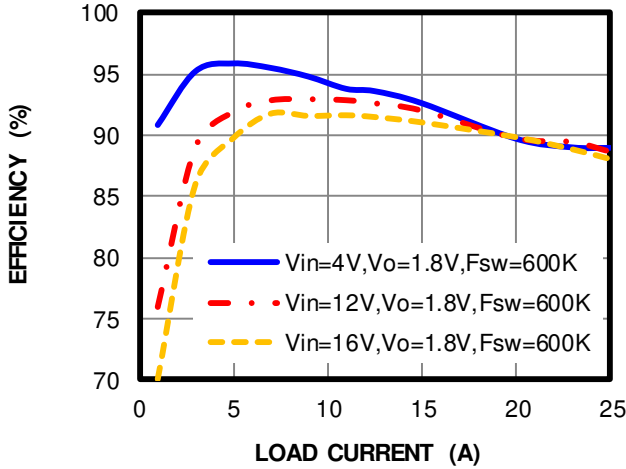


Power Loss vs. Load Current

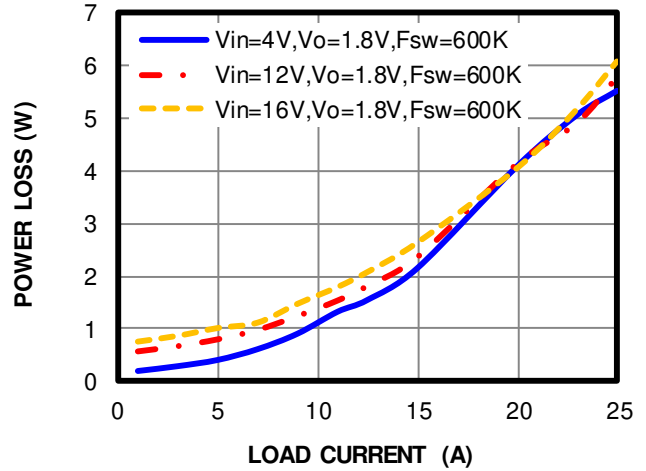

Regulation vs. Load Current

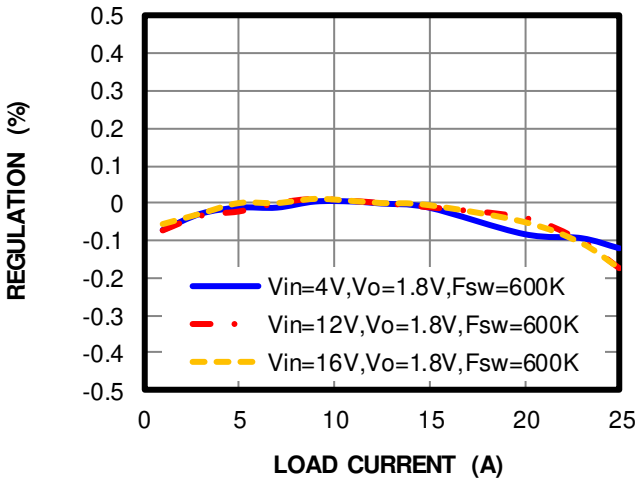


Thermal De-rating vs. Ambient Temp@200LFM Air Flow

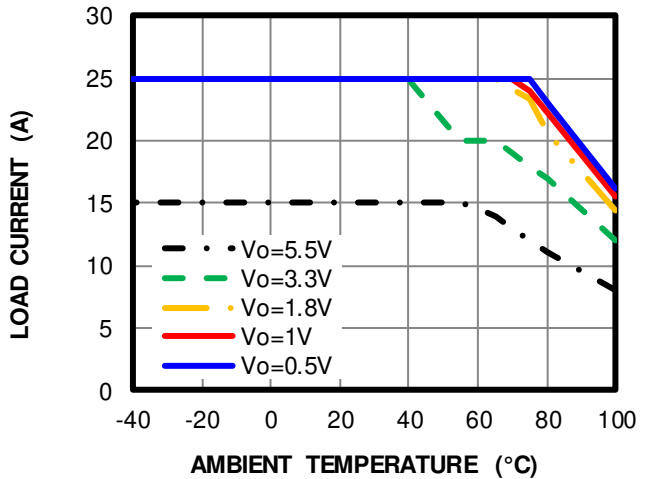

TYPICAL PERFORMANCE CHARACTERISTICS (Continued)
 $V_{IN} = 12V, V_{OUT} = 1.8V, I_o = 20A, T_A = 25^\circ C$, unless otherwise noted.

VIN Start-Up


CH1: V_{OUT}
500mV/div.
CH2: V_{IN}
5V/div.
CH3: V_{SW}
5V/div.
CH4: I_{OUT}
20A/div.

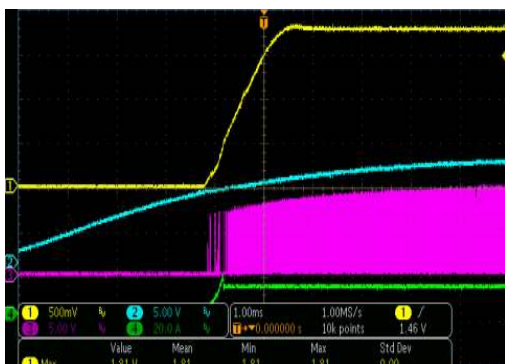

1ms/div.

VIN Shutdown


CH1: V_{OUT}
500mV/div.
CH2: V_{IN}
5V/div.
CH3: V_{SW}
5V/div.
CH4: I_{OUT}
20A/div.

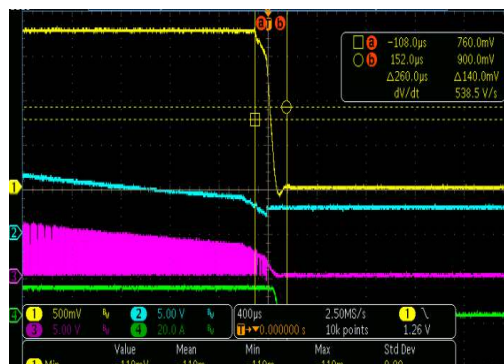

400µs/div.

EN Start-Up


CH1: V_{OUT}
1V/div.
CH2: V_{EN}
2V/div.
CH3: V_{SW}
5V/div.
CH4: I_{OUT}
20A/div.

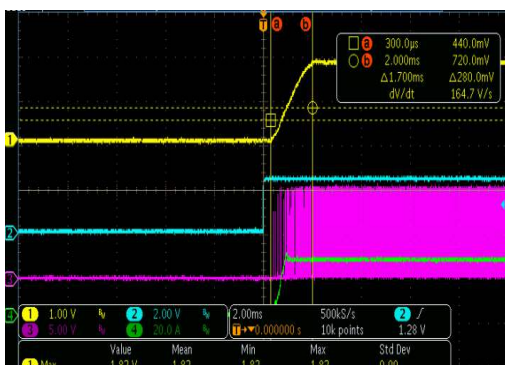

2ms/div.

EN Shutdown


CH1: V_{OUT}
1V/div.
CH2: V_{EN}
2V/div.
CH3: V_{SW}
5V/div.
CH4: I_{OUT}
20A/div.

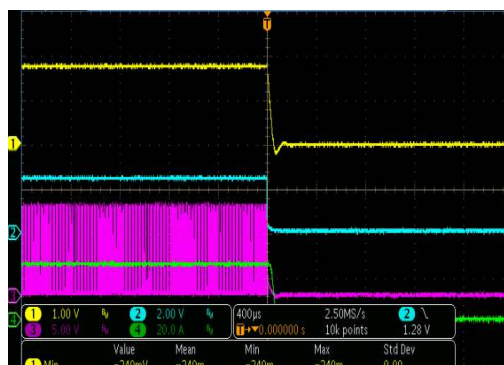

400µs/div.

VOUT Ripple@VIN=12V, IO=20A

CH1: V_{OUT}
10mV/div.
CH3: V_{SW}
5V/div.
CH4: I_{OUT}
20A/div.

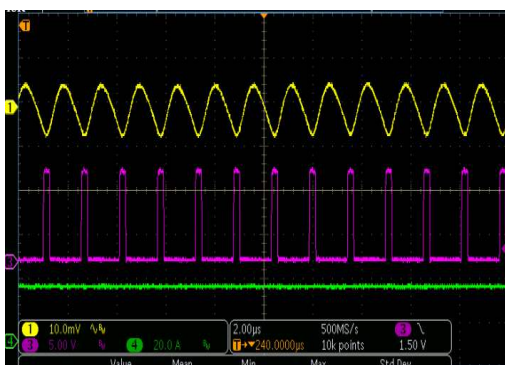

2µs/div.

Load Transient@25% to 50% Load, 2.5A/us

CH1: V_{OUT}
50mV/div.
CH3: I_{OUT}
5V/div.



100µs/div.

EVM3695-25-RF-02A PCB LAYOUT

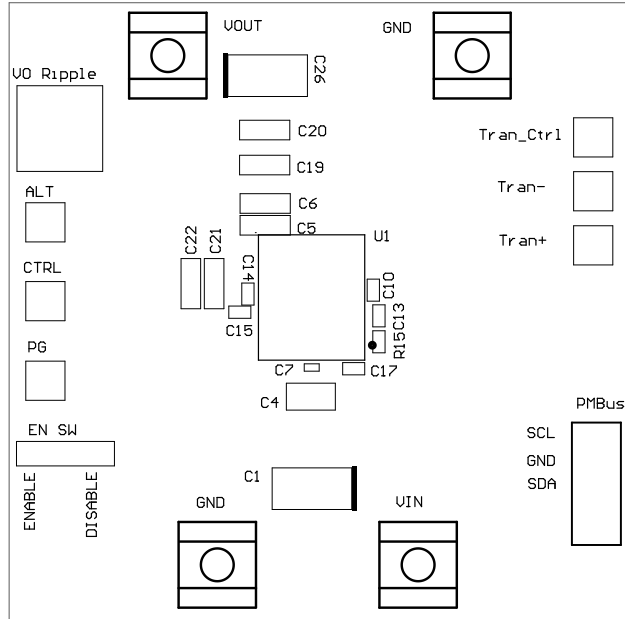


Figure 1-Top Silk Layer

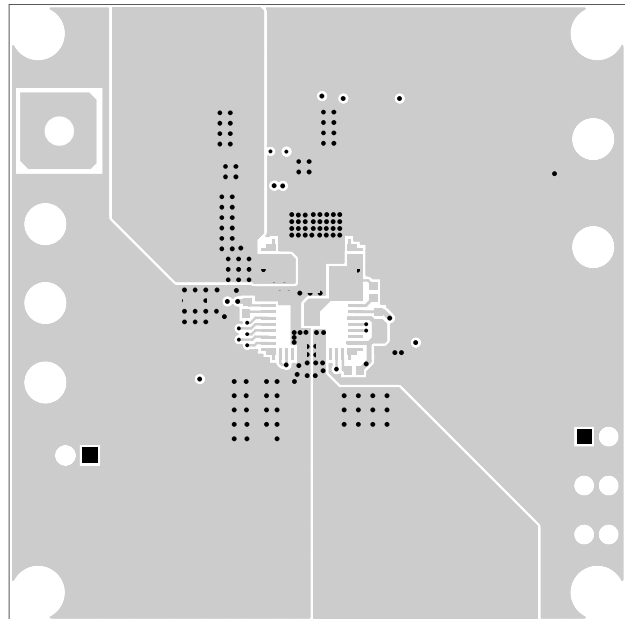


Figure 2-Top Layer

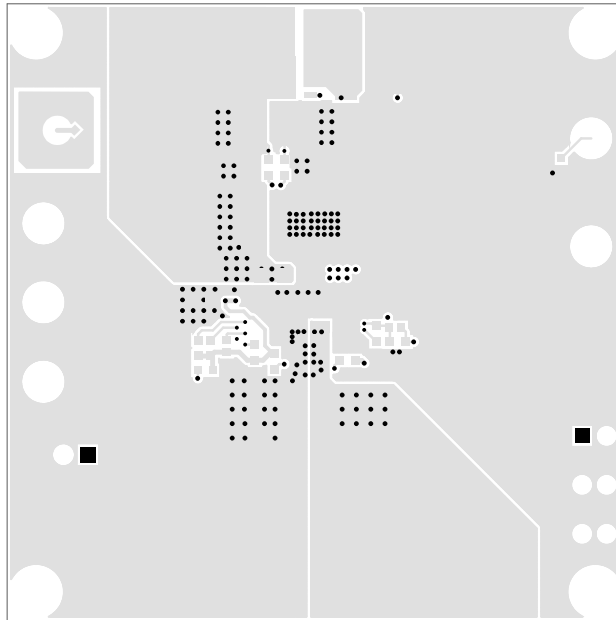


Figure 3-Bottom Layer

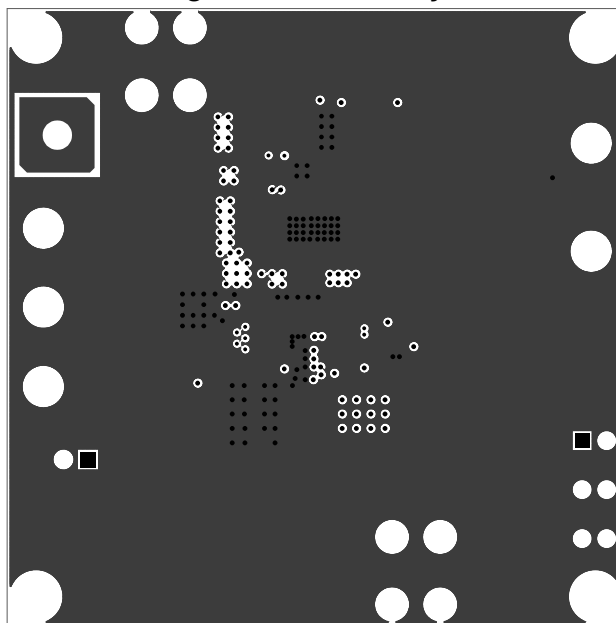


Figure 4-Inner1 Layer

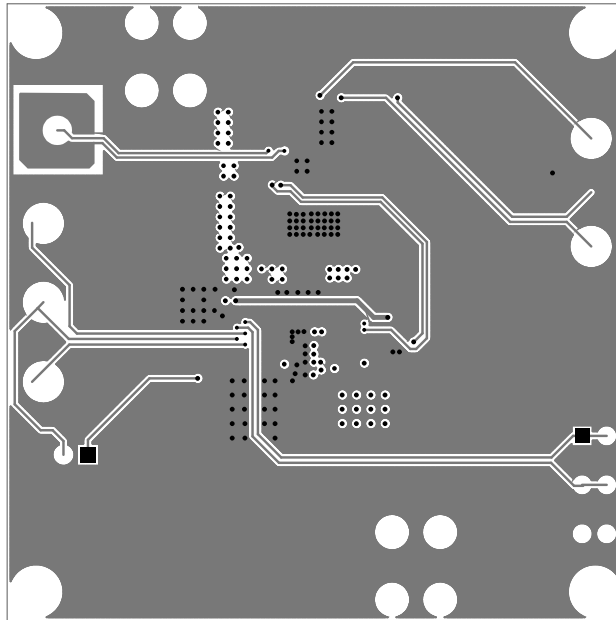


Figure 5-Inner2 Layer

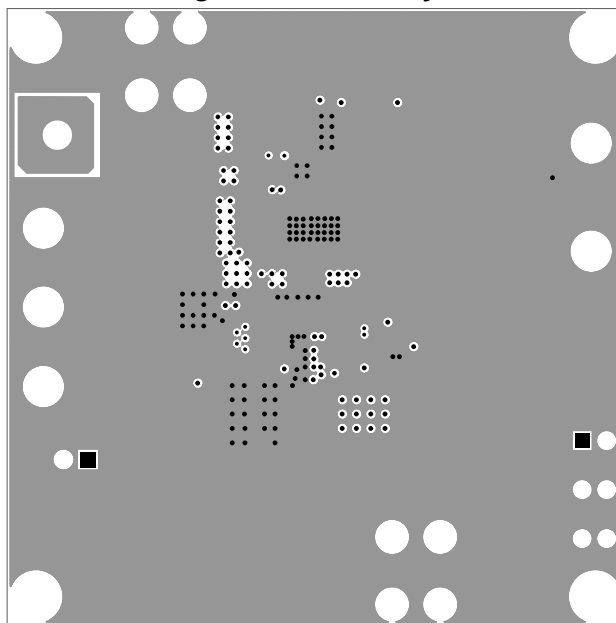


Figure 6-Inner3 Layer

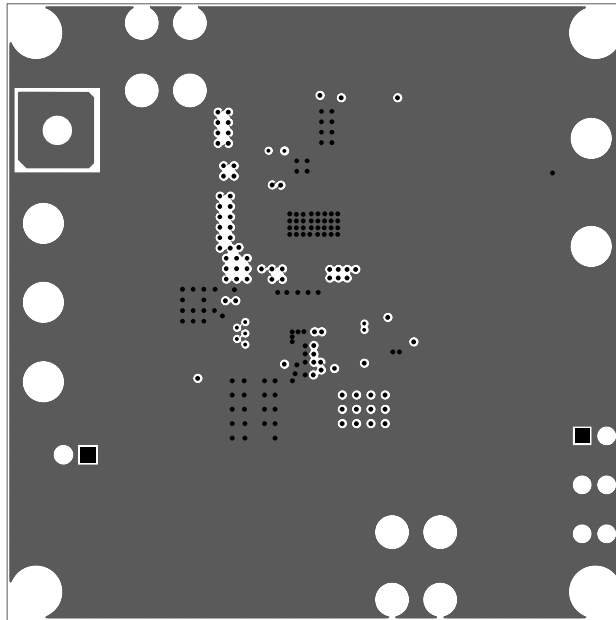




Figure 7-Inner4 Layer

QUICK START:

1. Connect the positive and negative terminals of the load to the VOUT and GND pins, respectively.
2. Preset the power supply output between 4V and 16V, and then turn off the power supply.
3. Connect the positive and negative terminals of the power supply output to the VIN and GND pins, respectively.
4. Turn the power supply on. The board will automatically start up. Figure 1-Top Silk Layer
5. MPM3695-25 GUI Simple Guide:
 - a. Check completeness for the PMBus tools:


| ITEM | PN | QUANTITY |
|------------|-------------------|----------|
| EVB | EVM3695-25-RF-02A | 1 |
| PMBus Kit | EVKT-USBI2C-02 | 1 |
| USB Cable | \ | 1 |
| PMBus Wire | \ | 1 |

- b. Connect PMBus wires to EVB and click the 'Virtual Bench Pro.exe', GUI will auto scan device:

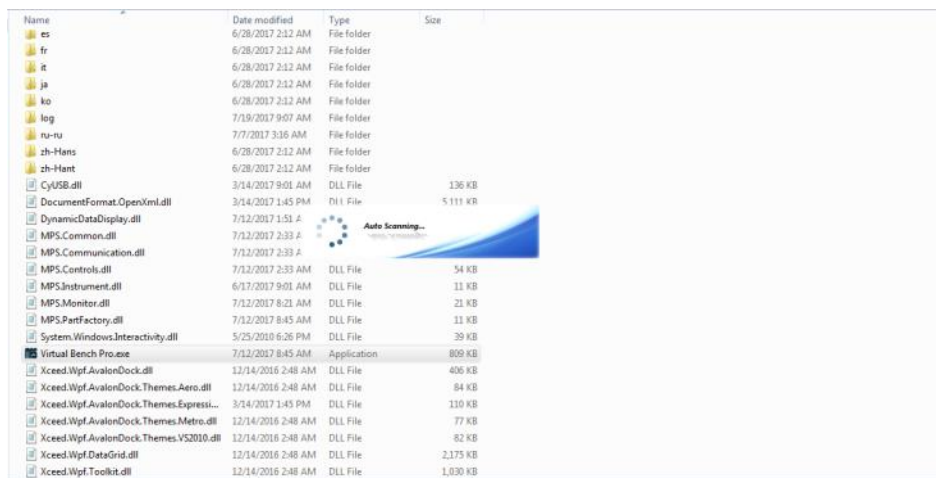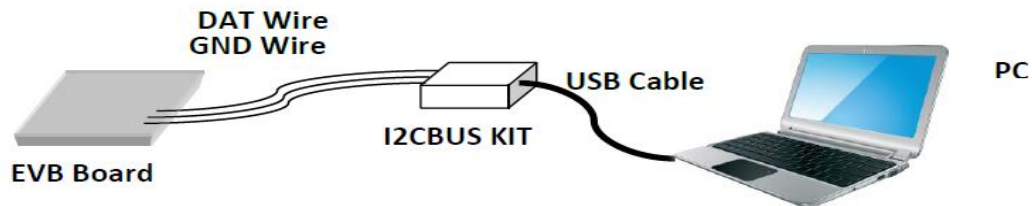

- c. When the part is found, the PN will be shown. The GUI allow user modify the internal parameters; please refer to the register details in IC datasheet.

On the right side, user can read the VOUT, IOUT, Temperature and other parameters.

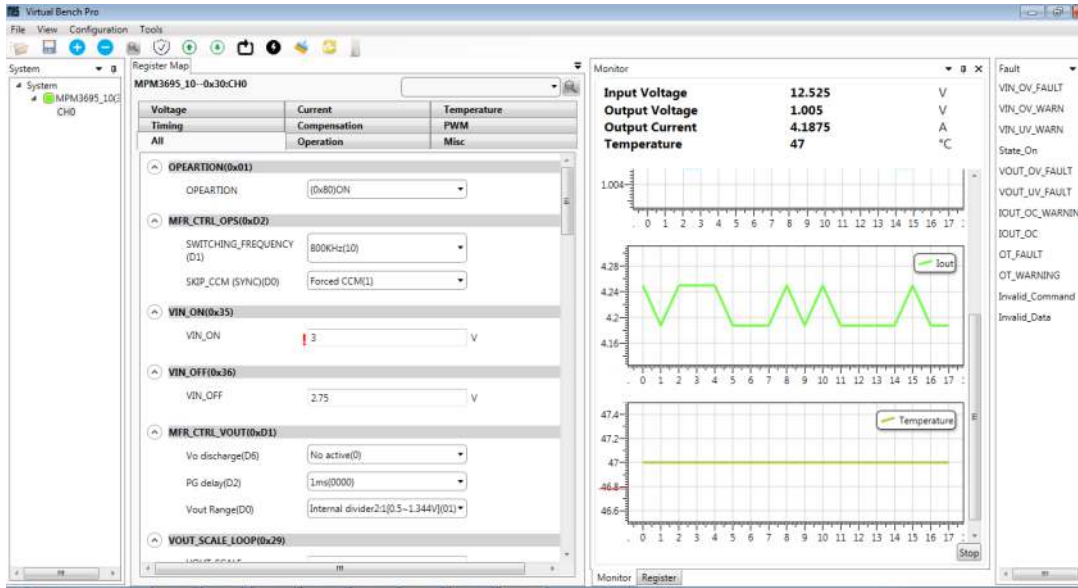

6. For different Output Voltage, recommended FB divider and PMBus parameters below:

| Recommended Vo Range(V) | R3 | R4 | Vout_scale | Ramp | Cff | Fsw |
|-------------------------|--------|--------|------------|--------|------|------|
| 0.5~1 | 500ohm | 500ohm | 0.5 | 44.7mV | 33nF | 600k |
| 1~1.8 | 2k | 1k | 0.335 | 44.7mV | 33nF | 600k |
| 1.8~2.4 | 3k | 1k | 0.25 | 44.7mV | 33nF | 600k |
| 2.4~4 | 6.98k | 1k | 0.125 | 44.7mV | 33nF | 600k |
| 4~6 | 9.09k | 1k | 0.1 | 44.7mV | 33nF | 600k |

NOTICE: The information in this document is subject to change without notice. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.