

REV. 2 2/15/99


DCO 15103

| | |
|-----------------|----------------|
| COIL: @ +25 °C | |
| RESISTANCE | 700 OHMS ± 10% |
| NOMINAL VOLTAGE | 26.5 VDC |
| MUST OPERATE | 13.5 VDC |
| MUST RELEASE | 1.5 VDC |

| | |
|--------------|-----------------------------|
| ENVIRONMENT: | |
| VIBRATION | 10 CPS TO 2000 CPS @ 20 g's |
| SHOCK | 100 g's 6 MS. DURATION |
| TEMPERATURE | -65 °C TO +125 °C |

NOTES: _____

CUSTOMER DATA SHEET

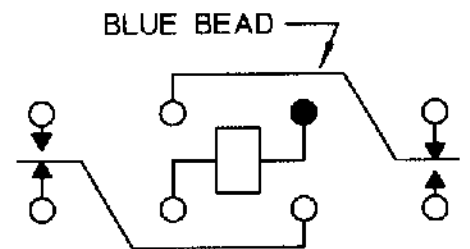

CONTACT RATING: LOW LEVEL
TO 5 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. R.B. 5/28/92 CK. GAH 2-15-99



CUST. C. I. I. STD.
 CUST. NO. _____

TYPE HFWSA RELAY

HFWSA1201K00