


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED. © COPYRIGHT 1984


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
G	14			E		REVISED & REDRAWN PER 0720-0303-93	8-30-93	gbb

REVISIONS

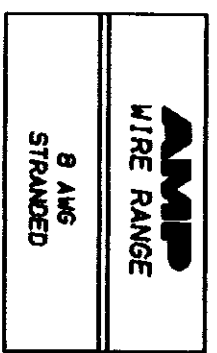

METRIC
DIMENSIONS LISTED IN mm [INCHES]

NOTE:
1. WIRE INSULATION DIA 8.51 [0.335] MAX

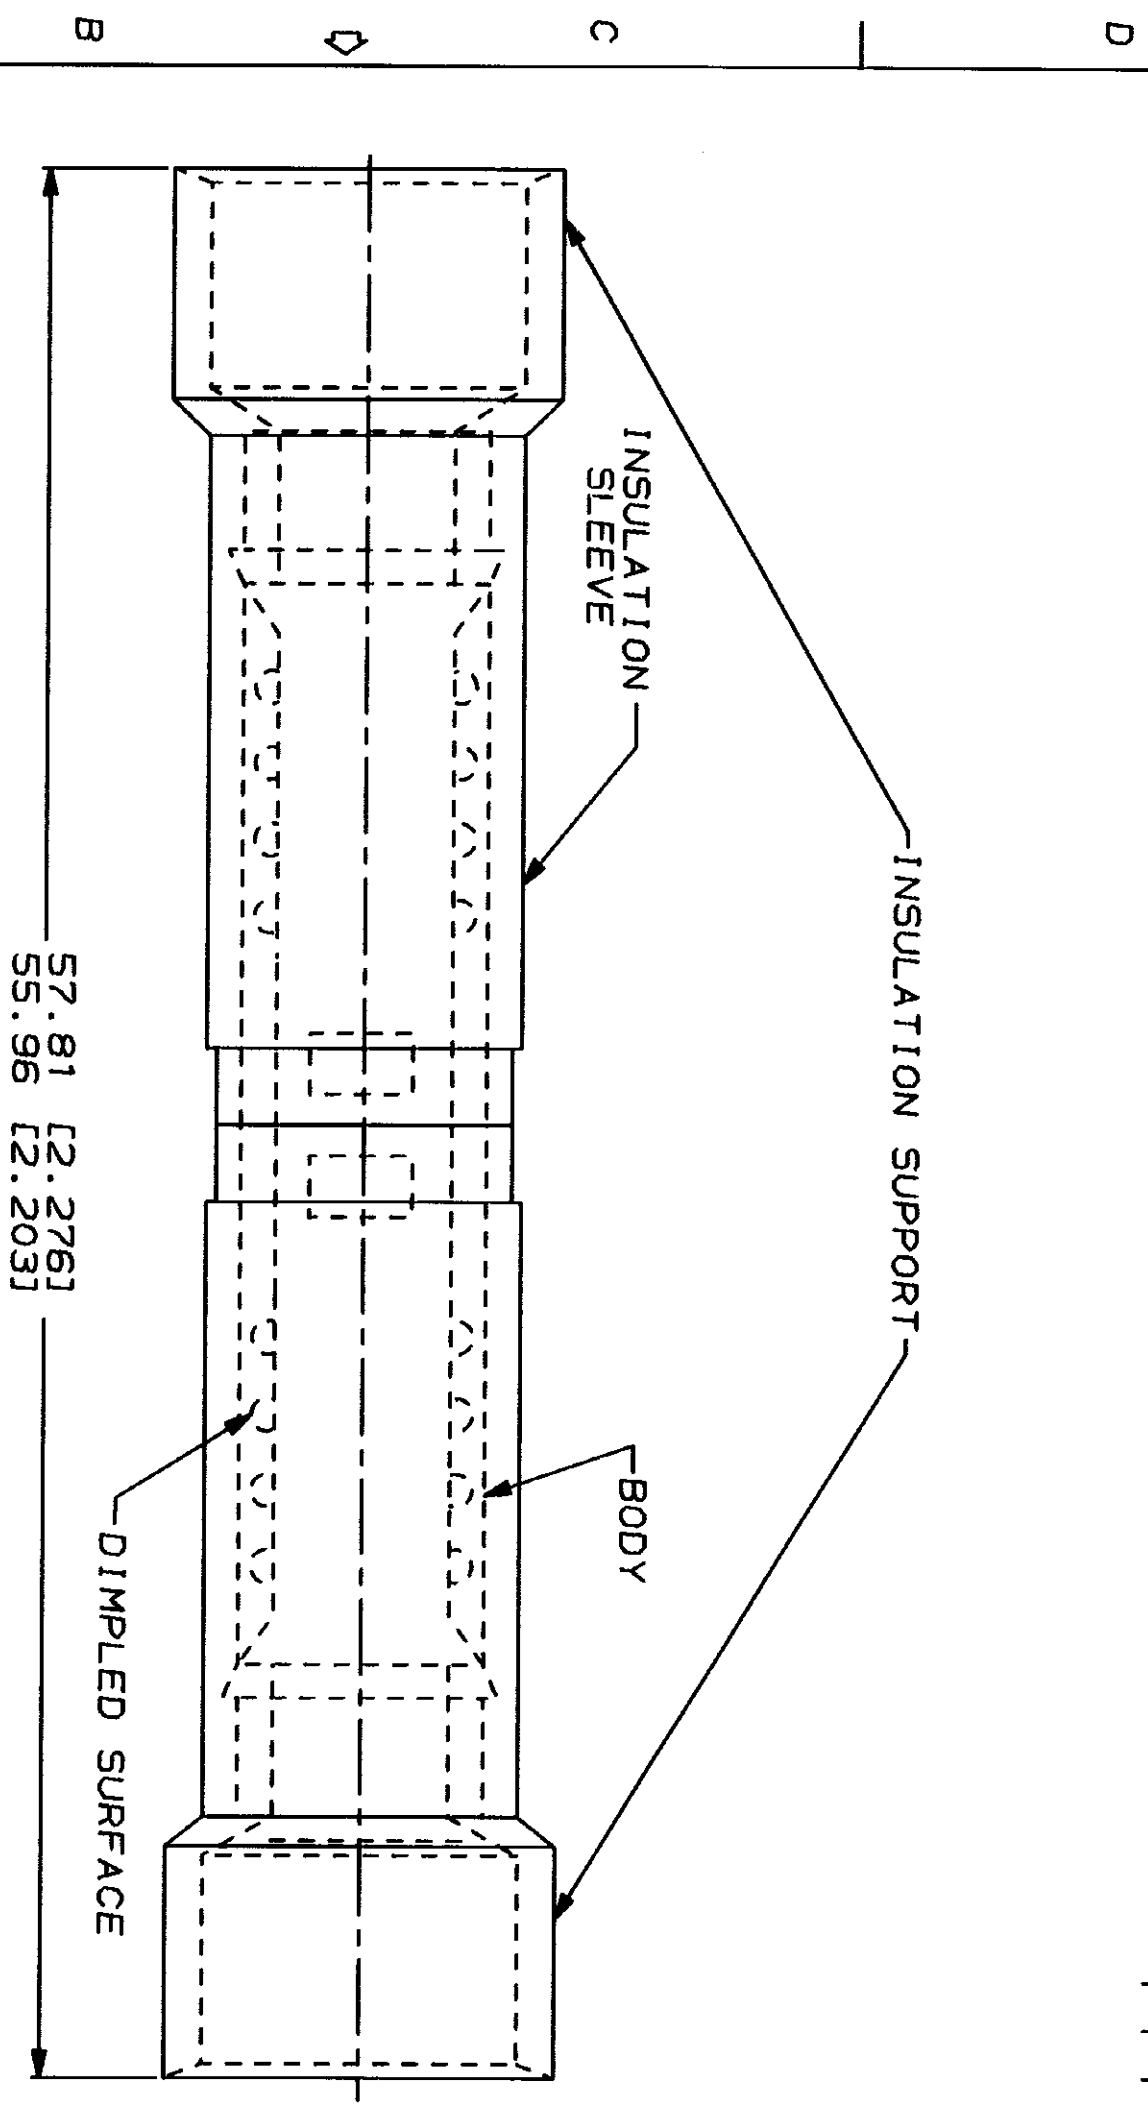

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C		DO NOT SCALE PRINT. UNLESS SPECIFIED OTHERWISE		DR 8-30-93 S.S. GOLDEN		QTY 100		LOOSE PC		324657	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		PRODUCT INFORMATION CENTER 1-800-522-6752		TOLERANCES UNLESS SPECIFIED: 2 P.C DEC ± 0.20; 0.001 3 P.C DEC ± 0.001		CHK 8-30-93 R. HENNEY		PACKAGE TYPE		AMP		AMP Incorporated Harrisburg, PA 17105-3608	
FOR APPLICATION		TOOLING ASSISTANCE CENTER 1-800-722-1111		MATERIAL COPPER PER ASTM B-152 MILON, COLOR RED		APPD 8-30-93 N. BLIS		NAME		SPLICE, BUTT, MULTIPLE TO MULTIPLE, TERMINAL,		WIRE SIZE: 8 AWG	
TOOLING INFORMATION		1-800-526-5142		FINISH TIN PLATE PER MIL-T-10727		APPD 8-30-93 N. BLIS		APPLICATION SPEC		SIZE B		CASE CODE 00779	
FOR ORDER ENTRY		1-800-526-5142		CIRCULAR MIL AREA: 6.84-10.54mm² [13,100-20,800] STRANDED		PRODUCT SPEC		WEIGHT		SCALE NTS		DRAWING NO G-324657	

AMP 1400-15 REV 3-92 10 JAN 1994 14:49:33 APT0744 <DUJ28A>DEPT1132<APT0744>J. TERMINL. SPICE-CUST CUSTOMER DRAWING