


PNP Silicon AF Transistors

- For AF input stages and driver applications
- High current gain
- Low collector-emitter saturation voltage
- Low noise between 30 Hz and 15 kHz
- Complementary types: BCW60, BCX70 (NPN)
- Pb-free (RoHS compliant) package¹⁾
- Qualified according AEC Q101

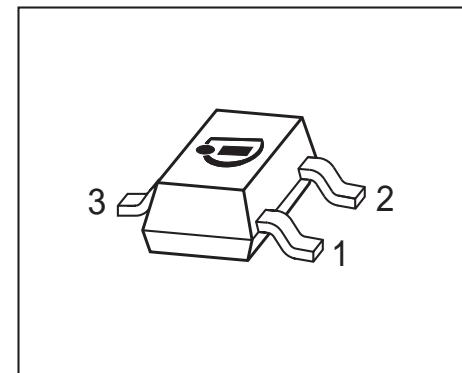

Type	Marking	Pin Configuration			Package
BCW61A	BAs	1=B	2=E	3=C	SOT23
BCW61B	BBs	1=B	2=E	3=C	SOT23
BCW61C	BCs	1=B	2=E	3=C	SOT23
BCW61D	BDs	1=B	2=E	3=C	SOT23
BCX71G	BGs	1=B	2=E	3=C	SOT23
BCX71H	BHs	1=B	2=E	3=C	SOT23
BCX71J	BJs	1=B	2=E	3=C	SOT23
BCX71K	BKs	1=B	2=E	3=C	SOT23

¹Pb-containing package may be available upon special request

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage BCW61... BCX71...	V_{CEO}	32 45	V
Collector-base voltage BCW61... BCX71...	V_{CBO}	32 45	
Emitter-base voltage	V_{EBO}	5	mA
Collector current	I_C	100	
Peak collector current	I_{CM}	200	
Peak base current	I_{BM}	200	
Total power dissipation- $T_S \leq 71 \text{ }^{\circ}\text{C}$	P_{tot}	330	mW
Junction temperature	T_j	150	-
Storage temperature	T_{stg}	-65 ... 150	$^{\circ}\text{C}$

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾	R_{thJS}	≤ 240	K/W

¹For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 10 \text{ mA}, I_B = 0$, BCW61...	$V_{(\text{BR})\text{CEO}}$	32	-	-	V
$I_C = 10 \text{ mA}, I_B = 0$, BCX71...		45	-	-	
Collector-base breakdown voltage $I_C = 10 \mu\text{A}, I_E = 0$, BCW61...	$V_{(\text{BR})\text{CBO}}$	32	-	-	
$I_C = 10 \mu\text{A}, I_E = 0$, BCX71...		45	-	-	
Emitter-base breakdown voltage $I_E = 1 \mu\text{A}, I_C = 0$	$V_{(\text{BR})\text{EBO}}$	5	-	-	
Collector-base cutoff current $V_{CB} = 32 \text{ V}, I_E = 0$ $V_{CB} = 45 \text{ V}, I_E = 0$ $V_{CB} = 32 \text{ V}, I_E = 0, T_A = 150^\circ\text{C}$, BCW61... $V_{CB} = 45 \text{ V}, I_E = 0, T_A = 150^\circ\text{C}$, BCX71...	I_{CBO}	-	-	0.02	μA
Emitter-base cutoff current $V_{EB} = 4 \text{ V}, I_C = 0$	I_{EBO}	-	-	20	nA
DC current gain ¹⁾ $I_C = 10 \mu\text{A}, V_{CE} = 5 \text{ V}, h_{FE}\text{-grp. A/G}$ $I_C = 10 \mu\text{A}, V_{CE} = 5 \text{ V}, h_{FE}\text{-grp. B/H}$ $I_C = 10 \mu\text{A}, V_{CE} = 5 \text{ V}, h_{FE}\text{-grp. C/J}$ $I_C = 10 \mu\text{A}, V_{CE} = 5 \text{ V}, h_{FE}\text{-grp. D/K}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, h_{FE}\text{-grp. A/G}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, h_{FE}\text{-grp. B/H}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, h_{FE}\text{-grp. C/J}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, h_{FE}\text{-grp. D/K}$ $I_C = 50 \text{ mA}, V_{CE} = 1 \text{ V}, h_{FE}\text{-grp. A/G}$ $I_C = 50 \text{ mA}, V_{CE} = 1 \text{ V}, h_{FE}\text{-grp. B/H}$ $I_C = 50 \text{ mA}, V_{CE} = 1 \text{ V}, h_{FE}\text{-grp. C/J}$ $I_C = 50 \text{ mA}, V_{CE} = 1 \text{ V}, h_{FE}\text{-grp. D/K}$	h_{FE}	20	140	-	-
		30	200	-	
		40	300	-	
		100	460	-	
		120	170	220	
		180	250	310	
		250	350	460	
		380	500	630	
		60	-	-	
		80	-	-	
		100	-	-	
		110	-	-	

DC Electrical Characteristics

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Characteristics					
Collector-emitter saturation voltage ¹⁾ $I_C = 10 \text{ mA}, I_B = 0.25 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 1.25 \text{ mA}$	V_{CEsat}	-	0.12	0.25	V
-	-	-	0.2	0.55	
Base emitter saturation voltage ¹⁾ $I_C = 10 \text{ mA}, I_B = 0.25 \text{ mA}$ $I_C = 50 \text{ mA}, I_B = 1.25 \text{ mA}$	V_{BEsat}	-	0.7	0.85	
-	-	-	0.83	1.05	
Base-emitter voltage ¹⁾ $I_C = 10 \mu\text{A}, V_{CE} = 5 \text{ V}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}$ $I_C = 50 \text{ mA}, V_{CE} = 1 \text{ V}$	$V_{BE(ON)}$	-	0.52	-	
-	-	0.55	0.65	0.75	
-	-	-	0.78	-	


¹⁾Pulse test: t < 300μs; D < 2%

AC Characteristics

Transition frequency $I_C = 20 \text{ mA}, V_{CE} = 5 \text{ V}, f = 100 \text{ MHz}$	f_T	-	250	-	MHz
Collector-base capacitance $V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$	C_{cb}	-	1.5	-	pF
Emitter-base capacitance $V_{EB} = 0.5 \text{ V}, f = 1 \text{ MHz}$	C_{eb}	-	8	-	
Short-circuit input impedance $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}, h_{FE}-\text{grp. A/B}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}, h_{FE}-\text{grp. B/H}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}, h_{FE}-\text{grp. C/J}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}, h_{FE}-\text{grp. D/K}$	h_{11e}	-	2.7 3.6 4.5 7.5	-	kΩ
Open-circuit reverse voltage transf. ratio $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}, h_{FE}-\text{grp. A/B}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}, h_{FE}-\text{grp. B/H}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}, h_{FE}-\text{grp. C/J}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}, h_{FE}-\text{grp. D/K}$	h_{12e}	-	1.5 2 2 3	-	10^{-4}
Short-circuit forward current transf. ratio $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}, h_{FE}-\text{grp. A/B}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}, h_{FE}-\text{grp. B/H}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}, h_{FE}-\text{grp. C/J}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}, h_{FE}-\text{grp. D/K}$	h_{21e}	-	200 260 330 520	-	-
Open-circuit output admittance $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}, h_{FE}-\text{grp. A/B}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}, h_{FE}-\text{grp. B/H}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}, h_{FE}-\text{grp. C/J}$ $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}, h_{FE}-\text{grp. D/K}$	h_{22e}	-	18 24 30 50	-	∞S
Noise figure $I_C = 200 \mu\text{A}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz},$ $\Delta f = 200 \text{ Hz}, R_S = 2 \text{ k}\Omega, h_{FE}-\text{grp. A/K}$	F	-	2	-	dB


DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 5 \text{ V}$

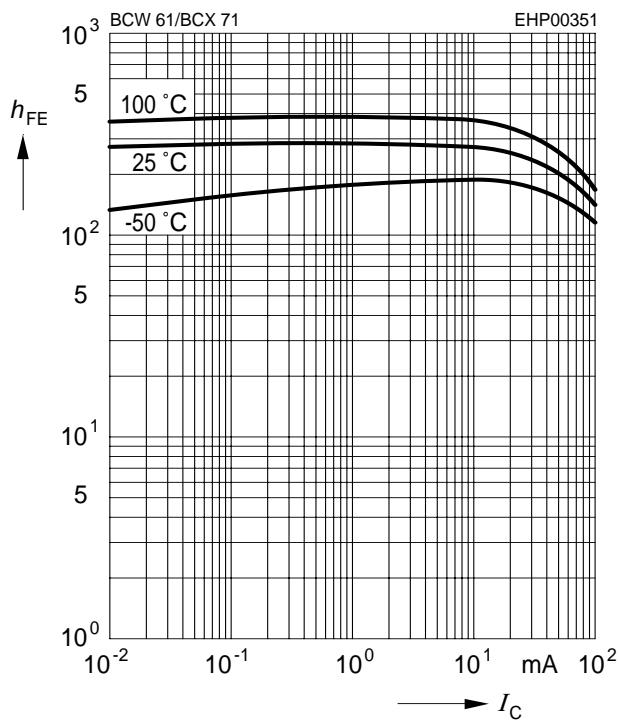


Base-emitter saturation voltage

$I_C = f(V_{BEsat})$, $h_{FE} = 40$

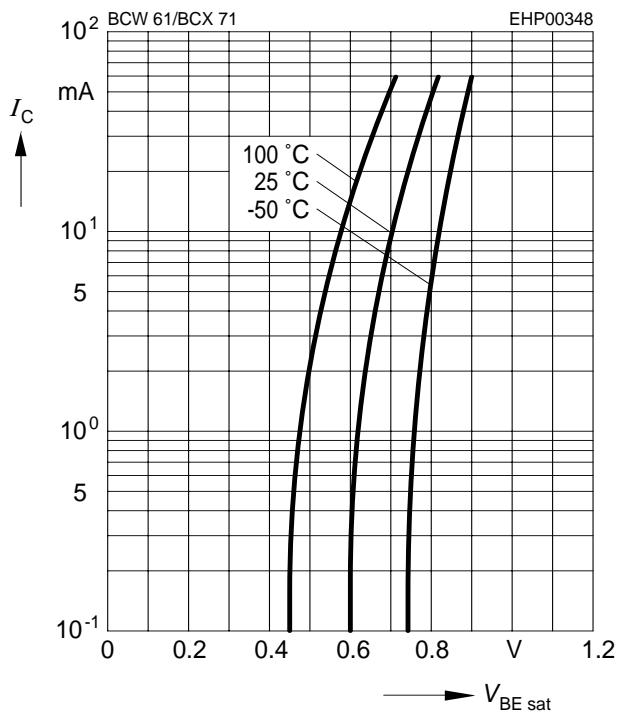


Collector-emitter saturation voltage

$I_C = f(V_{CEsat})$, $h_{FE} = 40$

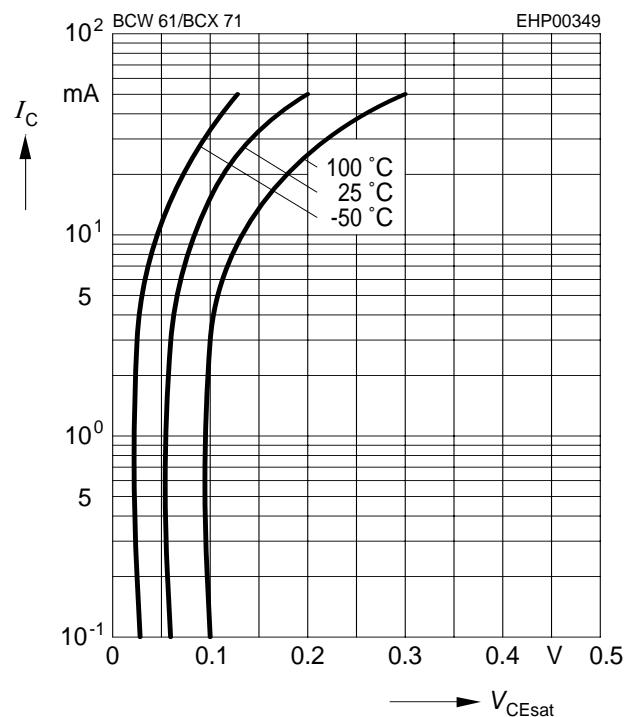


Collector current $I_C = f(V_{BE})$


$V_{CE} = 5 \text{ V}$

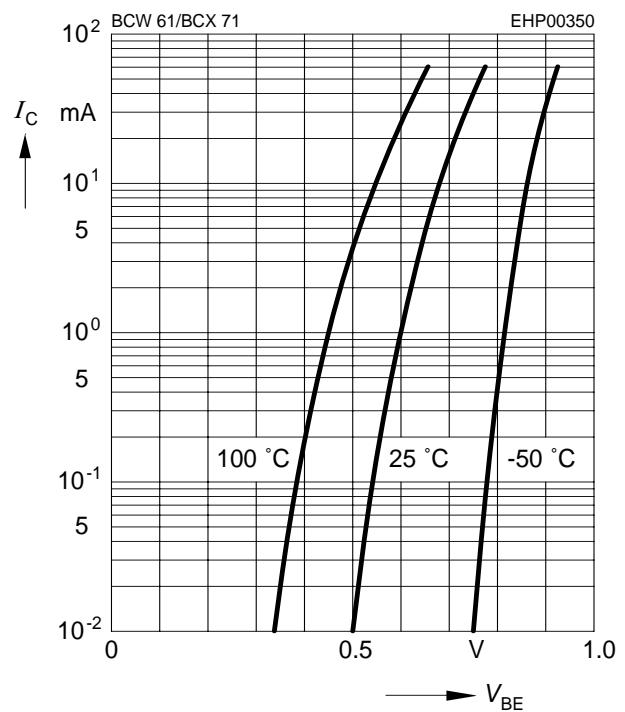


Collector cutoff current $I_{CBO} = f(T_A)$
 $V_{CB} = V_{CEmax}$

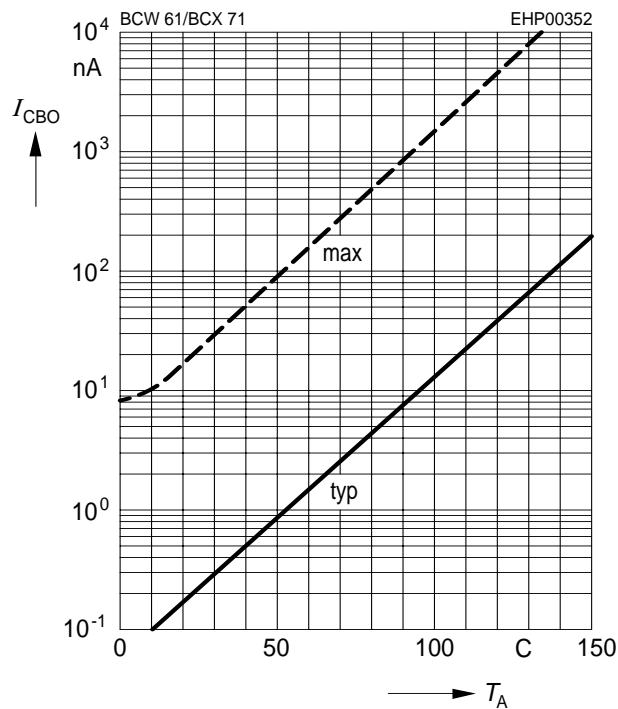


Collector-base capacitance $C_{cb} = f(V_{CB})$
Emitter-base capacitance $C_{eb} = f(V_{EB})$

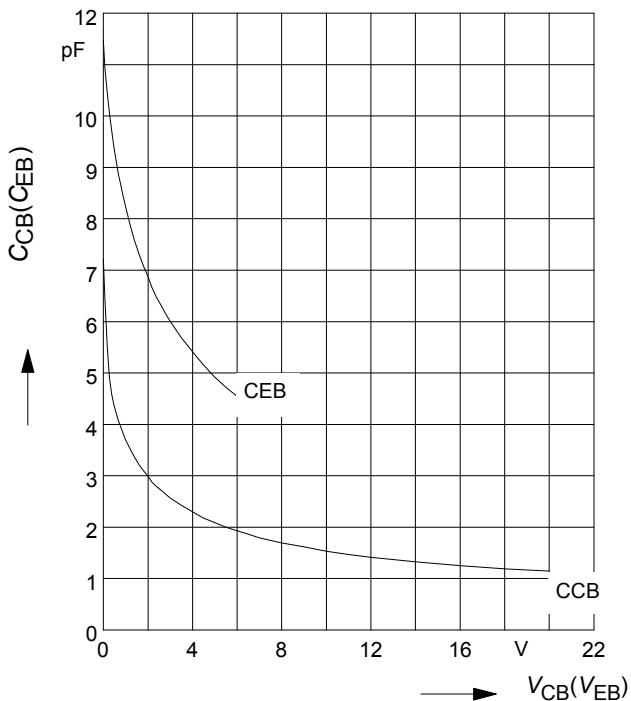

Transition frequency $f_T = f(I_C)$
 $V_{CE} = \text{parameter in } V, f = 2 \text{ GHz}$

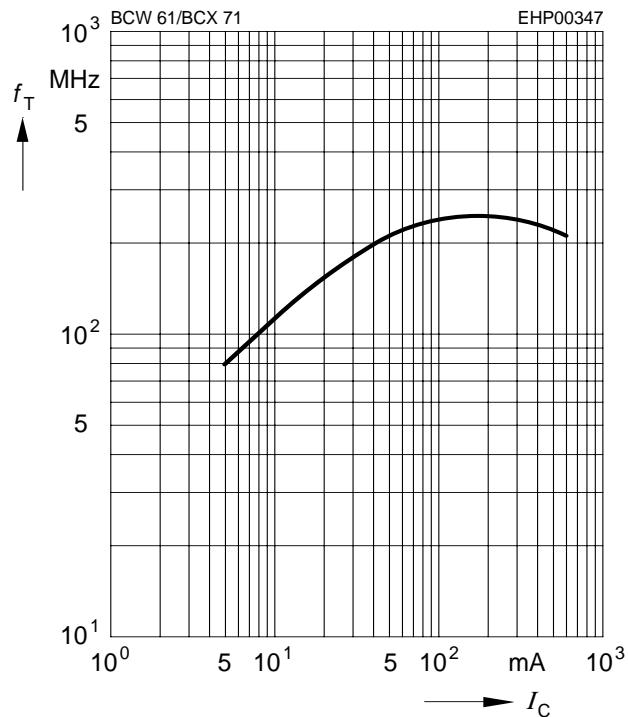


Total power dissipation $P_{tot} = f(T_S)$

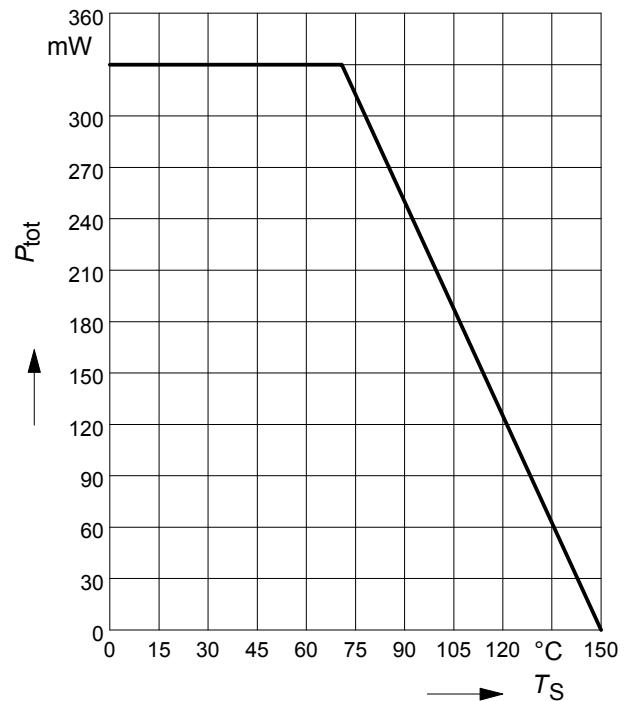

Permissible Pulse Load


$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

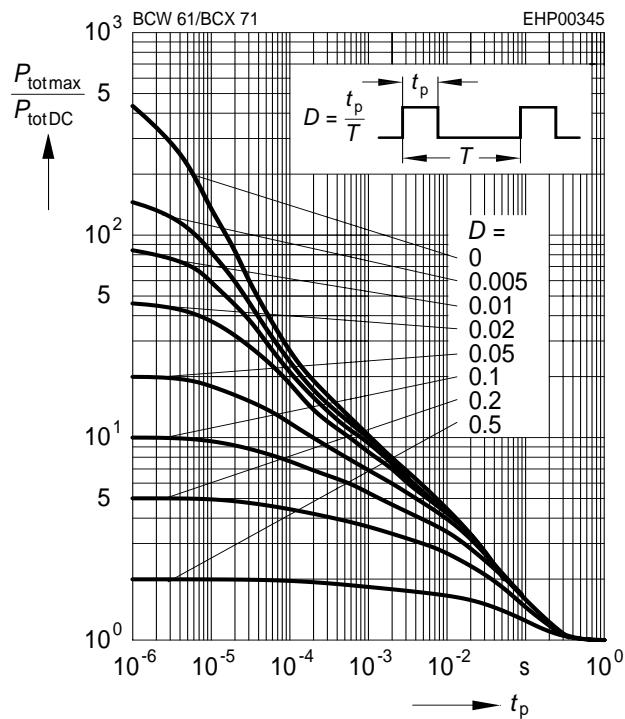
h parameter $h_e = f(V_{CE})$ normalized



$$I_C = 2 \text{mA}$$

h parameter $h_e = f(I_C)$ normalized

$$V_{CE} = 5 \text{V}$$

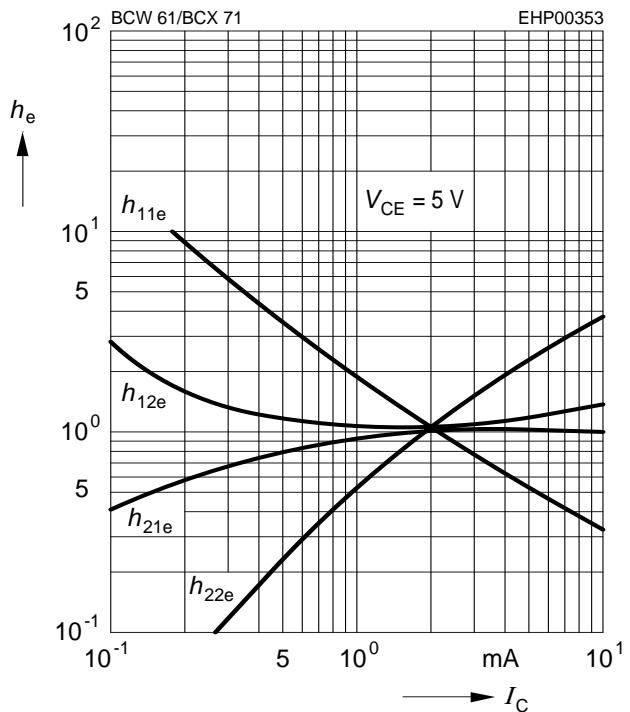

Noise figure $F = f(V_{CE})$

$$I_C = 0.2 \text{mA}, R_S = 2 \text{k}\Omega, f = 1 \text{kHz}$$

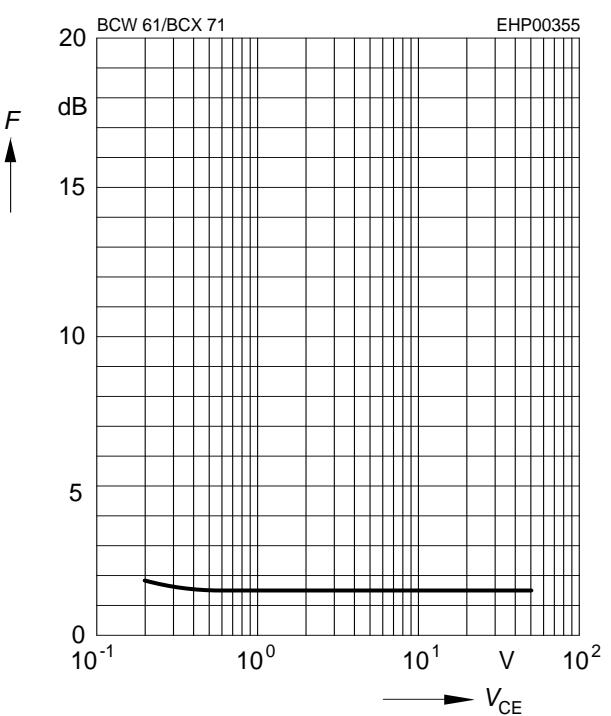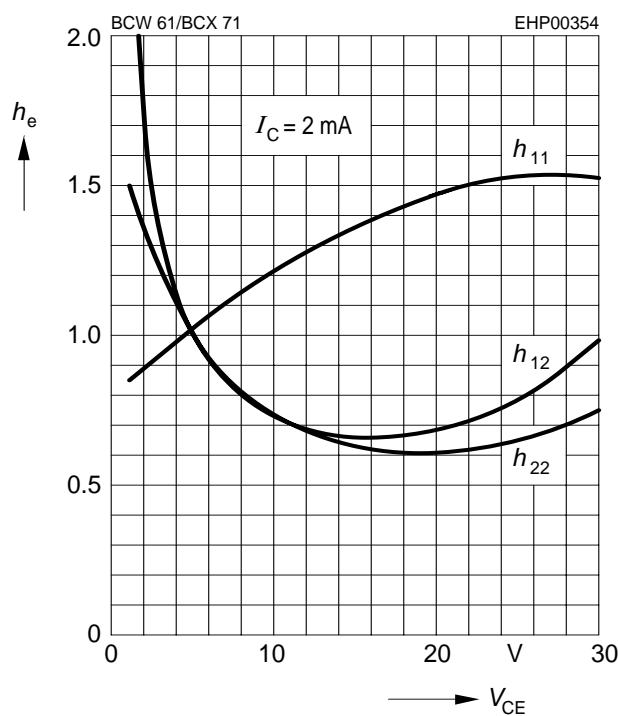


Noise figure $F = f(f)$

$V_{CE} = 5V, Z_S = Z_{Sopt}$

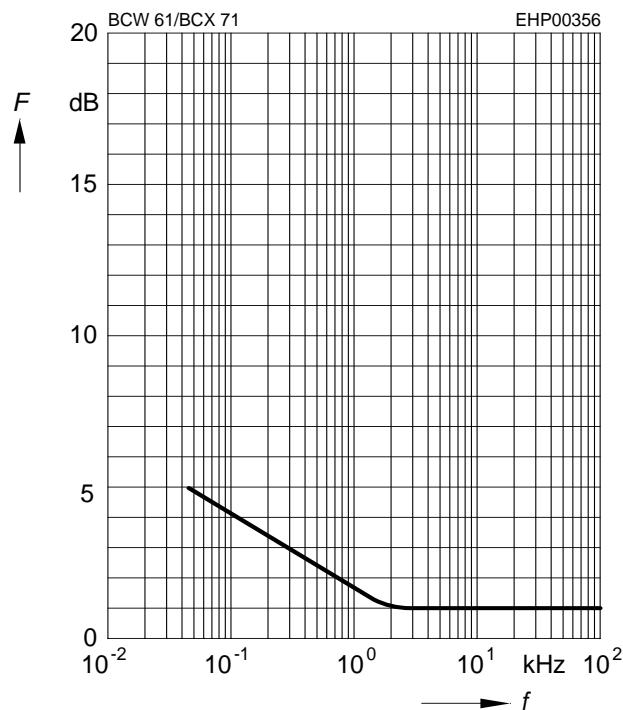


Noise figure $F = f(I_C)$

$V_{CE} = 5V, f = 1\text{kHz}$

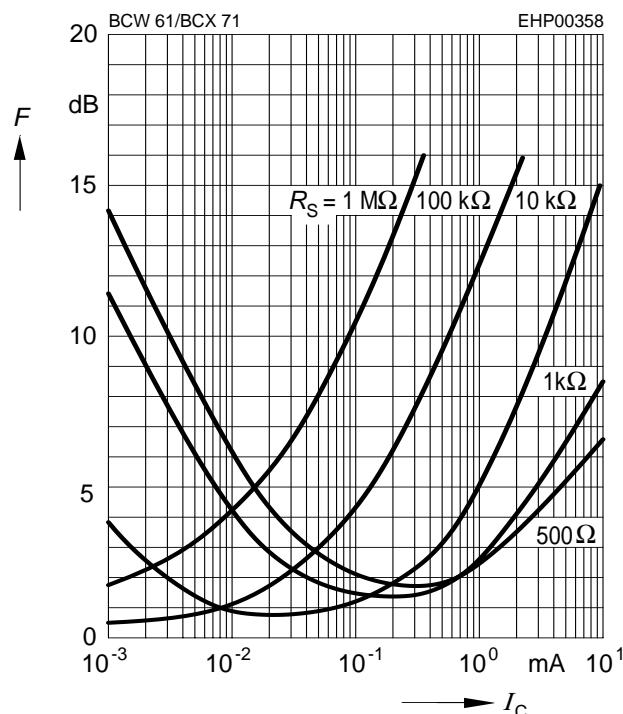


Noise figure $F = f(I_C)$

$V_{CE} = 5V, f = 120\text{Hz}$

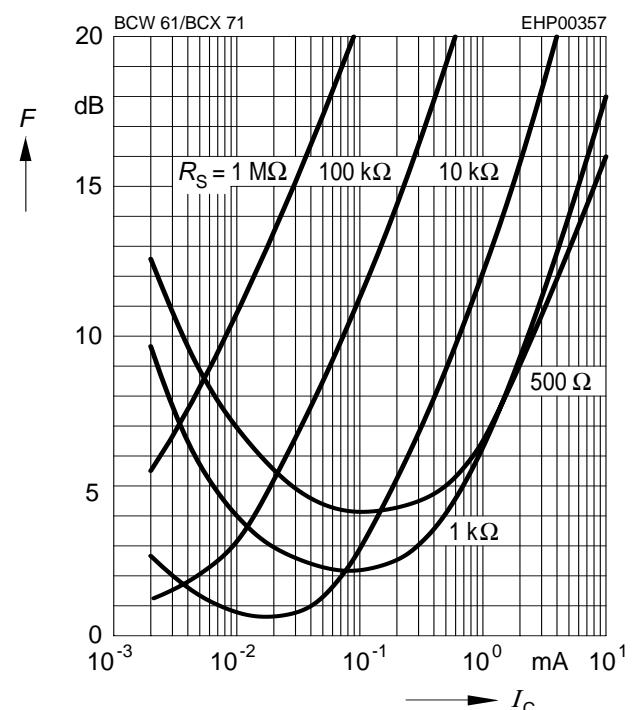


Noise figure $F = f(I_C)$

$V_{CE} = 5V, f = 10\text{kHz}$

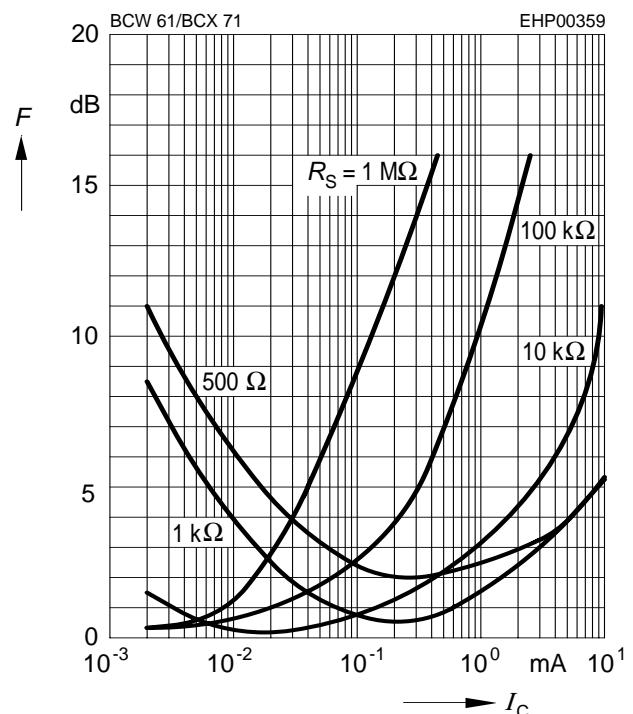


Package Outline

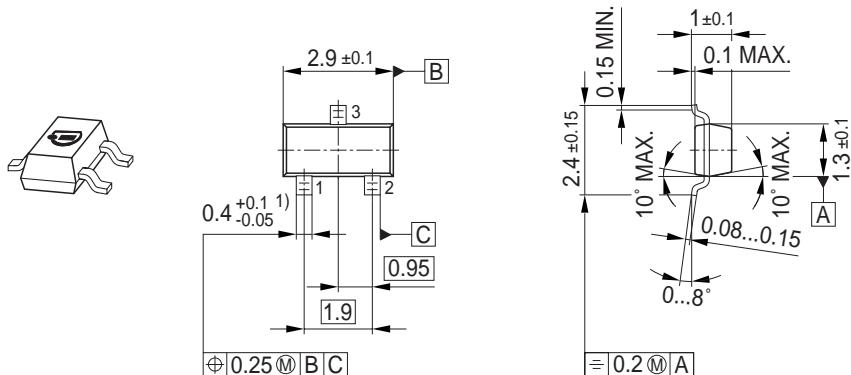


1) Lead width can be 0.6 max. in dambar area

Foot Print




Marking Layout (Example)

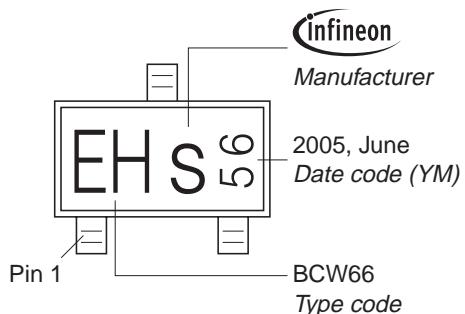

Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

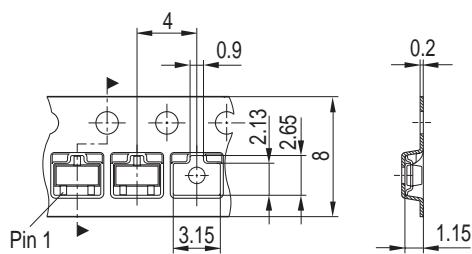

Edition 2006-02-01

Published by

Infineon Technologies AG

81726 München, Germany

© Infineon Technologies AG 2007.

All Rights Reserved.

Attention please!

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances.
For information on the types in question please contact your nearest
Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.