

# TPS62184 Buck Converter Evaluation Module User's Guide



## ABSTRACT

This user's guide describes the characteristics, operation, and use of TI's TPS62184 evaluation module (EVM). The TPS62184EVM-581 (PWR581-002) facilitates the evaluation of the TPS62184 6-A, 2-phase buck converter. The EVM outputs a 1.8-V output voltage from input voltages between 4 V and 17 V. The TPS62184 features Automatic Efficiency Enhancement (AEE™) to deliver efficiencies in excess of 90% across the load current range. The small solution size (99 mm<sup>2</sup>) and low profile possible enable a very dense power solution in tablets, Solid State Drives (SSDs), and other portable devices. This user's guide includes setup instructions for the hardware, a printed-circuit board layout for the EVM, a schematic diagram, a bill of materials (BOM), and test results for the EVM.

## Table of Contents

|  |    |
|--|----|
| <b>1 Introduction</b> .....                    | 2  |
| 1.1 Performance Specification.....             | 2  |
| 1.2 Modifications.....                         | 2  |
| <b>2 Setup</b> .....                           | 3  |
| 2.1 Input/Output Connector Descriptions.....   | 3  |
| 2.2 Setup.....                                 | 3  |
| <b>3 TPS62184EVM-581 Test Results</b> .....    | 4  |
| <b>4 Board Layout</b> .....                    | 5  |
| <b>5 Schematic and Bill of Materials</b> ..... | 8  |
| 5.1 Schematic.....                             | 9  |
| 5.2 Bill of Materials.....                     | 10 |
| <b>6 Revision History</b> .....                | 10 |

## List of Figures

|   |   |
|---|---|
| Figure 3-1. Thermal Performance ( $V_{IN} = 17$ V, Load = 6 A).....   | 4 |
| Figure 3-2. Loop Measurement ( $V_{IN} = 12$ V, Load = 6 A, 50- $\Omega$ resistor added in series with R1)..... | 4 |
| Figure 4-1. Assembly Layer.....   | 5 |
| Figure 4-2. Top Silk Layer.....   | 5 |
| Figure 4-3. Top Layer.....  | 6 |
| Figure 4-4. Internal Layer 1.....   | 6 |
| Figure 4-5. Internal Layer 2.....   | 7 |
| Figure 4-6. Bottom Layer.....   | 7 |
| Figure 5-1. TPS62184EVM-581 Schematic.....  | 9 |

## List of Tables

|   |    |
|---|----|
| Table 1-1. Performance Specification Summary..... | 2  |
| Table 5-1. TPS62184EVM-581 Bill of Materials..... | 10 |

## Trademarks

AEE™ is a trademark of Texas Instruments.  
All trademarks are the property of their respective owners.

## 1 Introduction

The TPS62184 is a 6-A, dual-phase, synchronous, step-down converter in a 2 × 3-mm, WCSP package.

### 1.1 Performance Specification

[Table 1-1](#) provides a summary of the TPS62184EVM-581 performance specifications. All specifications are given for an ambient temperature of 25°C.

**Table 1-1. Performance Specification Summary**

| Specification           | Test Conditions                                 | Min | Typ | Max | Unit          |
|-------------------------|---|-----|-----|-----|---------------|
| Input voltage           |   | 4   |     | 17  | V             |
| Output voltage setpoint |   |     | 1.8 |     | V             |
| Output current          | $V_{OUT} \leq 1.8\text{ V}$                     | 0   |     | 6   | A             |
|                         | $V_{OUT} > 1.8\text{ V and } \leq 2.5\text{ V}$ | 0   |     | 5.5 | A             |
|                         | $V_{OUT} > 2.5\text{ V and } \leq 3.5\text{ V}$ | 0   |     | 5   | A             |
| Soft-start time         | Ramp time of $V_{OUT}$                          |     | 825 |     | $\mu\text{s}$ |

### 1.2 Modifications

The output voltage of the EVM may be adjusted within the range stated in the device data sheet. Additional input and output capacitors can also be added. A lower profile inductor may also be used to reduce the total solution height. Finally, the input voltage at which the IC turns on can be adjusted with two resistors.

#### 1.2.1 Changing the Output Voltage

The output voltage may be adjusted by changing the values of R1 and R2. Be sure and keep the output voltage within the range specified in the device data sheet. Setting an output voltage above 1.8 V reduces the maximum amount of current which can reliably be delivered, per [Table 1-1](#). See the data sheet for details.

#### 1.2.2 Input and Output Capacitors

C13 and C14 are provided for additional input capacitors. These capacitors are not required for proper operation but can be used to reduce the input voltage ripple.

C7, C8, C9, C10, C11, and C12 are provided for additional output capacitors. These capacitors are not required for proper operation but can be used to reduce the output voltage ripple and to improve the load transient response. The total output capacitance must remain within the recommended range in the TPS62184 data sheet ([SLVSCQ5](#)) for proper operation.

#### 1.2.3 Lower Profile Solutions

The TPS62184EVM-581 supports modifications to achieve a lower total solution profile (height). The current EVM gives a maximum height of 2.1 mm. To obtain a lower profile solution, replace both inductors L1 and L2 with a suitable inductor of lower height. An option is the DFE252012P series from Toko which has a maximum profile of 1.2 mm. These inductors fit well on the existing pads for L1 and L2.

#### 1.2.4 Configurable Enable Threshold Voltage

With JP1 removed, R4 and R5 can be installed to set a user-selectable input voltage at which the IC turns on. See the equations in the data sheet for details of calculating the resistor values.

## 2 Setup

This section describes how to properly use the TPS62184EVM-581.

### 2.1 Input/Output Connector Descriptions

|                                |  |
|--------------------------------|--|
| <b>J1 – VIN</b>                | Positive input connection from the input supply for the EVM  |
| <b>J2 – S+/S–</b>              | Input voltage sense connections. Measure the input voltage at this point.  |
| <b>J3 – GND</b>                | Return connection from the input supply for the EVM  |
| <b>J4 – VOUT</b>               | Output voltage connection  |
| <b>J5 – S+/S–</b>              | Output voltage sense connections. Measure the output voltage at this point.  |
| <b>J6 – GND</b>                | Output return connection   |
| <b>J7 – PG/GND</b>             | The PG output appears on pin 1 of this header with a convenient ground on pin 2  |
| <b>J8 – SS/TR/GND</b>          | The SS/TR pin voltage appears on pin 2 of this header with a convenient ground on pin 1  |
| <b>JP1 – EN</b>                | EN pin input jumper. Place the supplied jumper across ON and EN to turn on the IC. Place the jumper across OFF and EN to turn off the IC. Remove the jumper to set a configurable enable threshold voltage with R4 and R5.   |
| <b>JP2 – PG Pullup Voltage</b> | PG pin pullup voltage jumper. Place the supplied jumper on JP2 to connect the PG pin pullup resistor to the output voltage. Alternatively, the jumper can be removed and a different voltage can be supplied on pin 1 to pull up the PG pin to a different level. This externally applied voltage must remain below 7 V. |

### 2.2 Setup

To operate the EVM, set jumpers JP1 and JP2 to the desired positions per [Section 2.1](#). Connect the input supply to J1 and J3 and connect the load to J4 and J6.

### 3 TPS62184EVM-581 Test Results

The TPS62184EVM-581 was used to take the data in the TPS62184 data sheet ([SLVSCQ5](#)). See the device data sheet for the performance of this EVM.

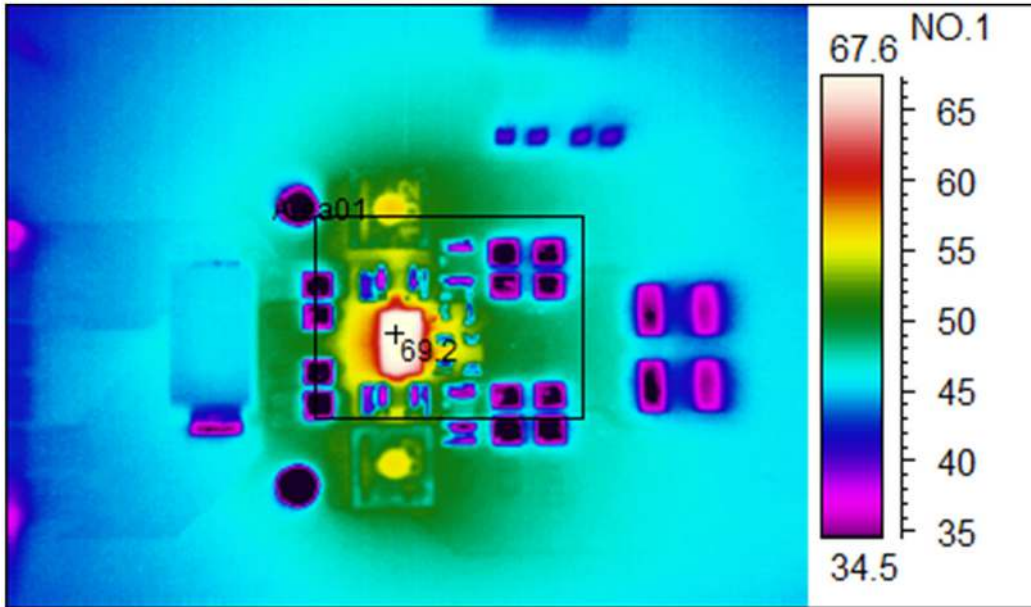



Figure 3-1. Thermal Performance ( $V_{IN} = 17\text{ V}$ , Load = 6 A)

**WARNING**



Hot surface. Contact may cause burns. Do not touch!

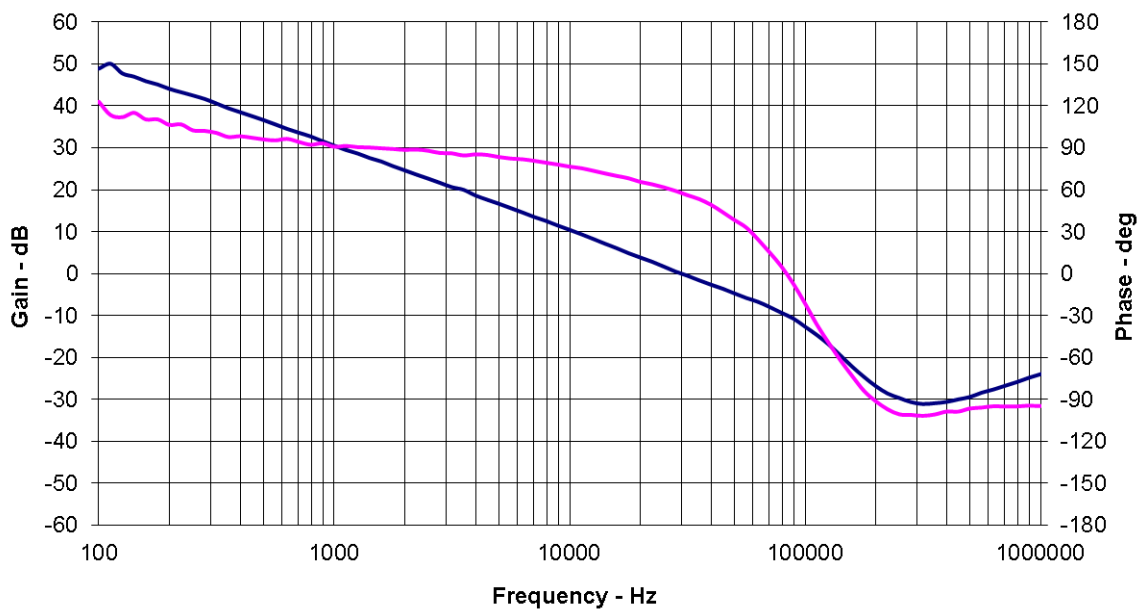


Figure 3-2. Loop Measurement ( $V_{IN} = 12\text{ V}$ , Load = 6 A, 50- $\Omega$  resistor added in series with R1)

## 4 Board Layout

This section provides the TPS62184EVM-581 board layout and illustrations. The Gerbers are available on the EVM product page: [TPS62184EVM-581](https://www.ti.com/tps62184evm-581). Rev. B of the PCB just filled the vias under U1 to improve manufacturability. No copper changes were made from Rev. A.

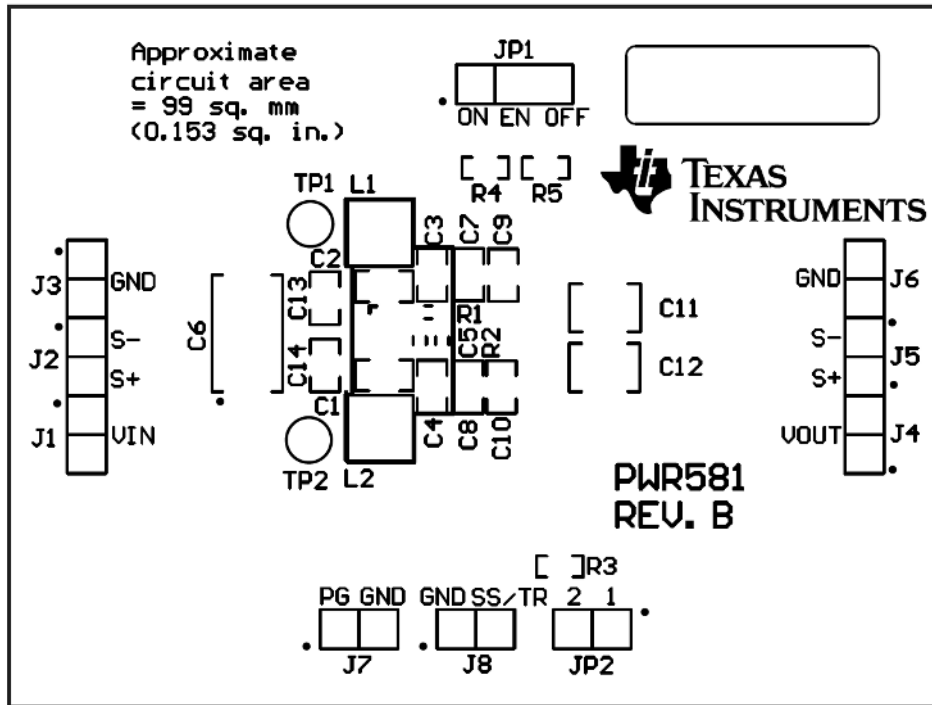


Figure 4-1. Assembly Layer



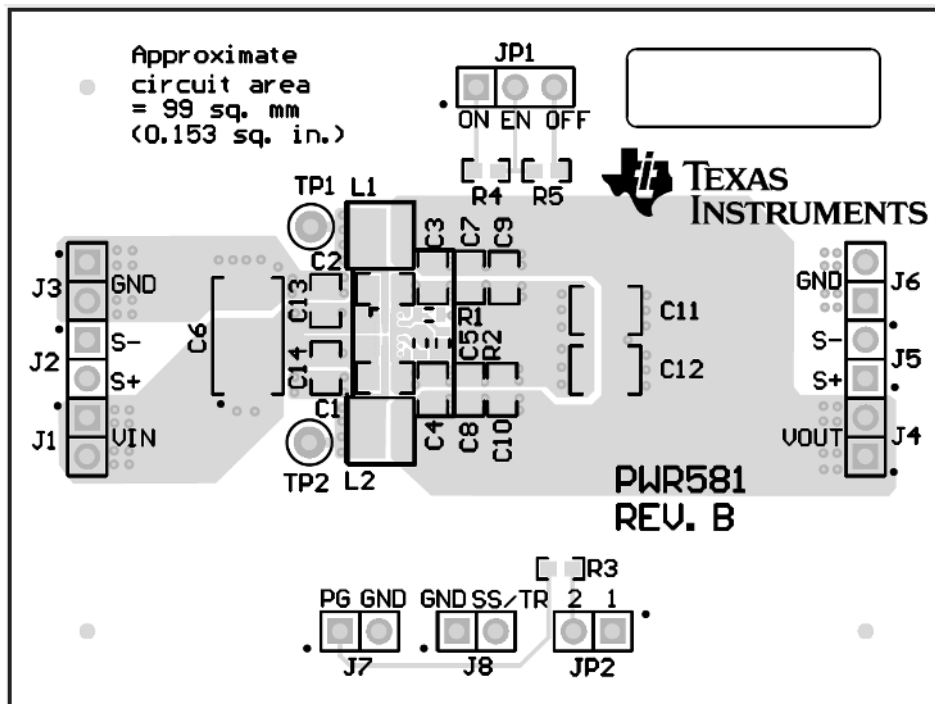



Figure 4-2. Top Silk Layer

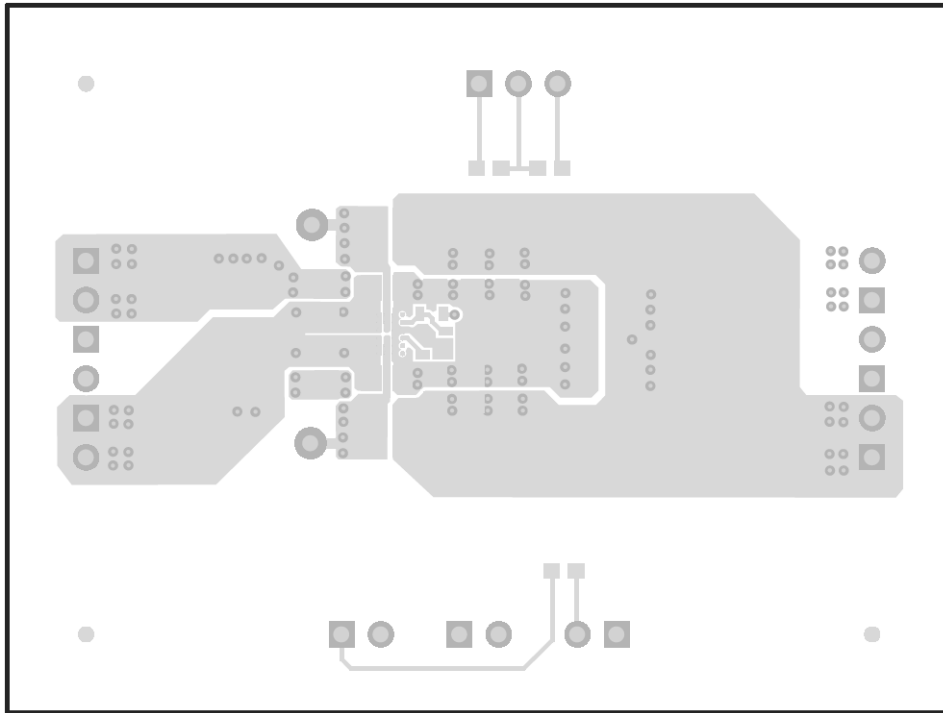


**Figure 4-3. Top Layer**

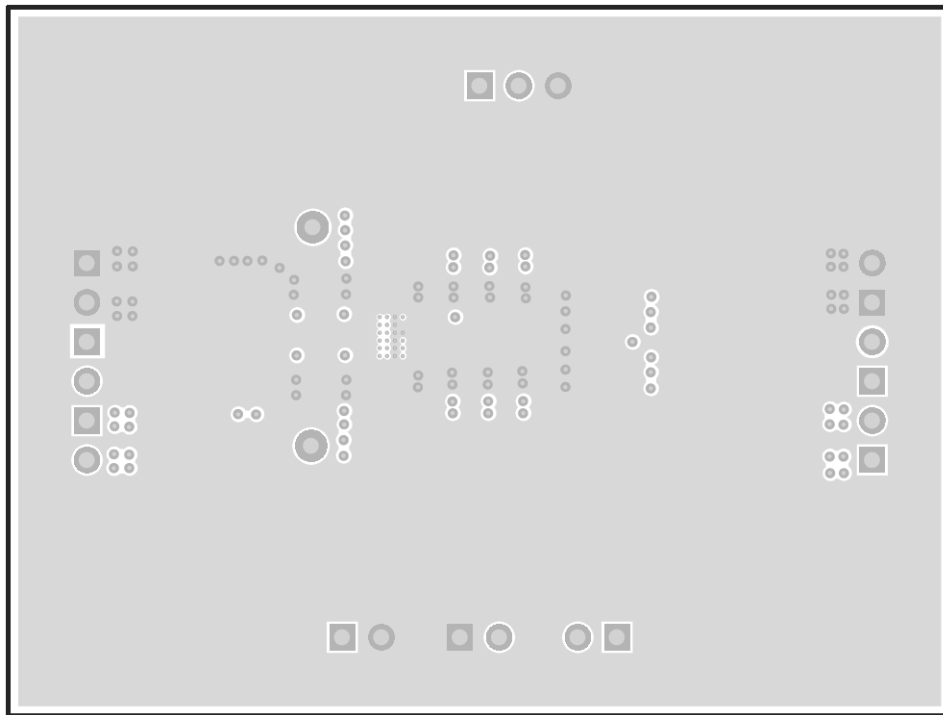

**Figure 4-4. Internal Layer 1**

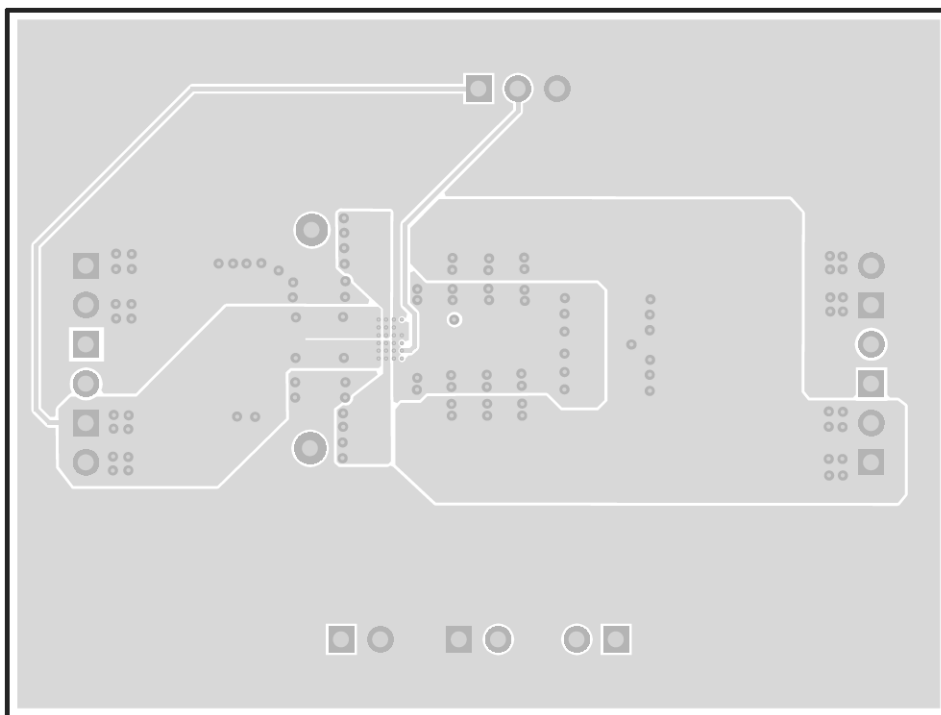

**Figure 4-5. Internal Layer 2**

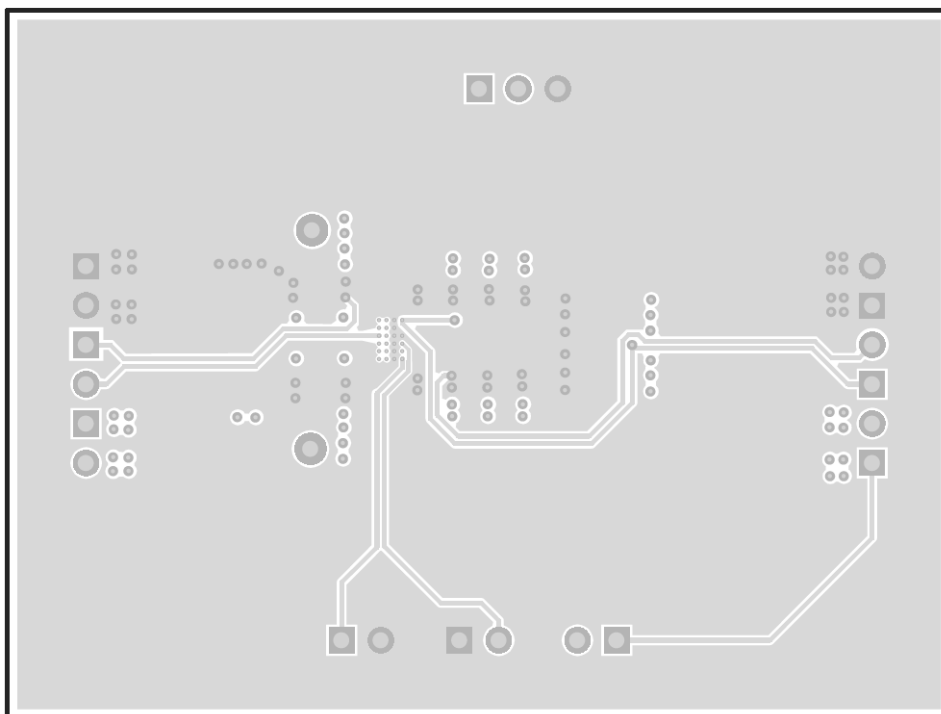

**Figure 4-6. Bottom Layer**

## 5 Schematic and Bill of Materials

This section provides the TPS62184EVM-581 schematic and bill of materials.



## 5.1 Schematic

Figure 5-1 illustrates the TPS62184EVM-581 schematic.

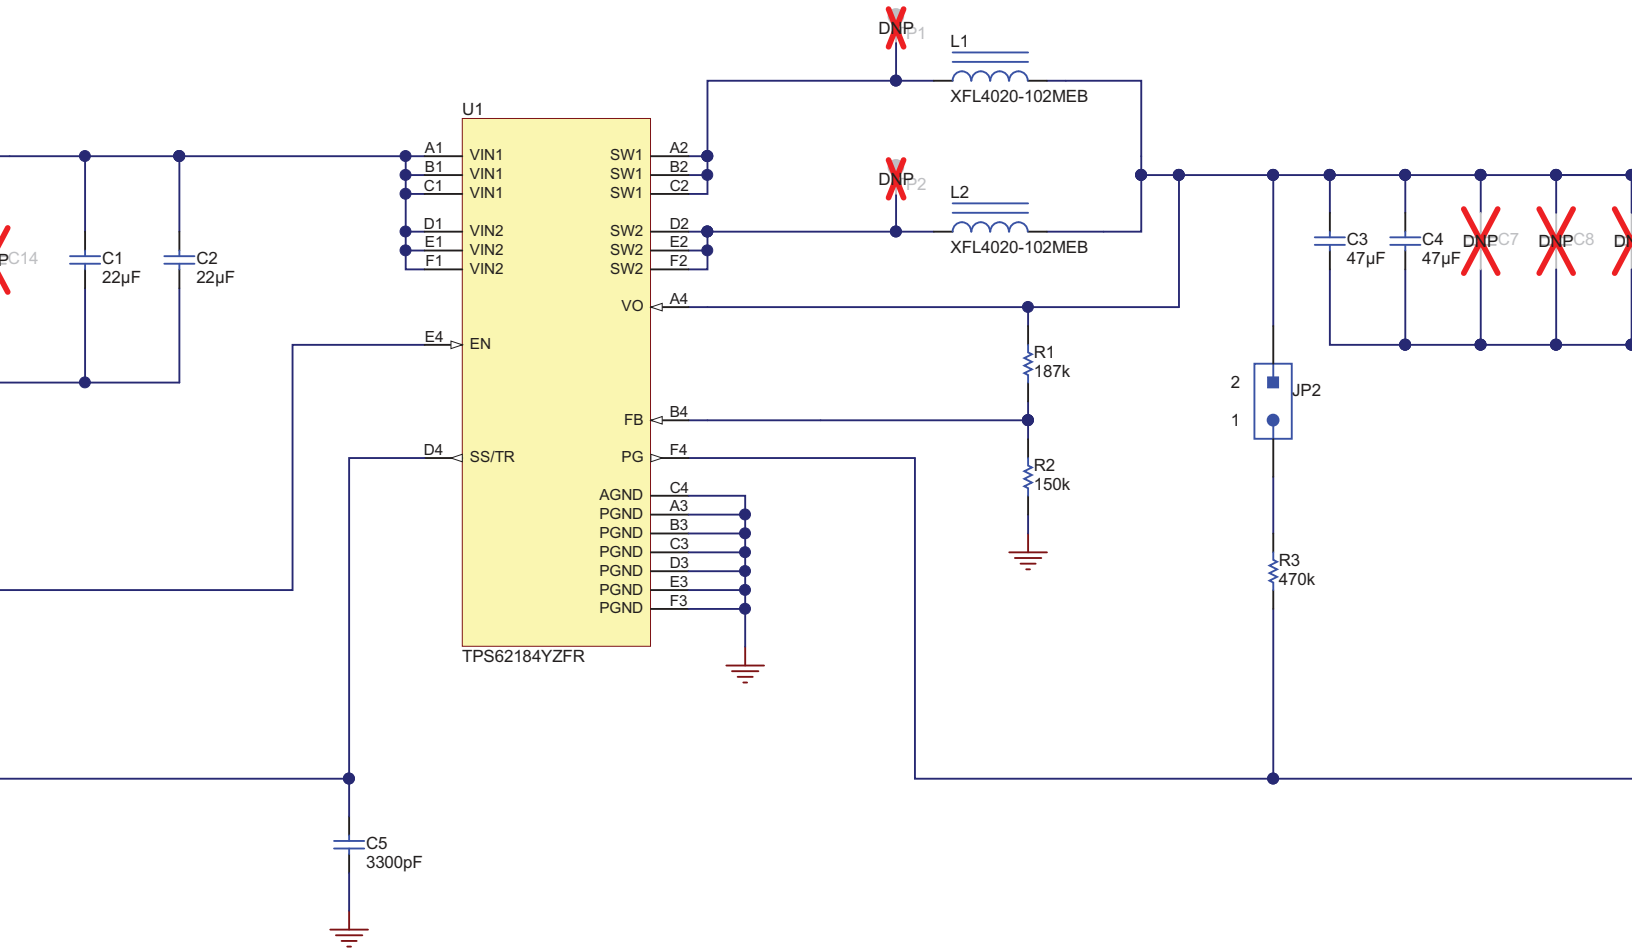


Figure 5-1. TPS62184EVM-581 Schematic

## 5.2 Bill of Materials

Table 5-1 lists the BOM for this EVM.

**Table 5-1. TPS62184EVM-581 Bill of Materials**

| Quantity | Ref Des | Value    | Description                               | Size    | Part Number                    | Manufacturer      |
|----------|---------|----------|---|---------|--------------------------------|-------------------|
| 2        | C1, C2  | 22uF     | CAP, CERM, 22uF, 25V, +/-20%, X5R, 0805   | 0805    | GRM21BR61E226ME44L             | MuRata            |
| 2        | C3, C4  | 47uF     | CAP, CERM, 47uF, 10V, +/-20%, X5R, 0805   | 0805    | GRM21BR61A476ME15L             | MuRata            |
| 1        | C5      | 3300pF   | CAP, CERM, 3300pF, 25V, +/-10%, X7R, 0603 | 0603    | GRM188R71E332KA01D             | MuRata            |
| 1        | C6      | 100uF    | CAP, TA, 100uF, 20V, +/-10%, 0.5 ohm, SMD | 7343-43 | 293D107X9020E2TE3              | Vishay-Sprague    |
| 2        | L1, L2  | 1uH      | Inductor, Shielded, Composite, 1uH, SMD   | 4x2x4mm | XFL4020-102ME or XAL4020-102ME | Coilcraft         |
| 1        | R1      | 187k     | RES, 187k ohm, 1%, 0.1W, 0603             | 0603    | RC0603FR-07187KL               | Yageo America     |
| 1        | R2      | 150k     | RES, 150k ohm, 1%, 0.1W, 0603             | 0603    | RC0603FR-07150KL               | Yageo America     |
| 1        | R3      | 470k     | RES, 470k ohm, 1%, 0.1W, 0603             | 0603    | RC0603FR-07470KL               | Yageo America     |
| 1        | U1      | TPS62184 | 4 - 17V, 6A, 2-Phase Step-Down Converter  | 2x3mm   | TPS62184YZF                    | Texas Instruments |

## 6 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision * (March 2015) to Revision A (May 2021)  | Page |
|--|------|
| • Updated user's guide title.....  | 2    |
| • Updated the numbering format for tables, figures, and cross-references throughout the document. .... | 2    |

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2022, Texas Instruments Incorporated