

# PD30CTBx20BPxxIO - IO-Link



## Photoelectric Background Suppression sensors with IO-Link communication



### Benefits

- Red or infrared Background suppression sensor with IO-Link with a adjustable distance of 25 to 200 mm, either by trimmer or via IO-Link.
- Application functions: Pattern Recognition, Speed & Length, Divider function and Object & Gap Monitoring.
- Neighbour Immunity, selectable up to 3 sensors
- Easy customization to specific OEM requests by use of the build in IO-Link functionalities.
- The output can be operated either as a standard switching output or in IO-Link mode.
- Fully configurable via output IO-Link v 1.1. Electrical outputs can be configured as PNP / NPN / Push-Pull / External input, normally open or normally closed.
- Timer functions can be set, such as ON-delay, Off-delay, and one shots.
- Logging functions: Temperatures, detecting counter, power cycles and operating hours.
- Detection modes Single point, two point, windows and foreground suppression (FGS) mode.
- Logic functions: AND, OR, XOR and Gated SR-FF.
- Analogue output: In IO-Link mode the sensor will generate 16 bit analogue process data output representing various selectable process data such as received signal level.



### Description

The PD30CTBx20BPxxIO are a part of the latest generation of high performance photoelectric sensors designed to solve most detection tasks due to the new IO-Link features.

The sensors are implemented in the compact 10 x 20 x 30 mm ABS housing that are acknowledged world wide.

New implemented functions with weight on functionality, reliability, Predictive maintenance make these sensors ideal for Industry 4.0.

### Applications

**Pattern Recognition:** An easy way to verify that a product is manufactured to the specification e.g. Furniture production where tabs or holes has to be with a defined pattern.

**Speed and Length:** Monitor the speed and length of an object on a conveyor for e.g. sorting on size.

**Divider function:** A de-central counting function that gives a signal when a preset count level is reached e.g. when a certain items are packed in a carton box it ask for a new box.

**Object and Gap Monitoring:** Function that can sort out good objects and gaps between them so e.g. a packaging machine only receive objects with the correct size and gaps.

### Main functions

- Detects presence or absence of objects that cut off the light from the emitter
- The detection distance is very independent of the colour of the object to detect.
- The sensor can be operated in IO-Link mode once connected to an IO-Link master or in standard I/O mode.
- Received sensing distance as process data.



- Neighbor inference protection.
- Sensing distance by potentiometer, teach by wire or by IO-link parameter.
- Quality of Run and Quality of Teach result.
- Temperature date for preventive maintenance.
- Front-end check for preventive maintenance.

#### Adjustable parameters via IO-Link interface:

- Sensing distance and hysteresis.
- Sensing modes: single point or two point or window mode.
- Timer functions, e.g.: On-delay, Off delay, One shot leading edge or trailing edge.
- Logic functions such as: AND, OR, X-OR and SR-FF.
- External input.
- Logging functions: Maximum temperatures, minimum temperatures, operating hours, operating cycles, power cycles, minutes above maximum temperature, minutes below minimum temperature, etc.
- Auto hysteresis
- Special functions: Pattern Recognition, Speed & Length, Divider function and Object & Gap Monitoring.

## References

### Product selection key

**PD30CTB**  **20BP**  **IO**

Enter the code option instead of

Code	Option	Description
P	-	Sensing principle: Photoelectric sensor
D	-	Rectangular housing
30	-	Length of housing
C	-	Plastic housing
T	-	Top trimmer
B	-	Background suppression
<input type="checkbox"/>	I	infrared light
<input type="checkbox"/>	R	Red light
20	-	Sensing distance: 200 mm
B	-	<b>Selectable functions:</b> NPN, PNP, Push-Pull, External Input (only pin 2) or External teach input (only pin 2)
P	-	<b>Selectable:</b> N.O. or N.C.
<input type="checkbox"/>	A2	Cable, 2 m
<input type="checkbox"/>	M5	Connector M8
IO	-	IO-Link version



**Type selection**

Connec-tion	Housing	Light type	Code
Cable	Plastic housing	Infrared	<b>PD30CTBI20BPA2IO</b>
Plug	Plastic housing	Infrared	<b>PD30CTBI20BPM5IO</b>
Cable	Plastic housing	Red	<b>PD30CTBR20BPA2IO</b>
Plug	Plastic housing	Red	<b>PD30CTBR20BPM5IO</b>

## Structure

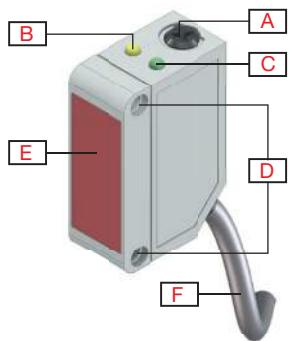


Fig. 1 Cable

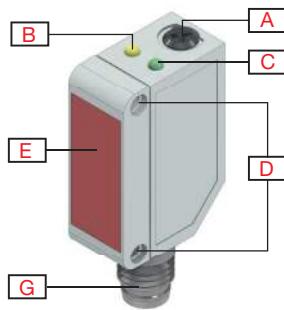


Fig. 2 Plug


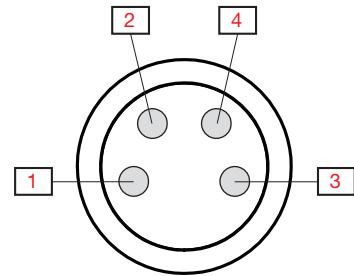


Fig. 3 "M8-plug" Pin numbers

<b>A</b>	Sensitivity adjustment (Top trimmer)	<b>G</b>	M8, 4-pin male connector
<b>B</b>	Yellow LED	<b>1</b>	Brown
<b>C</b>	Green LED	<b>2</b>	White
<b>D</b>	M3 Fixing holes for sensor mounting	<b>3</b>	Blue
<b>E</b>	Sensing window	<b>4</b>	Black
<b>F</b>	2 m, 4 wire PVC Ø 3.3 mm cable		

# Sensing

## Detection

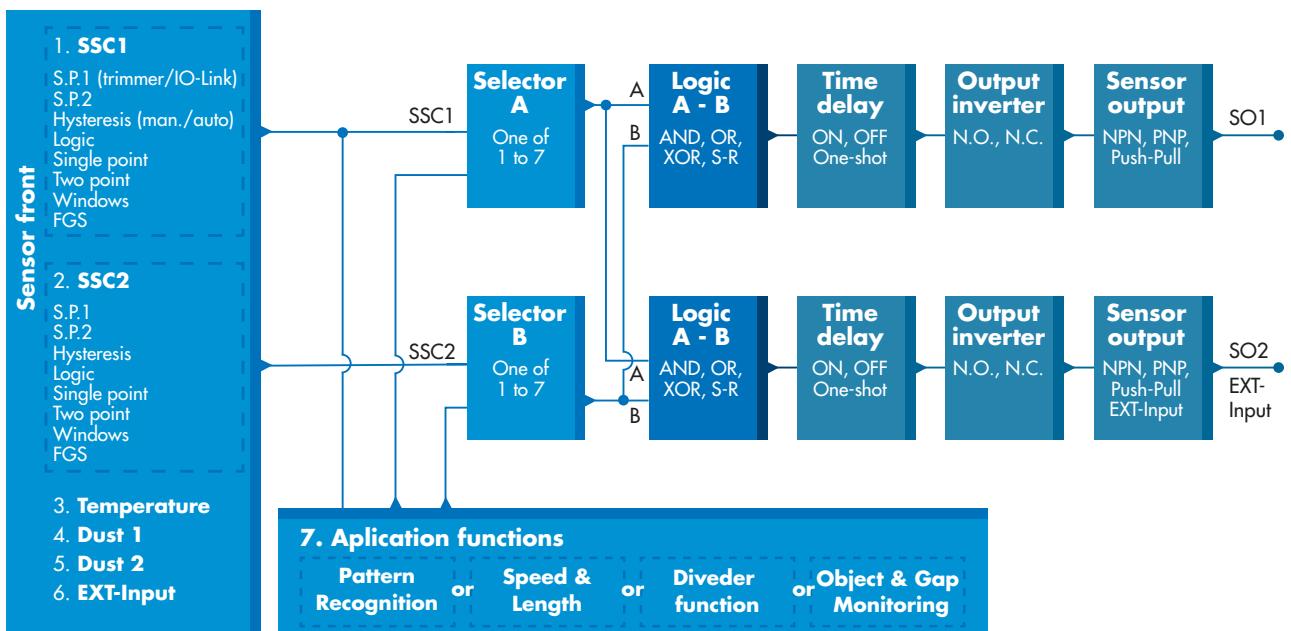

<b>Sensor switching channel SSC1 and SSC2</b>	<b>SSC1</b> <ul style="list-style-type: none"><li>• Enabled</li><li>• Disabled</li></ul> <b>Factory settings:</b> Enabled	<b>SSC2</b> <ul style="list-style-type: none"><li>• Enabled</li><li>• Disabled</li></ul> <b>Factory settings:</b> Enabled
<b>Set Point 1 (SP1)</b>	• 20 ... 225 <b>Factory settings:</b> 200 (Approx. 200 mm @ Reference target 90% reflection)	
<b>Set Point 2 (SP2)</b>	• 20 ... 225 <b>Factory settings:</b> 20 (Approx. 20 mm @ Reference target 90% reflection)	
<b>Switching logic</b>	• High active • Low active <b>Factory settings:</b> High active	
<b>Switching mode</b>	<b>SSC1</b> <ul style="list-style-type: none"><li>• Deactivated</li><li>• Single point mode</li><li>• Two point mode</li><li>• Windows mode</li><li>• FGS mode</li></ul> <b>Factory settings:</b> Single point mode	<b>SSC2</b> <ul style="list-style-type: none"><li>• Deactivated</li><li>• Single point mode</li><li>• Two point mode</li><li>• Windows mode</li><li>• FGS mode</li></ul> <b>Factory settings:</b> Single point mode
<b>Rated operating distance (<math>S_n</math>)</b>	≤ 200 mm	Reference target, white paper with 90 % reflectivity, Size 200x200 mm
<b>Maximum detection distance</b>	≤ 200 mm	White object 90% reflection
	≤ 200 mm	Grey object 18% reflection
	≤ 200 mm	Black object 6% reflection
<b>Cutoff distance</b>	20...250 mm <b>Factory settings:</b> 250 mm Measured distance beyond Cutoff distance, will be truncated to Cutoff distance. Cutoff distance value will also be used when an object cannot be detected.	
<b>Sensitivity control (selectable between)</b>	• IO-Link Adjustment (SSC1) • Trimmer Input (SSC1) • Teach by wire (SSC1) <b>Factory settings:</b> Trimmer Input	
<b>Sensitivity adjustment</b>	23 mm ... 210 mm	Single-turn potentiometer
<b>Blind zone</b>	≤ 10 mm	White object 90% reflection
	≤ 12 mm	Grey object 18% reflection
	≤ 14 mm	Black object 6% reflection
<b>Light source / Light type</b>	620 nm / Red modulated 850 nm / Infrared modulated	PD30CTBR20BPxxIO PD30CTBI20BPxxIO
<b>Detection angle</b>	± 1.2° @ half sensing distance	@ 100 mm
<b>Light spot size</b>	Ø 6.8 mm	@ 100 mm
<b>Emitter beam angle</b>	± 2.0°	@ 100 mm
<b>Adjustable distance</b>	20 ... 225 mm <b>Factory settings:</b> SP1 200 and SP2 20	White object 90% reflection
	20 ... 225 mm <b>Factory settings:</b> SP1 200 and SP2 20	Grey object 18% reflection
	20 ... 225 mm <b>Factory settings:</b> SP1 200 and SP2 20	Black object 6% reflection
<b>Hysteresis (H)</b> <b>Manual</b> <b>Automatic</b>	Adjustable by IO-Link • 2 mm ... 225 mm <b>Factory settings:</b> 14 mm	
<b>Detection filter</b>	This function can increase the immunity towards unstable targets and electromagnetic disturbances: Value can be set from 1 to 255. <b>Factory settings:</b> 1 (1 is max. operating frequency and 255 is min. operating frequency)	

<b>Mutual Inteference Protection</b>	<ul style="list-style-type: none"> <li>• MIP Off</li> <li>• One channel</li> <li>• 2 channels - CH A</li> <li>• 2 channels - CH B</li> <li>• 3 channels - CH A</li> <li>• 3 channels - CH B</li> <li>• 3 channels - CH C</li> </ul>	<b>Factory settings:</b> MIP Off
--------------------------------------	---	----------------------------------

## ► Application functions

<b>Selectable dedicated applications</b>	<ul style="list-style-type: none"> <li>• No application</li> <li>• Pattern Recognition</li> <li>• Speed and Length</li> <li>• Divider function</li> <li>• Object and Gap Monitoring</li> </ul>	<b>Factory settings:</b> No application
--	--	---

## Pattern Recognition

<b>Function description</b>	The Pattern recognition function detects a pattern (e.g. a row of holes or pins) and compare the order with a pre-taught reference pattern.
<b>Conditions</b>	Two sensors (Main sensor and Trigger sensor) are needed for this function.
<b>Settings</b>	<ul style="list-style-type: none"> <li>• The Trigger sensor has to detect the full length of the body that contains the pattern.</li> <li>• The Main sensor has to be aimed at the e.g. holes or pins that constitute the pattern.</li> </ul>

## Speed and Length

<b>Function description</b>	This function is designed to monitor the length of an object as well as the speed of a conveyor belt. The actual value if the length in [mm] and the speed in [mm/s] are directly available on the IO-Link master.	
<b>Conditions</b>	Two sensors (Main sensor and Trigger sensor) are needed for this function.	
<b>Settings</b>	Distance between sensors.	25 ... 150 mm <b>Factory settings:</b> 100 mm

## Divider function

<b>Function description</b>	This function can be used to e.g. monitor how many items that are packed into a carton box. Once the preset number is reached the sensor gives an output so the full box can be replaced.	
<b>Conditions</b>	Only one sensor is needed for this function.	
<b>Settings</b>	A counter value must be set in the sensor. Counter limit.	1...60 000 <b>Factory settings:</b> 5




## Object and Gap Monitoring

<b>Function description</b>	This function is designed to monitor, that the length of an object and the gap between the following object on a conveyer belt, are within certain limits.	
<b>Conditions</b>	Only one sensor is needed for this function.	
		An acceptable minimum and maximum time [ms] must be set for both the object size a gap size between two objects represented by the time it takes to pass the sensor.
<b>Settings</b>	Object minimum time.	10...60 000 ms <b>Factory settings:</b> 500 ms
	Object maximum time.	10...60 000 ms <b>Factory settings:</b> 10 000 ms
	Gap minimum time.	10...60 000 ms <b>Factory settings:</b> 500 ms
	Gap maximum time.	10...60 000 ms <b>Factory settings:</b> 10 000 ms
<b>Outputs</b>	Output 1 is active when an object is outside the set limits. Output 2 is active when the gap between two objects is outside the set limits.	

### ▶ Alarm settings

<b>Safe limits</b>	<b>SSC1</b> • 0 ... 100 % of actual SP <b>Factory settings:</b> 5%	<b>SSC2</b> • 0 ... 100 % of actual SP <b>Factory settings:</b> 5%
<b>Dust alarm</b>	Safe limits are used for dust alarm level.	
<b>Temperature alarm</b>	<ul style="list-style-type: none"> <li>High threshold -50 ... +150 °C</li> <li>Low threshold -50 ... +150 °C</li> </ul> <b>Factory settings:</b> <i>High value 70 °C</i> <i>Low value -20 °C</i>	

### ▶ Detection diagram

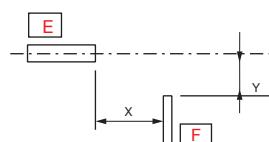

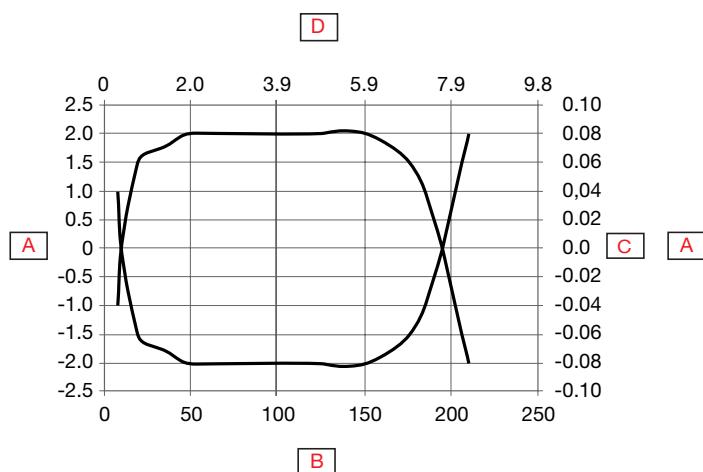


Fig. 4 PD30CTBR20BPxxIO

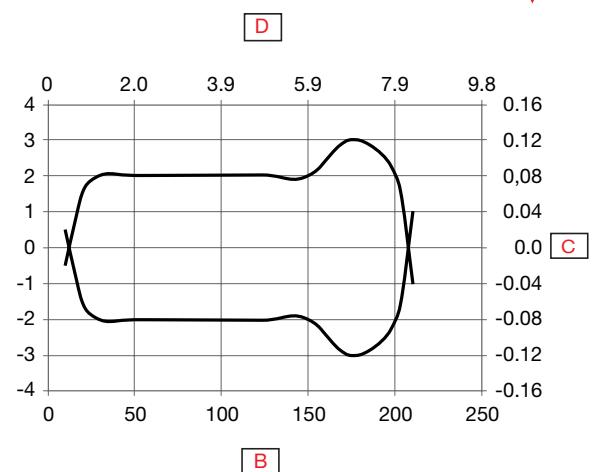


Fig. 5 PD30CTBI20BPxxIO

<b>A</b>	Detection width (mm)	<b>D</b>	Sensing range (inches)
<b>B</b>	Sensing range (mm)	<b>E</b>	Sensor
<b>C</b>	Detection width (inches)	<b>F</b>	Object 25 x 25 mm, White 90%

## ► Accuracy

Temperature drift  $\leq 0.2\%/\text{°C}$

## ► Sensing conditions

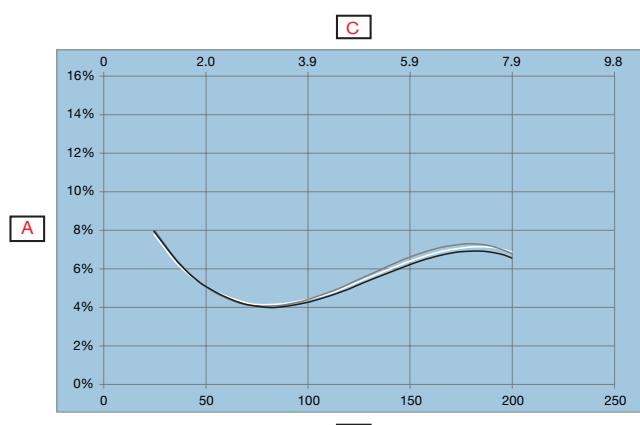


Fig. 6 PD30CTBR20BPxxIO

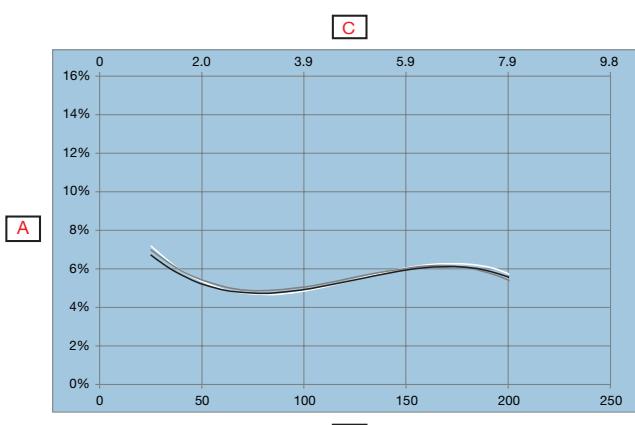


Fig. 7 PD30CTBI20BPxxIO

<b>A</b>	Distance from background (%)	<b>(Black on white 6%/90%)</b>
<b>B</b>	White background 90% (mm)	<b>(Grey on white 18%/90%)</b>
<b>C</b>	White background 90% (inches)	<b>(White on white 90%/90%)</b>



## Features

### ▶ Power Supply

<b>Rated operational voltage (<math>U_B</math>)</b>	10 ... 30 VDC (ripple included)
<b>Ripple (<math>U_{\text{pp}}</math>)</b>	$\leq 10\%$
<b>No load supply current (<math>I_o</math>)</b>	$\leq 35 \text{ mA} @ U_B \text{ min.}$ $\leq 15 \text{ mA} @ U_B \text{ max.}$
<b>Power-ON delay (<math>t_v</math>)</b>	$\leq 150 \text{ ms}$

### ▶ Input selector

<b>Input selector</b>	<b>Channel A</b> <ul style="list-style-type: none"> <li>• Deactivated</li> <li>• SSC1</li> <li>• SSC2</li> <li>• Dust alarm 1</li> <li>• Dust alarm 2</li> <li>• Temperature alarm</li> <li>• External input</li> <li>• Application functions</li> </ul> <p><b>Factory settings:</b> SSC1</p>	<b>Channel B</b> <ul style="list-style-type: none"> <li>• Deactivated</li> <li>• SSC1</li> <li>• SSC2</li> <li>• Dust alarm 1</li> <li>• Dust alarm 2</li> <li>• Temperature alarm</li> <li>• External input</li> <li>• Application functions</li> </ul> <p><b>Factory settings:</b> SSC1</p>
-----------------------	---	---

### ▶ Logic functions

<b>Logic functions</b>	<b>Channel A + B for SO1</b> <ul style="list-style-type: none"> <li>• Direct</li> <li>• AND</li> <li>• OR</li> <li>• X-OR</li> <li>• SR-FF</li> </ul> <p><b>Factory settings:</b> Direct</p>	<b>Channel A + B for SO2</b> <ul style="list-style-type: none"> <li>• Direct</li> <li>• AND</li> <li>• OR</li> <li>• X-OR</li> <li>• SR-FF</li> </ul> <p><b>Factory settings:</b> Direct</p>
------------------------	--	--

## ► Time delays

Timer mode	<b>For SO1</b> • Disabled • ON delay • OFF delay • ON delay and OFF delay • One-shot leading edge • One-shot trailing edge <b>Factory settings:</b> <i>Disabled</i>	<b>For SO2</b> • Disabled • ON delay • OFF delay • ON delay and OFF delay • One-shot leading edge • One-shot trailing edge <b>Factory settings:</b> <i>Disabled</i>
Timer scale	<b>For SO1</b> • [ms] • [s] • [min] <b>Factory settings:</b> <i>ms</i>	<b>For SO2</b> • [ms] • [s] • [min] <b>Factory settings:</b> <i>ms</i>
Timer value	<b>For SO1</b> • 0 ... 32 767 <b>Factory settings:</b> <i>0</i>	<b>For SO2</b> • 0 ... 32 767 <b>Factory settings:</b> <i>0</i>


## ► Outputs

Sensor output	<b>For SO1 Pin 4 Black wire</b> • Disabled output • NPN • PNP • Push-Pull  <b>Factory settings:</b> <i>PNP</i>	<b>For SO2 Pin 2 White wire</b> • Disabled output • NPN • PNP • Push-Pull • External input, active high • External input, active low • External teach • Mute input <b>Factory settings:</b> <i>PNP</i>
Output Inverter	<b>For SO1 Pin 4 Black wire</b> • N.O. • N.C. <b>Factory settings:</b> <i>N.O.</i>	<b>For SO2 Pin 2 White wire</b> • N.O. • N.C. <b>Factory settings:</b> <i>N.C.</i>
Rated operational current ( $I_o$ )	$\leq 100\text{mA}$ (continuous) pr. output $100 \text{ mA} @ 100 \text{ nF Load (Short-time)}$ pr. output	
OFF-state current ( $I_o$ )	$\leq 50 \mu\text{A}$	
Minimum operational current ( $I_m$ )	$> 0,5 \text{ mA}$	
Voltage drop ( $U_d$ )	$\leq 1.0 \text{ VDC} @ 100 \text{ mA}$	
Protection	Short circuit, reverse polarity, transients	
Utilization category	DC-12	Control of resistive loads and solid-state loads with optical isolation
	DC-13	Control of electromagnets
Capacitive load	$100 \text{ nF} @ 100 \text{ mA}, 24 \text{ VDC}$	

## ► Operation diagram

### For default factory sensor

$T_v$  = Power-ON delay

<b>Power supply</b>	ON	
<b>Target (Object)</b>	Present	
<b>Break output (N.C.)</b>	ON	
<b>Make output (N.O.)</b>	ON	

## ► Response times

<b>Operating frequency (f)</b>	$\leq 500$ Hz	
<b>Response times</b>	$\leq 1$ ms	OFF-ON ( $t_{on}$ )
	$\leq 1$ ms	ON-OFF ( $t_{off}$ )

## ► Indication

Green LED	Yellow LED	Power	Function
<b>SIO and IO-Link mode</b>			
ON	ON	ON	ON (stable)* SSC1
ON	OFF	ON	OFF (stable)* SSC1
OFF	OFF	OFF	OFF (Not stable) SSC1
Flashing 1 Hz (10% or 90% du- tencycle )	-	ON	Connected via IO-Link
-	Flashing 10 Hz 50% dutycycle	ON	Output short-circuit
-	Flashing 0.5...20 Hz 50% dutycycle	ON	Timer triggered indication
<b>SIO mode only</b>			
-	Flashing 1 HZ ON 100 ms OFF 900 ms	ON	External teach by wire. Only for single point mode.
-	Flashing 1 HZ ON 900 ms OFF 100 ms	ON	Teach time window (3 - 6 sec).
-	Flashing 10 HZ ON 50 ms OFF 50 ms Flashing for 2 sec	ON	Teach time out (12 sec).
-	Flashing 2 HZ ON 250 ms OFF 250 ms Flashing for 2 sec	ON	Teach successful.
<b>O-Link mode only</b>			
Flashing 1 HZ ON 900 ms OFF 100 ms	-	ON	Sensor is in IO-Link mode.
Flashing 2 Hz 50% dutycycle		ON	Find my sensor

\*See operation diagram

## ► LED indication

<b>LED indication selection</b>	<ul style="list-style-type: none"> <li>• LED indication inactive</li> <li>• LED indication active</li> <li>• Find my sensor</li> </ul> <p><b>Factory settings:</b> LED indication active</p>
---------------------------------	--

## ► Environmental

<b>Ambient temperature</b>	-25° ... +60°C (-13° ... +140°F)	Operating <sup>1)</sup>
	-40° ... +85°C (-40° ... +185°F)	Storage <sup>1)</sup>
<b>Ambient humidity range</b>	35% ... 95%	Operating <sup>2)</sup>
	35% ... 95%	Storage <sup>2)</sup>
<b>Ambient light</b>	≤ 65 000 lux	@ 3000 ... 3200 °K
<b>Vibration</b>	10 ...150 Hz, 1.0 mm/15 g	EN 60068-2-6
<b>Shock</b>	30 g <sub>n</sub> / 11 ms, 3 pos, 3 neg per axis	EN60068-2-27
<b>Drop test</b>	2 x 1 m and 100 x 0.5 m	EN 60068-2-31
<b>Rated insulation voltage (U<sub>i</sub>)</b>	50 VDC	
<b>Dielectric insulation voltage</b>	≥ 500 VAC rms	50/60 Hz for 1 min.
<b>Rated impulse withstand voltage</b>	>1 kV (with 500 Ω)	1.2/50 µs
<b>Pollution degree</b>	3	IEC60664, 60664A; EN60947-1
<b>Oversupply category</b>	III	IEC60664; EN60947-1
<b>Degree of protection</b>	IP67	IEC60539; EN60947-1
<b>NEMA Enclosure Types</b>	1	NEMA 250

<sup>1)</sup> Do not bend the cable in temperatures below -10°C

<sup>2)</sup> With no icing or condensation

## ► EMC

<b>Electrostatic discharge immunity test</b>	± 8 kV @ air discharge or ± 4 kV @ contact discharge	IEC 61000-4-2; EN60947-1
<b>Electromagnetic field immunity</b>	10 V/m	IEC 61000-4-3; EN60947-1
<b>Fast transient immunity</b>	±2 kV / 5 kHz	IEC 61000-4-4; EN60947-1
<b>Wire-conducted noise</b>	10 Vrms	IEC 61000-4-3; EN60947-1
<b>Power frequency magnetic field immunity test</b>	Continuous: >30 A/m, 28 µ tesla Short-time: >300 A/m, 280 µ tesla	IEC 61000-4-8; EN60947-1

## ► Diagnostic parameters

Function	Unit	Range
<b>Sensor Diagnostics</b>		
Frontend Failure	0	0 or 1
Memory Failure	0	0 or 1
<b>Temperature Diagnostics</b>		
Current temperature	[°C]	-50 ... +150
Maximum temperature - All time high	[°C]	-50 ... +150
Minimum temperature - All time low	[°C]	-50 ... +150
Maximum temperature - Since last power-up	[°C]	-50 ... +150
Minimum temperature - Since last power-up	[°C]	-50 ... +150
Minutes above Maximum Temperature	[min]	0 ... 2 147 483 647
Minutes below Minimum Temperature	[min]	0 ... 2 147 483 647
<b>Operating Diagnostic</b>		
Operating Hours	[h]	0 ... 2 147 483 647
Number of Power Cycles	[cycles]	0 ... 2 147 483 647
Detection counter SSC1	[cycles]	0 ... 2 147 483 647
Maintenaince event counter	[cycles]	0 ... 2 147 483 647
Download counter	[counts]	0 ... 65 536
Quality of Teach	-	0 ... 255%
Quality of Run	-	0 ... 255%
Excess gain		0.00 ... 1 000.00
Error Count	[counts]	0 ... 65 536
Device Status	0 = Device is operating properly 1 = Maintenance required 2 = Out-of-specification 3 = Functional-Check 4 = Failure <b>Factory settings: 0</b>	

## ► Events Configuration

Events	Factory default setting
Maintenaince Event	Inactive
Temperature fault event	Inactive
Temperature over-run	Inactive
Temperature under-run	Inactive
Short circuit	Inactive

 Observation menu

Process Data	Factory default setting
Analogue value	Analogue value Inactive
	Analogue value normal <b>Factory settings</b>
	Analogue value as Object Length
	Analogue value as Object Speed
	Analogue value as Counter value
Excess gain	Inactive
SO1, Switching output 1	Active
SO2, Switching output 2	Active
SSC1, Sensor switching channel 1	Inactive
SSC2, Sensor switching channel 2	Inactive
DA1, Dust alarm SSC1	Inactive
DA2, Dust alarm SSC2	Inactive
TA, Temperature alarm	Inactive
SC, Short circuit	Inactive
AFO1, Application functions output 1	Inactive

## Process data structure

4 Bytes, Analogue value 16 ... 31 (16 bit)

Byte 0	31	30	29	28	27	26	25	24
	<b>MSB</b>	-	-	-	-	-	-	-
Byte 1	23	22	21	20	19	18	17	16
	-	-	-	-	-	-	-	<b>LSB</b>
Byte 2	15	14	13	12	11	10	9	8
	-	-	<b>SC</b>	<b>TA</b>	<b>DA2</b>	<b>DA1</b>	<b>SSC2</b>	<b>SSC1</b>
Byte 3	7	6	5	4	3	2	1	0
	<b>AFO1</b>	-	-	-	-	-	<b>SO2</b>	<b>SO1</b>




## Mechanics/electronics

### ► Connection

<b>Cable</b>	2 m, 4-wire 4 x 0.14 mm <sup>2</sup> , Ø = 3.3 mm, PVC, Black
<b>Plug</b>	M8, 4-pin, male

### ► Wiring

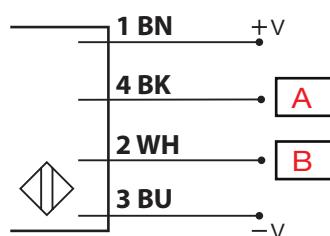

BN	BK	WH	BU	A	B
Brown	Black	White	Blue	OUT/IO-Link	IN/OUT

### ► Housing

<b>Body</b>	ABS	
<b>Front glass</b>	PMMA, Red	
<b>Trimmer shaft</b>	POM, Grey	
<b>Indication</b>	TPU, Transparent	
<b>Sealing</b>	NBR70	
<b>Dimensions</b>	10 x 30 x 20 mm	
<b>Weight</b>	≤ 50 g	Cable version
	≤ 20 g	Plug version

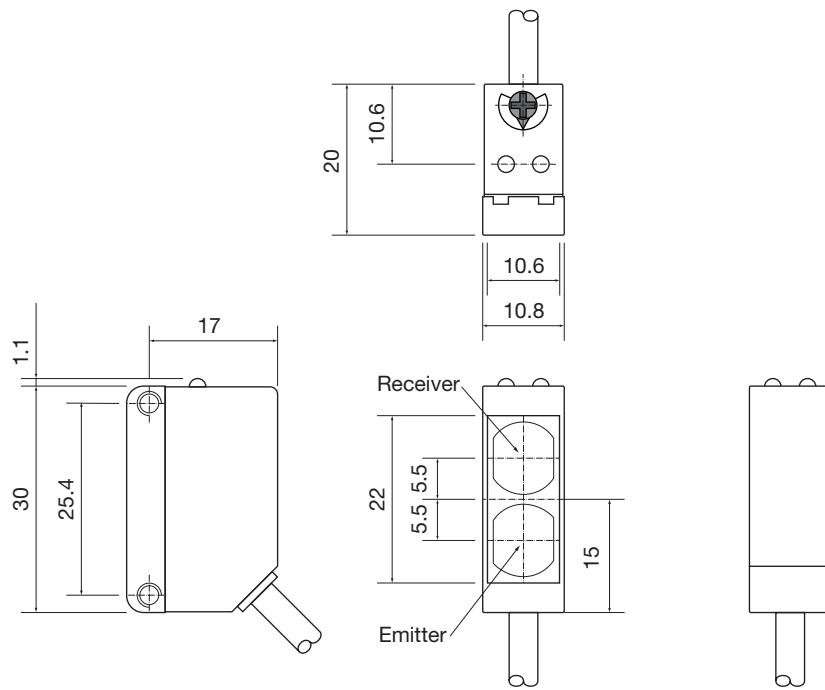
 Dimensions

Fig. 8 Cable

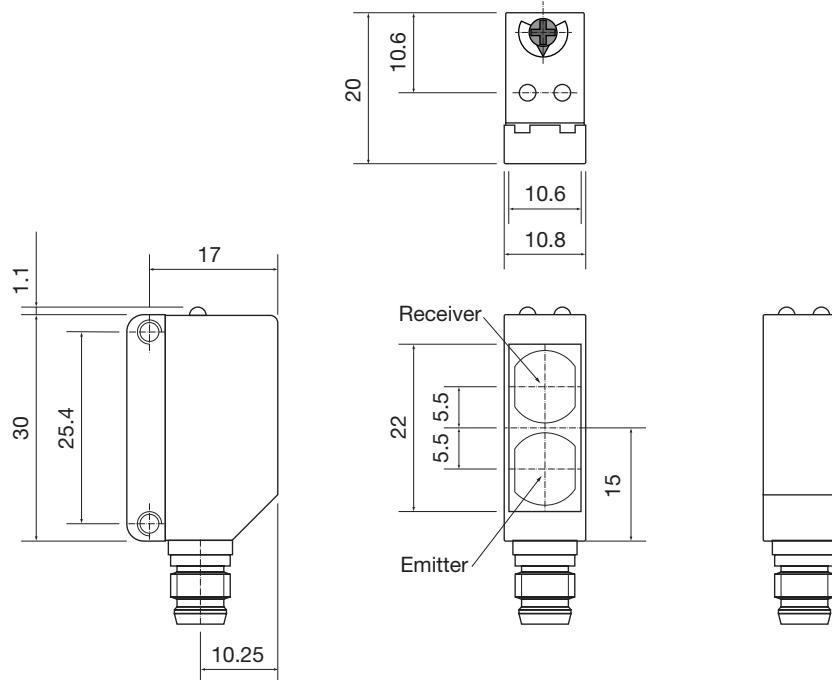


Fig. 9 Plug



## Compatibility and conformity

### ▶ Approvals and markings

<b>General reference</b>	Sensor designed according to EN60947-5-2	
<b>MTTF<sub>d</sub></b>	138.5 years	EN ISO 13849-1, SN 29500
<b>CE-marking</b>		
<b>Approvals</b>	(UL508)	

### ▶ IO-Link

<b>IO-Link revision</b>	1.1
<b>Transmission rate</b>	COM2 (38.4 kbaud)
<b>SDCI-Norm</b>	IEC 61131-9
<b>Profile</b>	Smart sensor profile 2nd edition, common profile
<b>Min. cycle time</b>	5 ms
<b>SIO mode</b>	Yes
<b>Min. master port class</b>	A (4-pin)
<b>Process data length</b>	32 bit



## Delivery contents and accessories

### ▶ Delivery contents

- Photoelectric switch: PD30CTBx20BPxxIO
- Screwdriver
- Packaging: Plastic bag

### ▶ Accessories

- Mounting bracket: APD30-MB1 or APD30-MB2 to be purchased separately
- Connector type: CO..54NF... series to be purchased separately

### ▶ Further information

Information	Where to find it	QR
IO-Link manual	<a href="http://cga.pub/?93ec5c">http://cga.pub/?93ec5c</a>	
Mounting brackets	<a href="http://cga.pub/?6fa29a">http://cga.pub/?6fa29a</a>	
Connectors	<a href="http://cga.pub/?0aae3e">http://cga.pub/?0aae3e</a>	



COPYRIGHT ©2021  
Content subject to change. Download the PDF: [www.gavazziautomation.com](http://www.gavazziautomation.com)