

LTM4678 Dual 25A or Single 50A μModule Regulator with Digital Power System Management 4x LTM4678; 200A

Description

Demonstration circuit 2638A-C is a high efficiency, high density, μModule regulator with 4.5V to 16V input range. The output voltage is adjustable from 0.5V to 3.3V, and it can supply 200A maximum load current. The demo board has four LTM[®]4678 μModule[®] regulators, and the LTM4678 is a dual 25A or single 50A step-down regulator with PMBus power system management. Please see LTM4678 data sheet for more detailed information.

DC2638A-C powers up to default settings and produce power based on configuration resistors without the need for any serial bus communication. This allows easy evaluation of the DC/DC converter. To fully explore the extensive power system management features of the part, download


All registered trademarks and trademarks are the property of their respective owners.

Performance summary

Specifications are at $T_A = 25^\circ\text{C}$

PARAMETER	CONDITIONS	VALUE
Input Voltage Range		4.5V to 16V
Output Voltage, V _{OUT}	V _{IN} = 4.5V–16V, I _{OUT} = 0A to 200A	0.5V to 3.3V, Default: 1.0V
Maximum Output Current, I _{OUT}	V _{IN} = 4.5V–16V, V _{OUT} = 0.5V to 3.3V	200A
Typical Efficiency	V _{IN} = 12V, V _{OUT} = 1.0V, I _{OUT} = 200A	86% (See Figure 5)
Default Switching Frequency		350kHz

BOARD PHOTO

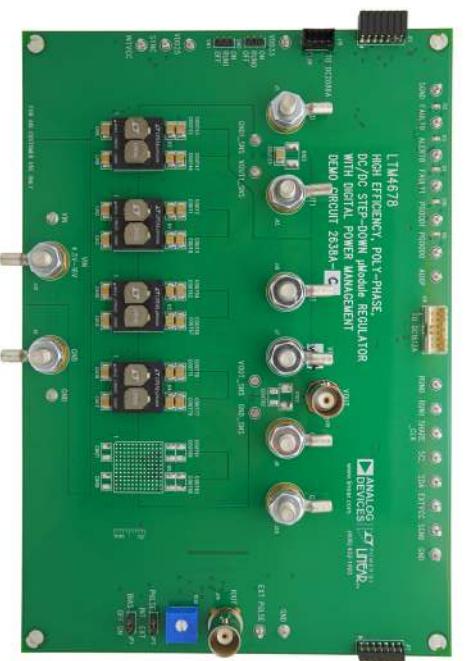

DEMO MANUAL DC2638A-C

QUICK START PROCEDURE

Table 1. LTM4678 Demo Boards for up to 250A Point-of-Load Regulation

MAXIMUM OUTPUT CURRENT	NUMBER OF OUTPUTS	NUMBER OF LTM4678 μ Module REGULATORS ON THE BOARD	DEMO BOARD NUMBER
25A	2	1	DC252A
50A	1	1	DC2570A
100A	1	2	DC2638A-A
150A	1	3	DC2638A-B
200A	1	4	DC2638A-C
250A	1	5	DC2638A-D

Demonstration circuit 2638A-C is easy to set up to evaluate the performance of the LTM4678EY. Refer to Figure 2 for the proper measurement equipment setup and follow the procedure below.

1. With power off, connect the input power supply to V_{IN} (4.5V–16V) and GND (input return).
2. Connect the 1.0V output load between V_{OUT} and GND (initial load: no load).
3. Connect the DVMs to the input and output. Set default jumper position: SW0: ON; SW1: ON.

4. Turn on the input power supply and check for the proper output voltage. V_{OUT} should be $1.0V \pm 0.5\%$.

5. Once the proper output voltages are established, adjust the load within the operating range and observe the output voltage regulation, ripple voltage and other parameters.

6. Connect the dongle and control the output voltage from the GUI. See “LTpowerPlay GUI for the LTM4678 Quick Start Guide” for details.

Note: When measuring the output or input voltage ripple, do not use the long ground lead on the oscilloscope probe. See Figure 3 for the proper scope probe technique. Short, stiff leads need to be soldered to the (+) and (-) terminals of an output capacitor. The probe's ground ring needs to touch the (-) lead and the probe tip needs to touch the (+) lead.

Connecting a PC to DC2638A-C

You can use a PC to reconfigure the power management features of the LTM4678 such as: nominal V_{OUT} , margin set points, OV/UV limits, temperature fault limits, sequencing parameters, the fault log, fault responses, GPIOs and other functionalities. The DC1613A dongle may be plugged when V_{IN} is present.

DEMO MANUAL DC2638A-C

QUICK START PROCEDURE

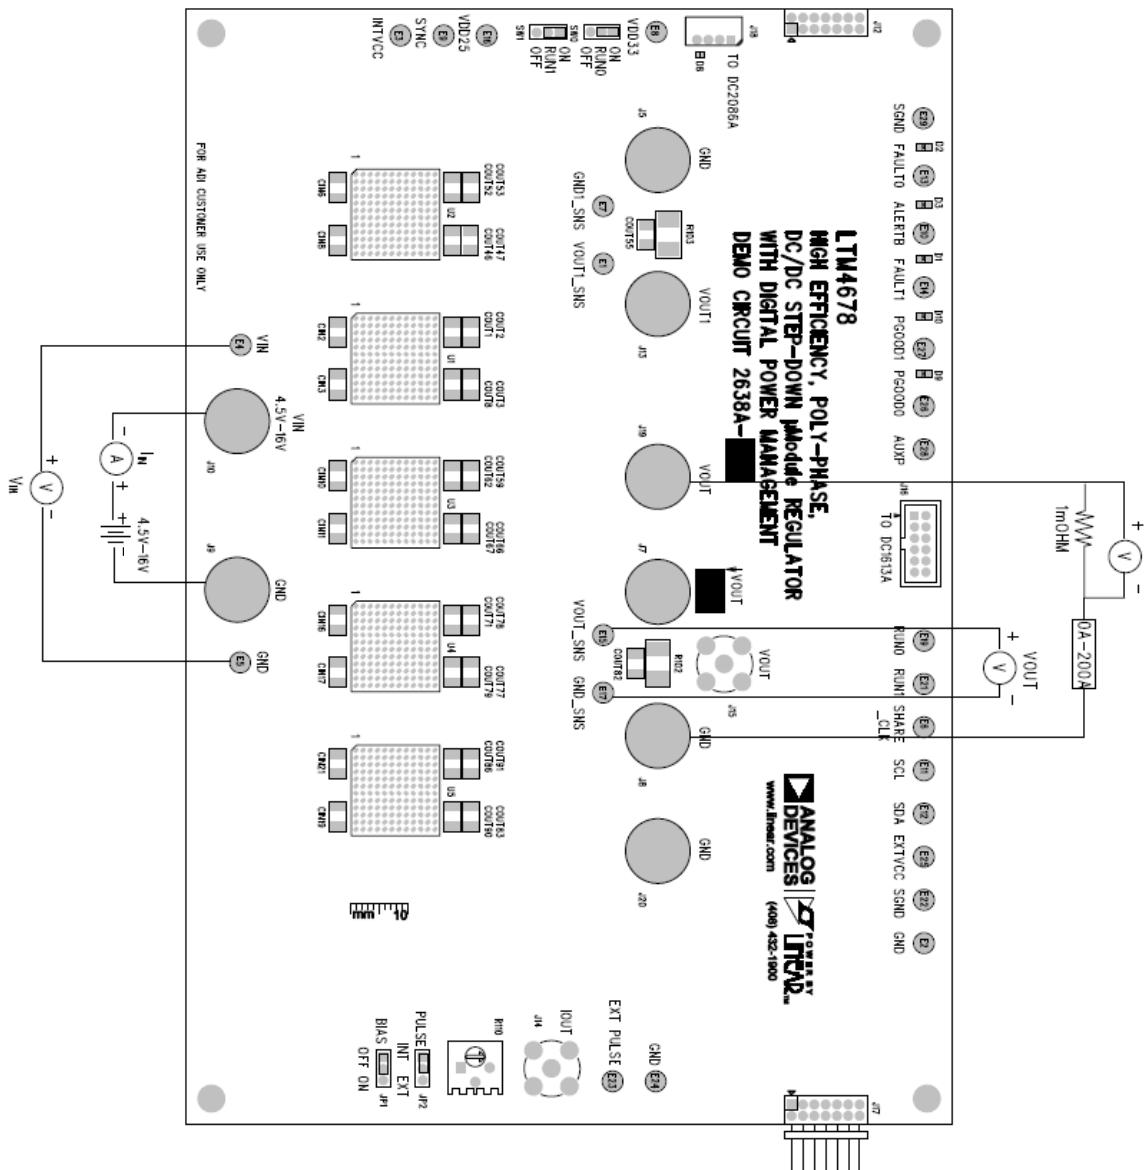


Figure 2. Proper Measurement Equipment Setup

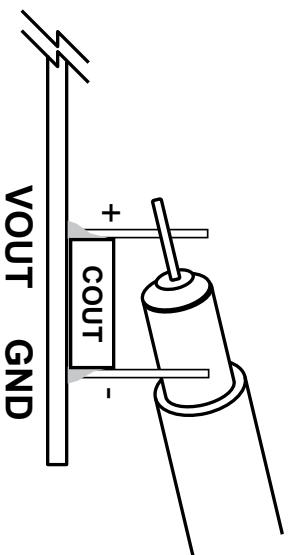


Figure 3. Measuring Output Voltage Ripple

DEMO MANUAL DC2638A-C

QUICK START PROCEDURE

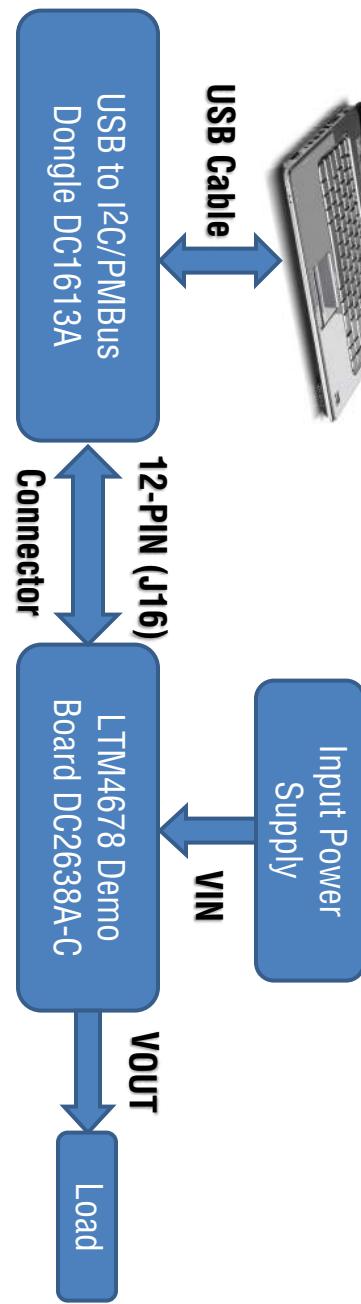


Figure 4. Demo Setup with PC

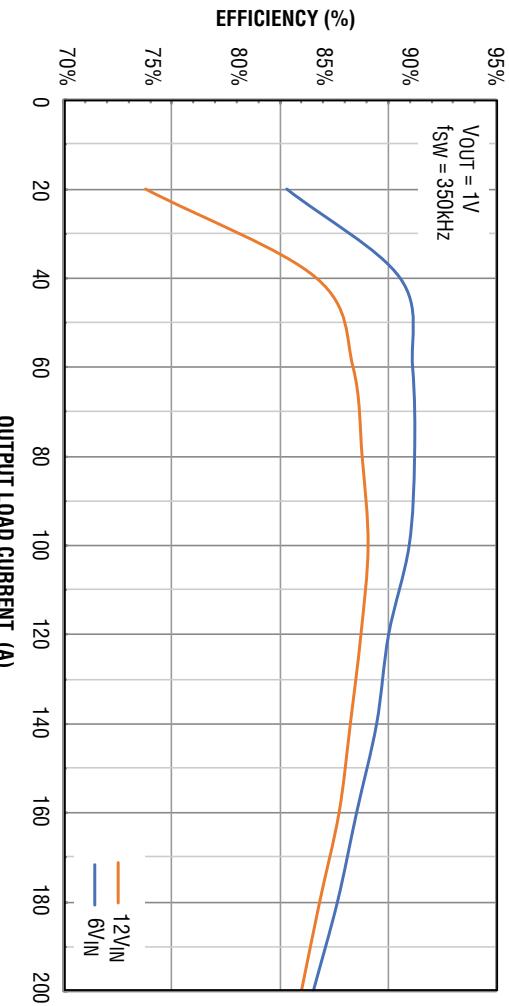


Figure 5. Efficiency vs Load Current

DEMO MANUAL DC2638A-C

QUICK START PROCEDURE

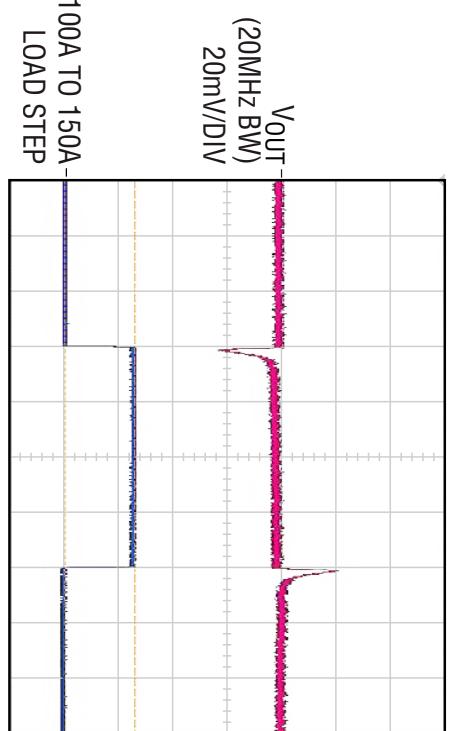


Figure 6. Output Voltage V_{out} vs Load Current @ $V_{\text{IN}} = 12\text{V}$, $V_{\text{out}} = 1\text{V}$, $f_{\text{SW}} = 350\text{kHz}$

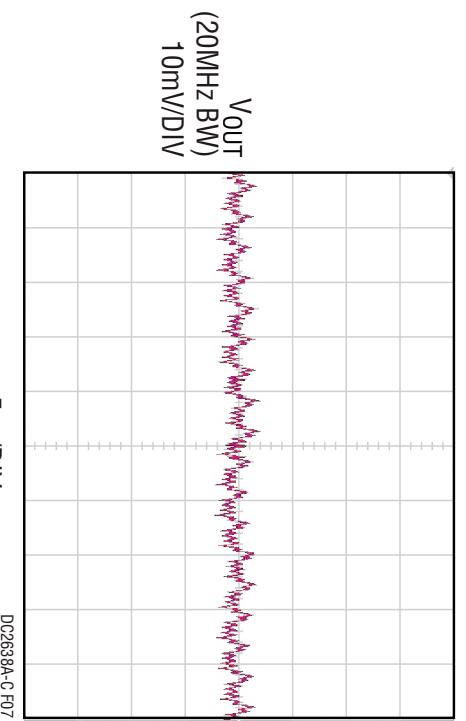


Figure 7. Output Voltage Ripple @ $V_{\text{IN}} = 12\text{V}$, $V_{\text{out}} = 1\text{V}$, $I_{\text{out}} = 200\text{A}$, $f_{\text{SW}} = 350\text{kHz}$

DEMO MANUAL DC2638A-C

QUICK START PROCEDURE


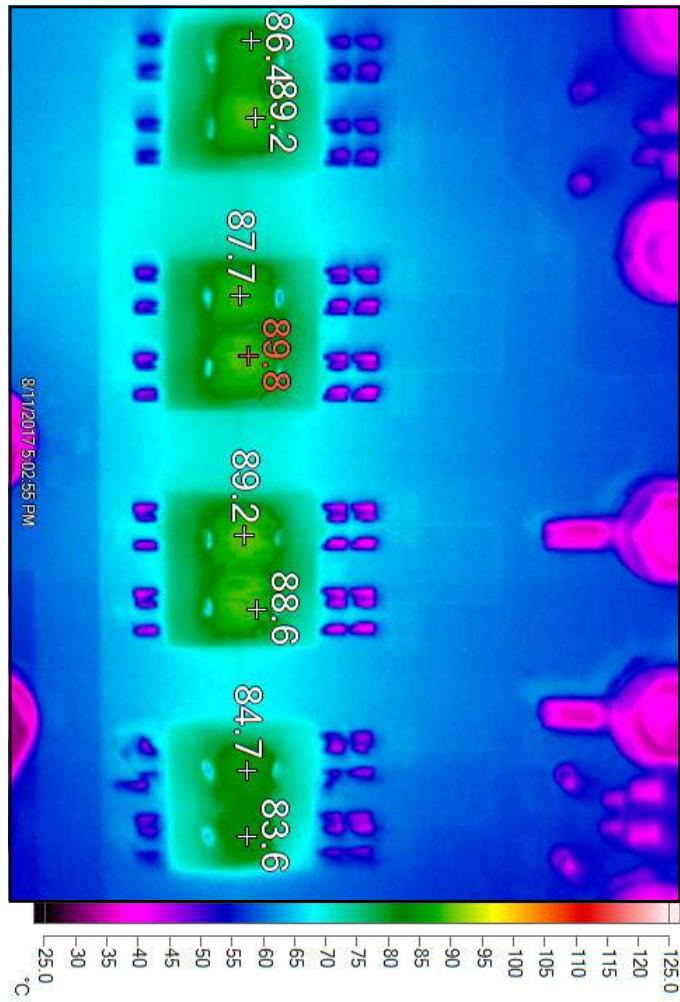


Figure 8. Thermal @ $V_{IN} = 12V$, $V_{OUT} = 1.0V$, $I_{OUT} = 130A$,
 $T_A = 25^{\circ}C$, NO Airflow

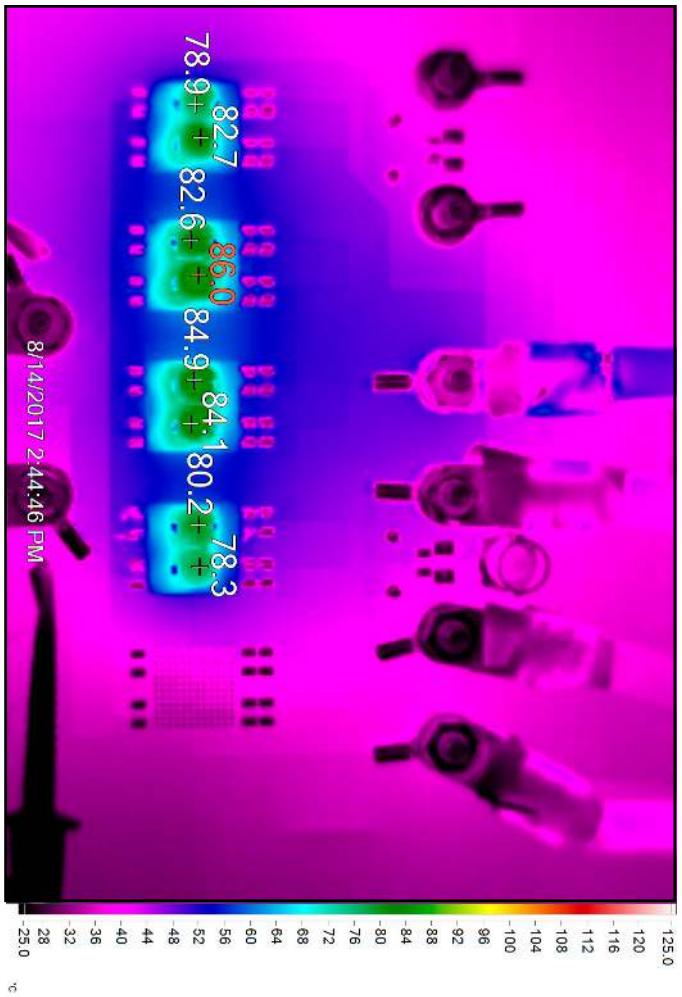

DEMO MANUAL DC2638A-C

POWERPLAY SOFTWARE GUI

L^IpowerPlay is a powerful Windows-based development environment that supports Analog Devices power system management ICs and µModules, including the LTM4675, LTM4676, LTM4677, LTM4678, LTC3880, LTC3882 and LTC3883. The software supports a variety of different tasks. You can use L^IpowerPlay to evaluate Analog Devices ICs by connecting to a demo board system. L^IpowerPlay can also be used in an offline mode (with no hardware present) in order to build a multichip configuration file that can be saved and reloaded at a later time. L^IpowerPlay provides unprecedented diagnostic and debug features. It becomes a valuable diagnostic tool during board bringup to program or tweak the power management scheme in a system, or to diagnose power issues when bringing up rails. L^IpowerPlay utilizes the

To access technical support documents for ADI Digital Power Products visit the LTpowerPlay Help menu. Online help also available through the LTpowerPlay.

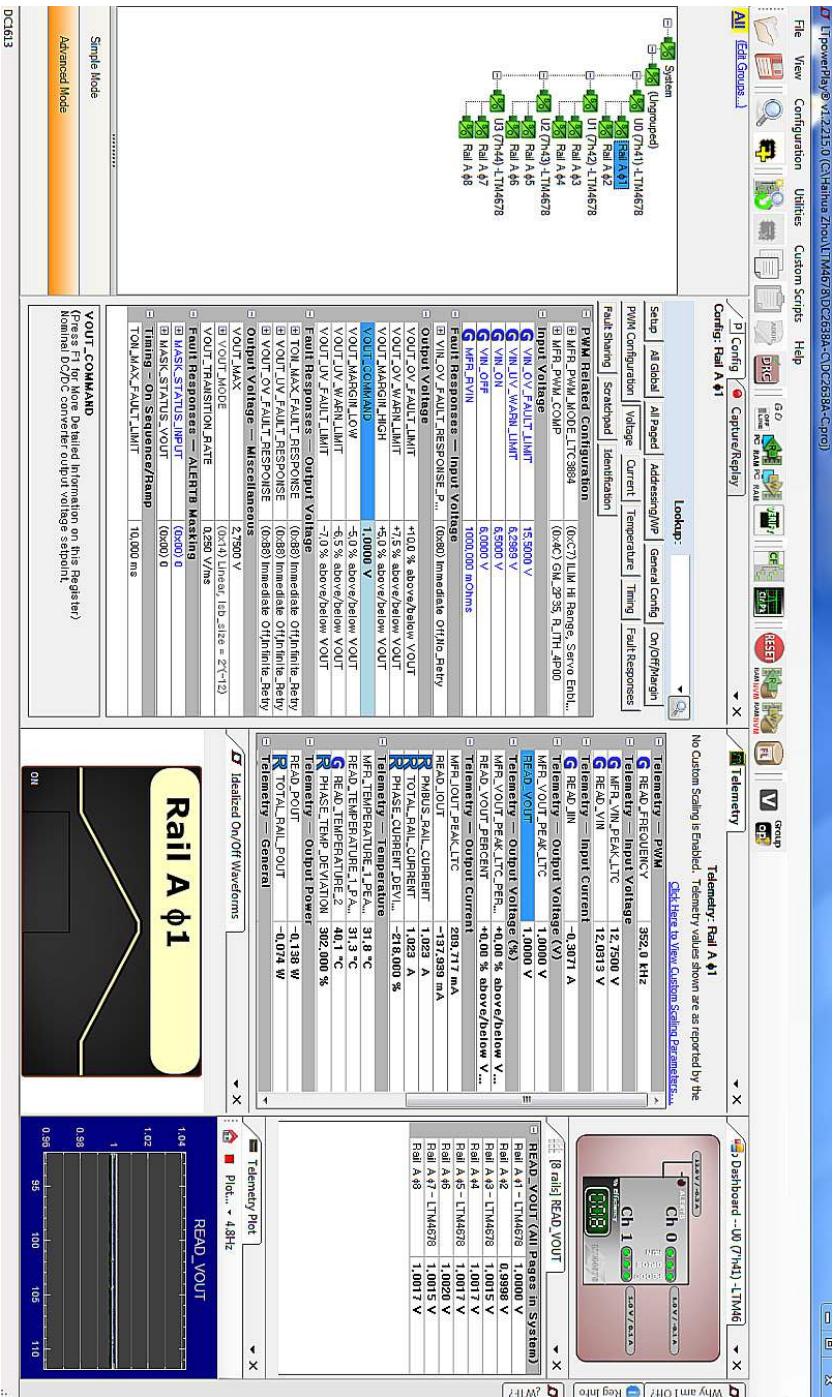


Figure 10. LTpowerPlay Main Interface

DC1613A USB-to-SMBus controller to communicate with one of many potential targets, including the LTM4675, LTM4676, LTM4677, LTM4678, LTC3880, LTC3882, LTC3883's demo system, or a customer board. The software also provides an automatic update feature to keep the software current with the latest set of device drivers and documentation. The LTpowerPlay software can be downloaded from:

DEMO MANUAL DC2638A-C

LTPowerPlay Quick Start Procedure


The following procedure describes how to use LTpowerPlay to monitor and change the settings of LTM4678.

1. Download and install the LTpowerPlay GUI:

LTPowerPlay

2. Launch the LTpowerPlay GUI.

- a. The GUI should automatically identify the DC2638A-C. The system tree on the left hand side should look like this:

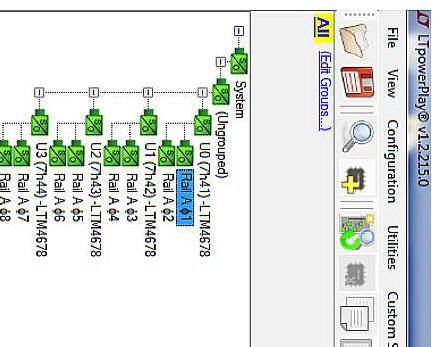

- b. A green message box shows for a few seconds in the lower left hand corner, confirming that LTM4678 is communicating:



- c. In the Toolbar, click the "R" (RAM to PC) icon to read the RAM from the LTM4678. This reads the configuration from the RAM of LTM4678 and loads it into the GUI.




- e. You can save the changes into the NVM. In the tool bar, click "RAM to NVM" button, as following



- f. Save the demo board configuration to a (*.proj) file. Click the Save icon and save the file. Name it whatever you want.

- d. If you want to change the output voltage to a different value, like 0.8V. In the Config tab, type in 0.8 in the VOUT_COMMAND box, like this:

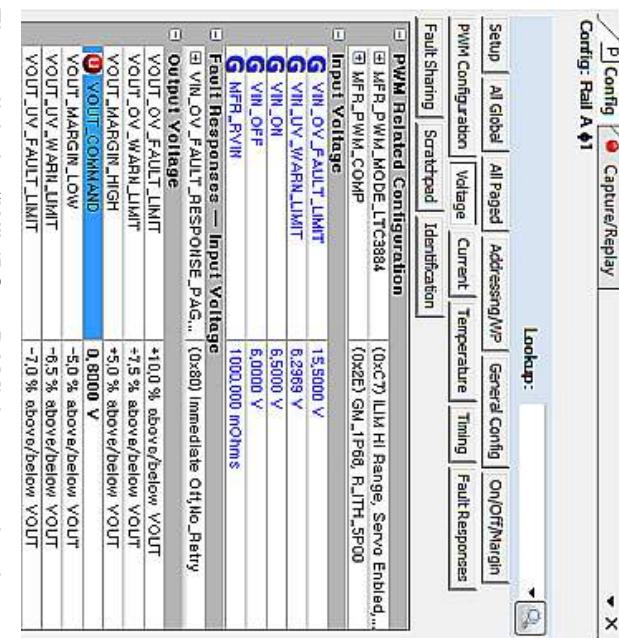

Then, click the "W" (PC to RAM) icon to write these register values to the LTM4678. After finishing this step, you will see the output voltage will change to 0.8V.




If the write is successful, you will see the following message:



DEMO MANUAL DC2638A-C


SCHEMATIC DIAGRAM

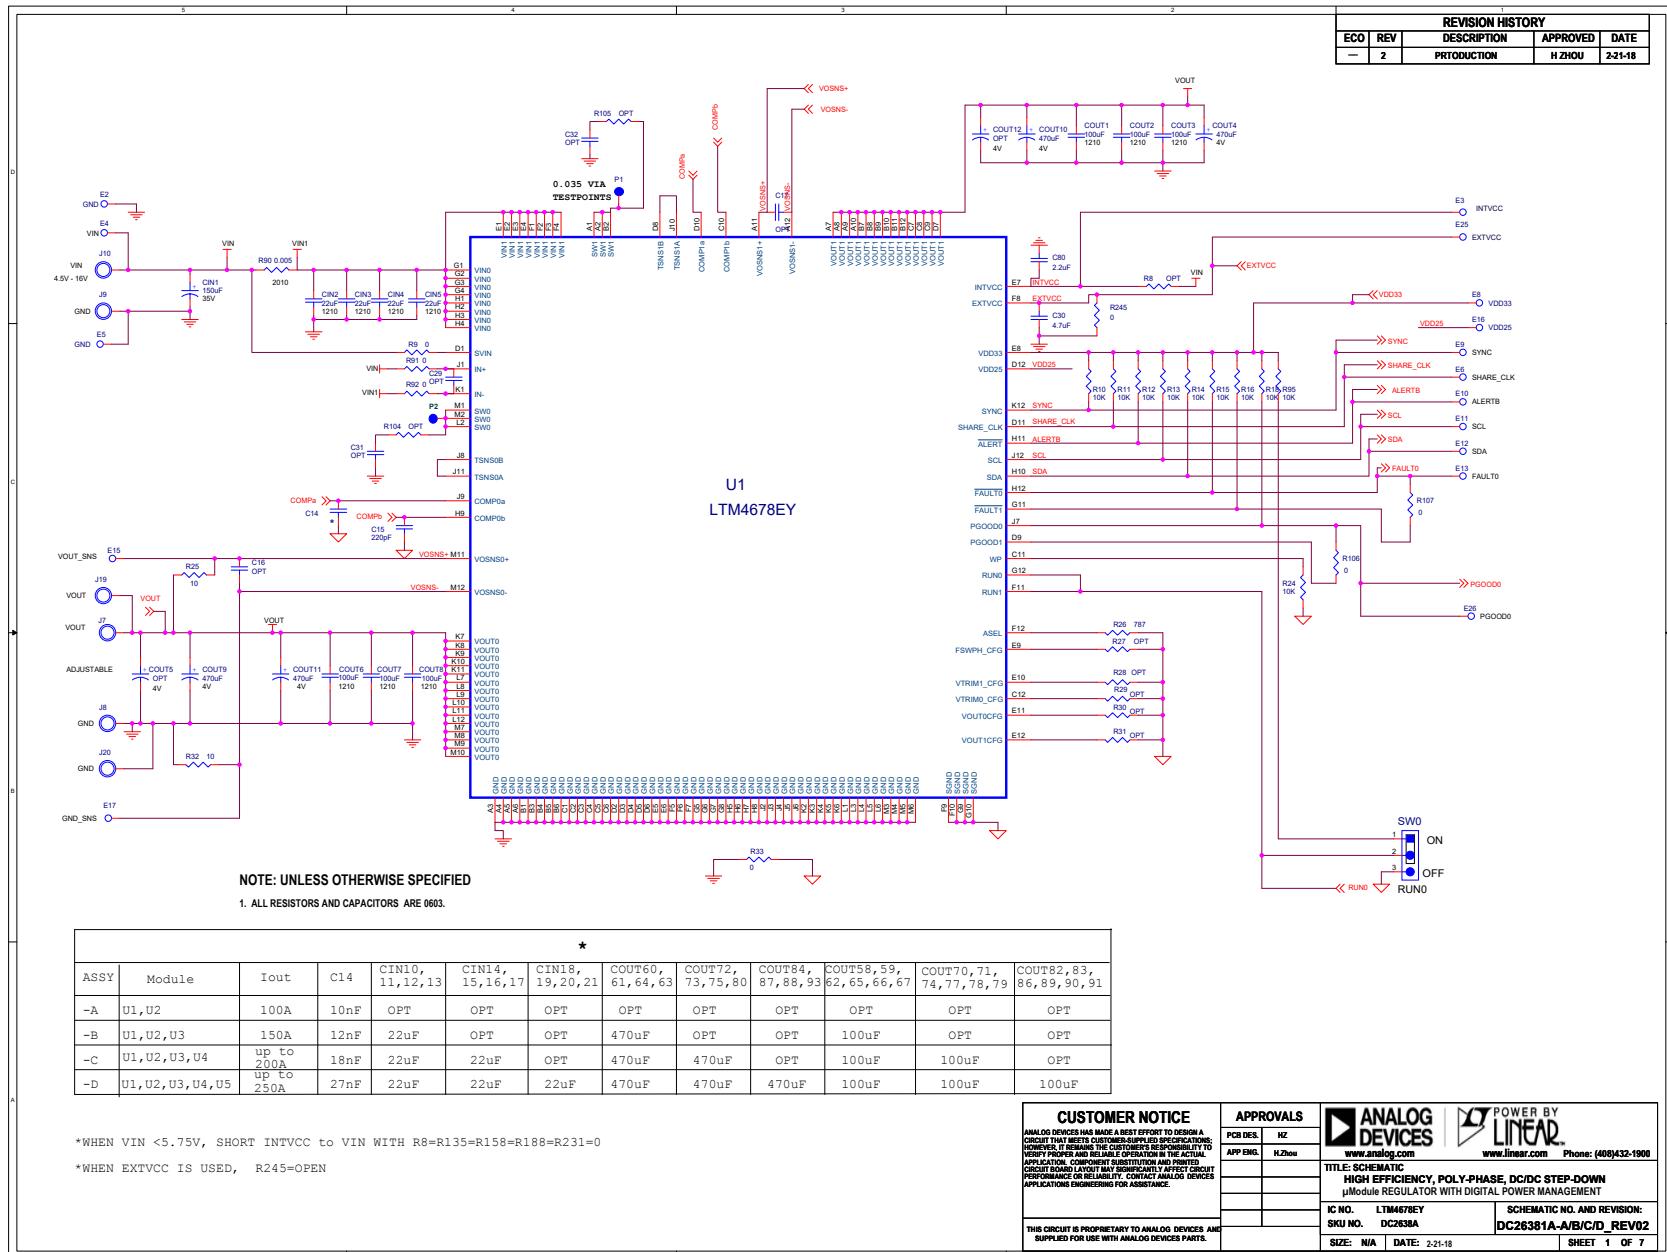

DEMO MANUAL DC2638A-C

SCHEMATIC DIAGRAM

10

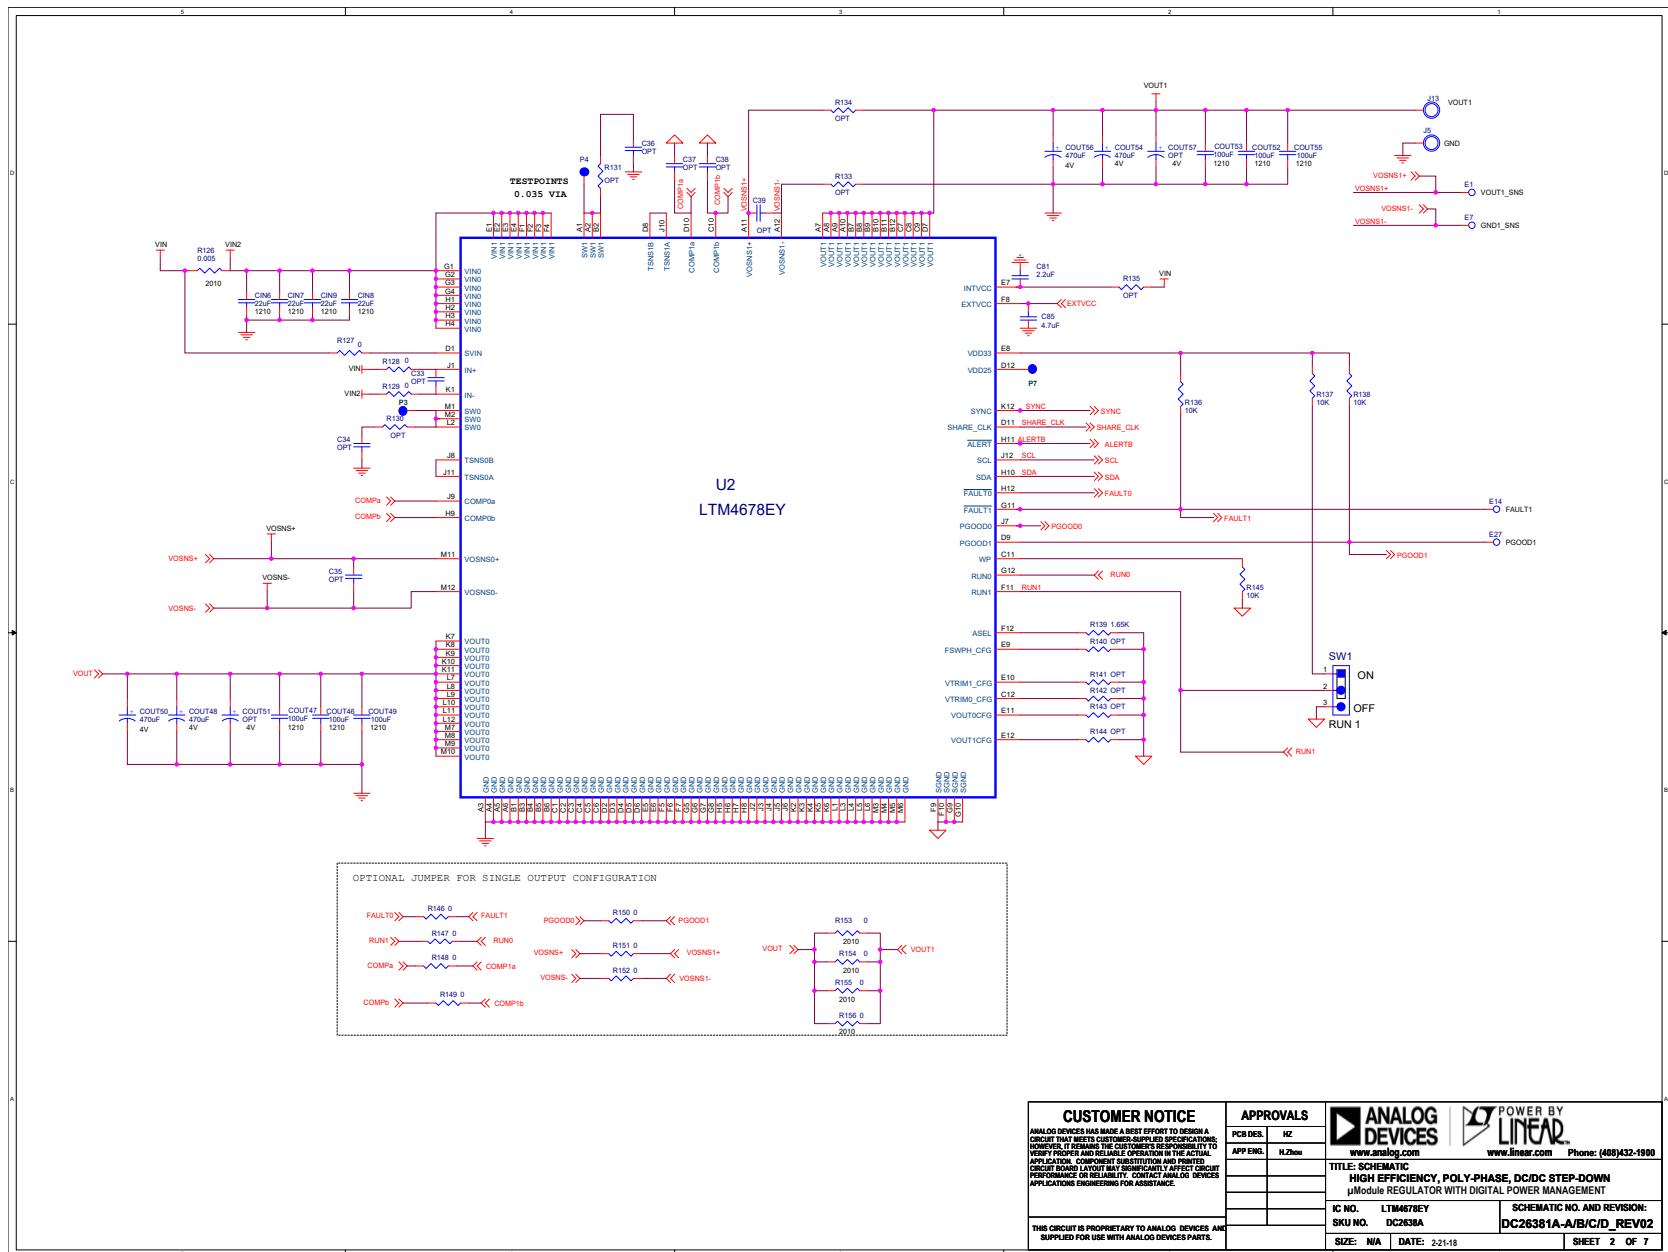


CUSTOMER NOTICE
ANALOG DEVICES HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS THE REQUIREMENTS OF THE SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY THE CIRCUITRY FOR THE SPECIFIC APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD CHANGES MAY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT ANALOG DEVICES APPLICATIONS ENGINEERING FOR ASSISTANCE.

APPROVALS	
PCB DES.	NZ
APP ENG.	H.Zhou
TITLE: SCHEMATIC HIGH EFFICIENCY, POLY-PHASE, DC/DC STEP-DOWN µMODULE REGULATOR WITH DIGITAL POWER MANAGEMENT	
IC NO.	LTM4678EY
SKU NO.	DC2638A
SCHEMATIC NO. AND REVISION:	DC26381A-A/B/C/D_REV02
SIZE:	N/A
DATE:	2-21-18
SHEET 2 OF 7	

DEMO MANUAL DC2638A-C

SCHEMATIC DIAGRAM

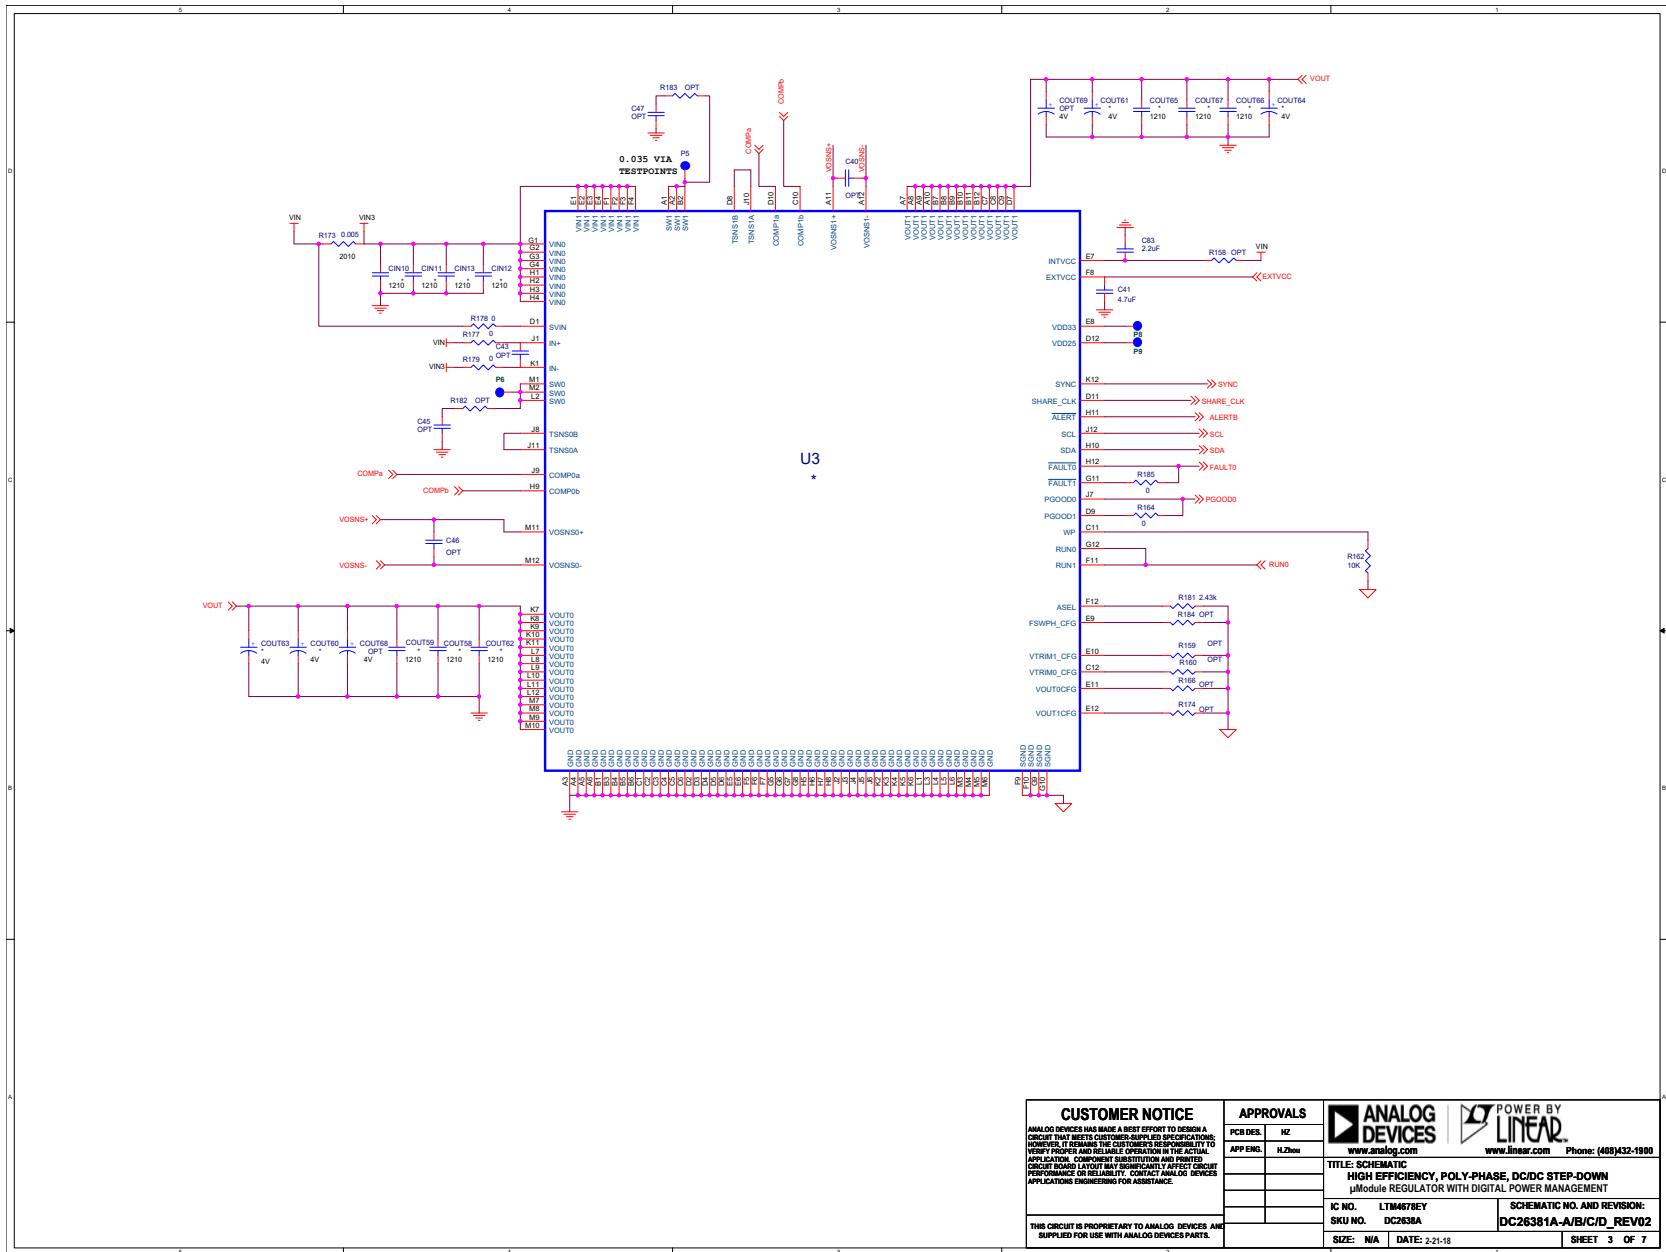

CUSTOMER NOTICE
ANALOG DEVICES HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS THE REQUIREMENTS OF ITS SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY THE CIRCUIT DESIGN FOR THE CUSTOMER'S APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD CHANGES MAY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT ANALOG DEVICES APPLICATIONS ENGINEERING FOR ASSISTANCE.

THIS CIRCUIT IS PROPRIETARY TO ANALOG DEVICES AND SUPPLIED FOR USE WITH ANALOG DEVICES PARTS.

APPROVALS

PCB DES.	NZ
APP ENG.	H.Zhou



POWER BY
LINEAR

www.analog.com www.linear.com Phone: (408)432-1999

TITLE: SCHEMATIC
HIGH EFFICIENCY, POLY-PHASE, DC/DC STEP-DOWN

µModule REGULATOR WITH DIGITAL POWER MANAGEMENT

IC NO.: LTM4678EY

SKU NO.: DC2638A

SCHEMATIC NO. AND REVISION:

DC26381A-A/B/C/D_REV02


SIZE: N/A DATE: 2-21-18

SHEET 3 OF 7

DEMO MANUAL DC2638A-C

SCHEMATIC DIAGRAM

12

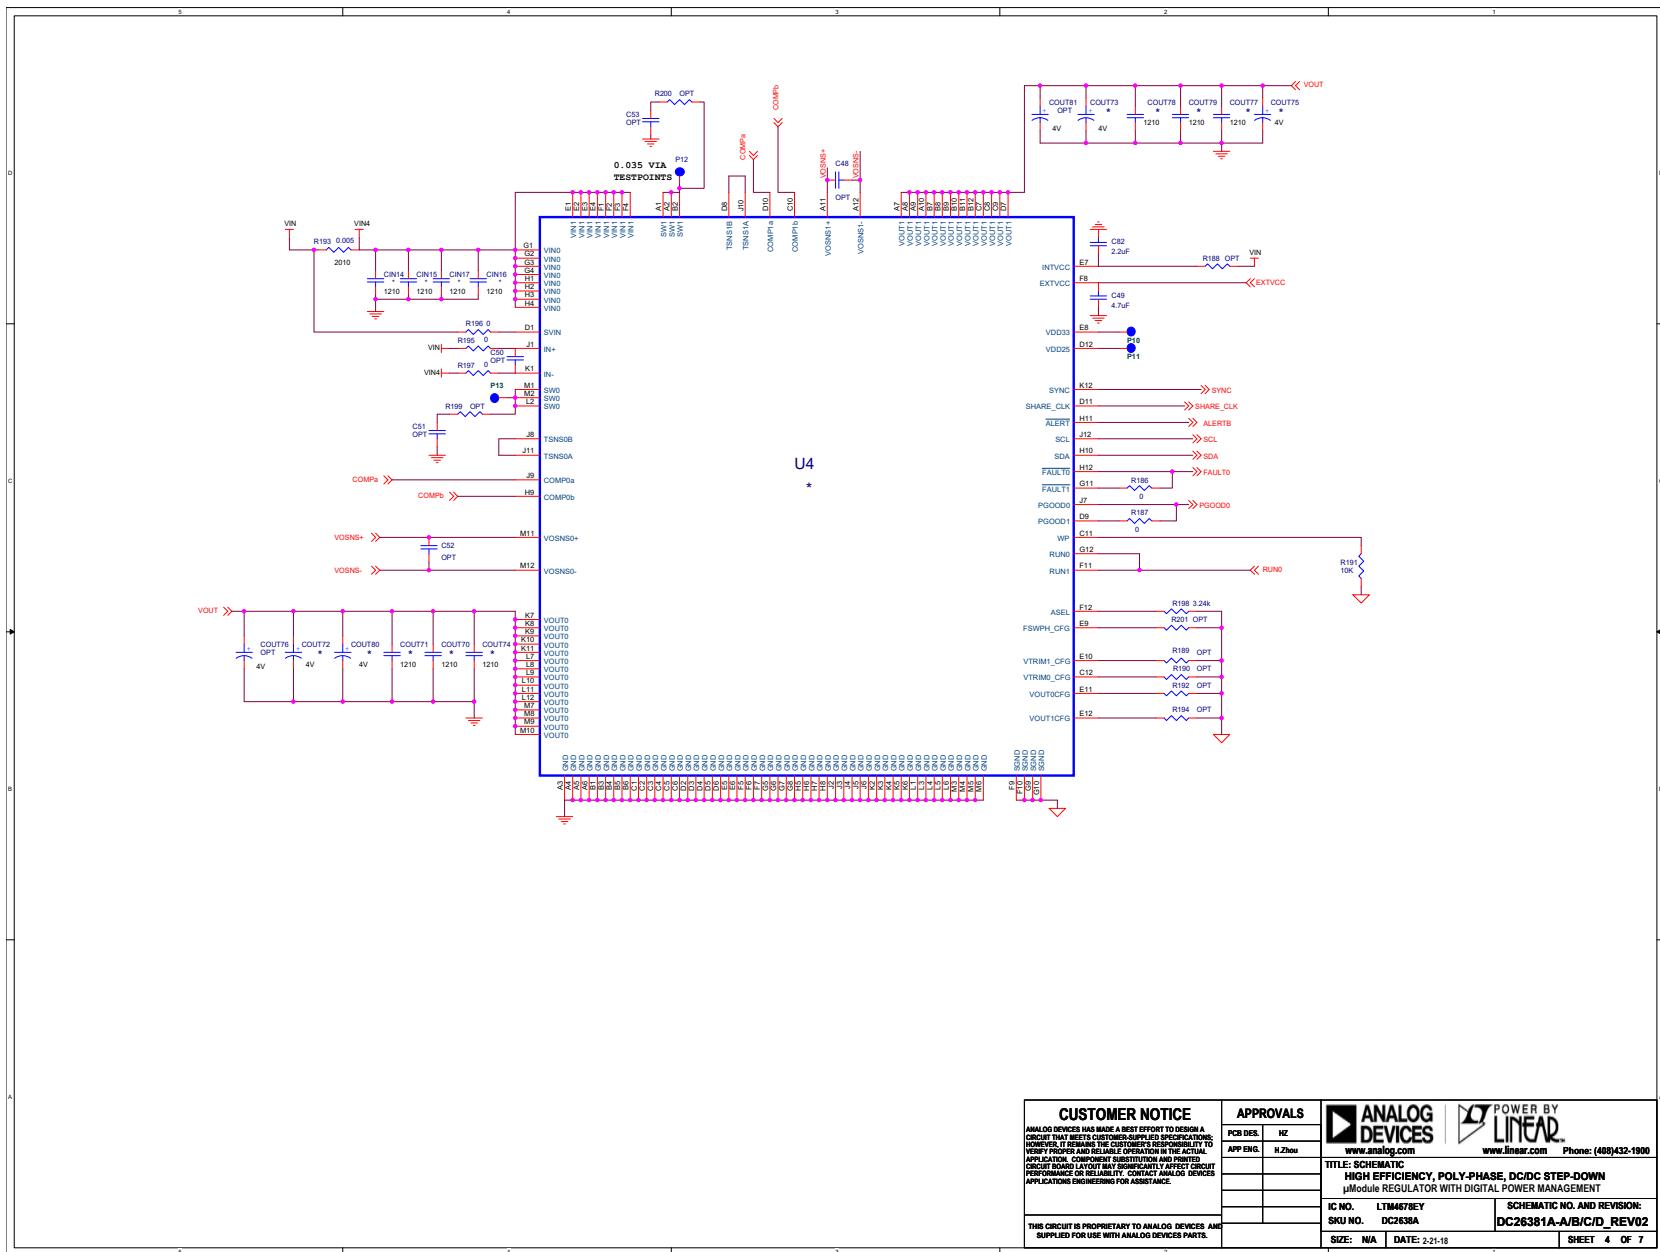


CUSTOMER NOTICE
 ANALOG DEVICES HEREBY MAKES A BEST EFFORT TO DESIGN A CIRCUIT THAT IS CUSTOMER-PROVEN FOR THE INDICATED APPLICATIONS. HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY THE CIRCUIT DESIGN FOR THE SPECIFIC APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD CHANGES MAY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT ANALOG DEVICES ENGINEERING FOR ASSISTANCE.

APPROVALS

PCB DES.	HZ
APP ENG.	H.Zhou
TITLE: SCHEMATIC HIGH EFFICIENCY, POLY-PHASE, DC/DC STEP-DOWN µModule REGULATOR WITH DIGITAL POWER MANAGEMENT	
IC NO.	LTM4678EVY
SKU NO.	DC2638A
SIZE:	N/A
DATE:	2/21/18
SCHEMATIC NO. AND REVISION: DC2638A-A/B/C/D_REV02	
SHEET 4 OF 7	

卷之三

DEMO MANUAL DC2638A-C

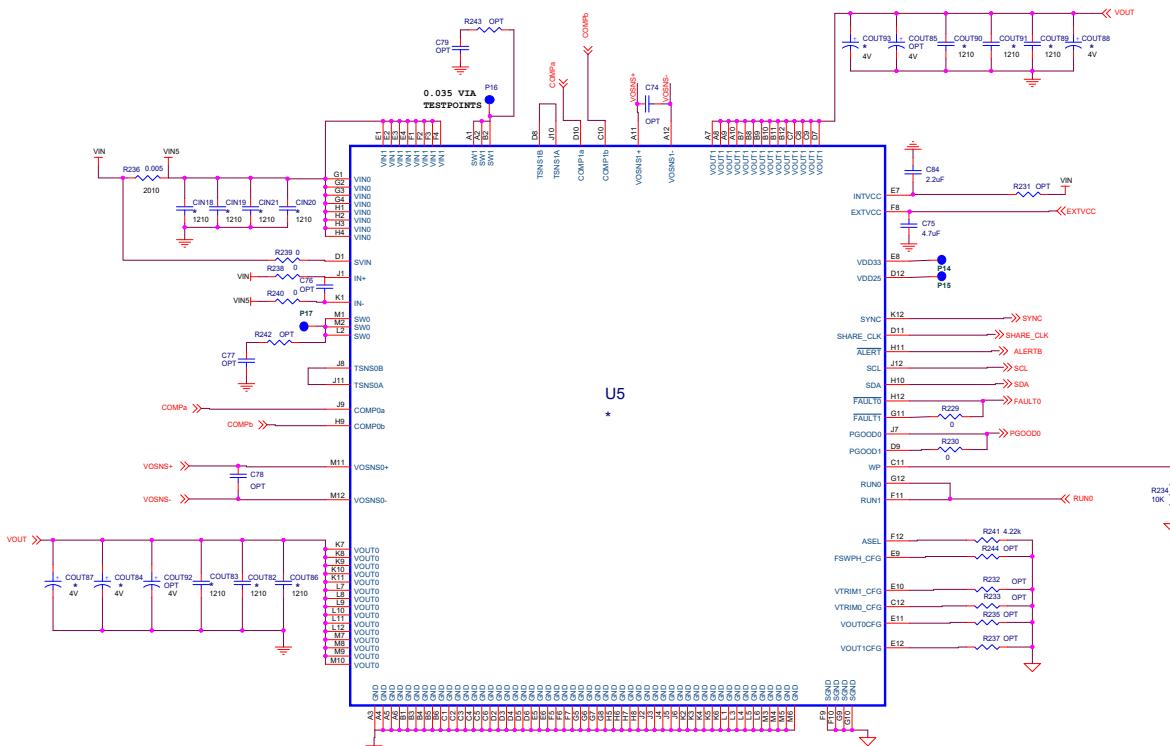


CUSTOMER NOTICE		APPROVALS		
ANALOG DEVICES HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SPECIFIED REQUIREMENTS. THE CIRCUIT HAS BEEN TESTED AND IS SHIPPED AS FABRICATED. THE CIRCUIT HAS NOT BEEN PROVEN TO MEET THE SPECIFICATIONS. THE CIRCUIT IS NOT TESTED FOR DURABILITY, STABILITY, OR RELIABILITY. THE CIRCUIT IS NOT TESTED FOR CIRCUIT BOARD LAYOUT. ANY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT ANALOG DEVICES APPLICATIONS ENGINEERING FOR ASSISTANCE.		PCB DES. H.Zhou	HZ	
		APP ENG. H.Zhou		
THIS CIRCUIT IS PROPRIETARY TO ANALOG DEVICES AND SUPPLIED FOR USE WITH ANALOG DEVICES PARTS.		TITLE: SCHEMATIC	POWER BY	
		HIGH EFFICIENCY, POLY-PHASE, DC/DC STEP-DOWN	LINEAR	
		uModule REGULATOR WITH DIGITAL POWER MANAGEMENT	www.linear.com	
		IC NO. LTM4678EY	SCHEMATIC NO. AND REVISION:	
		SKU NO. DC2638A	DC26381A-A/B/C/D/REV02	
		SIZE: N/A	DATE: 2-21-18	HEET 5 OF 7

DEMO MANUAL DC2638A-C


SCHEMATIC DIAGRAM

14

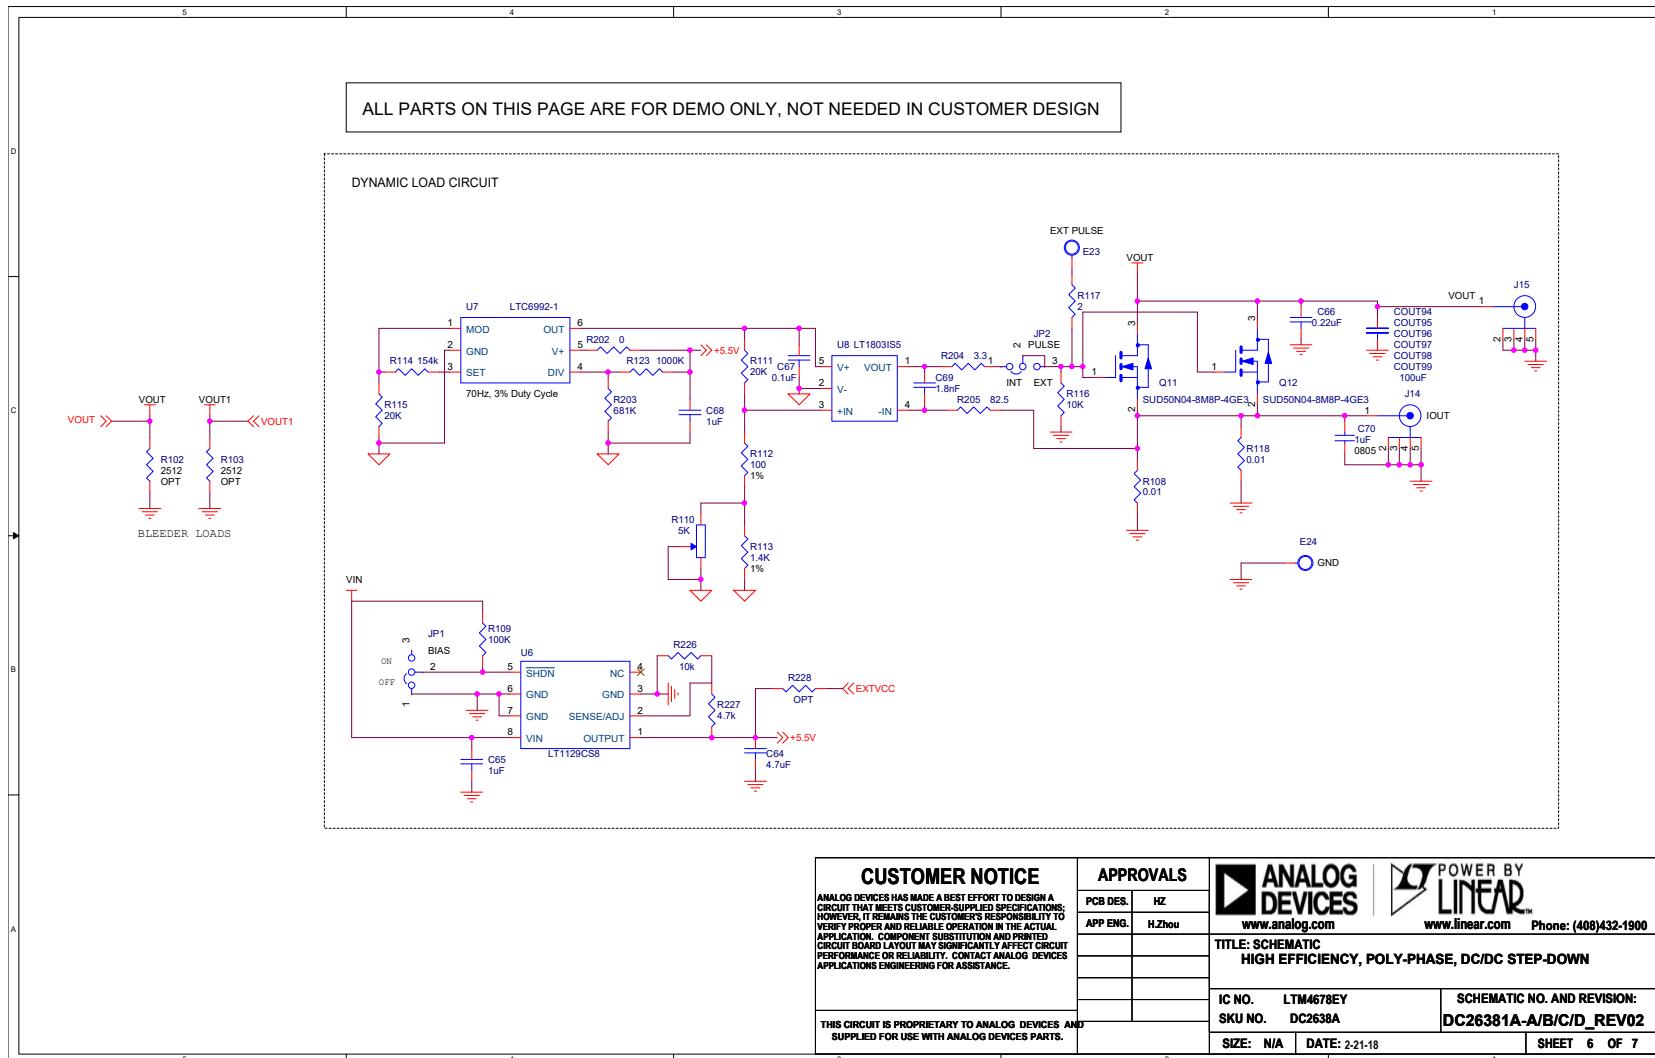

DEMO MANUAL DC2638A-C

Schematic Diagram

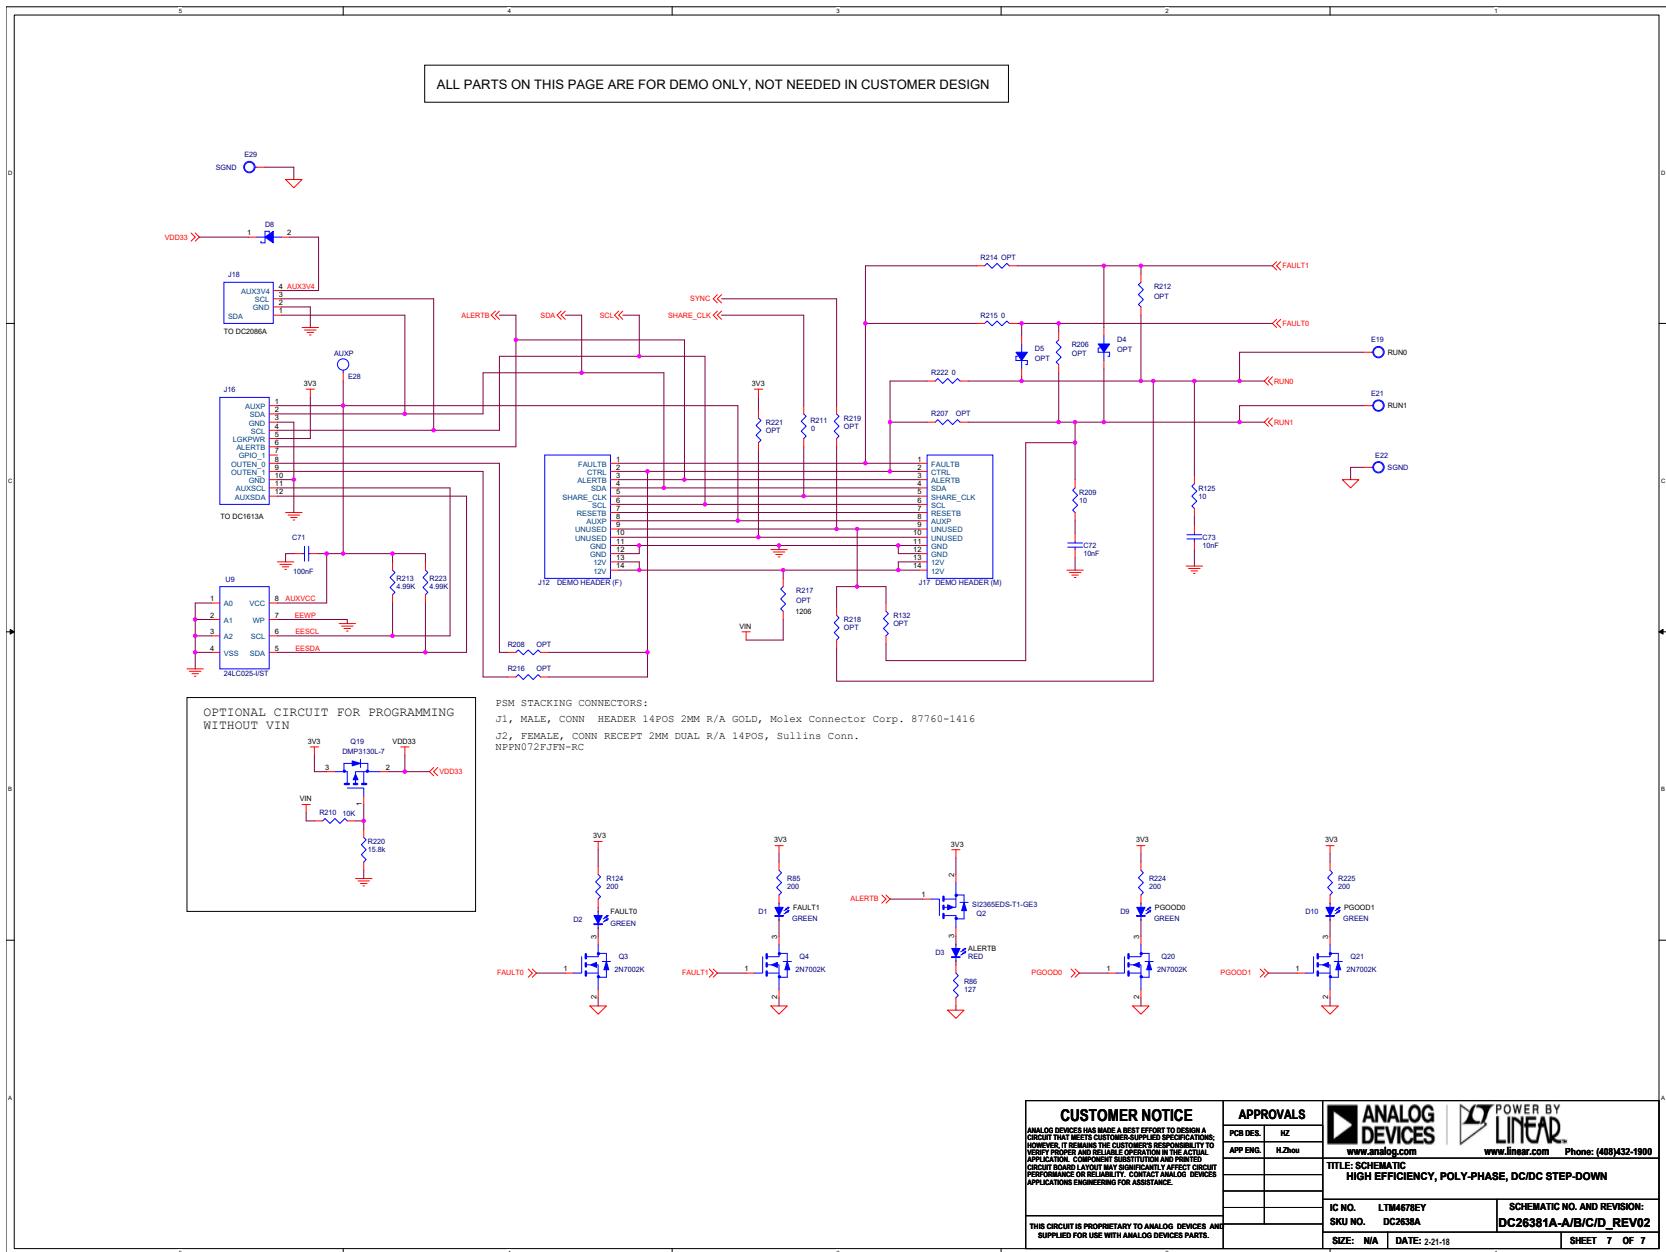

DEMO MANUAL DC2638A-C

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	1	CIN1	CAP, 150μF, ALUM. ELECT. 35V, 20%, 8mm x 10.2mm SMD, RADIAL, AEC-Q200	PANASONIC, EEHZA1V151P
2	30	COUT1, COUT2, COUT3, COUT6, COUT7, COUT8, COUT46, COUT47, COUT49, COUT52, COUT53, COUT55, COUT58, COUT59, COUT62, COUT65, COUT66, COUT67, COUT70, COUT71, COUT74, COUT77, COUT78, COUT79, COUT94, COUT95, COUT96, COUT97, COUT98, COUT99	CAP., 100μF, X5R, 6.3V, 20%, 1210	AVX, 12106D107MAT2A MURATA, GRM32ER60J107ME20L TDK, C3225X5R01107W250AC
3	16	CIN2, CIN3, CINA, CIN5, CIN6, CIN7, CIN8, CIN9, CIN10, CIN11, CIN12, CIN13, CIN14, CIN15, CIN16, CIN17	CAP., 22μF, X5R, 25V, 10%, 1210	AVX, 12103D226KAT2A MURATA, GRM32ER61E226KE15L TAYO YUDEN, TMK325B1226KM-P TAYO YUDEN, TMK325B1226KM-T
4	16	COUT4, COUT9, COUT10, COUT11, COUT48, COUT50, COUT54, COUT56, COUT60, COUT61, COUT63, COUT64, COUT72, COUT73, COUT75, COUT80	CAP, 470μF, TANT. POSCAR 4V, 20%, 7343, 10mΩ, TPF, NO SUBS. ALLOWED	PANASONIC, 4TPF470ML
5	0	COUT5, COUT12, COUT51, COUT57, COUT68, COUT69, COUT76, COUT81, COUT84, COUT85, COUT87, COUT88, COUT92, COUT93	CAP., OPTION, D3L	
6	1	C14	CAP., 0.018μF, X7R, 16V, 10%, 0603	AVX, 0603YC183KAT2A KEMET, C0603C183K4RACTU NIC, NMCG0603XTR183K16TRPF
7	1	C15	CAP, 220pF, X7R, 16V, 10%, 0603	AVX, 0603YC221KAT2A KEMET, C0603C221K4RACTU NIC, NMCG0603XTR221K16TRPF
10	6	C30, C41, C49, C64, C75, C85	CAP, 4.7μF, X5R, 25V, 10%, 0603, NO SUBS. ALLOWED	MURATA, GRM188R61E475KE1D
11	2	C65, C68	CAP., 1μF, X7R, 25V, 10%, 1206	AVX, 12063C-05KAT2A MURATA, GRM31MR71E105KA01L TAYO YUDEN, TMK316B7105KL-T TDK, G3216X7R1E105K160AA
12	1	C66	CAP, 0.22μF, X5R, 25V, 10%, 0805	AVX, 080503D224KAT2A TAYO YUDEN, TMK212B124KGHT VENKEL LTD., C0805X5R250-224KINE
13	1	C67	CAP, 0.1μF, X7R, 25V, 10%, 1206	AVX, 12063C-104KAT2A NIC, NMCG206X7R104K25TRPF
14	1	C69	CAP, 1800pF, X7R, 16V, 10%, 0603	AVX, 0603YC182KAT2A KEMET, C0603C182K4RACTU NIC, NMCG0603X7R182K16TRPF
15	1	C70	CAP., 1μF, X5R, 25V, 10%, 0805	AVX, 080503D105KAT2A MURATA, GRM216R61E105KA12D TDK, CGBB3X5RF105K055AB
16	1	C71	CAP, 0.1μF, X7R, 25V, 10%, 0603	AVX, 060303C104KAT2A KEMET, C0603C104K3RACTU NIC, NMCG0603X7R104K25TRPF TDK, C1608X7R1E104K080AA
17	2	C72, C73	CAP., 0.01μF, X7R, 25V, 10%, 0603	AVX, 060303C103KAT2A MURATA, GRM188R71E103KA01D YAGEO, CC0603KR7R8BB103
18	5	C80, C81, C82, C83, C84	CAP, 2.2μF, X7R, 25V, 10%, 0603	MURATA, GRM188Z71E225KE43D
19	4	D1, D2, D9, D10	LED, GREEN, WATERCLEAR, 0603	WURTH ELEKTRONIK, 150060GS75000

DEMO MANUAL DC2638A-C

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
20	1	D3	LED, SUPER RED, WATERCLEAR, 0603	WURTH ELEKTRONIK, 150060SS75000
22	1	D8	DIODE, SCHOTTKY RECT., 20V, 0.5A, SOD-882D, LEADLESS, 2-TERM.	NEXPERIA, PMEG2005AELD, 315
36	1	Q2	XSTR., MOSFET, P-CH, 20V, 5.9A, TO-236 (SOT23-3)	VISHAY, SI2365EDS-T1-GE3
37	4	Q3, Q4, Q20, Q21	XSTR., MOSFET, SINGLE N-CH, 60V, 380mA, SOT23-3, AEC-Q101	ON SEMICONDUCTOR, 2N7002KT1G
38	2	Q11, Q12	XSTR., MOSFET, N-CH, 40V, TO-252 (DPAK)	VISHAY, SUD50N04-8M88P-4GE3
39	1	Q19	XSTR., MOSFET, P-CH, 30V, 3.5A, SOT23-3, AEC-Q101	DIODES INC., DMP3130L-7
41	36	R9, R33, R91, R92, R106, R107, R127, R128, R129, R146, R147, R148, R149, R150, R151, R152, R164, R177, R178, R179, R185, R186, R187, R195, R196, R197, R202, R211, R215, R222, R229, R230, R238, R239, R240, R245	RES., 0Ω, 1/10W, 0603, AEC-Q200	NIC, NRC06Z0TRF VISHAY, CRCW06030000Z0EA
42	20	R10, R11, R12, R13, R14, R15, R16, R18, R24, R95, R116, R136, R137, R138, R145, R162, R191, R210, R226, R234	RES., 10k, 1%, 1/10W, 0603, AEC-Q200	KOA SPEER, RK73H1JTD1002F PANASONIC, ERJ3EKF1002V VISHAY, CRCW060310K0FKEA
43	4	R25, R32, R125, R209	RES., 10Ω, 1%, 1/10W, 0603	NIC, NRC06F10R0TRF PANASONIC, ERJ3EKF10R0V ROHM, MCR03EZPFX10R0 VISHAY, CRCW060310R0FKEA VAGEO, RC0603FR-0710RL
44	1	R26	RES., 787Ω, 1%, 1/10W, 0603, AEC-Q200	NIC, NRC06F7870TRF PANASONIC, ERJ3EKF7870V VISHAY, CRCW0603787RFKEA
45	4	R85, R124, R224, R225	RES., 200Ω, 1%, 1/10W, 0603	NIC, NRC06F2000TRF VISHAY, CRCW0603200RFKEA VAGEO, RC0603FR-07200RL
46	1	R86	RES., 127Ω, 1%, 1/10W, 0603, AEC-Q200	NIC, NRC06F1270TRF PANASONIC, ERJ3EKF1270V VISHAY, CRCW0603127RFKEA
47	5	R90, R126, R173, R193, R236	RES., 0.005Ω, 1%, 1/2W, 2010, SENSE, AEC-Q200	VISHAY, WSL20105L000FEA
49	2	R108, R118	RES., 0.01Ω, 1%, 1/2W, 2010, SENSE, AEC-Q200	VISHAY, WSL2010R0100FEA
50	1	R109	RES., 100k OHMS, 1%, 1/10W, 0603, AEC-Q200	NIC, NRC06F1003TRF PANASONIC, ERJ3EKF1003V VISHAY, CRCW0603100KFKEA
51	1	R110	RES., 5k, 10%, 1/2W, THT 3/8 SQ, 1-TURN, TOP ADJ., TRIMPT	
52	2	R111, R115	RES., 20k, 1%, 1/10W, 0603	PANASONIC, ERJ3EKF2002V VISHAY, CRCW0603320K0FKEA VAGEO, RC0603FR-0720KL
53	1	R112	RES., 100Ω, 1%, 1/10W, 0603, AEC-Q200	NIC, NRC06F1000TRF PANASONIC, ERJ3EKF1000V VISHAY, CRCW0603100RFKEA
54	1	R113	RES., 1.4k, 1%, 1/10W, 0603, AEC-Q200	NIC, NRC06F1401TRF PANASONIC, ERJ3EKF1401V VISHAY, CRCW06031K40FKEA
55	1	R114	RES., 154k, 1%, 1/10W, 0603, AEC-Q200	NIC, NRC06F1543TRF PANASONIC, ERJ3EKF1543V VISHAY, CRCW0603154KFKEA

DEMO MANUAL DC2638A-C

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
56	1	R117	RES., 2Ω, 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW06032R005KEA
57	1	R123	RES., 1MΩ, 1%, 1/10W, 0603, AEC-Q200	NIC, NRC006F1004TRF PANASONIC, ERJ3EKF1004V VISHAY, CRCW06031M00FKEA
58	1	R139	RES., 1.65k, 1%, 1/10W, 0603, AEC-Q200	NIC, NRC006F1651TRF PANASONIC, ERJ3EKF1651V VISHAY, CRCW06031K651KEA
59	4	R153, R154, R155, R156	RES., 0Ω, 3/4W, 2010, AEC-Q200	NIC, NRC50Z0TRF PANASONIC, ERJ1ZZY0R00U VISHAY, CRCW2010000070EF
60	1	R181	RES., 2.43k, 1%, 1/10W, 0603, AEC-Q200	NIC, NRC06F2431TRF PANASONIC, ERJ3EKF2431V VISHAY, CRCW06032K438KEA
61	1	R198	RES., 3.24k, 1%, 1/10W, 0603, AEC-Q200	NIC, NRC06F5813TRF PANASONIC, ERJ3EKF5813V VISHAY, CRCW06033R307KEA
62	1	R203	RES., 681k, 1%, 1/10W, 0603, AEC-Q200	NIC, NRC06F5813TRF PANASONIC, ERJ3EKF5813V VISHAY, CRCW0603681K4FKEA
63	1	R204	RES., 3.3Ω, 1%, 1/10W, 0603, AEC-Q200	NIC, NRC006F522R5TRF PANASONIC, ERJ3EKF522R5V VISHAY, CRCW06033RR307KEA
64	1	R205	RES., 82.5Ω, 1%, 1/10W, 0603, AEC-Q200	NIC, NRC006F522R5TRF PANASONIC, ERJ3EKF522R5V VISHAY, CRCW0603681K4FKEA
65	2	R213, R223	RES., 4.99k, 1%, 1/10W, 0603, AEC-Q200	NIC, NRC006F4991TRF PANASONIC, ERJ3EKF4991V VISHAY, CRCW06034K99FKEA
66	1	R220	RES., 15.8k, 1%, 1/10W, 0603, AEC-Q200	NIC, NRC006F1582TRF PANASONIC, ERJ3EKF1582V VISHAY, CRCW06034K22FKEA
67	1	R227	RES., 4.7k, 1%, 1/10W, 0603, AEC-Q200	NIC, NRC006F4701TRF PANASONIC, ERJ3EKF4701V VISHAY, CRCW06034K70FKEA
68	1	R241	RES., 4.22k, 1%, 1/10W, 0603, AEC-Q200	NIC, NRC006F4221TRF PANASONIC, ERJ3EKF4221V VISHAY, CRCW06034K22FKEA
69				
70	4	U1, U2, U3, U4	IC, DUAL 25A PSMN MODULE, BGA-144	ANALOG DEVICES, LTM4678EY#PBF
71	1	U6	IC, 700mA POWER LDO WITH SHUTDOWN, SO-8	ANALOG DEVICES, LTI129CS8#PBF ANALOG DEVICES, LTI129CS8#TRPBF
72	1	U7	IC, TIMERBLOX VOLTAGE-CTRL. PWM, TSOT23-6	ANALOG DEVICES, LT66992CS6-1#PBF ANALOG DEVICES, LT66992CS6- 1#TRMPBF ANALOG DEVICES, LTC6992CS6-1#TRPBF
73	1	U8	IC, SINGLE R TO R INPUT OP AMP, TSOT23-5, 100V/μs, 85MHz	ANALOG DEVICES, LT1803ISS5#PBF ANALOG DEVICES, LT1803ISS5#TRPBF
74	1	U9	IC, MEMORY, EEPROM, 2kb (256x8), TSSOP-8, 400kHz	MICROCHIP 24LC025-I/ST MICROCHIP 24LC025-I/ST

DEMO MANUAL DC2638A-C

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Additional Demo Board Circuit Components				
1	0	C16, C17, C29, C31, C32, C33, C34, C35, C36, C37, C38, C39, C40, C43, C45, C46, C47, C48, C50, C51, C52, C53, C74, C76, C77, C78, C79	CAP, OPTION, 0603	
2	0	CIN18,CIN19,CIN20,CIN21,COUT82,COUT83, COUT86,COUT89,COUT90,COUT91	CAP, OPTION, 0603	
3	0	D4, D5	DIODE, OPTION, SOD-323	
4	0	R8, R27, R28, R29, R30, R31, R104, R105, R130, R131, R132, R133, R134, R135, R140, R141, R142, R143, R144, R158, R159, R160, R166, R174, R182, R183, R184, R188, R189, R190, R192, R194, R199, R200, R201, R206, R207, R208, R212, R214, R216, R218, R219, R221, R228, R231, R232, R233, R235, R237, R242, R243, R244	RES., OPTION, 0603	
5	0	R217	RES., OPTION, 1206	
6	0	R102, R103	RES., OPTION, 2512	
7	0	U5	IC., OPTION, BGA-144	
8	0		PCB ASSY DWG, DC2638A	
Hardware: For Demo Board Only				
1	27	E1, E2, E3, E4, E5, E6, E7, E8, E9, E10, E11, E12, E13, E14, E15, E16, E17, E20, E21, E22, E23, E24, E25, E26, E27, E28, E29	TEST POINT, TURRET, 0.064, MTG. HOLE	MILL-MAX, 2308-2-00-80-00-00-07-0
2	2	JP1, JP2	CONN., HDR, MALE, 1x3, 2mm, VERT, STR, THT	WURTHELEKTRONIK, 62000311121
3	8	J5, J7, J8, J9, J10, J13, J19, J20	RING, LUG, CRIMP, #10, NON-INSULATED, SOLDERLESS TERMINALS	KEYSTONE, 8205
4	16	J5, J7, J8, J9, J10, J13, J19, J20	NUT, HEX, STEEL, ZINC PLATE, 10-32	KEYSTONE, 4705
5	8	J5, J7, J8, J9, J10, J13, J19, J20	WASHER, FLAT, STEEL, ZINC PLATE, 00:0.436 [11.1]	KEYSTONE, 4703
6	8	J5, J7, J8, J9, J10, J13, J19, J20	STUD, FASTENER, #10-32	PENNENGINEERING, KFH-032-10ET
7	1	J12	CONN., HDR, FEMALE, 2x7, 2mm, R/A THT	SULLINS CONNECTOR SOLUTIONS, NPPN072FFJN-RG
8	2	J14, J15	CONN., RF, BNC, RCPT, JACK, 5-PIN, STR, THT, 50 OHMS	AMPHENOL RF, 112404
9	1	J16	CONN., SHROUDED HDR, MALE, 2x6, 2mm, VERT, STR, THT	FCI, 98414-606-12ULF
10	1	J17	CONN., HDR, MALE, 2x7, 2mm, R/A THT	MOLEX, 0877601416
11	1	J18	CONN., SHROUDED HDR, MALE, 1x4, 2mm, VERT, STR, THT	HIROSE ELECTRIC, DF3A-4P-2DSA
12	1	LB1	LABEL SPEC, DEMO BOARD SERIAL NUMBER	BRADY, THT-96-717-10
13	2	SW0, SW1	CONN., HDR., MALE, 1x3, 2mm, VERT, STR, THT, 10µ AU	SAMTEC, TMM-103-02-L-S
14	4	MH1, MH2, MH3, MH4	STANDOFF, NYLON, SNAP-ON, 0.50	WURTHELEKTRONIK, 702935000
15	2	XJP1, XJP2	CONN., SHUNT, FEMALE, 2-POS, 2mm	WURTHELEKTRONIK, 60080213421
16				
17	1		PCB, DC2638A	MAOBANG, 600-DC2638A
18	1		TOOL, STENCIL, 700-DC2638A	ANALOG DEVICES, 830-DC2638A

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

DEMO MANUAL DC2638A-C



ESD Caution

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components, documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity, other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE, OR NONINFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT: Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW: This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.