



# Bridgelux® Gen 8 Vero® SE 10 Array

Product Data Sheet DS430



# Introduction

Vero SE



The Vero® SE Series is a revolutionary light source system that integrates Bridgelux's eighth generation COB technology with poke-in connectivity, enabling solder-free installation. Vero SE LED light sources streamline assembly processes, lower manufacturing costs, simplify the luminaire design process, improve light quality, and increase design flexibility.

Vero SE is available in four different light emitting surface (LES) configurations that operate reliably over a broad current range. With Vero SE, secondary connector and holder components are not required, allowing for rapid integration of arrays into fixtures, and an efficient field replaceable solution. Vero SE arrays deliver increased lumen density for improved beam control and precision lighting, with 2 and 3 SDCM color control standards for clean and consistent uniform lighting.

## Features

- Poke-in electrical connectivity
- Top side part number markings
- Efficacy of 173 lm/W typical, 3000K 80 CRI
- Reliable operation at up to 3x nominal current, 30% increase in maximum lumens per LES size
- Wide selection of CCT options (2700K-6500K) with minimum 70, 80 and 90 CRI options
- Uniform high-quality illumination
- 2 and 3 SDCM binning options (2700K – 4000K)
- Forward voltage bin codes (backside marking)
- 10-Year warranty

## Benefits

- Low cost, solderless, connector free installation and field upgradability
- Improved inventory management and quality control
- Enables high efficiency lighting systems and lower operating costs
- Supports the trend toward luminaire miniaturization and delivers enhanced optical control
- Design flexibility for a broad range of lighting applications
- Clean white light without pixelation
- Uniform consistent white light
- Design flexibility for multi-source applications
- Design with confidence


# Contents

Product Feature Map	2
Product Nomenclature	2
Product Selection Guide	3
Performance at Commonly Used Drive Currents	7
Electrical Characteristics	16
Eye Safety	17
Absolute Maximum Ratings	18
Performance Curves	19
Typical Radiation Pattern	21
Typical Color Spectrum	22
Mechanical Dimensions	23
Color Binning Information	24
Packaging and Labeling	25
Design Resources	27
Precautions	27
Disclaimers	27
About Bridgelux	28

# Product Feature Map


Vero SE 10 is the smallest form factor in the product family of next generation solid state light sources. In addition to delivering the performance and light quality required for many lighting applications,

Vero SE incorporates several features to simplify the design integration and manufacturing process, accelerate time to market and reduce system costs. Please visit [www.bridgelux.com](http://www.bridgelux.com) for more information on the Vero SE family of products.

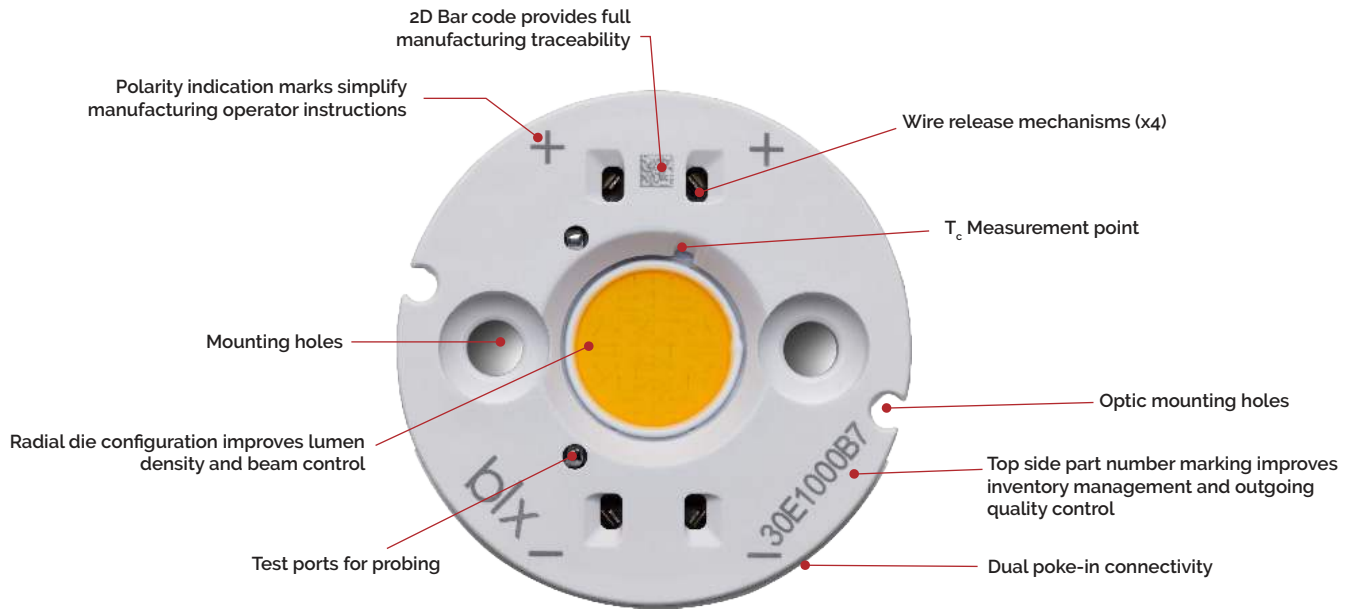

## Product Nomenclature

The part number designation for Bridgelux Vero SE LED arrays is explained as follows:

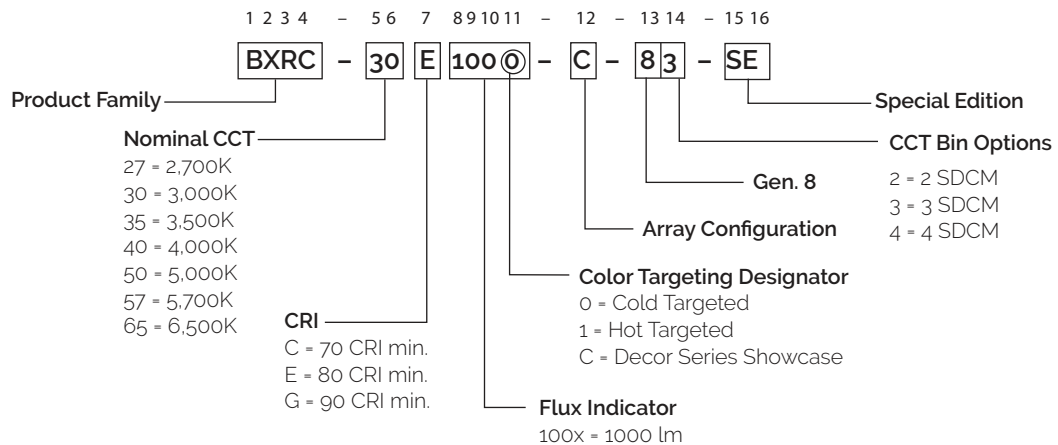

# Product Selection Guide

The following product configurations are available:

**Table 1:** Selection Guide, Pulsed Measurement Data ( $T_j = T_c = 25^\circ\text{C}$ )

Part Number	Nominal CCT <sup>1</sup> (K)	CRI <sup>2</sup>	Nominal Drive Current <sup>3</sup> (mA)	Typical Pulsed Flux <sup>4,5,6</sup> $T_c = 25^\circ\text{C}$ (lm)	Minimum Pulsed Flux <sup>6,7</sup> $T_c = 25^\circ\text{C}$ (lm)	Typical $V_f$ (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-27E1000-B-8x-SE	2700	80	200	1113	980	34.2	6.8	163
BXRC-27E1000-C-8x-SE	2700	80	300	1501	1321	30.7	9.2	163
BXRC-27E1000-D-8x-SE	2700	80	250	1014	892	24.9	6.2	163
BXRC-27G1000-B-8x-SE	2700	90	200	919	808	34.2	6.8	134
BXRC-27G1000-C-8x-SE	2700	90	300	1239	1090	30.7	9.2	134
BXRC-27G1000-D-8x-SE	2700	90	250	836	736	24.9	6.2	134
BXRC-27G10H0-B-8x-SE	2700	90	200	958	843	34.2	6.8	140
BXRC-27G10H0-C-8x-SE	2700	90	300	1292	1137	30.7	9.2	140
BXRC-27G10H0-D-8x-SE	2700	90	250	872	768	24.9	6.2	140
BXRC-30C1001-B-8x-SE	3000	70	200	1239	1090	34.2	6.8	181
BXRC-30C1001-C-8x-SE	3000	70	300	1670	1470	30.7	9.2	181
BXRC-30C1001-D-8x-SE	3000	70	250	1128	992	24.9	6.2	181
BXRC-30E1000-B-8x-SE	3000	80	200	1183	1041	34.2	6.8	173
BXRC-30E1000-C-8x-SE	3000	80	300	1595	1404	30.7	9.2	173
BXRC-30E1000-D-8x-SE	3000	80	250	1077	948	24.9	6.2	173
BXRC-30G1000-B-8x-SE	3000	90	200	960	845	34.2	6.8	140
BXRC-30G1000-C-8x-SE	3000	90	300	1295	1139	30.7	9.2	141
BXRC-30G1000-D-8x-SE	3000	90	250	874	769	24.9	6.2	140
BXRC-30G10H0-B-8x-SE	3000	90	200	1005	885	34.2	6.8	147
BXRC-30G10H0-C-8x-SE	3000	90	300	1356	1193	30.7	9.2	147
BXRC-30G10H0-D-8x-SE	3000	90	250	915	806	24.9	6.2	147
BXRC-35E1000-B-8x-SE	3500	80	200	1211	1065	34.2	6.8	177
BXRC-35E1000-C-8x-SE	3500	80	300	1633	1437	30.7	9.2	177
BXRC-35E1000-D-8x-SE	3500	80	250	1102	970	24.9	6.2	177
BXRC-35G1000-B-8x-SE	3500	90	200	995	876	34.2	6.8	145
BXRC-35G1000-C-8x-SE	3500	90	300	1342	1181	30.7	9.2	146
BXRC-35G1000-D-8x-SE	3500	90	250	906	797	24.9	6.2	146
BXRC-40C1001-B-8x-SE	4000	70	200	1273	1121	34.2	6.8	186
BXRC-40C1001-C-8x-SE	4000	70	300	1717	1511	30.7	9.2	186
BXRC-40C1001-D-8x-SE	4000	70	250	1159	1020	24.9	6.2	186
BXRC-40E1000-B-8x-SE	4000	80	200	1218	1072	34.2	6.8	178
BXRC-40E1000-C-8x-SE	4000	80	300	1642	1445	30.7	9.2	178
BXRC-40E1000-D-8x-SE	4000	80	250	1109	976	24.9	6.2	178

Notes for Table 1:

- Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to  $T_c = 85^\circ\text{C}$ .
- CRI values are minimums for all products. Minimum Rg value for 80 CRI products is 0, the minimum Rg value for 90 CRI products is 50, Bridgelux maintains a  $\pm 3$  tolerance on CRI and Rg values.
- Drive current is referred to as nominal drive current.
- Products tested under pulsed condition (10ms pulse width) at nominal test current where  $T_j$  (junction temperature) =  $T_c$  (case temperature) =  $25^\circ\text{C}$ .
- Typical performance values are provided as a reference only and are not a guarantee of performance.
- Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
- Minimum flux values at the nominal test current are guaranteed by 100% test.

# Product Selection Guide

**Table 1:** Selection Guide, Pulsed Measurement Data ( $T_j = T_c = 25^\circ\text{C}$ ) (continued)

Part Number	Nominal CCT <sup>1</sup> (K)	CRI <sup>2</sup>	Nominal Drive Current <sup>3</sup> (mA)	Typical Pulsed Flux <sup>4,5,6</sup> $T_c = 25^\circ\text{C}$ (lm)	Minimum Pulsed Flux <sup>6,7</sup> $T_c = 25^\circ\text{C}$ (lm)	Typical $V_f$ (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-40G1000-B-8x-SE	4000	90	200	1016	894	34.2	6.8	149
BXRC-40G1000-C-8x-SE	4000	90	300	1370	1205	30.7	9.2	149
BXRC-40G1000-D-8x-SE	4000	90	250	925	814	24.9	6.2	149
BXRC-50C1001-B-8x-SE	5000	70	200	1280	1127	34.2	6.8	187
BXRC-50C1001-C-8x-SE	5000	70	300	1726	1519	30.7	9.2	187
BXRC-50C1001-D-8x-SE	5000	70	250	1166	1026	24.9	6.2	187
BXRC-50E1001-B-8x-SE	5000	80	200	1232	1084	34.2	6.8	180
BXRC-50E1001-C-8x-SE	5000	80	300	1661	1461	30.7	9.2	180
BXRC-50E1001-D-8x-SE	5000	80	250	1121	987	24.9	6.2	180
BXRC-50G1001-B-8x-SE	5000	90	200	1065	937	34.2	6.8	156
BXRC-50G1001-C-8x-SE	5000	90	300	1436	1263	30.7	9.2	156
BXRC-50G1001-D-8x-SE	5000	90	250	969	853	24.9	6.2	156
BXRC-57C1001-B-8x-SE	5700	70	200	1246	1096	34.2	6.8	182
BXRC-57C1001-C-8x-SE	5700	70	300	1679	1478	30.7	9.2	182
BXRC-57C1001-D-8x-SE	5700	70	250	1134	998	24.9	6.2	182
BXRC-57E1001-B-8x-SE	5700	80	200	1183	1041	34.2	6.8	173
BXRC-57E1001-C-8x-SE	5700	80	300	1595	1404	30.7	9.2	173
BXRC-57E1001-D-8x-SE	5700	80	250	1077	948	24.9	6.2	173
BXRC-65C1001-B-8x-SE	6500	70	200	1246	1096	34.2	6.8	182
BXRC-65C1001-C-8x-SE	6500	70	300	1679	1478	30.7	9.2	182
BXRC-65C1001-D-8x-SE	6500	70	250	1134	998	24.9	6.2	182
BXRC-65E1001-B-8x-SE	6500	80	200	1197	1053	34.2	6.8	175
BXRC-65E1001-C-8x-SE	6500	80	300	1614	1420	30.7	9.2	175
BXRC-65E1001-D-8x-SE	6500	80	250	1090	959	24.9	6.2	175

Notes for Table 1:

1. Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are not targeted to  $T_c = 85^\circ\text{C}$ .
2. CRI values are minimums for all products. Minimum Rg value for 80 CRI products is 0, the minimum Rg value for 90 CRI products is 50, Bridgelux maintains a  $\pm 3$  tolerance on CRI and Rg values.
3. Drive current is referred to as nominal drive current.
4. Products tested under pulsed condition (10ms pulse width) at nominal test current where  $T_j$  (junction temperature) -  $T_c$  (case temperature) =  $25^\circ\text{C}$ .
5. Typical performance values are provided as a reference only and are not a guarantee of performance.
6. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
7. Minimum flux values at the nominal test current are guaranteed by 100% test.

# Product Selection Guide

**Table 2:** Selection Guide, Stabilized DC Performance ( $T_c = 85^\circ\text{C}$ )<sup>4,5</sup>

Part Number	Nominal CCT <sup>1</sup> (K)	CRI <sup>2</sup>	Nominal Drive Current <sup>3</sup> (mA)	Typical DC Flux <sup>4,5</sup> $T_c = 85^\circ\text{C}$ (lm)	Minimum DC Flux <sup>6</sup> $T_c = 85^\circ\text{C}$ (lm)	Typical $V_f$ (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-27E1000-B-8x-SE	2700	80	200	1002	882	33.6	6.7	149
BXRC-27E1000-C-8x-SE	2700	80	300	1351	1189	30.1	9.0	150
BXRC-27E1000-D-8x-SE	2700	80	250	912	803	24.4	6.1	149
BXRC-27G1000-B-8x-SE	2700	90	200	827	727	33.6	6.7	123
BXRC-27G1000-C-8x-SE	2700	90	300	1115	981	30.1	9.0	123
BXRC-27G1000-D-8x-SE	2700	90	250	753	662	24.4	6.1	123
BXRC-27G10H0-B-8x-SE	2700	90	200	862	759	33.6	6.7	129
BXRC-27G10H0-C-8x-SE	2700	90	300	1163	1023	30.1	9.0	129
BXRC-27G10H0-D-8x-SE	2700	90	250	785	691	24.4	6.1	129
BXRC-30C1001-B-8x-SE	3000	70	200	1115	981	33.6	6.7	166
BXRC-30C1001-C-8x-SE	3000	70	300	1503	1323	30.1	9.0	166
BXRC-30C1001-D-8x-SE	3000	70	250	1015	893	24.4	6.1	166
BXRC-30E1000-B-8x-SE	3000	80	200	1065	937	33.6	6.7	159
BXRC-30E1000-C-8x-SE	3000	80	300	1436	1263	30.1	9.0	159
BXRC-30E1000-D-8x-SE	3000	80	250	969	853	24.4	6.1	159
BXRC-30G1000-B-8x-SE	3000	90	200	864	761	33.6	6.7	129
BXRC-30G1000-C-8x-SE	3000	90	300	1165	1025	30.1	9.0	129
BXRC-30G1000-D-8x-SE	3000	90	250	787	692	24.4	6.1	129
BXRC-30G10H0-B-8x-SE	3000	90	200	905	796	33.6	6.7	135
BXRC-30G10H0-C-8x-SE	3000	90	300	1220	1074	30.1	9.0	135
BXRC-30G10H0-D-8x-SE	3000	90	250	824	725	24.4	6.1	135
BXRC-35E1000-B-8x-SE	3500	80	200	1090	959	33.6	6.7	162
BXRC-35E1000-C-8x-SE	3500	80	300	1469	1293	30.1	9.0	163
BXRC-35E1000-D-8x-SE	3500	80	250	992	873	24.4	6.1	162
BXRC-35G1000-B-8x-SE	3500	90	200	896	788	33.6	6.7	133
BXRC-35G1000-C-8x-SE	3500	90	300	1208	1063	30.1	9.0	134
BXRC-35G1000-D-8x-SE	3500	90	250	815	717	24.4	6.1	134
BXRC-40C1001-B-8x-SE	4000	70	200	1146	1009	33.6	6.7	171
BXRC-40C1001-C-8x-SE	4000	70	300	1545	1360	30.1	9.0	171
BXRC-40C1001-D-8x-SE	4000	70	250	1043	918	24.4	6.1	171
BXRC-40E1000-B-8x-SE	4000	80	200	1096	964	33.6	6.7	163
BXRC-40E1000-C-8x-SE	4000	80	300	1478	1300	30.1	9.0	164
BXRC-40E1000-D-8x-SE	4000	80	250	998	878	24.4	6.1	163

Notes for Table 2:

- Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to  $T_c = 85^\circ\text{C}$ .
- CRI values are minimums for all products. Minimum Rg value for 80 CRI products is 0, the minimum Rg value for 90 CRI products is 50. Bridgelux maintains a  $\pm 3$  tolerance on CRI and Rg values.
- Drive current is referred to as nominal drive current.
- Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
- Typical performance is estimated based on operation under DC (direct current) with LED array mounted onto a heat sink with thermal interface material and the case temperature maintained at  $85^\circ\text{C}$ . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
- Minimum flux values at elevated temperatures are provided for reference only and are not guaranteed by 100% production testing. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.

# Product Selection Guide

**Table 2:** Selection Guide, Stabilized DC Performance ( $T_c = 85^\circ\text{C}$ )<sup>4,5</sup> (continued)

Part Number	Nominal CCT <sup>1</sup> (K)	CRI <sup>2</sup>	Nominal Drive Current <sup>3</sup> (mA)	Typical DC Flux <sup>4,5</sup> $T_c = 85^\circ\text{C}$ (lm)	Minimum DC Flux <sup>6</sup> $T_c = 85^\circ\text{C}$ (lm)	Typical $V_f$ (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-40G1000-B-8x-SE	4000	90	200	914	805	33.6	6.7	136
BXRC-40G1000-C-8x-SE	4000	90	300	1233	1085	30.1	9.0	136
BXRC-40G1000-D-8x-SE	4000	90	250	832	733	24.4	6.1	136
BXRC-50C1001-B-8x-SE	5000	70	200	1152	1014	33.6	6.7	172
BXRC-50C1001-C-8x-SE	5000	70	300	1554	1367	30.1	9.0	172
BXRC-50C1001-D-8x-SE	5000	70	250	1049	923	24.4	6.1	172
BXRC-50E1001-B-8x-SE	5000	80	200	1108	975	33.6	6.7	165
BXRC-50E1001-C-8x-SE	5000	80	300	1495	1315	30.1	9.0	165
BXRC-50E1001-D-8x-SE	5000	80	250	1009	888	24.4	6.1	165
BXRC-50G1001-B-8x-SE	5000	90	200	958	843	33.6	6.7	143
BXRC-50G1001-C-8x-SE	5000	90	300	1292	1137	30.1	9.0	143
BXRC-50G1001-D-8x-SE	5000	90	250	872	768	24.4	6.1	143
BXRC-57C1001-B-8x-SE	5700	70	200	1121	986	33.6	6.7	167
BXRC-57C1001-C-8x-SE	5700	70	300	1512	1330	30.1	9.0	167
BXRC-57C1001-D-8x-SE	5700	70	250	1021	898	24.4	6.1	167
BXRC-57E1001-B-8x-SE	5700	80	200	1065	937	33.6	6.7	159
BXRC-57E1001-C-8x-SE	5700	80	300	1436	1263	30.1	9.0	159
BXRC-57E1001-D-8x-SE	5700	80	250	969	853	24.4	6.1	159
BXRC-65C1001-B-8x-SE	6500	70	200	1121	986	33.6	6.7	167
BXRC-65C1001-C-8x-SE	6500	70	300	1512	1330	30.1	9.0	167
BXRC-65C1001-D-8x-SE	6500	70	250	1021	898	24.4	6.1	167
BXRC-65E1001-B-8x-SE	6500	80	200	1077	948	33.6	6.7	161
BXRC-65E1001-C-8x-SE	6500	80	300	1452	1278	30.1	9.0	161
BXRC-65E1001-D-8x-SE	6500	80	250	981	863	24.4	6.1	161

Notes for Table 2:

- Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to  $T_c = 85^\circ\text{C}$ .
- CRI values are minimums for all products. Minimum Rg value for 80 CRI products is 0, the minimum Rg value for 90 CRI products is 50, Bridgelux maintains a  $\pm 3$  tolerance on CRI and Rg values.
- Drive current is referred to as nominal drive current.
- Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
- Typical performance is estimated based on operation under DC (direct current) with LED array mounted onto a heat sink with thermal interface material and the case temperature maintained at  $85^\circ\text{C}$ . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
- Minimum flux values at elevated temperatures are provided for reference only and are not guaranteed by 100% production testing. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.



# Performance at Commonly Used Drive Currents

Vero LED arrays are tested to the specifications shown using the nominal drive currents in Table 1. Vero SE may also be driven at other drive currents dependent on specific application design requirements. The performance at any drive current can be derived from the current vs. voltage characteristics shown in Figures 1, 2 & 3 and the flux vs. current characteristics shown in Figures 4, 5 & 6. The performance at commonly used drive currents is summarized in Table 3.

**Table 3:** Product Performance at Commonly Used Drive Currents

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical V <sub>f</sub> T <sub>c</sub> = 25°C (V)	Typical Power T <sub>c</sub> = 25°C (W)	Typical Flux <sup>2</sup> T <sub>c</sub> = 25°C (lm)	Typical DC Flux <sup>3</sup> T <sub>c</sub> = 85°C (lm)	Typical Efficacy T <sub>c</sub> = 25°C (lm/W)
BXRC-27E1000-B-8x-SE	80	100	32.9	3.3	580	522	176
		150	33.6	5.0	848	763	168
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>1113</b>	<b>1002</b>	<b>163</b>
		270	35.0	9.5	1458	1312	154
		400	36.5	14.6	2071	1864	142
		500	37.5	18.7	2509	2258	134
BXRC-27E1000-C-8x-SE	80	150	29.6	4.4	783	704	176
		225	30.2	6.8	1143	1028	168
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1501</b>	<b>1351</b>	<b>163</b>
		360	31.2	11.2	1766	1589	157
		600	32.8	19.7	2793	2514	142
		1000	35.0	35.0	4277	3849	122
BXRC-27E1000-D-8x-SE	80	125	24.0	3.0	528	476	176
		185	24.4	4.5	762	686	169
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>1014</b>	<b>912</b>	<b>163</b>
		350	25.6	9.0	1372	1235	153
		500	26.6	13.3	1886	1697	142
		1000	29.1	29.1	3316	2984	114
BXRC-27G1000-B-8x-SE	90	100	32.9	3.3	479	431	146
		150	33.6	5.0	699	629	139
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>919</b>	<b>827</b>	<b>134</b>
		270	35.0	9.5	1203	1083	127
		400	36.5	14.6	1709	1538	117
		500	37.5	18.7	2070	1863	110
BXRC-27G1000-C-8x-SE	90	150	29.6	4.4	646	581	146
		225	30.2	6.8	943	849	139
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1239</b>	<b>1115</b>	<b>134</b>
		360	31.2	11.2	1457	1311	130
		600	32.8	19.7	2304	2074	117
		1000	35.0	35.0	3528	3175	101
BXRC-27G1000-D-8x-SE	90	125	24.0	3.0	436	392	146
		185	24.4	4.5	629	566	139
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>836</b>	<b>753</b>	<b>134</b>
		350	25.6	9.0	1132	1019	126
		500	26.6	13.3	1556	1400	117
		1000	29.1	29.1	2736	2462	94

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 3:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical V <sub>f</sub> T <sub>c</sub> = 25°C (V)	Typical Power T <sub>c</sub> = 25°C (W)	Typical Flux <sup>2</sup> T <sub>c</sub> = 25°C (lm)	Typical DC Flux <sup>3</sup> T <sub>c</sub> = 85°C (lm)	Typical Efficacy T <sub>c</sub> = 25°C (lm/W)
BXRC-27G10H0-B-8x-SE	90	100	32.9	3.3	499	450	152
		150	33.6	5.0	729	656	145
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>958</b>	<b>862</b>	<b>140</b>
		270	35.0	9.5	1255	1130	133
		400	36.5	14.6	1783	1604	122
		500	37.5	18.7	2159	1943	115
BXRC-27G10H0-C-8x-SE	90	150	29.6	4.4	673	606	152
		225	30.2	6.8	984	885	145
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1292</b>	<b>1163</b>	<b>140</b>
		360	31.2	11.2	1520	1368	135
		600	32.8	19.7	2404	2163	122
		1000	35.0	35.0	3681	3313	105
BXRC-27G10H0-D-8x-SE	90	125	24.0	3.0	455	409	152
		185	24.4	4.5	656	590	145
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>872</b>	<b>785</b>	<b>140</b>
		350	25.6	9.0	1181	1063	132
		500	26.6	13.3	1623	1461	122
		1000	29.1	29.1	2854	2568	98
BXRC-30C1001-B-8x-SE	70	100	32.9	3.3	646	581	196
		150	33.6	5.0	943	849	187
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>1239</b>	<b>1115</b>	<b>181</b>
		270	35.0	9.5	1622	1460	172
		400	36.5	14.6	2305	2074	158
		500	37.5	18.7	2791	2512	149
BXRC-30C1001-C-8x-SE	70	150	29.6	4.4	871	784	196
		225	30.2	6.8	1271	1144	187
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1670</b>	<b>1503</b>	<b>181</b>
		360	31.2	11.2	1965	1768	175
		600	32.8	19.7	3107	2797	158
		1000	35.0	35.0	4758	4282	136
BXRC-30C1001-D-8x-SE	70	125	24.0	3.0	588	529	196
		185	24.4	4.5	848	763	188
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>1128</b>	<b>1015</b>	<b>181</b>
		350	25.6	9.0	1527	1374	170
		500	26.6	13.3	2098	1888	158
		1000	29.1	29.1	3689	3320	127
BXRC-30E1000-B-8x-SE	80	100	32.9	3.3	617	555	187
		150	33.6	5.0	900	810	179
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>1183</b>	<b>1065</b>	<b>173</b>
		270	35.0	9.5	1549	1394	164
		400	36.5	14.6	2201	1981	151
		500	37.5	18.7	2666	2399	142

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 3:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical V <sub>f</sub> T <sub>c</sub> = 25°C (V)	Typical Power T <sub>c</sub> = 25°C (W)	Typical Flux <sup>2</sup> T <sub>c</sub> = 25°C (lm)	Typical DC Flux <sup>3</sup> T <sub>c</sub> = 85°C (lm)	Typical Efficacy T <sub>c</sub> = 25°C (lm/W)
BXRC-30E1000-C-8x-SE	80	150	29.6	4.4	831	748	187
		225	30.2	6.8	1214	1093	179
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1595</b>	<b>1436</b>	<b>173</b>
		360	31.2	11.2	1876	1689	167
		600	32.8	19.7	2968	2671	151
		1000	35.0	35.0	4544	4090	130
BXRC-30E1000-D-8x-SE	80	125	24.0	3.0	561	505	187
		185	24.4	4.5	810	729	179
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>1077</b>	<b>969</b>	<b>173</b>
		350	25.6	9.0	1458	1312	163
		500	26.6	13.3	2004	1803	151
		1000	29.1	29.1	3523	3171	121
BXRC-30G1000-B-8x-SE	90	100	32.9	3.3	501	451	152
		150	33.6	5.0	731	658	145
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>960</b>	<b>864</b>	<b>140</b>
		270	35.0	9.5	1258	1132	133
		400	36.5	14.6	1787	1608	122
		500	37.5	18.7	2164	1948	115
BXRC-30G1000-C-8x-SE	90	150	29.6	4.4	675	607	152
		225	30.2	6.8	986	887	145
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1295</b>	<b>1165</b>	<b>140</b>
		360	31.2	11.2	1523	1371	136
		600	32.8	19.7	2409	2168	122
		1000	35.0	35.0	3689	3320	105
BXRC-30G1000-D-8x-SE	90	125	24.0	3.0	456	410	152
		185	24.4	4.5	657	592	145
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>874</b>	<b>787</b>	<b>140</b>
		350	25.6	9.0	1184	1065	132
		500	26.6	13.3	1627	1464	122
		1000	29.1	29.1	2860	2574	98
BXRC-30G10H0-B-8x-SE	90	100	32.9	3.3	524	472	159
		150	33.6	5.0	765	689	152
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>1005</b>	<b>905</b>	<b>147</b>
		270	35.0	9.5	1317	1185	139
		400	36.5	14.6	1871	1684	128
		500	37.5	18.7	2266	2039	121
BXRC-30G10H0-C-8x-SE	90	150	29.6	4.4	707	636	159
		225	30.2	6.8	1032	929	152
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1356</b>	<b>1220</b>	<b>147</b>
		360	31.2	11.2	1595	1435	142
		600	32.8	19.7	2523	2270	128
		1000	35.0	35.0	3862	3476	110

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 3:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical $V_f$ $T_c = 25^\circ\text{C}$ (V)	Typical Power $T_c = 25^\circ\text{C}$ (W)	Typical Flux <sup>2</sup> $T_c = 25^\circ\text{C}$ (lm)	Typical DC Flux <sup>3</sup> $T_c = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_c = 25^\circ\text{C}$ (lm/W)
BXRC-30G10H0-D-8x-SE	90	125	24.0	3.0	477	429	159
		185	24.4	4.5	688	619	152
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>915</b>	<b>824</b>	<b>147</b>
		350	25.6	9.0	1239	1115	138
		500	26.6	13.3	1703	1533	128
		1000	29.1	29.1	2995	2695	103
BXRC-35E1000-B-8x-SE	80	100	32.9	3.3	631	568	192
		150	33.6	5.0	922	829	183
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>1211</b>	<b>1090</b>	<b>177</b>
		270	35.0	9.5	1586	1427	168
		400	36.5	14.6	2253	2027	154
		500	37.5	18.7	2728	2456	146
BXRC-35E1000-C-8x-SE	80	150	29.6	4.4	851	766	192
		225	30.2	6.8	1243	1118	183
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1633</b>	<b>1469</b>	<b>177</b>
		360	31.2	11.2	1920	1728	171
		600	32.8	19.7	3038	2734	154
		1000	35.0	35.0	4651	4186	133
BXRC-35E1000-D-8x-SE	80	125	24.0	3.0	575	517	192
		185	24.4	4.5	829	746	183
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>1102</b>	<b>992</b>	<b>177</b>
		350	25.6	9.0	1492	1343	167
		500	26.6	13.3	2051	1846	154
		1000	29.1	29.1	3606	3246	124
BXRC-35G1000-B-8x-SE	90	100	32.9	3.3	519	467	158
		150	33.6	5.0	757	682	150
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>995</b>	<b>896</b>	<b>146</b>
		270	35.0	9.5	1303	1173	138
		400	36.5	14.6	1851	1666	127
		500	37.5	18.7	2242	2018	120
BXRC-35G1000-C-8x-SE	90	150	29.6	4.4	699	629	158
		225	30.2	6.8	1021	919	150
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1342</b>	<b>1208</b>	<b>146</b>
		360	31.2	11.2	1578	1420	141
		600	32.8	19.7	2496	2247	127
		1000	35.0	35.0	3822	3440	109
BXRC-35G1000-D-8x-SE	90	125	24.0	3.0	472	425	158
		185	24.4	4.5	681	613	151
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>906</b>	<b>815</b>	<b>146</b>
		350	25.6	9.0	1226	1104	137
		500	26.6	13.3	1686	1517	127
		1000	29.1	29.1	2964	2667	102

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 3:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical $V_f$ $T_c = 25^\circ\text{C}$ (V)	Typical Power $T_c = 25^\circ\text{C}$ (W)	Typical Flux <sup>2</sup> $T_c = 25^\circ\text{C}$ (lm)	Typical DC Flux <sup>3</sup> $T_c = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_c = 25^\circ\text{C}$ (lm/W)
BXRC-40C1001-B-8x-SE	70	100	32.9	3.3	664	597	202
		150	33.6	5.0	969	872	193
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>1273</b>	<b>1146</b>	<b>186</b>
		270	35.0	9.5	1668	1501	176
		400	36.5	14.6	2369	2132	162
		500	37.5	18.7	2870	2583	153
BXRC-40C1001-C-8x-SE	70	150	29.6	4.4	895	806	202
		225	30.2	6.8	1307	1176	193
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1717</b>	<b>1545</b>	<b>186</b>
		360	31.2	11.2	2020	1818	180
		600	32.8	19.7	3195	2875	162
		1000	35.0	35.0	4891	4402	140
BXRC-40C1001-D-8x-SE	70	125	24.0	3.0	604	544	202
		185	24.4	4.5	872	784	193
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>1159</b>	<b>1043</b>	<b>186</b>
		350	25.6	9.0	1569	1413	175
		500	26.6	13.3	2157	1941	162
		1000	29.1	29.1	3793	3413	130
BXRC-40E1000-B-8x-SE	80	100	32.9	3.3	635	571	193
		150	33.6	5.0	927	834	184
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>1218</b>	<b>1096</b>	<b>178</b>
		270	35.0	9.5	1595	1435	169
		400	36.5	14.6	2266	2039	155
		500	37.5	18.7	2744	2470	146
BXRC-40E1000-C-8x-SE	80	150	29.6	4.4	856	770	193
		225	30.2	6.8	1250	1125	184
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1642</b>	<b>1478</b>	<b>178</b>
		360	31.2	11.2	1931	1738	172
		600	32.8	19.7	3055	2750	155
		1000	35.0	35.0	4678	4210	133
BXRC-40E1000-D-8x-SE	80	125	24.0	3.0	578	520	193
		185	24.4	4.5	833	750	184
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>1109</b>	<b>998</b>	<b>178</b>
		350	25.6	9.0	1501	1351	168
		500	26.6	13.3	2063	1856	155
		1000	29.1	29.1	3627	3264	125
BXRC-40G1000-B-8x-SE	90	100	32.9	3.3	530	477	161
		150	33.6	5.0	773	696	154
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>1016</b>	<b>914</b>	<b>149</b>
		270	35.0	9.5	1331	1198	141
		400	36.5	14.6	1890	1701	130
		500	37.5	18.7	2289	2060	122

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 3:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical $V_f$ $T_c = 25^\circ\text{C}$ (V)	Typical Power $T_c = 25^\circ\text{C}$ (W)	Typical Flux <sup>2</sup> $T_c = 25^\circ\text{C}$ (lm)	Typical DC Flux <sup>3</sup> $T_c = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_c = 25^\circ\text{C}$ (lm/W)
BXRC-40G1000-C-8x-SE	90	150	29.6	4.4	714	643	161
		225	30.2	6.8	1043	939	154
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1370</b>	<b>1233</b>	<b>149</b>
		360	31.2	11.2	1611	1450	144
		600	32.8	19.7	2549	2294	130
		1000	35.0	35.0	3902	3512	111
BXRC-40G1000-D-8x-SE	90	125	24.0	3.0	482	434	161
		185	24.4	4.5	695	626	154
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>925</b>	<b>832</b>	<b>149</b>
		350	25.6	9.0	1252	1127	140
		500	26.6	13.3	1721	1549	130
		1000	29.1	29.1	3026	2723	104
BXRC-50C1001-B-8x-SE	70	100	32.9	3.3	667	601	203
		150	33.6	5.0	975	877	194
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>1280</b>	<b>1152</b>	<b>187</b>
		270	35.0	9.5	1677	1509	177
		400	36.5	14.6	2382	2144	163
		500	37.5	18.7	2885	2597	154
BXRC-50C1001-C-8x-SE	70	150	29.6	4.4	900	810	203
		225	30.2	6.8	1314	1183	194
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1726</b>	<b>1554</b>	<b>187</b>
		360	31.2	11.2	2031	1828	181
		600	32.8	19.7	3212	2891	163
		1000	35.0	35.0	4918	4426	140
BXRC-50C1001-D-8x-SE	70	125	24.0	3.0	608	547	203
		185	24.4	4.5	876	789	194
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>1166</b>	<b>1049</b>	<b>187</b>
		350	25.6	9.0	1578	1420	176
		500	26.6	13.3	2169	1952	163
		1000	29.1	29.1	3813	3432	131
BXRC-50E1001-B-8x-SE	80	100	32.9	3.3	642	578	195
		150	33.6	5.0	938	844	186
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>1232</b>	<b>1108</b>	<b>180</b>
		270	35.0	9.5	1613	1452	171
		400	36.5	14.6	2292	2062	157
		500	37.5	18.7	2775	2498	148
BXRC-50E1001-C-8x-SE	80	150	29.6	4.4	866	779	195
		225	30.2	6.8	1264	1138	186
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1661</b>	<b>1495</b>	<b>180</b>
		360	31.2	11.2	1953	1758	174
		600	32.8	19.7	3090	2781	157
		1000	35.0	35.0	4731	4258	135

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 3:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical V <sub>f</sub> T <sub>c</sub> = 25°C (V)	Typical Power T <sub>c</sub> = 25°C (W)	Typical Flux <sup>2</sup> T <sub>c</sub> = 25°C (lm)	Typical DC Flux <sup>3</sup> T <sub>c</sub> = 85°C (lm)	Typical Efficacy T <sub>c</sub> = 25°C (lm/W)
BXRC-50E1001-D-8x-SE	80	125	24.0	3.0	585	526	195
		185	24.4	4.5	843	759	187
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>1121</b>	<b>1009</b>	<b>180</b>
		350	25.6	9.0	1518	1366	169
		500	26.6	13.3	2086	1878	157
		1000	29.1	29.1	3668	3301	126
BXRC-50G1001-B-8x-SE	90	100	32.9	3.3	555	499	169
		150	33.6	5.0	810	729	161
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>1065</b>	<b>958</b>	<b>156</b>
		270	35.0	9.5	1394	1255	147
		400	36.5	14.6	1981	1783	136
		500	37.5	18.7	2399	2159	128
BXRC-50G1001-C-8x-SE	90	150	29.6	4.4	748	673	169
		225	30.2	6.8	1093	984	161
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1436</b>	<b>1292</b>	<b>156</b>
		360	31.2	11.2	1689	1520	150
		600	32.8	19.7	2671	2404	136
		1000	35.0	35.0	4090	3681	117
BXRC-50G1001-D-8x-SE	90	125	24.0	3.0	505	455	169
		185	24.4	4.5	729	656	161
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>969</b>	<b>872</b>	<b>156</b>
		350	25.6	9.0	1312	1181	146
		500	26.6	13.3	1803	1623	136
		1000	29.1	29.1	3171	2854	109
BXRC-57C1001-B-8x-SE	70	100	32.9	3.3	649	584	197
		150	33.6	5.0	948	853	188
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>1246</b>	<b>1121</b>	<b>182</b>
		270	35.0	9.5	1631	1468	172
		400	36.5	14.6	2317	2086	159
		500	37.5	18.7	2807	2526	150
BXRC-57C1001-C-8x-SE	70	150	29.6	4.4	875	788	197
		225	30.2	6.8	1278	1151	188
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1679</b>	<b>1512</b>	<b>182</b>
		360	31.2	11.2	1976	1778	176
		600	32.8	19.7	3125	2812	159
		1000	35.0	35.0	4784	4306	137
BXRC-57C1001-D-8x-SE	70	125	24.0	3.0	591	532	197
		185	24.4	4.5	852	767	189
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>1134</b>	<b>1021</b>	<b>182</b>
		350	25.6	9.0	1535	1382	171
		500	26.6	13.3	2110	1899	159
		1000	29.1	29.1	3710	3339	127

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 3:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical V <sub>f</sub> T <sub>c</sub> = 25°C (V)	Typical Power T <sub>c</sub> = 25°C (W)	Typical Flux <sup>2</sup> T <sub>c</sub> = 25°C (lm)	Typical DC Flux <sup>3</sup> T <sub>c</sub> = 85°C (lm)	Typical Efficacy T <sub>c</sub> = 25°C (lm/W)
BXRC-57E1001-B-8x-SE	80	100	32.9	3.3	617	555	187
		150	33.6	5.0	900	810	179
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>1183</b>	<b>1065</b>	<b>173</b>
		270	35.0	9.5	1549	1394	164
		400	36.5	14.6	2201	1981	151
		500	37.5	18.7	2666	2399	142
BXRC-57E1001-C-8x-SE	80	150	29.6	4.4	831	748	187
		225	30.2	6.8	1214	1093	179
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1595</b>	<b>1436</b>	<b>173</b>
		360	31.2	11.2	1876	1689	167
		600	32.8	19.7	2968	2671	151
		1000	35.0	35.0	4544	4090	130
BXRC-57E1001-D-8x-SE	80	125	24.0	3.0	561	505	187
		185	24.4	4.5	810	729	179
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>1077</b>	<b>969</b>	<b>173</b>
		350	25.6	9.0	1458	1312	163
		500	26.6	13.3	2004	1803	151
		1000	29.1	29.1	3523	3171	121
BXRC-65C1001-B-8x-SE	70	100	32.9	3.3	649	584	197
		150	33.6	5.0	948	853	188
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>1246</b>	<b>1121</b>	<b>182</b>
		270	35.0	9.5	1631	1468	172
		400	36.5	14.6	2317	2086	159
		500	37.5	18.7	2807	2526	150
BXRC-65C1001-C-8x-SE	70	150	29.6	4.4	875	788	197
		225	30.2	6.8	1278	1151	188
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1679</b>	<b>1512</b>	<b>182</b>
		360	31.2	11.2	1976	1778	176
		600	32.8	19.7	3125	2812	159
		1000	35.0	35.0	4784	4306	137
BXRC-65C1001-D-8x-SE	70	125	24.0	3.0	591	532	197
		185	24.4	4.5	852	767	189
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>1134</b>	<b>1021</b>	<b>182</b>
		350	25.6	9.0	1535	1382	171
		500	26.6	13.3	2110	1899	159
		1000	29.1	29.1	3710	3339	127
BXRC-65E1001-B-8x-SE	80	100	32.9	3.3	624	561	190
		150	33.6	5.0	911	820	181
		<b>200</b>	<b>34.2</b>	<b>6.8</b>	<b>1197</b>	<b>1077</b>	<b>175</b>
		270	35.0	9.5	1568	1411	166
		400	36.5	14.6	2227	2004	153
		500	37.5	18.7	2697	2427	144

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.



# Performance at Commonly Used Drive Currents

**Table 3:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical $V_f$ $T_c = 25^\circ\text{C}$ (V)	Typical Power $T_c = 25^\circ\text{C}$ (W)	Typical Flux <sup>2</sup> $T_c = 25^\circ\text{C}$ (lm)	Typical DC Flux <sup>3</sup> $T_c = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_c = 25^\circ\text{C}$ (lm/W)
BXRC-65E1001-C-8x-SE	80	150	29.6	4.4	841	757	190
		225	30.2	6.8	1228	1106	181
		<b>300</b>	<b>30.7</b>	<b>9.2</b>	<b>1614</b>	<b>1452</b>	<b>175</b>
		360	31.2	11.2	1898	1708	169
		600	32.8	19.7	3003	2702	153
		1000	35.0	35.0	4597	4138	131
BXRC-65E1001-D-8x-SE	80	125	24.0	3.0	568	511	190
		185	24.4	4.5	819	737	181
		<b>250</b>	<b>24.9</b>	<b>6.2</b>	<b>1090</b>	<b>981</b>	<b>175</b>
		350	25.6	9.0	1475	1328	165
		500	26.6	13.3	2027	1825	153
		1000	29.1	29.1	3565	3208	122

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Electrical Characteristics

**Table 4:** Electrical Characteristics

Part Number	Drive Current (mA)	Forward Voltage Pulsed, $T_c = 25^\circ\text{C}$ (V) <sup>1, 2, 3, 8</sup>			Typical Coefficient of Forward Voltage <sup>4</sup> $\Delta V_f / \Delta T_c$ (mV/ $^\circ\text{C}$ )	Typical Thermal Resistance Junction to Case <sup>5,6</sup> $R_{j-c}$ ( $^\circ\text{C}/\text{W}$ )	Driver Selection Voltages <sup>7</sup> (V)	
		Minimum	Typical	Maximum			$V_f$ Min. Hot $T_c = 105^\circ\text{C}$ (V)	$V_f$ Max. Cold $T_c = -40^\circ\text{C}$ (V)
BXRC-xxx100x-B-8x-SE	200	31.6	34.2	36.8	-11.03	0.62	30.8	37.5
	500	34.7	37.5	40.3	-12.10	0.95	33.7	41.1
BXRC-xxx100x-C-8x-SE	300	28.4	30.7	33.0	-9.90	0.38	27.6	33.6
	1000	32.4	35	37.6	-11.29	0.55	31.5	38.4
BXRC-xxx100x-D-8x-SE	250	23.0	24.9	26.8	-8.03	0.37	22.4	27.3
	1000	26.9	29.1	31.3	-9.39	0.55	26.2	31.9

Notes for Table 4:

- Parts are tested in pulsed conditions,  $T_c = 25^\circ\text{C}$ . Pulse width is 10ms.
- Voltage minimum and maximum are provided for reference only and are not a guarantee of performance.
- Bridgelux maintains a tester tolerance of  $\pm 0.10\text{V}$  on forward voltage measurements.
- Typical coefficient of forward voltage tolerance is  $\pm 0.1\text{mV}$  for nominal current.
- Thermal resistance values are based from test data of a 3000K 80 CRI product.
- Thermal resistance value was calculated using total electrical input power; optical power was not subtracted from input power. The thermal interface material used during testing is not included in the thermal resistance value.
- $V_f$  min hot and max cold values are provided as reference only and are not guaranteed by test. These values are provided to aid in driver design and selection over the operating range of the product.
- This product has been designed and manufactured per IEC 62031:2014. This product has passed dielectric withstand voltage testing at 1140 V. The working voltage designated for the insulation is 70V d.c. The maximum allowable voltage across the array must be determined in the end product application.

# Eye Safety

**Table 5:** Eye Safety Risk Group (RG) Classifications

Part Number	Drive Current (mA)	CCT			
		2700K/3000K	4000K <sup>2</sup>	5000K <sup>3</sup>	6500K <sup>4</sup>
BXRC-xxx100x-B-8x-SE	355	RG1	RG1	RG1	RG1
	500	RG1	RG1	RG1	RG2
BXRC-xxx100x-C-8x-SE	395	RG1	RG1	RG1	RG1
	550	RG1	RG1	RG1	RG2
	730	RG1	RG1	RG2	RG2
	1000	RG1	RG2	RG2	RG2
BXRC-xxx100x-D-8x-SE	490	RG1	RG1	RG1	RG1
	680	RG1	RG1	RG1	RG2
	900	RG1	RG1	RG2	RG2
	1000	RG1	RG2	RG2	RG2

Notes for Table 5:

1. Eye safety classification for the use of Bridgelux V Series LED arrays is in accordance with specification IEC/TR 62778: Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires.
2. For products classified as RG2 at 4000K, Ethr= 1980 lx.
3. For products classified as RG2 at 5000K Ethr= 1530 lx.
4. For products classified as RG2 at 6500K, Ethr= 1170 lx.
5. Please contact your Bridgelux sales representative for Ethr values at specific drive currents and CCTs not listed.

# Absolute Maximum Ratings

**Table 6** Maximum Ratings


Parameter	Maximum Rating		
LED Junction Temperature (T <sub>J</sub> )	150°C		
Storage Temperature	-40°C to +105°C		
Operating Case Temperature <sup>1</sup> (T <sub>C</sub> )	105°C		
Soldering Temperature <sup>2</sup>	300°C or lower for a maximum of 6 seconds		
	BXRC-xxx100x-B-8x-SE	BXRC-xxx100x-C-8x-SE	BXRC-xxx100x-D-8x-SE
Maximum Drive Current <sup>3</sup>	500 mA	1000 mA	1000 mA
Maximum Peak Pulsed Drive Current <sup>4</sup>	560 mA	1120 mA	1120 mA
Maximum Reverse Voltage <sup>5</sup>	-60V	-55V	-45V

Notes for Table 6:


1. For IEC 62717 requirement, please consult your Bridgelux sales representative.
2. Refer to Bridgelux Application Note AN121: Assembly Considerations for Bridgelux Vero SE LED Arrays.
3. Arrays may be driven at higher currents however lumen maintenance may be reduced and warranty will not apply.
4. Bridgelux recommends a maximum duty cycle of 10% and pulse width of 20 ms when operating LED Arrays at maximum peak pulsed current specified. Maximum peak pulsed currents indicate values where LED Arrays can be driven without catastrophic failures.
5. Light emitting diodes are not designed to be driven in reverse voltage and will not produce light under this condition. Maximum rating provided for reference only.

# Performance Curves


**Figure 1: Vero SE 10B Drive Current vs. Voltage**

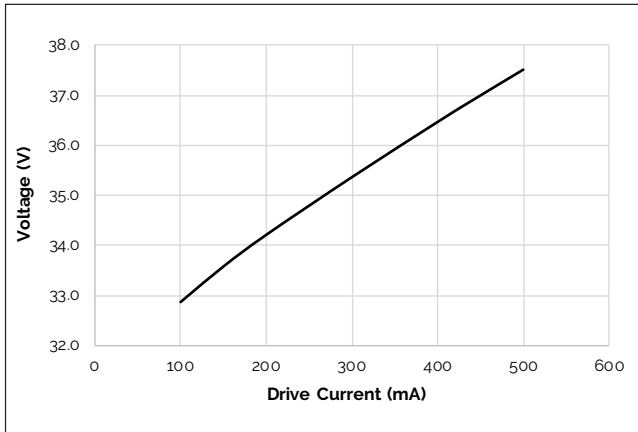


**Figure 2: Vero 10C SE Drive Current vs. Voltage**

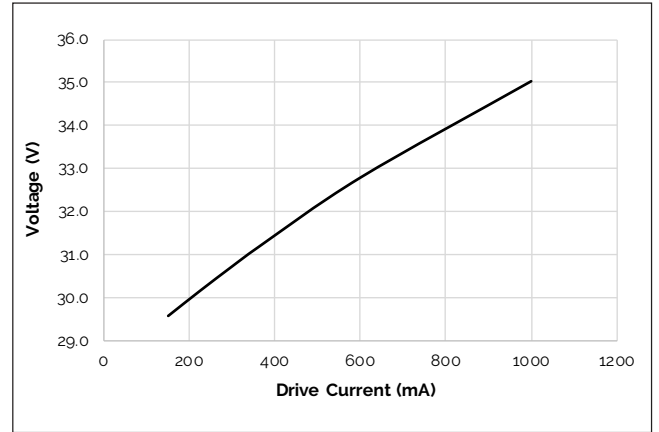


**Figure 3: Vero SE 10D Drive Current vs. Voltage**

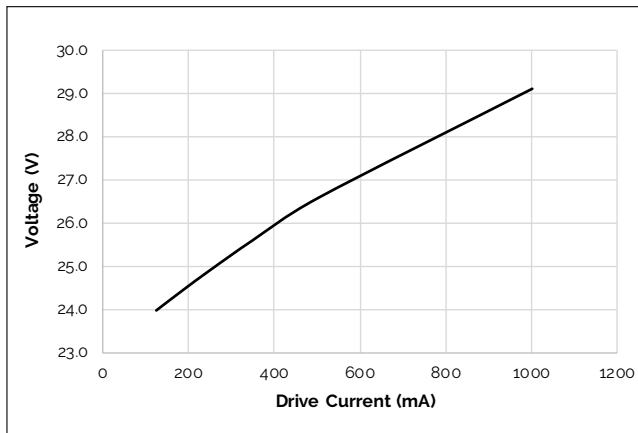


**Figure 4: Vero SE 10B Typical Relative Flux vs. Current**

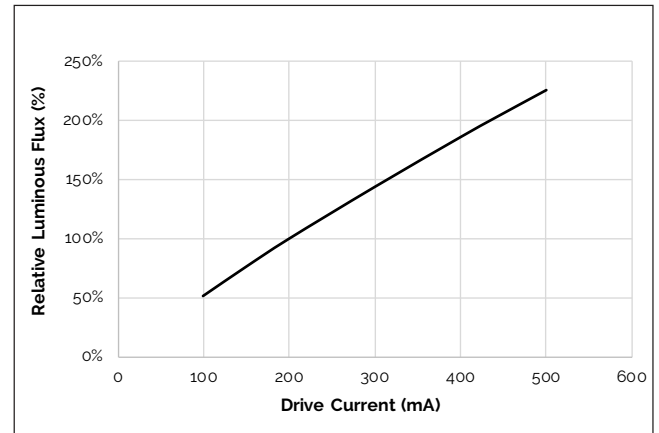

**Figure 5: Vero SE 10C Typical Relative Flux vs. Current**

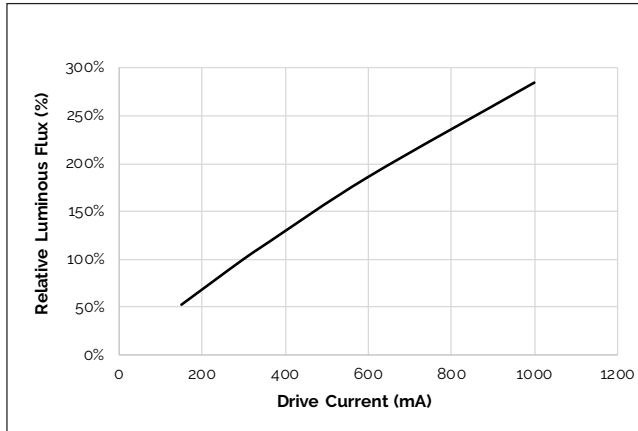

**Figure 6 Vero SE 10D Typical Relative Flux vs. Current**

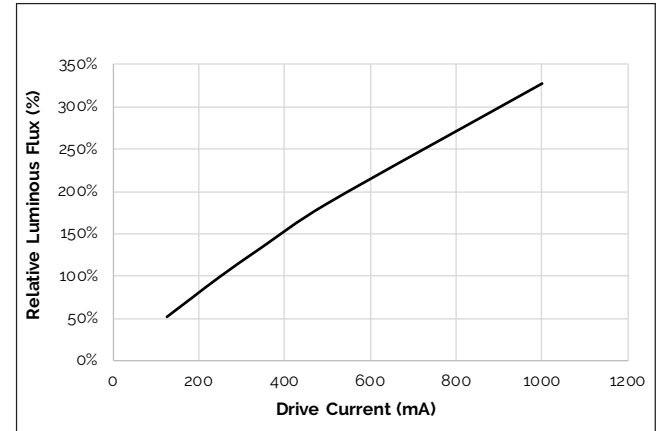

Notes for Figure 1-6:

1. Bridgelux does not recommend driving high power LEDs at low currents. Doing so may produce unpredictable results. Pulse width modulation (PWM) is recommended for dimming effects.
2. Products tested under pulsed condition (10ms pulse width) at nominal test current where  $T_j$  (junction temperature) =  $T_c$  (case temperature) = 25°C.

# Performance Curves

Figure 7: Typical DC Flux vs. Case Temperature

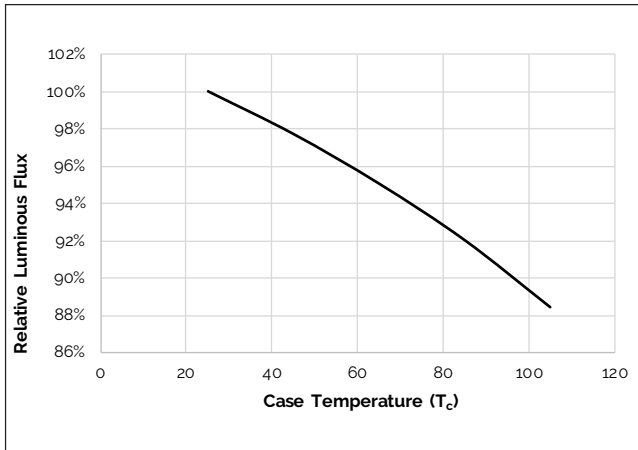


Figure 8: Typical DC ccy Shift vs. Case Temperature



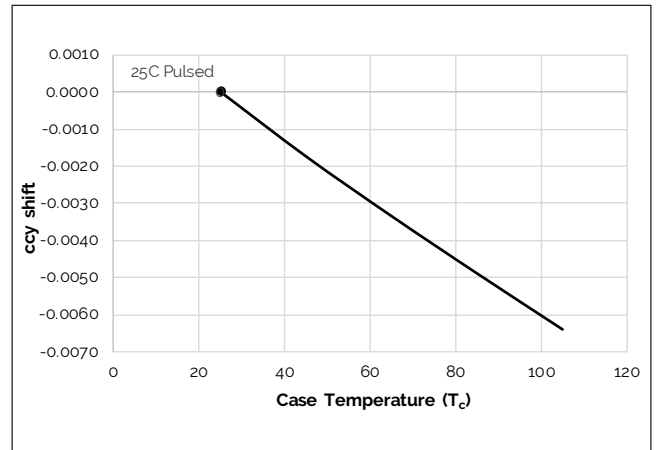


Figure 9: Typical DC ccx Shift vs. Case Temperature

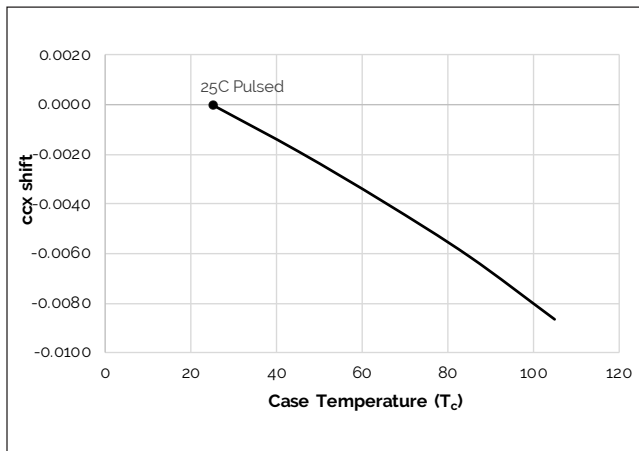

# Typical Radiation Pattern


Figure 10: Typical Spatial Radiation Pattern

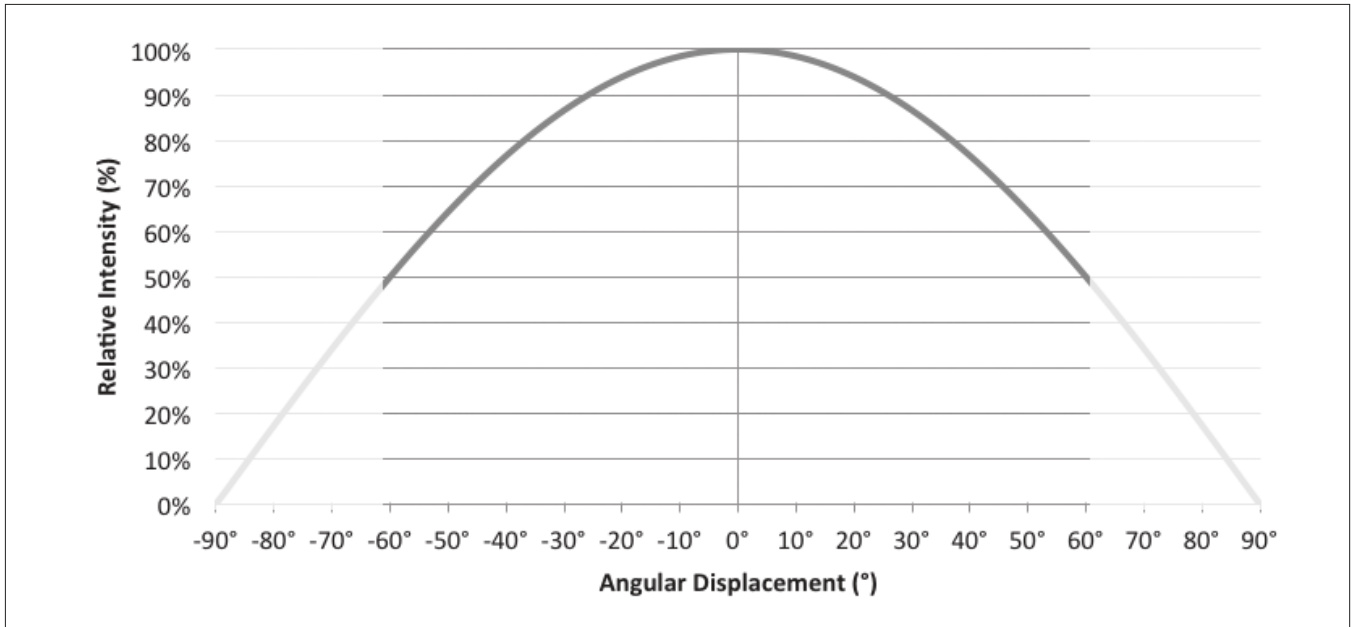

Note for Figure 10:


1. Typical viewing angle is 120°.
2. The viewing angle is defined as the off axis angle from the centerline where intensity is ½ of the peak value.

Figure 11: Typical Polar Radiation Pattern

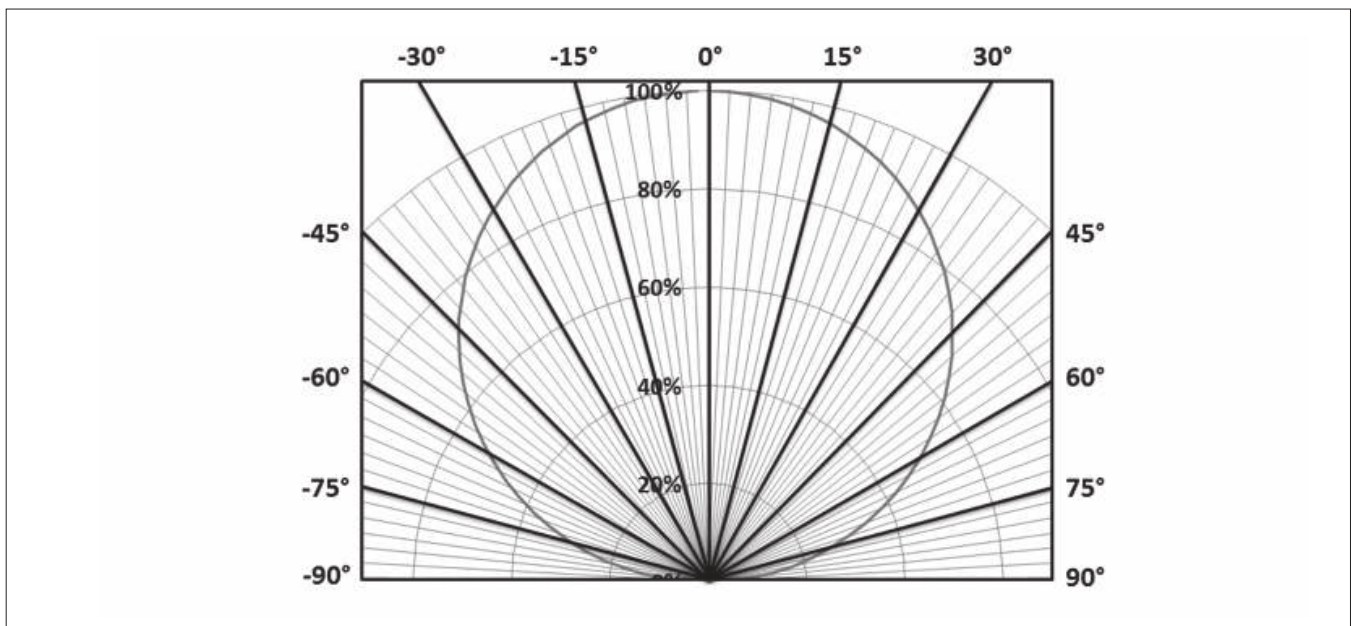

# Typical Color Spectrum

Figure 12: Typical Color Spectrum

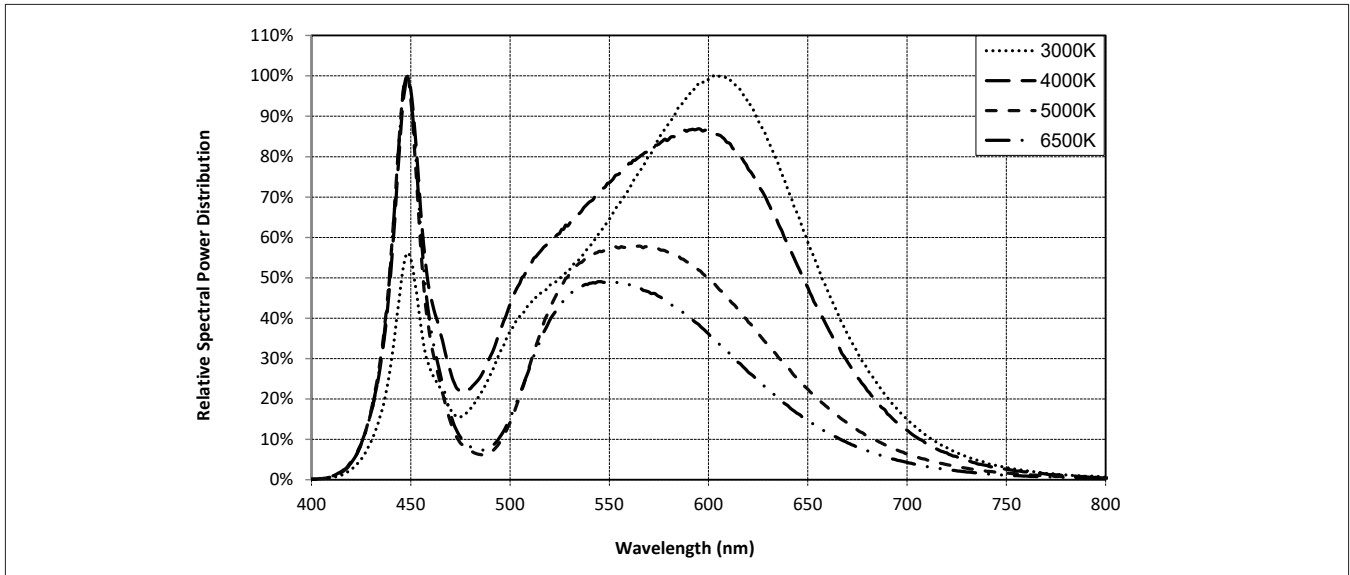


Note for Figure 12:

1. Color spectra measured at nominal current for  $T_j = T_c = 25^\circ\text{C}$ .
2. Color spectra shown is 3000K and 80 CRI.
3. Color spectra shown is 4000K and 80 CRI.
4. Color spectra shown is 5000K and 70 CRI.
4. Color spectra shown is 6500K and 70 CRI.



# Mechanical Dimensions

**Figure 13: Drawing for Vero SE 10 LED Array**

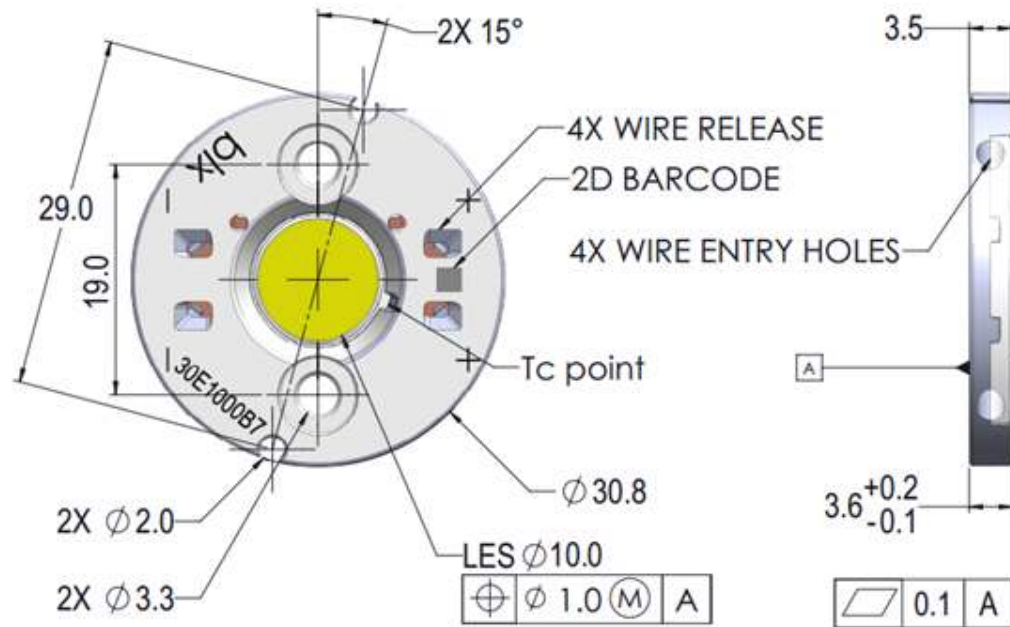


Notes for Figure 13:

1. Drawings are not to scale.
2. Drawing dimensions are in millimeters.
3. Unless otherwise specified, tolerances are  $\pm 0.1$ mm.
4. Mounting holes (2X) are for M3 screws.
5. Bridgelux recommends two tapped holes for mounting screws with  $31.4 \pm 0.10$ mm center-to-center spacing.
6. Screws with flat shoulders (pan, dome, button, round, truss, mushroom) provide optimal torque control. Do NOT use flat, countersink, or raised head screws.
7. The optical center of the LED Array is nominally defined by the mechanical center of the array to a tolerance of  $\pm 0.2$ mm.
8. Bridgelux maintains a flatness of 0.10mm across the mounting surface of the array


# Color Binning Information

**Figure 14: Warm and Neutral White Test Bins in xy Color Space**

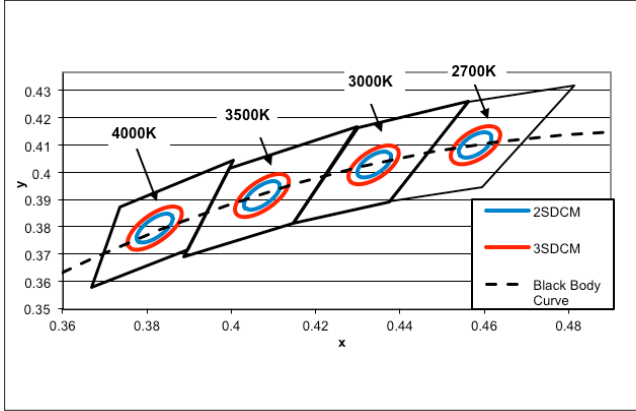

Note: Pulsed Test Conditions,  $T_c = 25^\circ\text{C}$

**Figure 15: Graph of Cool White Test Bins in xy Color Space**

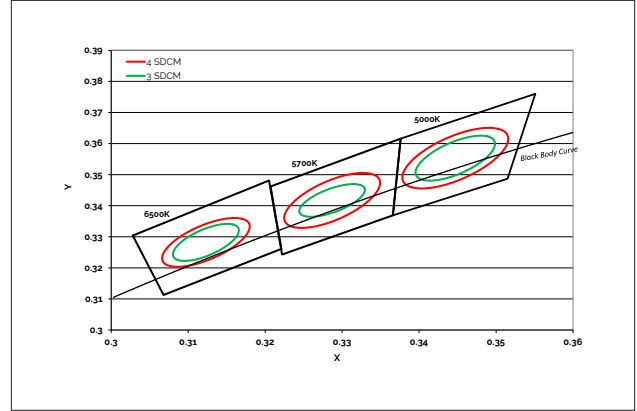

Note: Pulsed Test Conditions,  $T_c = 25^\circ\text{C}$

**Table 7: Warm and Neutral White xy Bin Coordinates and Associated Typical CCT**


Bin Code	2700K	3000K	3500K	4000K
ANSI Bin (for reference only)	(2580K - 2870K)	(2870K - 3220K)	(3220K - 3710K)	(3710K - 4260K)
83 (3 SDCM)	(2651K - 2794K)	(2968K - 3136K)	(3369K - 3586K)	(3851K - 4130K)
82 (2 SDCM)	(2674K - 2769K)	(2995K - 3107K)	(3404K - 3548K)	(3895K - 4081K)
Center Point (x,y)	(0.4578, 0.4101)	(0.4338, 0.403)	(0.4073, 0.3917)	(0.3818, 0.3797)

**Table 8: Cool White xy Bin Coordinates and Associated Typical CCT (product is hot targeted to  $T_c = 85^\circ\text{C}$ )**

Bin Code	5000K	5700K	6500K
ANSI Bin (for reference only)	(4745K - 5311K)	(5312K - 6022K)	(6022K - 7042K)
84 (4 SDCM)	(4801K - 5282K)	(5481K - 5829K)	(6270K - 6765K)
83 (3 SDCM)	(4835K - 5215K)	(5490K - 5820K)	(6250K - 6745K)
Center Point (x,y)	(0.3447, 0.3553)	(0.3287, 0.3417)	(0.3123, 0.3282)

# Packaging and Labeling

Figure 16: Drawing for Vero SE 10 Packaging Tray

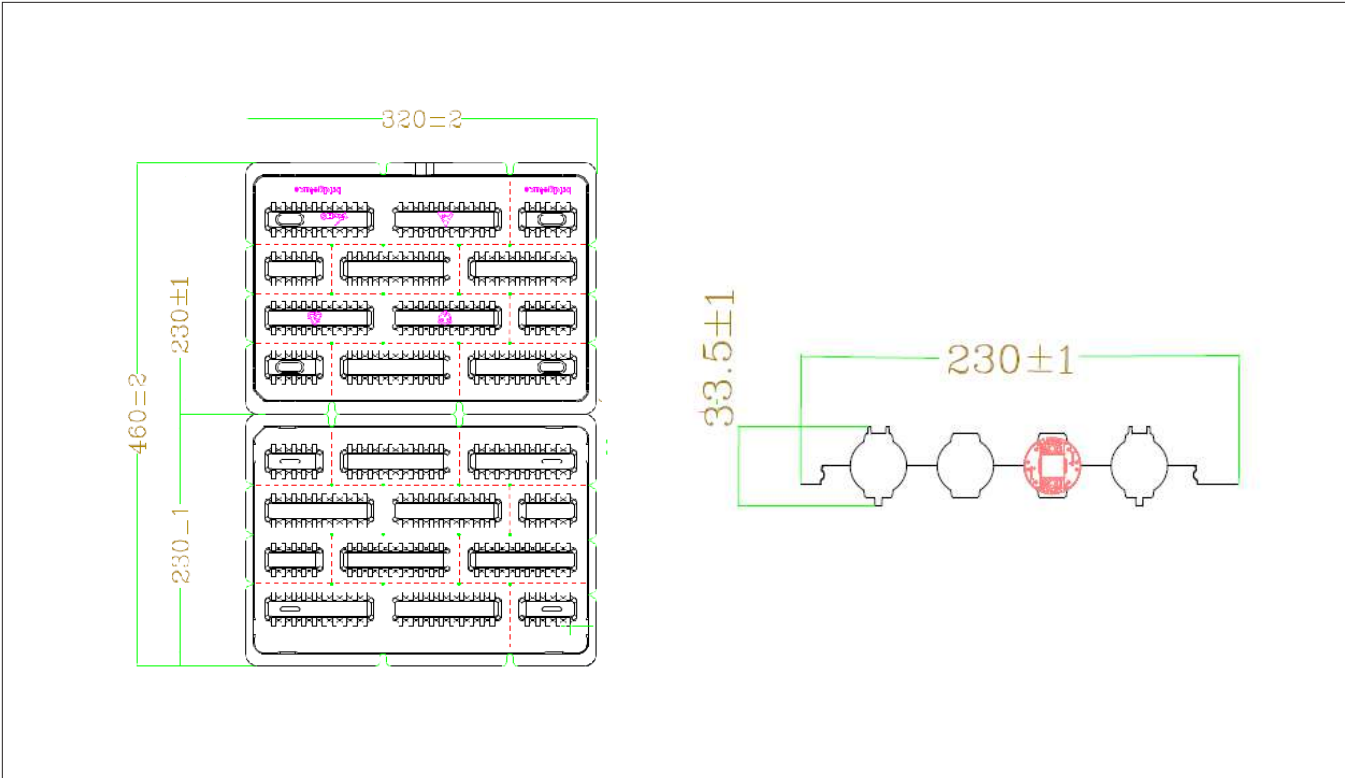

- Notes for Figure 16:
- 1. Dimensions are in millimeters.
  - 2. Drawings are not to scale.

# Packaging and Labeling

**Figure 17: Vero SE Series Packaging and Labeling**



Notes for Figure 17:

1. Each tray holds 200 COBs.
2. Each tray is vacuum sealed in an anti-static bag and placed in its own box.
3. Each tray, bag and box is to be labeled as shown above.

**Figure 18: Vero SE Product Labeling**

Bridgelux COB arrays have laser markings on the back side of the substrate to help with product identification. In addition to the product identification markings, Bridgelux COB arrays also contain markings for internal Bridgelux manufacturing use only. The image below shows which markings are for customer use and which ones are for Bridgelux internal use only. The Bridgelux internal manufacturing markings are subject to change without notice, however these will not impact the form, function or performance of the COB array.



Customer Use- 2D Barcode  
Scannable barcode provides product part number, V, bin and other Bridgelux internal production information.

Customer Use- Product part number

**30E1000C 82 2F**

Customer Use- V, Bin Code included to enable greater luminaire design flexibility. Refer to ANg2 for bin code definitions.

# Design Resources

## Application Notes

Bridgelux has developed a comprehensive set of application notes and design resources to assist customers in successfully designing with the Vero product family of LED array products. For all available application notes visit [www.bridgelux.com](http://www.bridgelux.com).

## Optical Source Models

Optical source models and ray set files are available for all Bridgelux products. For a list of available formats, visit [www.bridgelux.com](http://www.bridgelux.com).

## 3D CAD Models

Three dimensional CAD models depicting the product outline of all Bridgelux Vero LED arrays are available in both IGS and STEP formats. Please contact your Bridgelux sales representative for assistance.

## LM80

LM80 testing has been completed and the LM80 report is now available. Please contact your Bridgelux sales representative for LM-80 report.

# Precautions

## CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the LED array. Please consult Bridgelux Application Note AN121 for additional information.

## CAUTION: RISK OF BURN

Do not touch the Vero LED array during operation. Allow the array to cool for a sufficient period of time before handling. The Vero LED array may reach elevated temperatures such that could burn skin when touched.

## CAUTION

### CONTACT WITH LIGHT EMITTING SURFACE (LES)

Avoid any contact with the LES. Do not touch the LES of the LED array or apply stress to the LES (yellow phosphor resin area). Contact may cause damage to the LED array.

Optics and reflectors must not be mounted in contact with the LES (yellow phosphor resin area). Optical devices may be mounted on the top surface of the plastic housing of the Vero LED array. Use the mechanical features of the LED array housing, edges and/or mounting holes to locate and secure optical devices as needed.

# Disclaimers

## MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

## STANDARD TEST CONDITIONS

Unless otherwise stated, array testing is performed at the nominal drive current.

# About Bridgelux: Bridging Light and Life™

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

**For more information about the company, please visit**  
**[bridgelux.com](http://bridgelux.com)**  
**[twitter.com/Bridgelux](https://twitter.com/Bridgelux)**  
**[facebook.com/Bridgelux](https://facebook.com/Bridgelux)**  
**[youtube.com/user/Bridgelux](https://youtube.com/user/Bridgelux)**  
**[linkedin.com/company/bridgelux-inc-\\_2](https://linkedin.com/company/bridgelux-inc-_2)**  
**WeChat ID: BridgeluxInChina**



46430 Fremont Boulevard  
Fremont, CA 94538 U.S.A.  
Tel (925) 583-8400  
**[www.bridgelux.com](http://www.bridgelux.com)**

© 2020 Bridgelux, Inc. All rights reserved. Product specifications are subject to change without notice. Bridgelux, the Bridgelux stylized logo design, Vero, V Series and V Series HD are registered trademarks, and Decor Series is a trademark of Bridgelux, Inc. All other trademarks are the property of their respective owners.

**Bridgelux Gen 8 Vero SE 10 Array Series Product Data Sheet DS430 Rev. A (06/2020)**