

Dual Output LCD Bias for Smartphones and Tablets

General Description

The RT4801H is a highly integrated Boost and LDO and inverting charge pump to generate positive and negative output voltage. The output voltages can be adjusted from $\pm 4V$ to $\pm 6V$ with 100mV steps by I²C interface protocols. With its input voltage range of 2.5V to 5.5V, the RT4801H is optimized for products powered by single-cell batteries and symmetrical output currents up to 80mA. The RT4801H is available in the WL-CSP-15B 1.31x2.07 (BSC) package.

Ordering Information

RT4801H □
 Package Type
 WSC : WL-CSP-15B 1.31x2.07 (BSC)

Note :

Richtek products are :

- ▶ RoHS compliant and compatible with the current requirements of IPC/JEDEC J-STD-020.
- ▶ Suitable for use in SnPb or Pb-free soldering processes.


Features

- 2.5V to 5.5V Supply Voltage Range
- Up to 90% Efficiency with Small Magnetics
- Support Up to 80mA Output Current
- Low 1 μ A Shutdown Current
- Internal Soft-start Function
- Short Circuit Protection Function
- Over-Voltage Protection Function
- Over-Current Protection Function
- Over-Temperature Protection Function
- Elastic Positive and Negative Voltage On/Off Control by ENP/ENN
- Voltage Output from 4V to 6V per 0.1V
- Low Input Noise and EMI
- Output with Programmable Fast Discharge when IC Shutdown
- Adjustable Output Voltage by I²C Compatible Interface
- Available in the 15-Ball WL-CSP Package


Applications

- TFT-LCD Smartphones
- TFT-LCD Tablets
- General Dual Power Supply Applications

Simplified Application Circuit

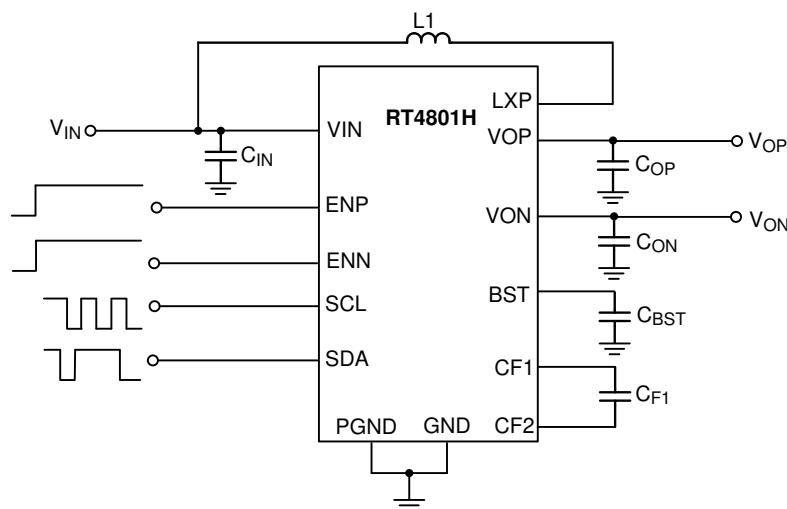


Pin Configuration

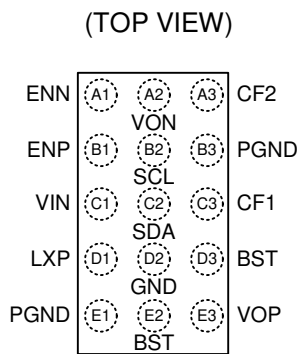

WL-CSP-15B 1.31x2.07 (BSC)


Marking Information



Functional Pin Description

| Pin No. | Pin Name | Pin Function |
|---------|----------|---|
| A1 | ENN | Enable Control Input for VON. |
| A2 | VON | Negative Terminal Output. |
| A3 | CF2 | Negative Charge Pump Flying Capacitor Pin. |
| B1 | ENP | Enable Control Input for VOP. |
| B2 | SCL | Clock of I ² C. |
| B3, E1 | PGND | Power Ground. |
| C1 | VIN | Power Input. |
| C2 | SDA | Data of I ² C. |
| C3 | CF1 | Negative Charge Pump Flying Capacitor Pin. |
| D1 | LXP | Switching Node of Boost Converter. |
| D2 | GND | Ground. The exposed pad must be soldered to a large PCB and connected to GND for maximum power dissipation. |
| D3, E2 | BST | Output Voltage of Boost Converter. |
| E3 | VOP | Positive Terminal Output. |

Function Block Diagram

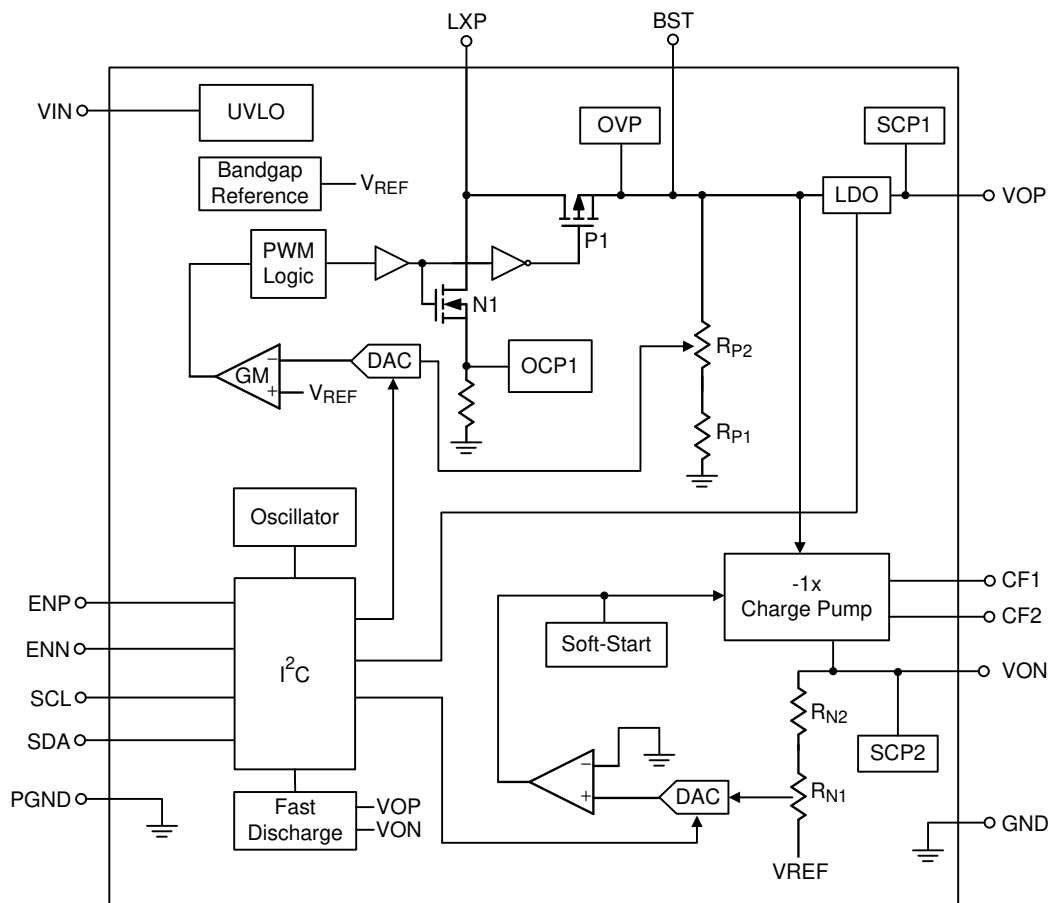

Operation

The RT4801H is a highly integrated Boost, LDO and inverting charge pump to generate positive and negative output voltages for LCD panel bias or consumer products. It can support input voltage range from 2.5V to 5.5V and the output current up to 80mA. Both positive and negative voltages can be programmed by a MCU through the dedicated I²C

interface. The RT4801H provides Over-Temperature Protection (OTP) and Short Circuit Protection (SCP) mechanisms to prevent the device from damage with abnormal operations. When the EN voltage is logic low for more than 375μs, the IC will be shut down with low input supply current less than 1μA.

Absolute Maximum Ratings (Note 1)

- Supply Input Voltage V_{IN} Pin ----- -0.3V to 6V
- Output Voltage VOP Pins----- -0.3V to 7V
- Output Voltage VON Pins ----- -7V to 0.3V
- Others Pin to GND ----- -0.3V to 6V
- Power Dissipation, P_D @ $T_A = 25^\circ\text{C}$
 WL-CSP-15B 1.31x2.07 (BSC) ----- 2.00W
- Package Thermal Resistance (Note 2)
 WL-CSP-15B 1.31x2.07 (BSC), θ_{JA} ----- 49.8°C/W
- Lead Temperature (Soldering, 10 sec.) ----- 260°C
- Junction Temperature ----- 150°C
- Storage Temperature Range ----- -65°C to 150°C
- ESD Susceptibility (Note 3)
 HBM (Human Body Model) ----- 2kV

Recommended Operating Conditions (Note 4)

- Supply Input Voltage ----- 2.5V to 5.5V
- Ambient Temperature Range----- -40°C to 85°C
- Junction Temperature Range ----- -40°C to 125°C

Electrical Characteristics

($V_{IN} = 3.7\text{V}$, $C_{IN} = C_{OP} = C_{F1} = 4.7\mu\text{F}$, $C_{BST} = C_{ON} = 10\mu\text{F}$, $L1 = 2.2\mu\text{H}$, $T_A = 25^\circ\text{C}$, unless otherwise specified.)

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|---|-----------------|------------------|------|-----|-----|------|
| Power Supply | | | | | | |
| Input Voltage Range | V_{IN} | | 2.5 | -- | 5.5 | V |
| Under Voltage Lockout Threshold Voltage | V_{UVLO_H} | V_{IN} Rising | -- | -- | 2.5 | V |
| | V_{UVLO_L} | V_{IN} Falling | -- | -- | 2.3 | |
| Over-Temperature Protection | T_{OTP} | (Note 5) | -- | 140 | -- | °C |
| Over-Temperature Protection Hysteresis | T_{OTP_HYST} | (Note 5) | -- | 15 | -- | °C |
| Shutdown Current | I_{SHDN} | ENP = ENN = 0V | -- | -- | 1 | μA |
| Boost Converter | | | | | | |
| Boost Voltage Range | V_{BST} | | 4.15 | -- | 6.2 | V |
| Peak Current Limit | I_{OCP} | | -- | 1 | -- | A |
| Boost Switching Frequency | f_{OSC_P} | | 0.8 | 1 | 1.2 | MHz |

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit | |
|--|-----------------------|--|--------------------------------|-----|-----|------|---|
| LDO | | | | | | | |
| Positive Output Voltage Range | V _{OP} | | 4 | | 6 | V | |
| Positive Output Voltage Setting Range | V _{OP_SET} | per step | -- | 100 | -- | mV | |
| Positive Output Voltage Accuracy | V _{OP_ACC} | | -1 | -- | 1 | % | |
| Positive Output Current Capability | I _{OP_MAX} | | -- | -- | 80 | mA | |
| Dropout Voltage | V _{OP_DROP} | V _{BST} = 5.4V, V _{OP} = 5.4V, I _{OP} = 100mA | -- | -- | 150 | mV | |
| Line Regulation | ΔV _{LINE_OP} | V _{IN} = 2.5 to 5.5V, I _{OP} = 40mA | -- | 2 | -- | mV | |
| Load Regulation | ΔV _{LOAD_OP} | ΔI _{OP} = 80mA | -- | 3 | -- | %/A | |
| Fast Discharge Resistance | R _{DISP} | | -- | 70 | -- | Ω | |
| Negative Charge Pump | | | | | | | |
| Negative Output Voltage Range | V _{ON} | | -4 | -- | -6 | V | |
| Negative Output Voltage Setting Range | V _{ON_SET} | per step | -- | 100 | -- | mV | |
| Negative Output Voltage Accuracy | V _{ON_ACC} | | -1 | -- | 1 | % | |
| Negative Output Current Capability | I _{ON_MAX} | | -- | -- | 80 | mA | |
| Negative Charge Pump Switching Frequency | f _{OSC_N} | | 0.8 | 1 | 1.2 | MHz | |
| Line Regulation | ΔV _{LINE_ON} | V _{IN} = 2.5 to 5.5V, I _{ON} = 40mA | -- | 10 | -- | mV | |
| Load Regulation | ΔV _{LOAD_ON} | ΔI _{ON} = 80mA | -- | 6 | -- | %/A | |
| Fast Discharge Resistance | R _{DISN} | | -- | 20 | -- | Ω | |
| Logic Input (ENP, ENN, SCL, SDA) | | | | | | | |
| Input Threshold Voltage | Logic-High | V _{IH} | V _{IN} = 2.5V to 5.5V | 1.2 | -- | -- | V |
| | Logic-Low | V _{IL} | V _{IN} = 2.5V to 5.5V | -- | -- | 0.4 | |
| ENP, ENN Pull-down Resistance | R _{EN} | | -- | 200 | -- | kΩ | |
| SDA, SCL Sink Current | I _{IH} | V _{SDA} , V _{SCL} = 3V | -- | 0.5 | -- | μA | |
| SDA, SCL Logic Input Voltage | Low-Level | V _{SCL_L} | | -- | -- | 0.4 | V |
| | High-Level | V _{SCL_H} | | 1.2 | -- | -- | |
| SCL Clock Frequency | f _{CLK} | | -- | -- | 400 | kHz | |
| Output Fall Time | t _{FL2COUT} | | -- | -- | 250 | ns | |
| Bus Free Time Between Stop/Start | t _{BUF} | | 1.3 | -- | -- | μs | |

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|--------------------------------|---------------------|-----------------|-----|-----|-----|------|
| Hold Time Start Condition | t _{HD,STA} | | 0.6 | -- | -- | μs |
| Setup Time for Start Condition | t _{SU,STA} | | 0.6 | -- | -- | μs |
| SCL Low Time | t _{LOW} | | 1.3 | -- | -- | μs |
| SCL High Time | t _{HIGH} | | 0.6 | -- | -- | μs |
| Data Setup Time | t _{SU,DAT} | | 100 | -- | -- | ns |
| Data Hold Time | t _{HD,DAT} | | 0 | -- | 900 | ns |
| Setup Time for Stop Condition | t _{SU,STO} | | 0.6 | -- | -- | μs |

Note 1. Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions may affect device reliability.


Note 2. θ_{JA} is measured at $T_A = 25^\circ\text{C}$ on a high effective thermal conductivity four-layer test board per JEDEC 51-7. θ_{JC} is measured at the exposed pad of the package.

Note 3. Devices are ESD sensitive. Handling precaution recommended.

Note 4. The device is not guaranteed to function outside its operating conditions.

Note 5. T_{OTP} , T_{OTP_HYST} are guaranteed by design.

Typical Application Circuit

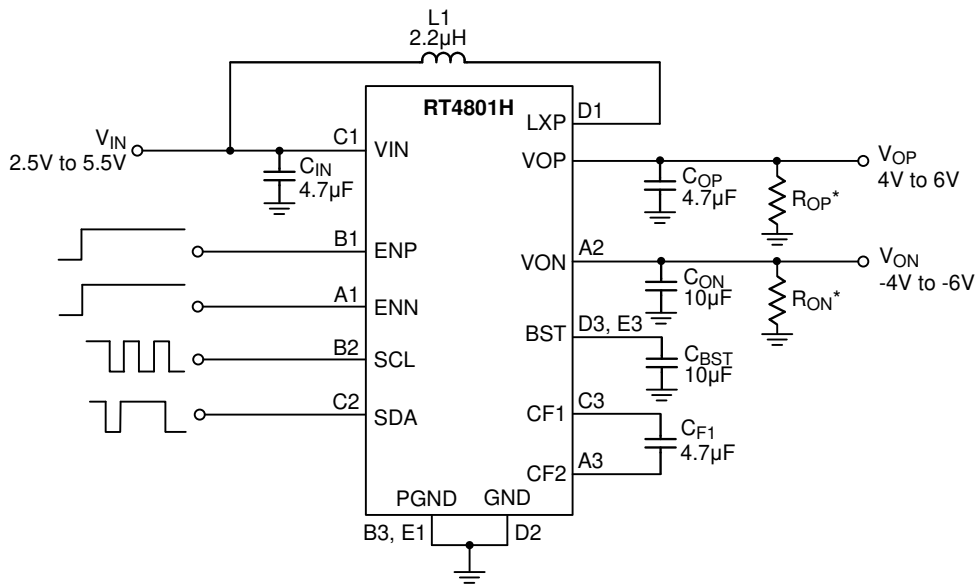


* : R_{OP} And R_{ON} should be paralleled with V_{OP} and V_{ON} if output continuous discharge is required when channel is powered off.

Table 1. Component List of Evaluation Board

| Reference | Qty | Part Number | Description | Package | Supplier |
|---|-----|--------------------|---------------|-----------------------|----------|
| C _{IN} , C _{OP} , C _{F1} | 1 | GRM188R61C475KAAJ | 4.7µF/16V/X5R | 0603 | Murata |
| C _{BST} , C _{ON} | 1 | GRM188R61C106KAAL | 10µF/16V/X5R | 0603 | Murata |
| L1 | 1 | 1269AS-H-2R2N = P2 | 2.2µH/130mΩ | 2.5mm x 2.0mm x 1.0mm | Toko |

I²C Interface

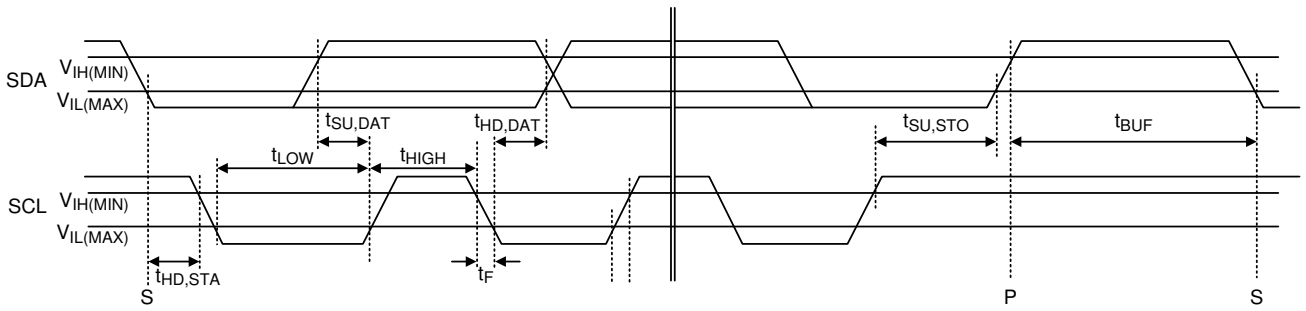


I²C Command

Slave Address


| Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 = LSB |
|-------|-------|-------|-------|-------|-------|-------|-------------|
| 1 | 1 | 1 | 0 | 0 | 1 | 1 | R/W |

Write Command

(a) Write single byte of data to Register




(b) Write multiple bytes of data to Registers

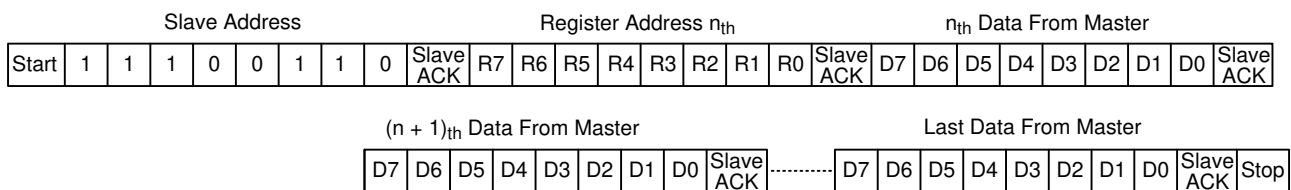


Read Command

(a) Read single byte of data from Register

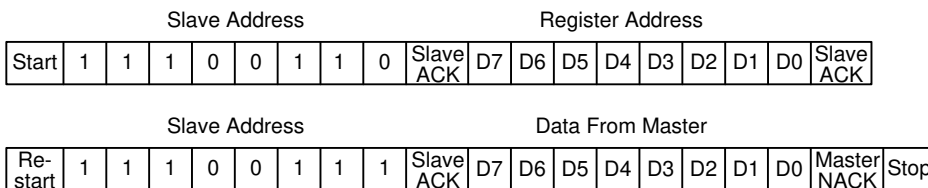

(b) Read multiple bytes of data from Registers

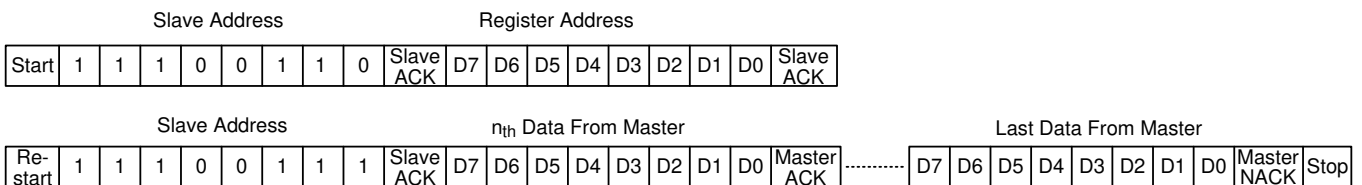

Start : Start command

ACK : Acknowledge = L active

R7 to R0 : Register Address.

D7 to D0 : Write data when WRITE command or read data when READ command

VOP : Register address = 0X00h

VON : Register address = 0X01h

Stop : Stop command

DISP : Register address = 0x03h

DISN : Register address = 0x03h

APPS : Register address = 0x03h

R/W : Read active (R/W = H) or Write active (R/W = L)

Registers Map

Table 2. VOP Voltage Selection

| Name | Register Address | DATA | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | VOP(V) |
|------|------------------|------|----------|----------|----------|------|------|------|------|------|--------|
| VOP | 00h | 00h | Reserved | Reserved | Reserved | 0 | 0 | 0 | 0 | 0 | 4 |
| VOP | 00h | 01h | Reserved | Reserved | Reserved | 0 | 0 | 0 | 0 | 1 | 4.1 |
| VOP | 00h | 02h | Reserved | Reserved | Reserved | 0 | 0 | 0 | 1 | 0 | 4.2 |
| VOP | 00h | 03h | Reserved | Reserved | Reserved | 0 | 0 | 0 | 1 | 1 | 4.3 |
| VOP | 00h | 04h | Reserved | Reserved | Reserved | 0 | 0 | 1 | 0 | 0 | 4.4 |
| VOP | 00h | 05h | Reserved | Reserved | Reserved | 0 | 0 | 1 | 0 | 1 | 4.5 |
| VOP | 00h | 06h | Reserved | Reserved | Reserved | 0 | 0 | 1 | 1 | 0 | 4.6 |
| VOP | 00h | 07h | Reserved | Reserved | Reserved | 0 | 0 | 1 | 1 | 1 | 4.7 |
| VOP | 00h | 08h | Reserved | Reserved | Reserved | 0 | 1 | 0 | 0 | 0 | 4.8 |
| VOP | 00h | 09h | Reserved | Reserved | Reserved | 0 | 1 | 0 | 0 | 1 | 4.9 |
| VOP | 00h | 0Ah | Reserved | Reserved | Reserved | 0 | 1 | 0 | 1 | 0 | 5 |
| VOP | 00h | 0Bh | Reserved | Reserved | Reserved | 0 | 1 | 0 | 1 | 1 | 5.1 |
| VOP | 00h | 0Ch | Reserved | Reserved | Reserved | 0 | 1 | 1 | 0 | 0 | 5.2 |
| VOP | 00h | 0Dh | Reserved | Reserved | Reserved | 0 | 1 | 1 | 0 | 1 | 5.3 |
| VOP | 00h | 0Eh | Reserved | Reserved | Reserved | 0 | 1 | 1 | 1 | 0 | 5.4 |
| VOP | 00h | 0Fh | Reserved | Reserved | Reserved | 0 | 1 | 1 | 1 | 1 | 5.5 |
| VOP | 00h | 10h | Reserved | Reserved | Reserved | 1 | 0 | 0 | 0 | 0 | 5.6 |
| VOP | 00h | 11h | Reserved | Reserved | Reserved | 1 | 0 | 0 | 0 | 1 | 5.7 |
| VOP | 00h | 12h | Reserved | Reserved | Reserved | 1 | 0 | 0 | 1 | 0 | 5.8 |
| VOP | 00h | 13h | Reserved | Reserved | Reserved | 1 | 0 | 0 | 1 | 1 | 5.9 |
| VOP | 00h | 14h | Reserved | Reserved | Reserved | 1 | 0 | 1 | 0 | 0 | 6 |

Table 3. VON Voltage Selection

| Name | Register Address | DATA | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | VON(V) |
|------|------------------|------|----------|----------|----------|------|------|------|------|------|--------|
| VON | 01h | 00h | Reserved | Reserved | Reserved | 0 | 0 | 0 | 0 | 0 | -4 |
| VON | 01h | 01h | Reserved | Reserved | Reserved | 0 | 0 | 0 | 0 | 1 | -4.1 |
| VON | 01h | 02h | Reserved | Reserved | Reserved | 0 | 0 | 0 | 1 | 0 | -4.2 |
| VON | 01h | 03h | Reserved | Reserved | Reserved | 0 | 0 | 0 | 1 | 1 | -4.3 |
| VON | 01h | 04h | Reserved | Reserved | Reserved | 0 | 0 | 1 | 0 | 0 | -4.4 |
| VON | 01h | 05h | Reserved | Reserved | Reserved | 0 | 0 | 1 | 0 | 1 | -4.5 |
| VON | 01h | 06h | Reserved | Reserved | Reserved | 0 | 0 | 1 | 1 | 0 | -4.6 |
| VON | 01h | 07h | Reserved | Reserved | Reserved | 0 | 0 | 1 | 1 | 1 | -4.7 |
| VON | 01h | 08h | Reserved | Reserved | Reserved | 0 | 1 | 0 | 0 | 0 | -4.8 |
| VON | 01h | 09h | Reserved | Reserved | Reserved | 0 | 1 | 0 | 0 | 1 | -4.9 |
| VON | 01h | 0Ah | Reserved | Reserved | Reserved | 0 | 1 | 0 | 1 | 0 | -5 |
| VON | 01h | 0Bh | Reserved | Reserved | Reserved | 0 | 1 | 0 | 1 | 1 | -5.1 |
| VON | 01h | 0Ch | Reserved | Reserved | Reserved | 0 | 1 | 1 | 0 | 0 | -5.2 |

| Name | Register Address | DATA | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | VON(V) |
|------|------------------|------|----------|----------|----------|------|------|------|------|------|--------|
| VON | 01h | 0Dh | Reserved | Reserved | Reserved | 0 | 1 | 1 | 0 | 1 | -5.3 |
| VON | 01h | 0Eh | Reserved | Reserved | Reserved | 0 | 1 | 1 | 1 | 0 | -5.4 |
| VON | 01h | 0Fh | Reserved | Reserved | Reserved | 0 | 1 | 1 | 1 | 1 | -5.5 |
| VON | 01h | 10h | Reserved | Reserved | Reserved | 1 | 0 | 0 | 0 | 0 | -5.6 |
| VON | 01h | 11h | Reserved | Reserved | Reserved | 1 | 0 | 0 | 0 | 1 | -5.7 |
| VON | 01h | 12h | Reserved | Reserved | Reserved | 1 | 0 | 0 | 1 | 0 | -5.8 |
| VON | 01h | 13h | Reserved | Reserved | Reserved | 1 | 0 | 0 | 1 | 1 | -5.9 |
| VON | 01h | 14h | Reserved | Reserved | Reserved | 1 | 0 | 1 | 0 | 0 | -6 |

Table 4. VOP Active Discharge

| Name | Register Address | DATA | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | VOP Discharge |
|------|------------------|------|----------|------|----------|----------|----------|----------|------|------|---------------|
| DISP | 03h | 00h | Reserved | APPS | Reserved | Reserved | Reserved | Reserved | 0 | DISN | W/O |
| DISP | 03h | 02h | Reserved | APPS | Reserved | Reserved | Reserved | Reserved | 1 | DISN | W |

Table 5. VON Active Discharge

| Name | Register Address | DATA | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | VON Discharge |
|------|------------------|------|----------|------|----------|----------|----------|----------|------|------|---------------|
| DISN | 03h | 00h | Reserved | APPS | Reserved | Reserved | Reserved | Reserved | DISP | 0 | W/O |
| DISN | 03h | 01h | Reserved | APPS | Reserved | Reserved | Reserved | Reserved | DISP | 1 | W |

Table 6. Application

| Name | Register Address | DATA | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 | Application |
|------|------------------|------|----------|------|----------|----------|----------|----------|------|------|-------------|
| APPS | 03h | 00h | Reserved | 0 | Reserved | Reserved | Reserved | Reserved | DISP | DISN | Tablet |
| APPS | 03h | 40h | Reserved | 1 | Reserved | Reserved | Reserved | Reserved | DISP | DISN | Smartphone |


The Reserved bits are ignored when written and return either 0 or 1 when read.

Factory Default Register Value


| Name | Register Address | DATA |
|------|------------------|------|
| VOP | 00h | 0Ah |
| VON | 01h | 0Ah |
| DISP | 03h | 43h |
| DISN | 03h | 43h |
| APPS | 03h | 43h |

Typical Operating Characteristics


Efficiency vs. Output Current

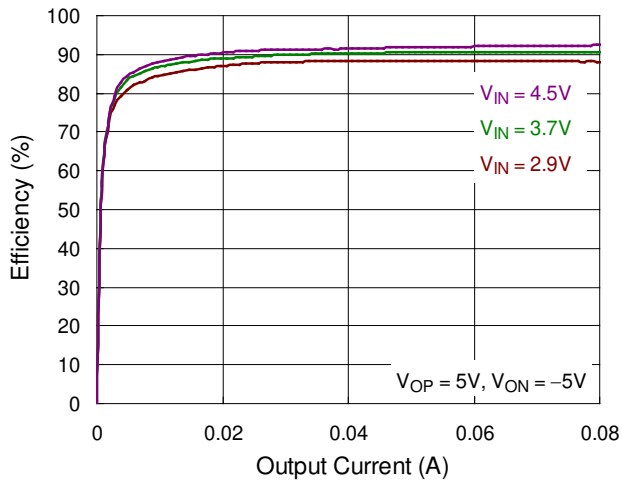


V_{OP} vs. Output Current

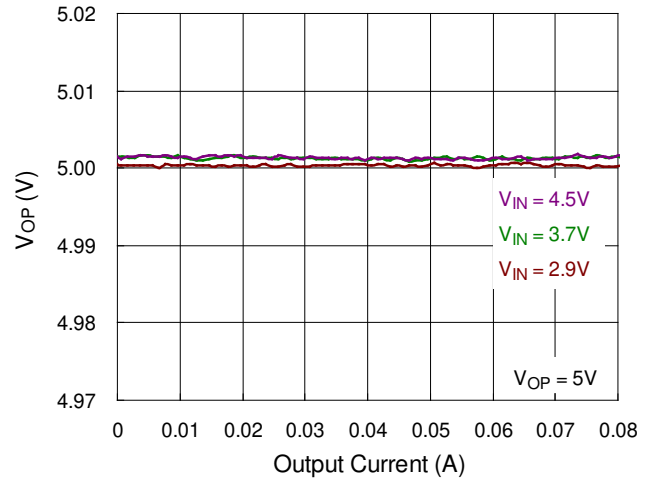


V_{ON} vs. Output Current

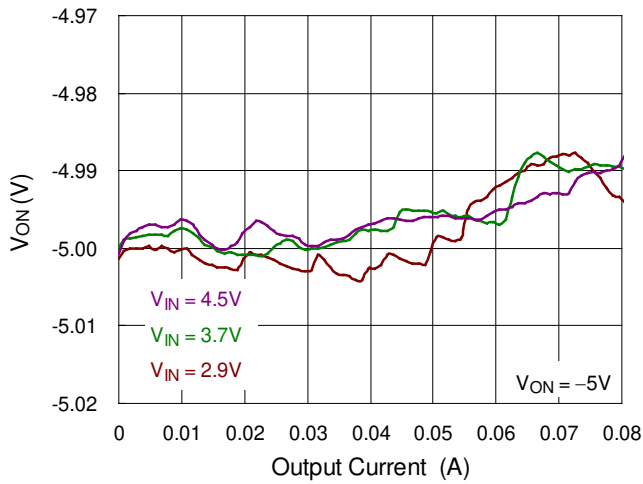


V_{OP} vs. Input Voltage

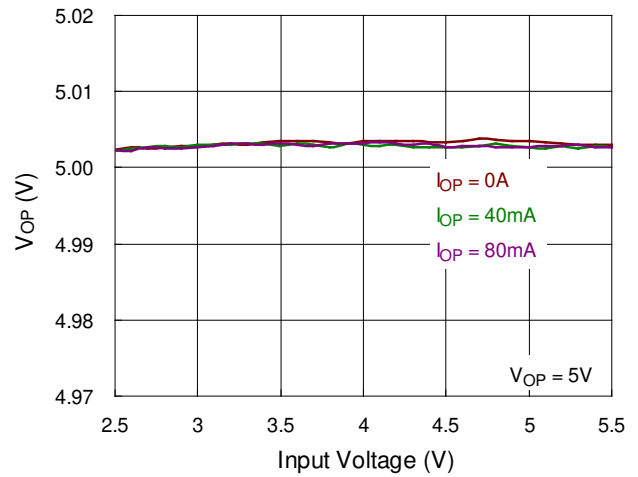


V_{ON} vs. Input Voltage

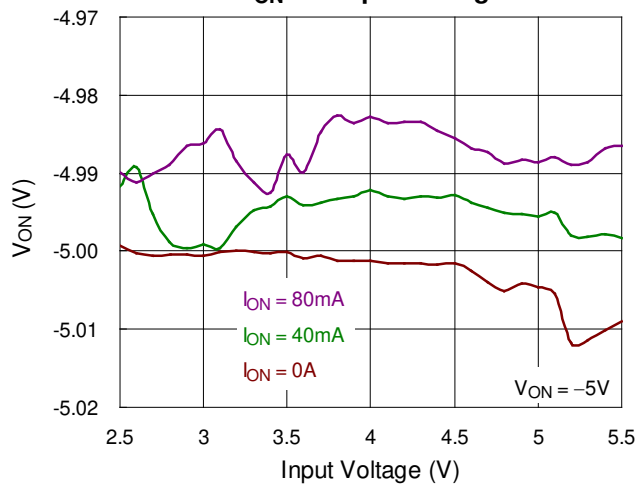


Shutdown Current vs. Temperature

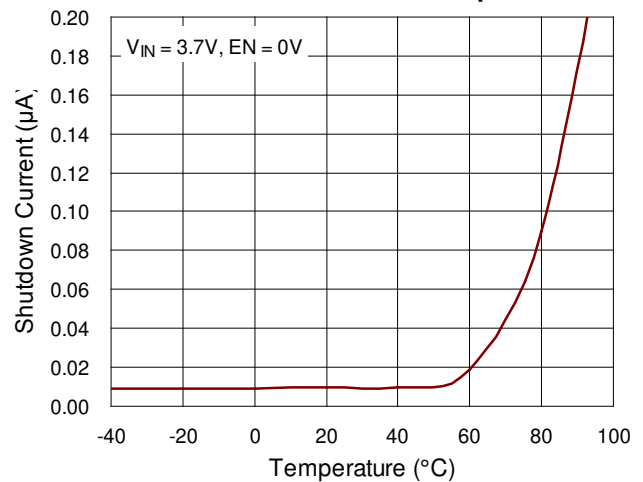


Quiescent Current vs. Temperature

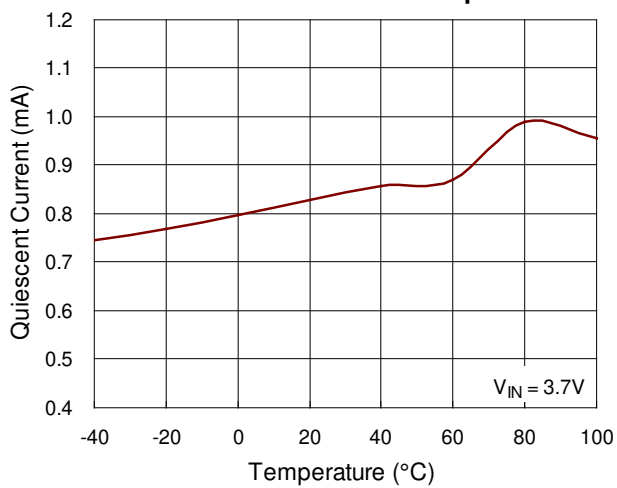


Input Voltage vs. Temperature

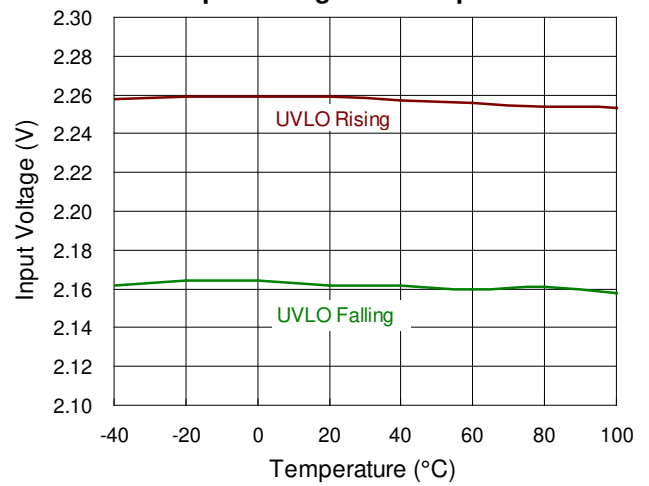


V_{OP} Ripple Voltage

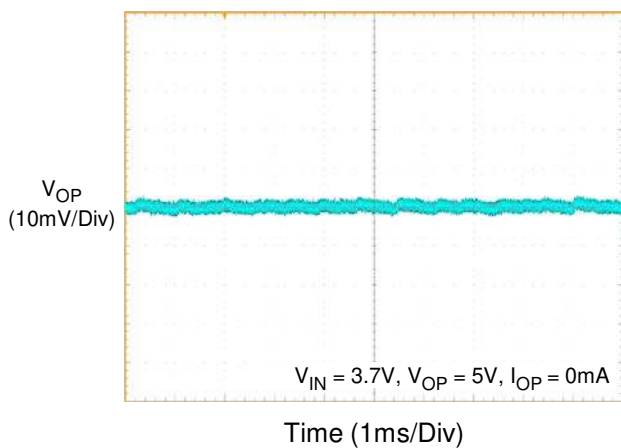


V_{OP} Ripple Voltage

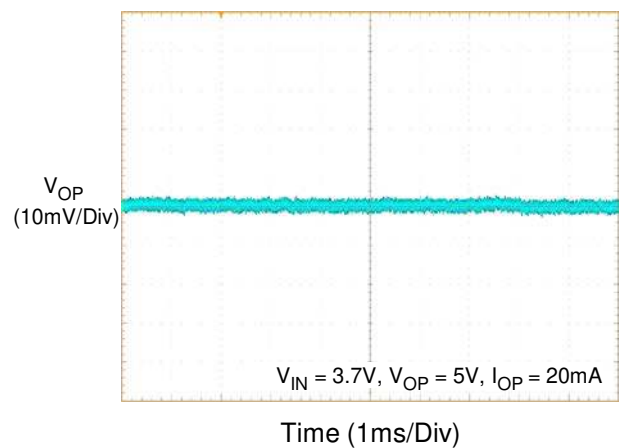


V_{OP} Ripple Voltage

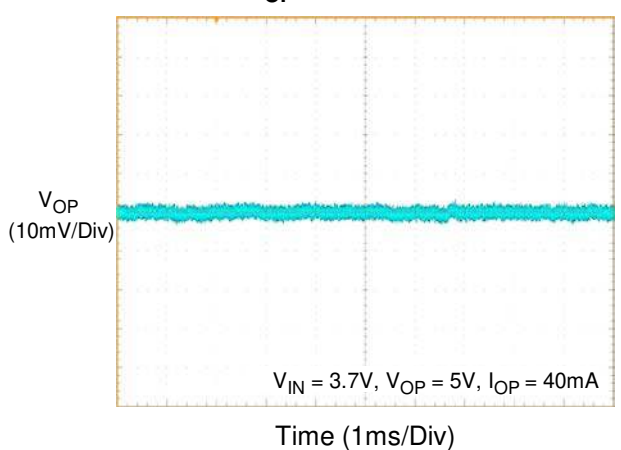


V_{OP} Ripple Voltage

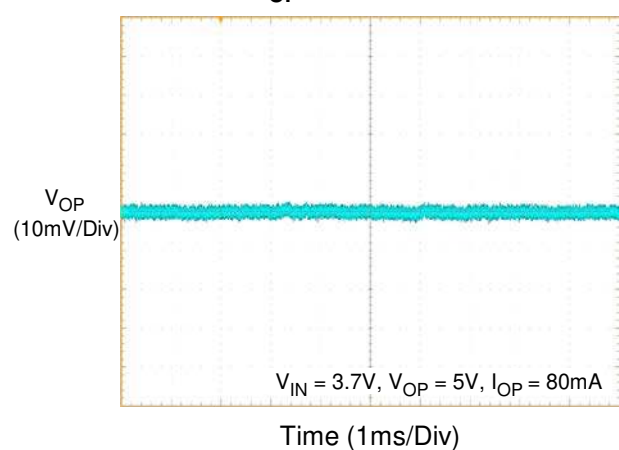


V_{ON} Ripple Voltage

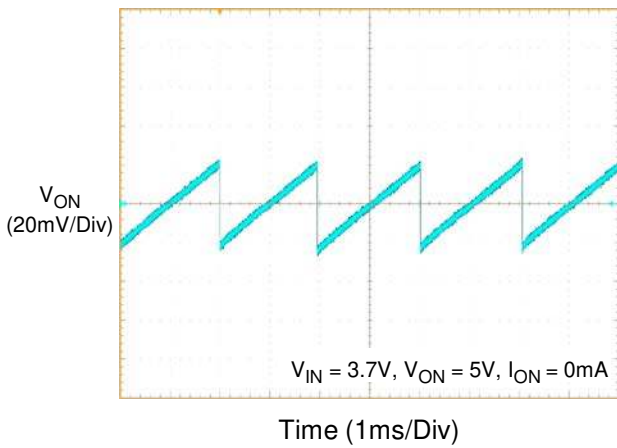


V_{ON} Ripple Voltage

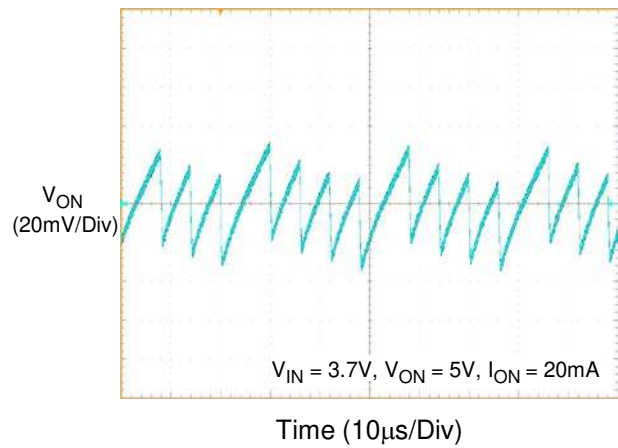


V_{ON} Ripple Voltage

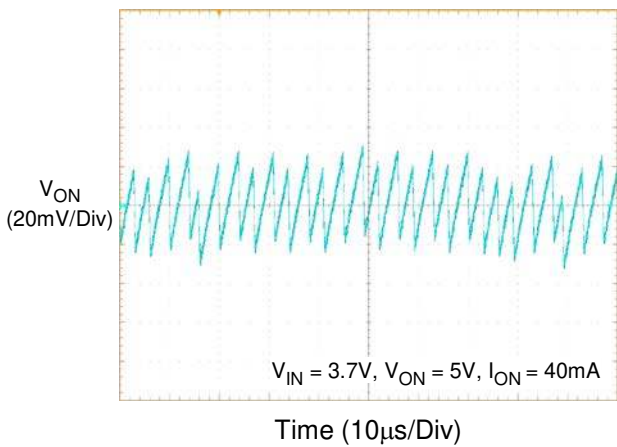


V_{ON} Ripple Voltage

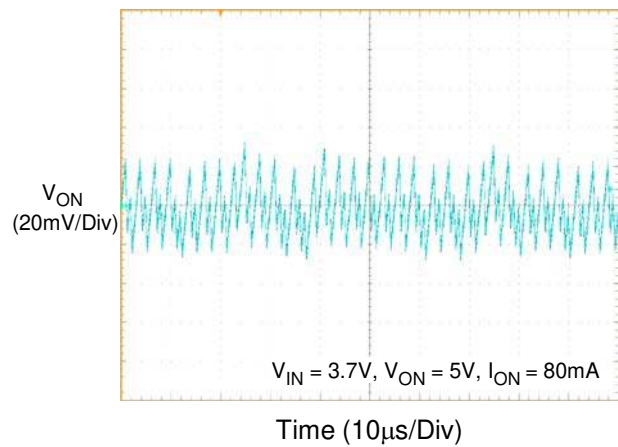


Load Transient

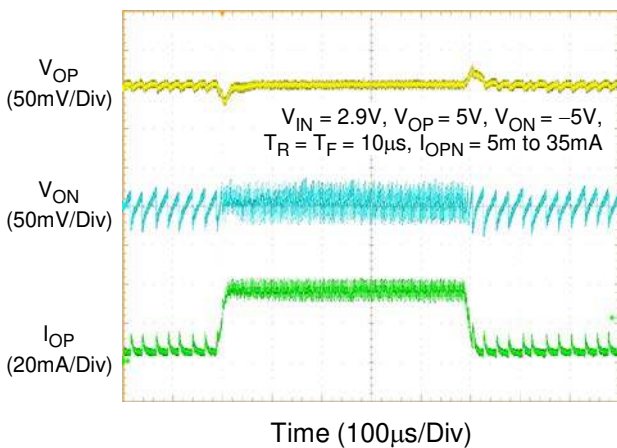

Load Transient

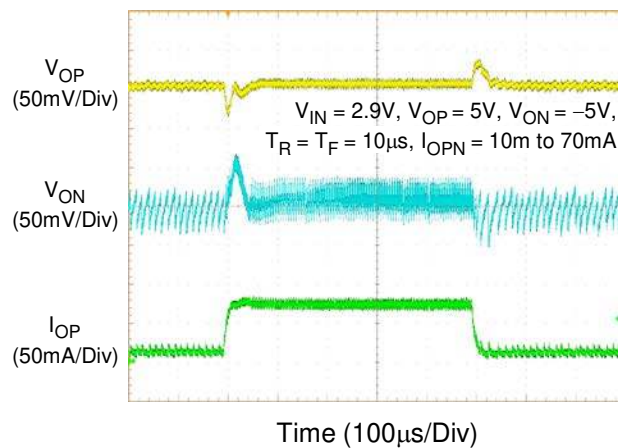


Load Transient

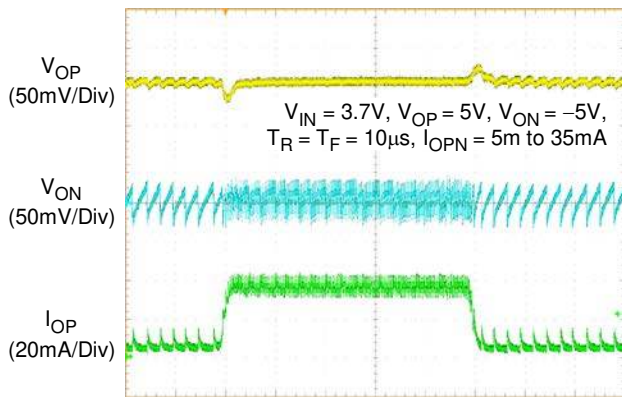


Time (100µs/Div)

Load Transient

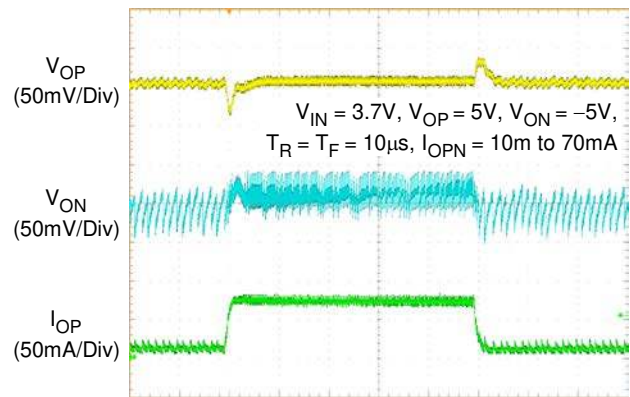


Time (100µs/Div)

Load Transient

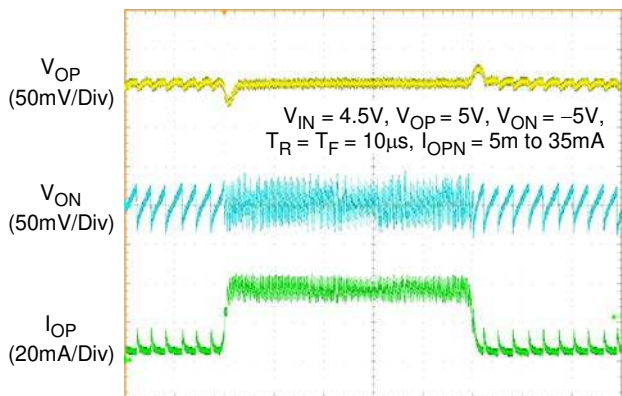


Time (100µs/Div)

Load Transient

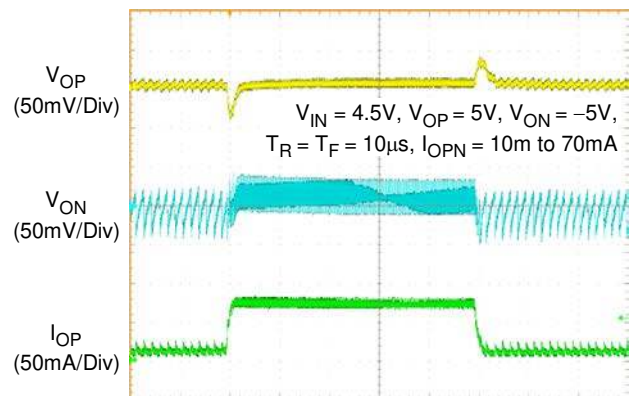


Time (100µs/Div)

Line Transient

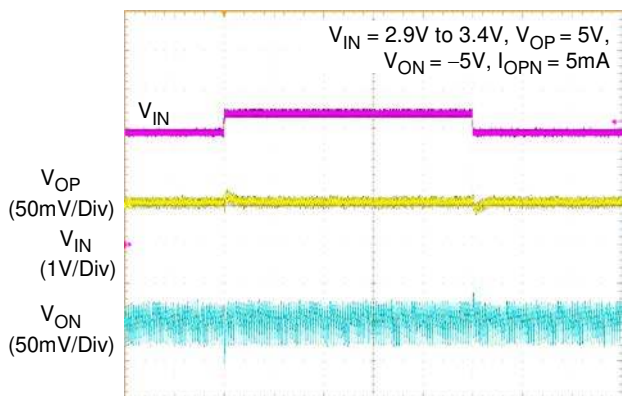


Time (500µs/Div)

Line Transient

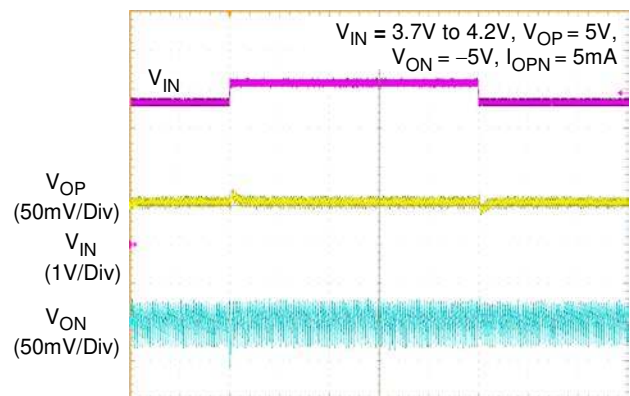


Time (500µs/Div)

Line Transient

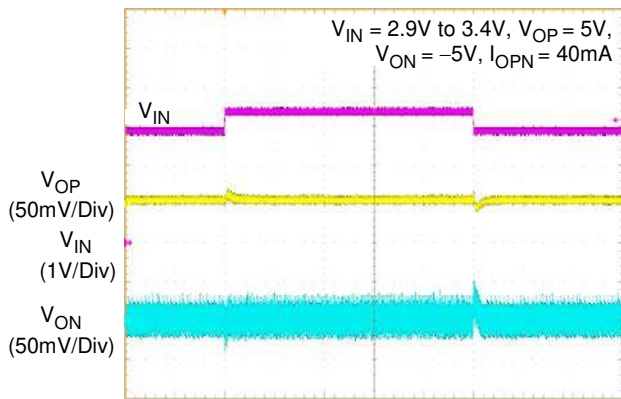


Time (500 μ s/Div)

Line Transient

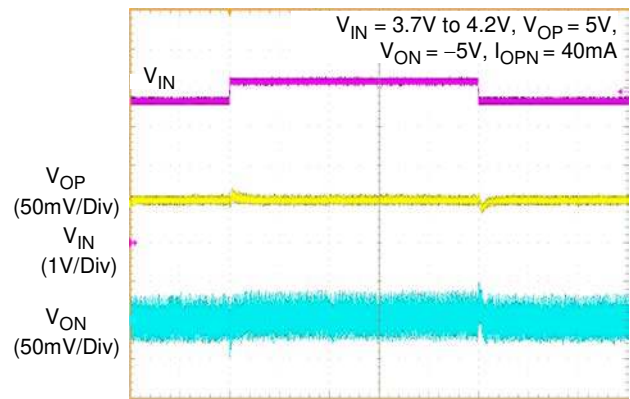


Time (500 μ s/Div)

Line Transient

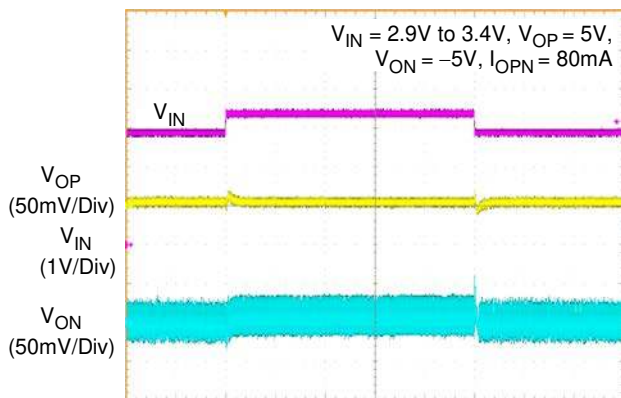


Time (500 μ s/Div)

Line Transient

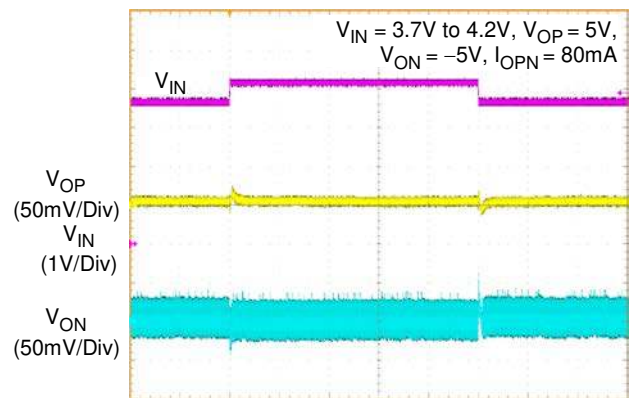


Time (500 μ s/Div)

Power On

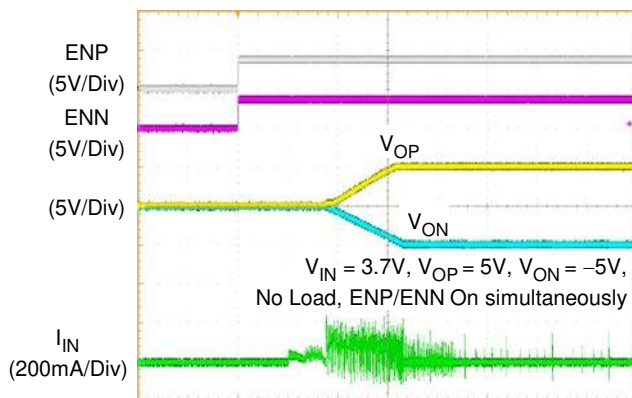


Time (1ms/Div)

Power Off

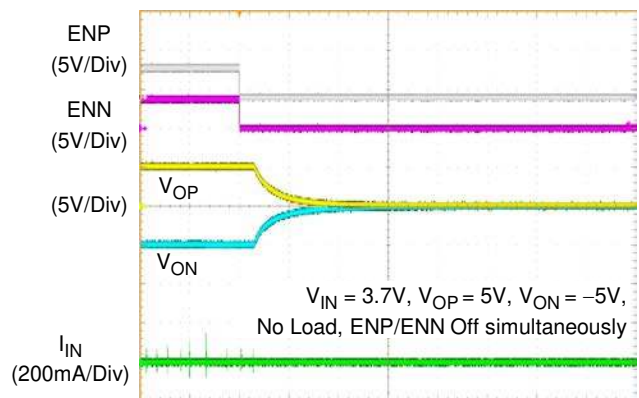


Time (1ms/Div)

Power On

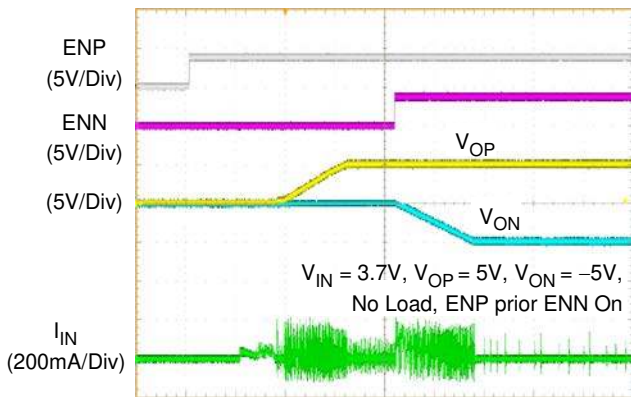


Time (1ms/Div)

Power Off

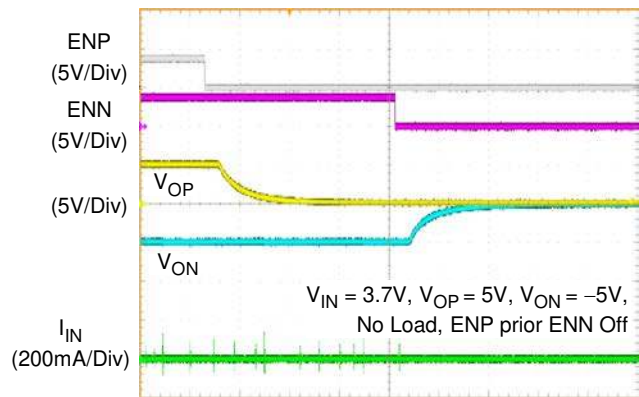


Time (1ms/Div)

Power On

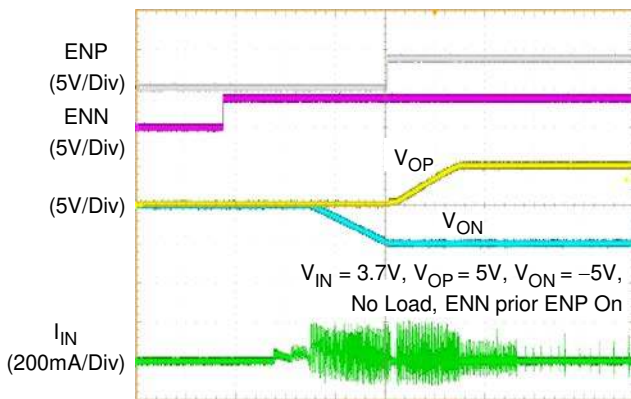

Time (1ms/Div)

Power Off

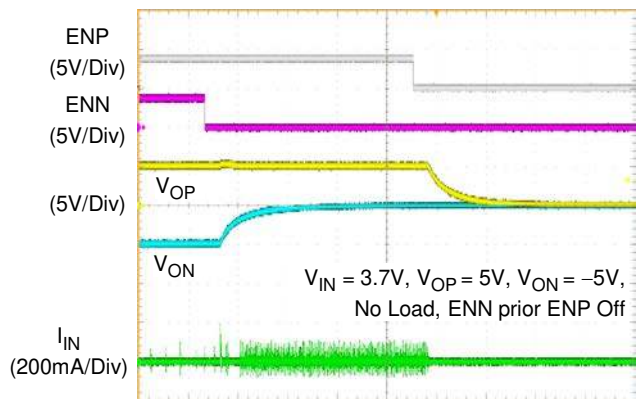

Time (1ms/Div)

Application Information

The RT4801H is a highly integrated Boost, LDO and inverting charge pump to generate positive and negative output voltages for LCD panel bias or consumer products. It can support input voltage range from 2.5V to 5.5V and the output current up to 80mA. The V_{OP} positive output voltage is generated from the LDO supplied from a synchronous Boost converter, and V_{OP} is set at a typical value of 5V. The Boost converter output also drives an inverting charge pump controller to generate V_{ON} negative output voltage which is set at a typical value of -5V. Both positive and negative voltages can be programmed by a MCU through the dedicated I²C interface and the available voltage range is from ±4V to ±6V with 100mV per step.

Input Capacitor Selection

Input ceramic capacitor with 4.7μF capacitance is suggested for applications. For better voltage filtering, select ceramic capacitors with low ESR, X5R and X7R types are suitable because of their wider voltage and temperature ranges.

Boost Inductor Selection

The inductance depends on the maximum input current. As a general rule, the inductor ripple current range is 20% to 40% of the maximum input current. If 40% is selected as an example, the inductor ripple current can be calculated according to the following equations :

$$I_{IN(MAX)} = \frac{V_{OUT} \times I_{OUT(MAX)}}{\eta \times V_{IN}}$$

$$I_{RIPPLE} = 0.4 \times I_{IN(MAX)}$$

where η is the efficiency of the VOP Boost converter, I_{IN(MAX)} is the maximum input current, and ΔI_L is the inductor ripple current. The input peak current can then be obtained by adding the maximum input current with half of the inductor ripple current as shown in the following equation :

$$I_{PEAK} = 1.2 \times I_{IN(MAX)}$$

Note that the saturated current of the inductor must be greater than I_{PEAK}.

The inductance can eventually be determined according to the following equation :

$$L = \frac{\eta \times (V_{IN})^2 \times (V_{OUT} - V_{IN})}{0.4 \times (V_{OUT})^2 \times I_{OUT(MAX)} \times f_{OSC}}$$

where f_{OSC} is the switching frequency. For better system performance, a shielded inductor is preferred to avoid EMI problems.

Boost Output Capacitor Selection

The output ripple voltage is an important index for estimating IC performance. This portion consists of two parts. One is the product of ripple current with the ESR of the output capacitor, while the other part is formed by the charging and discharging process of the output capacitor. As shown in Figure 1, ΔV_{OUT1} can be evaluated based on the ideal energy equalization. According to the definition of Q, the ΔV_{OUT1} value can be calculated as the following equation :

$$Q = I_{OUT} \times D \times \frac{1}{f_{OSC}} = C_{OUT} \times \Delta V_{OUT1}$$

$$\Delta V_{OUT1} = \frac{I_{OUT} \times D}{f_{OSC} \times C_{OUT}}$$

where f_{OSC} is the switching frequency and D is the duty cycle.

Finally, taking ESR into consideration, the overall output ripple voltage can be determined by the following equation :

$$\Delta V_{OUT} = \Delta V_{ESR} + \Delta V_{OUT1} = \Delta V_{SER} + \frac{I_{OUT} \times D}{f_{OSC} \times C_{OUT}}$$

where ΔV_{ESR} = I_{Crms} × R_{CESR}

The output capacitor, C_{OUT}, should be selected accordingly.

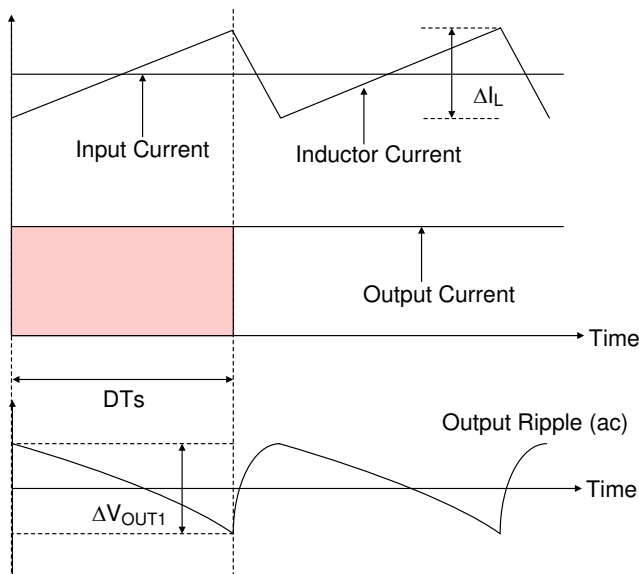


Figure 1. The Output Ripple Voltage without the Contribution of ESR

Under Voltage Lockout

To prevent abnormal operation of the IC in low voltage condition, an under voltage lockout is included which shuts down IC operation when input voltage is lower than the specified threshold voltage.

Soft-Start

The RT4801H employs an internal soft-start feature to avoid high inrush current during start-up. The soft-start function is achieved by clamping the output voltage of the internal error amplifier with another voltage source that is increased slowly from zero to near V_{IN} during the soft-start period.

Output Voltage Setting

The output voltage of WL-CSP package can be programmed by a MCU through the dedicated I²C interface according to the V_{OP}/V_{ON} Voltage Selection Table.

Shutdown Delay and Discharge

When the EN signal is logic low for more than 375 μ s, the output will be powered off. When the output discharge function is selected, the RT4801H starts to discharge the output voltage to ground with 20ms duration and then the output goes back to floating state. If the output continuous discharge function is required for application, the external resistor is recommended to

be paralleled with the output. In shutdown mode, the input supply current for the IC is less than 1 μ A.

Over Current Protection

The RT4801H includes a cycle-by-cycle current limit function which monitors the inductor current during each ON period. The power switch will be forced off to avoid large current damage once the current is over the limit level.

Short Circuit Protection

The RT4801H has an advanced output short-circuit protection mechanism which prevents the IC from damage by unexpected applications.

VOP short to ground

When the output voltage is under the limit level with 1ms (typ.) duration, the LCD bias function enters shutdown mode and can only re-start to normal operation after triggering the ENP/ENN pin.

VON short to ground

The output will keep current limit status without shutdown and re-start to normal operation once short condition removed.

Over Temperature Protection

The RT4801H equips an over temperature protection circuitry to prevent overheating due to excessive power dissipation. The OTP will shut down LCD bias operation when ambient temperature exceeds 140°C. Once the ambient temperature cools down by approximately 15°C, IC will automatically resume normal operation. To maintain continuous operation, the maximum junction temperature should be prevented from rising above 125°C.

Thermal Considerations

For continuous operation, do not exceed absolute maximum junction temperature. The maximum power dissipation depends on the thermal resistance of the IC package, PCB layout, rate of surrounding airflow, and difference between junction and ambient temperature. The maximum power dissipation can be calculated by the following formula :

$$P_{D(MAX)} = (T_{J(MAX)} - T_A) / \theta_{JA}$$

where $T_{J(MAX)}$ is the maximum junction temperature, T_A is the ambient temperature, and θ_{JA} is the junction to ambient thermal resistance.

For recommended operating condition specifications, the maximum junction temperature is 125°C. The junction to ambient thermal resistance, θ_{JA} , is layout dependent. For WL-CSP-15B 1.31x2.07 (BSC) package, the thermal resistance, θ_{JA} , is 49.8°C/W on a standard JEDEC 51-7 four-layer thermal test board. The maximum power dissipation at $T_A = 25^\circ\text{C}$ can be calculated by the following formula :

$$P_{D(MAX)} = (125^\circ\text{C} - 25^\circ\text{C}) / (49.8^\circ\text{C/W}) = 2\text{W for WL-CSP-15B 1.31x2.07 (BSC) package}$$

The maximum power dissipation depends on the operating ambient temperature for fixed $T_{J(MAX)}$ and thermal resistance, θ_{JA} . The derating curve in Figure 2 allows the designer to see the effect of rising ambient temperature on the maximum power dissipation.

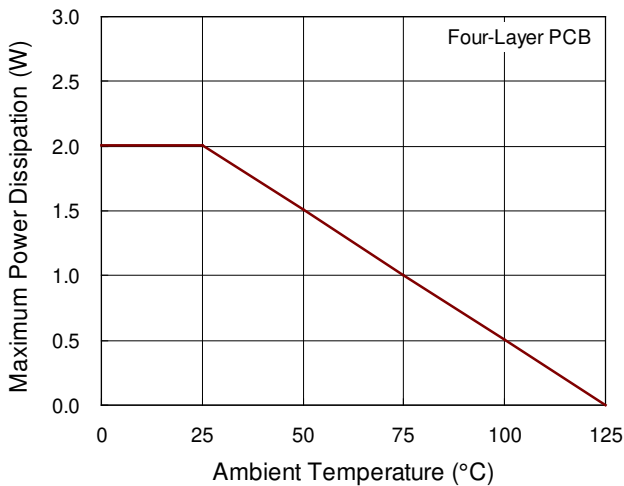


Figure 2. Derating Curve of Maximum Power Dissipation

Layout Considerations

For the best performance of RT4801H, the following PCB layout guidelines should be strictly followed.

- ▶ For good regulation, place the power components as close to the IC as possible. The traces should be wide and short especially for the high current output loop.
- ▶ The input and output bypass capacitor should be placed as close to the IC as possible and connected to the ground plane of the PCB.
- ▶ The flying capacitor should be placed as close to the CF1/CF2 pin as possible to avoid noise injection.
- ▶ Minimize the size of the LXP node and keep the traces wide and short. Care should be taken to avoid running traces that carry any noise-sensitive signals near LXP or high-current traces.
- ▶ Separate power ground (PGND) and analog ground (GND). Connect the GND and the PGND islands at a single end. Make sure that there are no other connections between these separate ground planes.


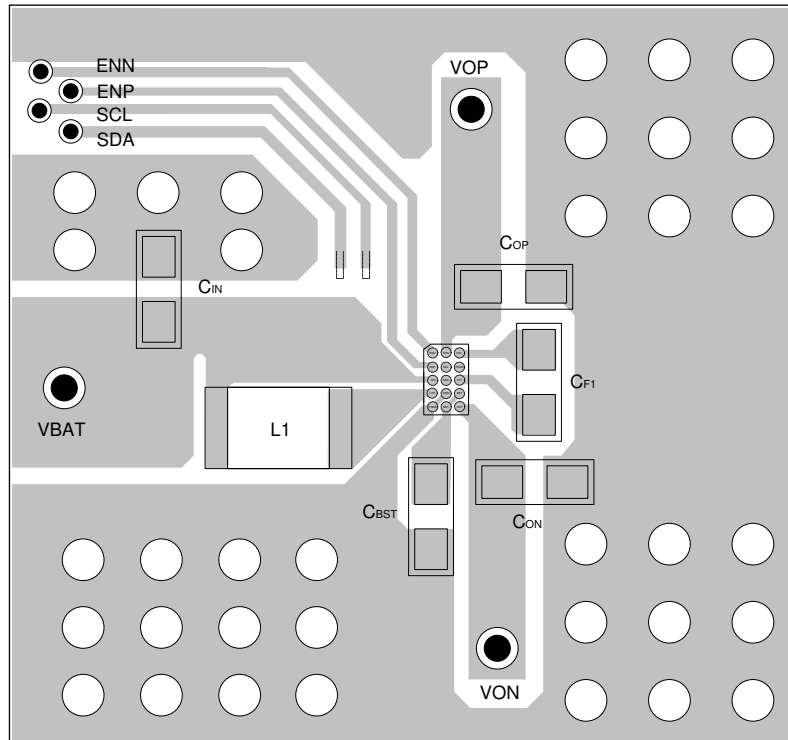


Figure 3. PCB Layout Guide

Outline Dimension

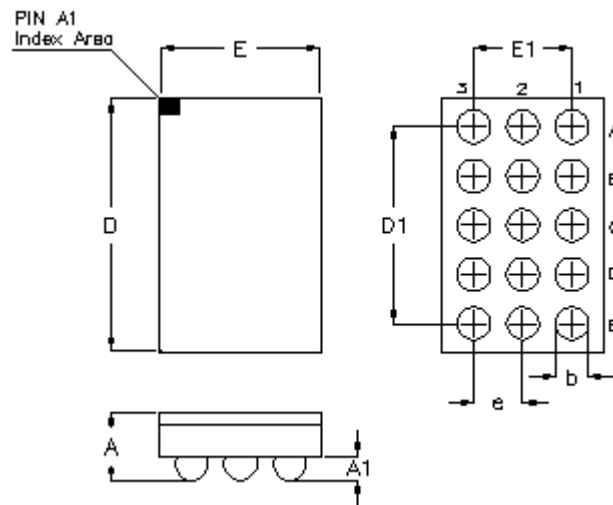

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 0.500 | 0.600 | 0.020 | 0.024 |
| A1 | 0.170 | 0.230 | 0.007 | 0.009 |
| b | 0.240 | 0.300 | 0.009 | 0.012 |
| D | 2.020 | 2.120 | 0.080 | 0.083 |
| D1 | 1.600 | | 0.063 | |
| E | 1.260 | 1.360 | 0.050 | 0.054 |
| E1 | 0.800 | | 0.031 | |
| e | 0.400 | | 0.016 | |

WL-CSP-15B 1.31x2.07 (BSC)

Richtek Technology Corporation

14F, No. 8, Tai Yuen 1st Street, Chupei City

Hsinchu, Taiwan, R.O.C.

Tel: (8863)5526789

Richtek products are sold by description only. Richtek reserves the right to change the circuitry and/or specifications without notice at any time. Customers should obtain the latest relevant information and data sheets before placing orders and should verify that such information is current and complete. Richtek cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Richtek product. Information furnished by Richtek is believed to be accurate and reliable. However, no responsibility is assumed by Richtek or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Richtek or its subsidiaries.

Copyright © 2018 Richtek Technology Corporation. All rights reserved. **RICHTEK** is a registered trademark of Richtek Technology Corporation.