


**STRAIGHT JACK FULL CRIMP-TYPE  
CABLE 2.6/50 S+D - PACK. 50**

**R161.236.000**  
SERIES N

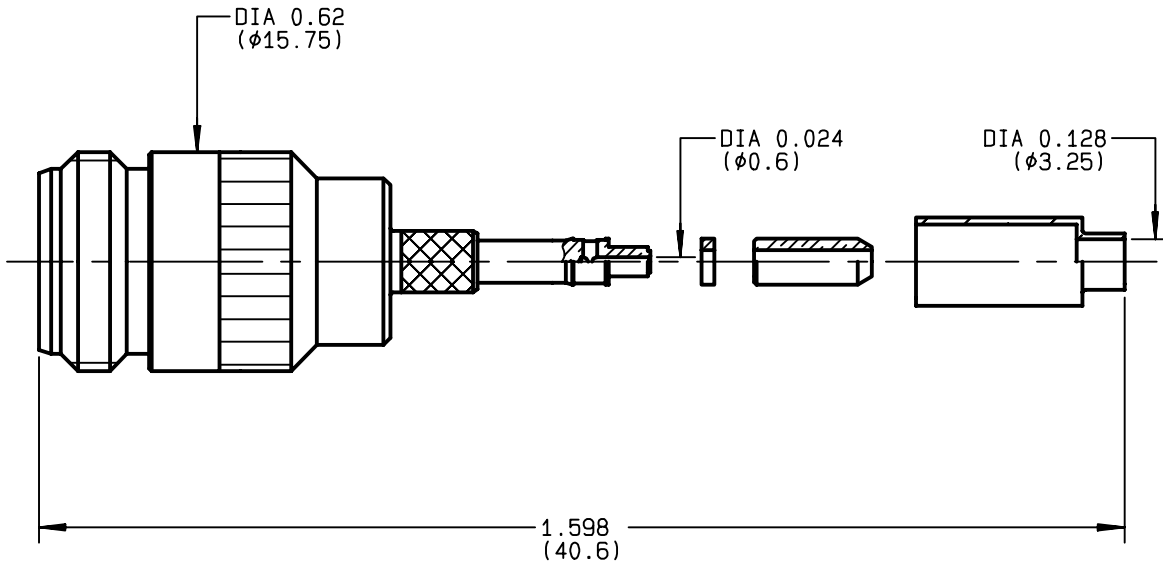

NOMINAL IMPEDANCE	<b>50</b> Ω	CABLES : <b>K02252D</b> <b>KX 22A</b> <b>RD 316</b> <b>RG 188</b> <b>RG 316</b>
FREQUENCY RANGE	<b>0-11</b> GHz	
TEMPERATURE RATING	<b>-55/+155</b> °C	
V.S.W.R	<b>1.30</b> + x F(GHz)Maxi	
RF INSERTION LOSS	<b>0.048</b> √F(GHz) dB Maxi	
VOLTAGE RATING	<b>250</b> Veff Maxi	
DIELECTRIC WITHSTANDING VOLTAGE	<b>750</b> Veff Mini	
INSULATION RESISTANCE	<b>5000</b> MΩMini	
HERMETIC SEAL	<b>NA</b> Atm.cm <sup>3</sup> /s	
LEAKAGE (pressurized only)	<b>NA</b>	
MECHANICAL DURABILITY	<b>500</b> Cycles	OTHERS CHARACTERISTICS
WEIGHT	<b>26.6</b> gr	CABLE RETENTION <b>40</b> N Mini
SPECIFICATION		CENTER CONTACT RETENTION
		Axial force - mating end <b>27</b> N Mini
		Axial force - opposite end <b>27</b> N Mini
		Torque <b>NA</b> cm.N Mini
		RECOMMENDED TORQUES
		Mating <b>NA</b> cm.N
		Panel nut <b>NA</b> cm.N
		Clamp nut <b>NA</b> cm.N

CONNECTOR PARTS	MATERIALS	FINISH	(all values are given ) in micrometers
BODY	BRASS	BBR 2	
OUTER CONTACT	BRASS	BBR 2	
CENTER CONTACT	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2	
INSULATOR	PTFE	-	
GASKET	-	-	
OTHERS PIECES	BRASS	BBR 2	

ISSUE <b>9726C01</b>	CREATION DATE <b>21/07/1993</b>	FILE PART-NUMBER
-------------------------	------------------------------------	------------------



BONOMINI


The information given here is subject to change without notice.  
Design changes may be in order to improve the product .

*Connect to the future*




**R161.236.000**

ISSUE **9726C01** SERIES **N**

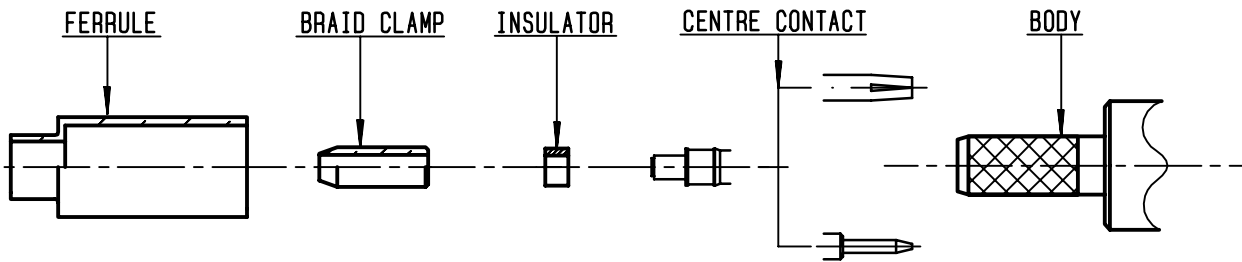

①


Slide onto the cable the ferrule  
Strip the cable .  
-  
-

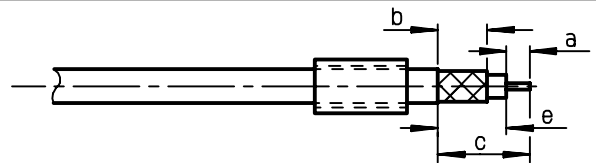

Stripping	a	b	c	d	e
inch	0.177	0.315	0.551	0	0.374
mm	4.5	8	14		9.5


②

Fan the braid .  
Slide the braid clamp and insulator between the dielectric and the braid .  
Slide on centre contact until it bottoms against cable dielectric .  
Crimp centre contact .  
Crimping tool : R282 223 000 ( Hex. : 0.068 )  
or crimping tool R282 293 000 ( M22520/5-01 )  
+ dies R282 235 011 ( M22520/5-11 )

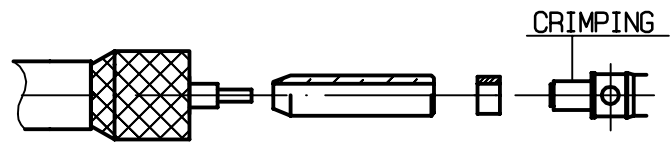

③

Slide cable dielectric into the body while gently ginding the braid over the knurl  
Push until the dielectric clicks into position .  
Slide ferrule over braid in direction F .

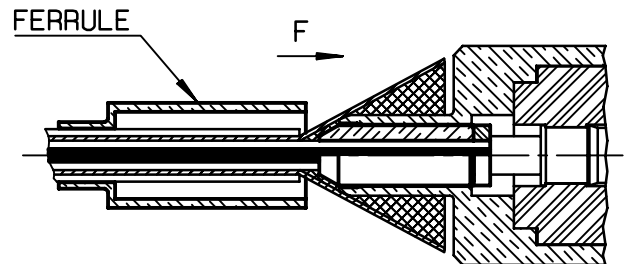

④

Crimp the ferrule with crimping tool R 282 223 000 ( Hex. : 0.213 ) or crimping tool R282 293 000 ( M22520/5-01 )  
+ dies R282 235 011 ( M22520/5-11 )  
Cut the excess of braid .  
-  
-

