

*High Performance
Synchronous Buck EVM
Using the TPS51124*

User's Guide

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Mailing Address:

Texas Instruments
Post Office Box 655303
Dallas, Texas 75265

Copyright . 2006, Texas Instruments Incorporated

CONTENTS

| | |
|--|-----------|
| 1. Description | 3 |
| 2. Electrical Performance Specifications..... | 4 |
| 3. Schematic | 5 |
| 4. Test Setup and Results | 7 |
| 5. Configuration | 8 |
| 6. EVM Assembly Drawing and PCB layout..... | 9 |
| 7. List of Materials..... | 12 |
| 8. References..... | 13 |

1. Description

The TPS51124 is a dual, adaptive on-time D-CAP™ mode synchronous buck controller. The part enables system designers to cost effectively complete the suite of notebook power bus regulators with the absolute lowest external component count and lowest standby consumption. The fixed frequency emulated adaptive on-time control supports seamless operation between PWM mode at heavy load condition and reduced frequency operation at light load for high efficiency down to milli-ampere range. The main control loop for the TPS51124 uses the D-CAP mode that optimized for low ESR output capacitors such as POSCAP or SP-CAP promises fast transient response with no external compensation. Simple and separate power good signals for each channel allow flexibility of power sequencing. The part provides a convenient and efficient operation with supply input voltages (V5IN, V5FILT) ranging from 4.5V to 5.5V, conversion voltages (Drain voltage for the synchronous high-side MOSFET) from 3V to 28V and output voltages from 0.76V to 5.5V.

HPA178 (TPS51124EVM) evaluation module is a high efficiency, dual synchronous buck converter providing 1.05V at 10A and 1.5V at 10A from 5V to 25V input. This user's guide describes the HPA178 performance in medium switching frequency.

2. ELECTRICAL PERFORMANCE

Table1. Electrical Performance

| SPECIFICATIONS | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|----------------------------|-----------------------|--------------------------------------|-----|------|-----|-------|
| Input voltage range (V5IN) | | | 4.5 | 5.0 | 5.5 | V |
| Input voltage range (VIN) | | | 5 | 12 | 25 | V |
| CH1 | Output voltage | | | 1.05 | | V |
| | Operating frequency | TONSEL : Float VIN=12V, Iout1=10A | | 300 | | kHz |
| | Output current | | | 10 | | A |
| | Over current limit | VIN=12V | | 13 | | A |
| | Output ripple voltage | VIN=12V, Iout1=10A | | 35 | | mVp-p |
| CH2 | Output voltage | | | 1.5 | | V |
| | Operating frequency | TONSEL : Float VIN=12V, Iout2=10A | | 360 | | kHz |
| | Output current | | | 10 | | A |
| | Over current limit | VIN=12V | | 13 | | A |
| | Output ripple voltage | VIN=12V, Iout2=10A | | 35 | | mVp-p |

3. Schematic

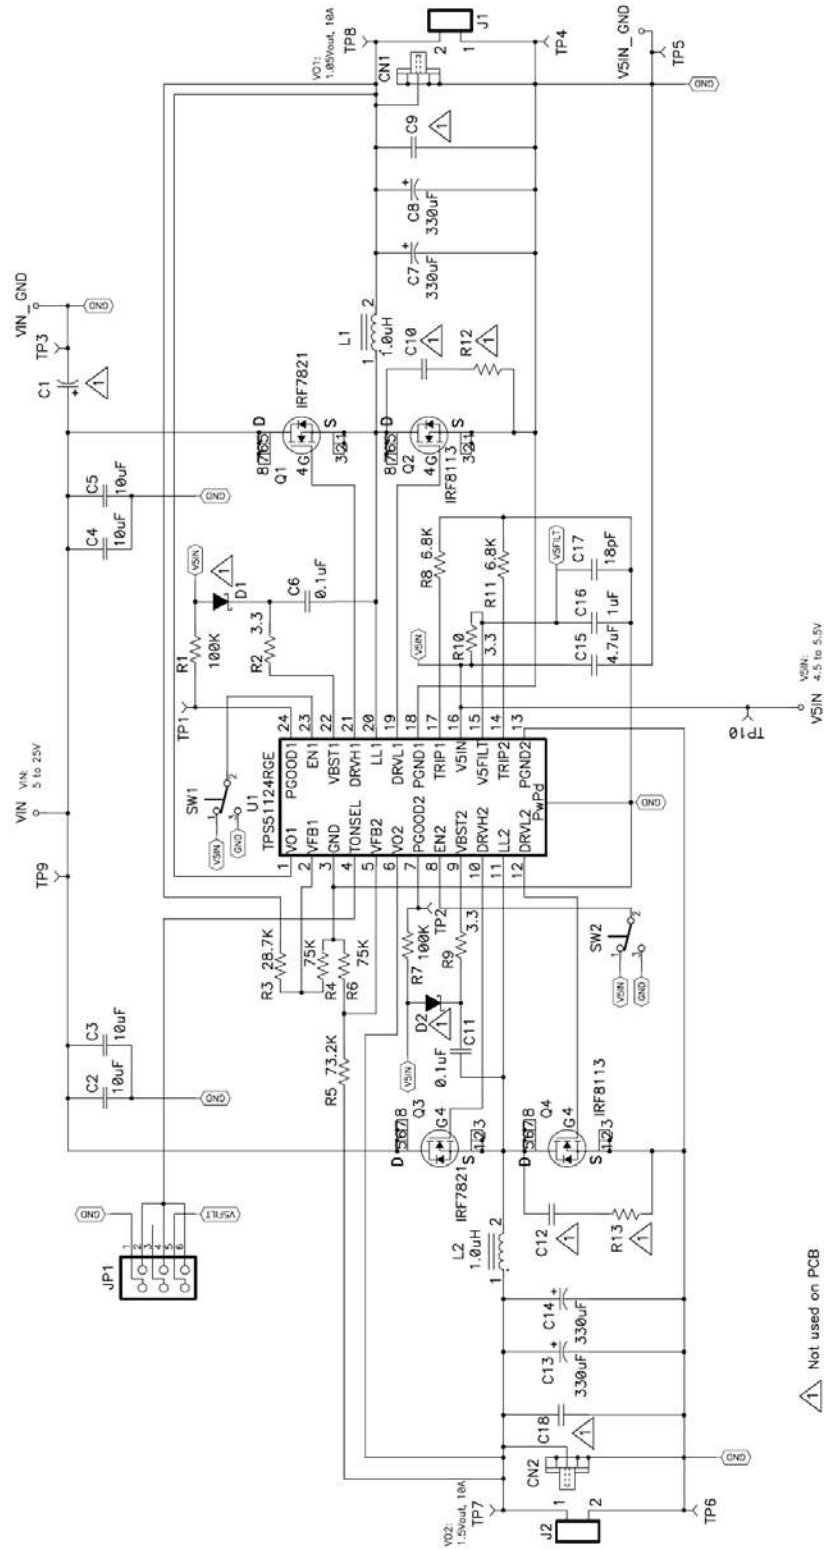


Figure 1. TPS51124 EVM schematic diagram

4. Test Setup and Results

4.1. Test setup

Connect test equipment and HPA178 EVM board as shown in Figure 2.

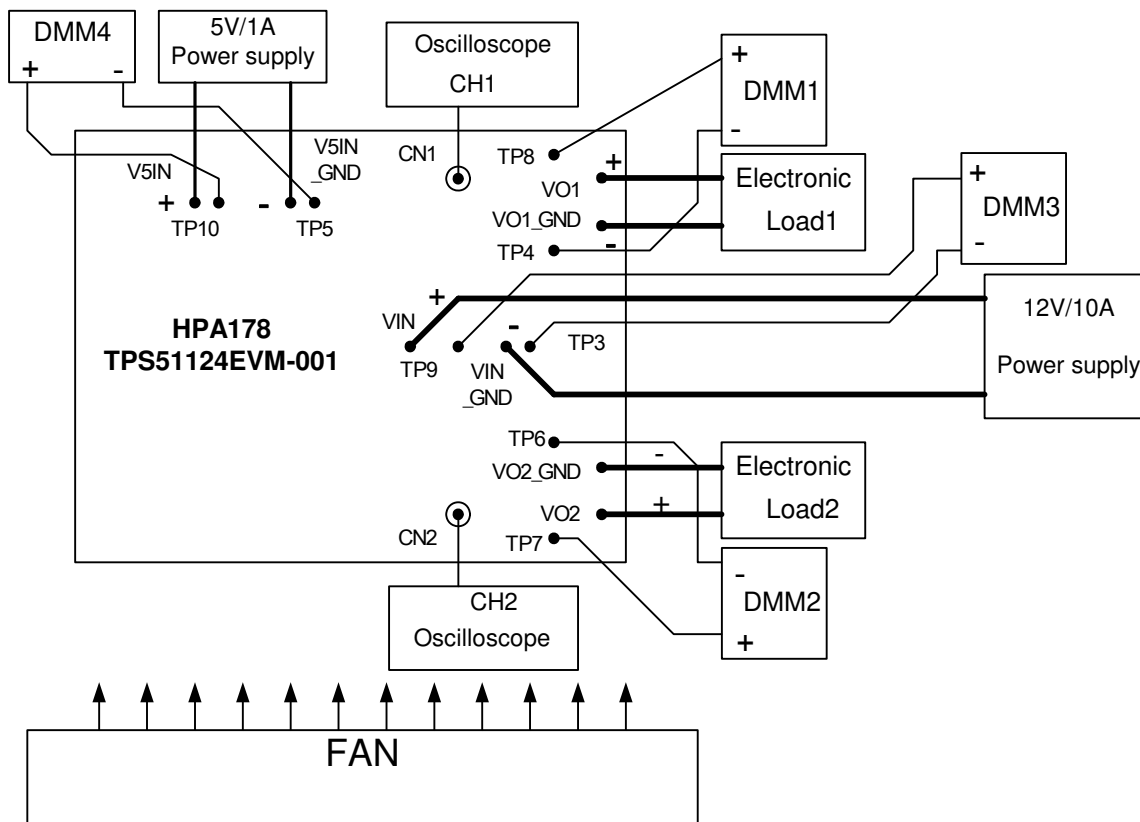


Figure 2. Equipment setup for HPA178 EVM board

4.2 Test procedure

1. Make sure the switches SW1 (EN1), SW2 (EN2) are in "OFF" position.
2. Make sure the shunt jumper for JP1 is set 3-pin to 4-pin (Med).
3. Apply appropriate V5IN voltage to V5IN and V5IN_GND terminals.
4. Apply appropriate VIN voltage to VIN and VIN_GND terminals
5. Turn on SW1 (EN1), CH1-output will start up.
6. Turn on SW2 (EN2), CH2-output will start up.

4.3. Start up performance

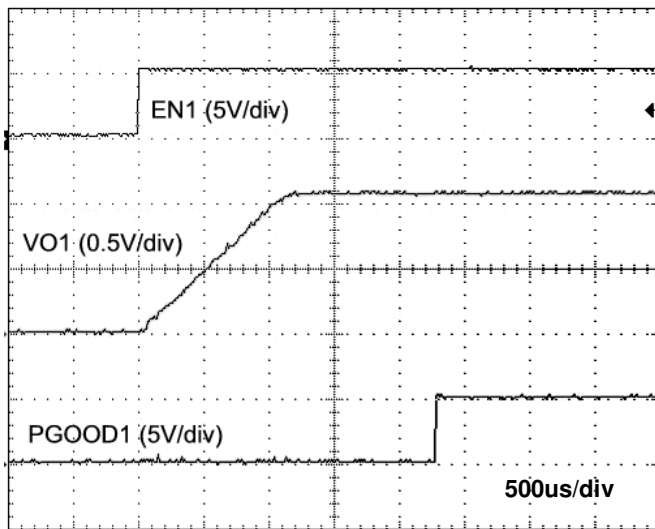


Figure3. 1.05V Startup Waveforms

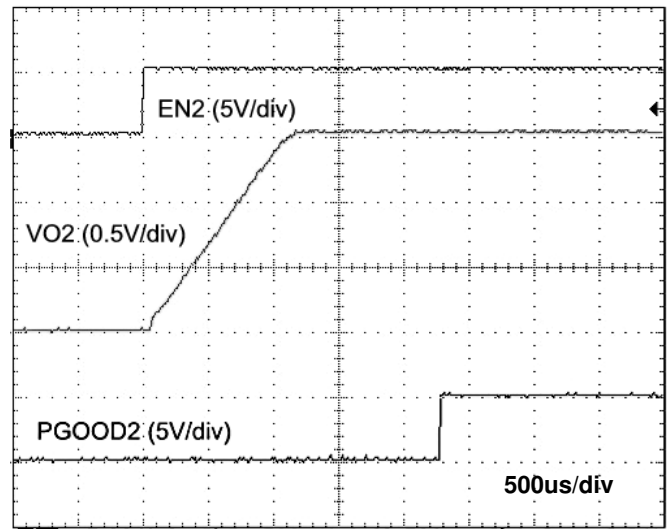


Figure4. 1.5V Startup Waveforms

4.4. Transient performance

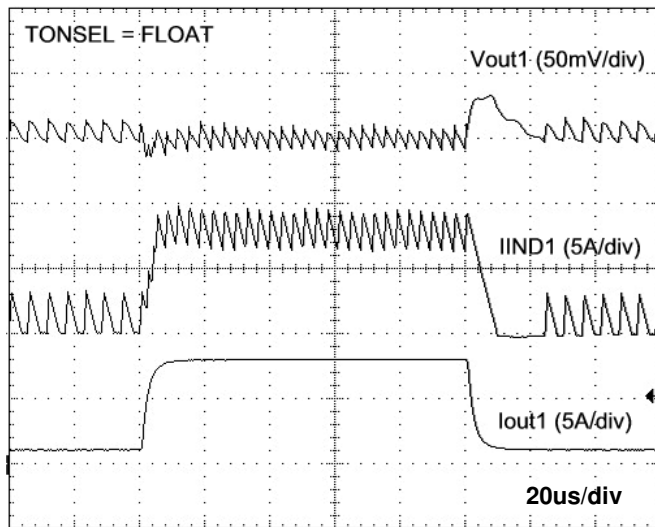


Figure5. 1.05V Load Transient Response

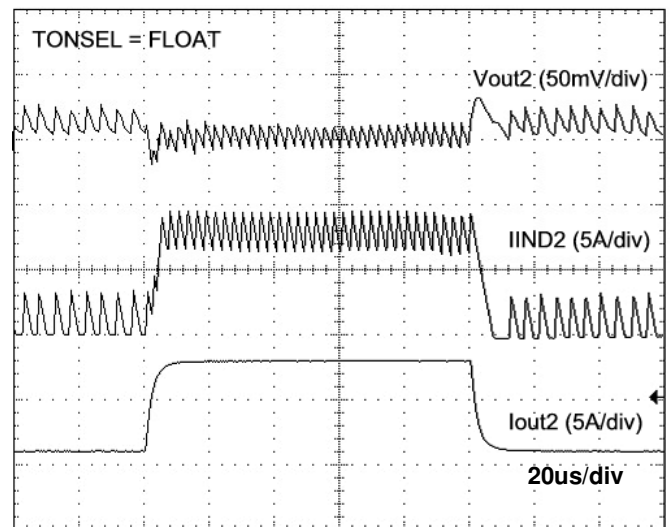


Figure6. 1.5V Load Transient Response

5. Configuration

This EVM could be set as user's desirable configurations.
Please refer to the following specific configuration setting sections.

5.1 Switching Frequency selection

Switching frequency can be set by the TONSEL pin using JP1 on the EVM.
Default setting is Medium.

Table 2. Switching Frequency selection

| Jumper (JP1) set to | TONSEL | Frequency | | |
|--------------------------|--------|-----------|--------|--------|
| | | Typ | CH1 | CH2 |
| Top (1-2 pin shorted) | GND | Slow | 240kHz | 300kHz |
| CENTER (3-4 pin shorted) | Float | Medium | 300kHz | 360kHz |
| Bottom (5-6 pin shorted) | V5FILT | Fast | 360kHz | 420kHz |

(Note; Frequencies are approximate)

5.2 Bootstrap Diode selection

Bootstrap diodes (D1, D2) are not populated on this EVM since TPS51124 has built-in them.
External Schottky diodes can be added in order to further improve the efficiency.

6. EVM Assembly Drawing and PCB layout

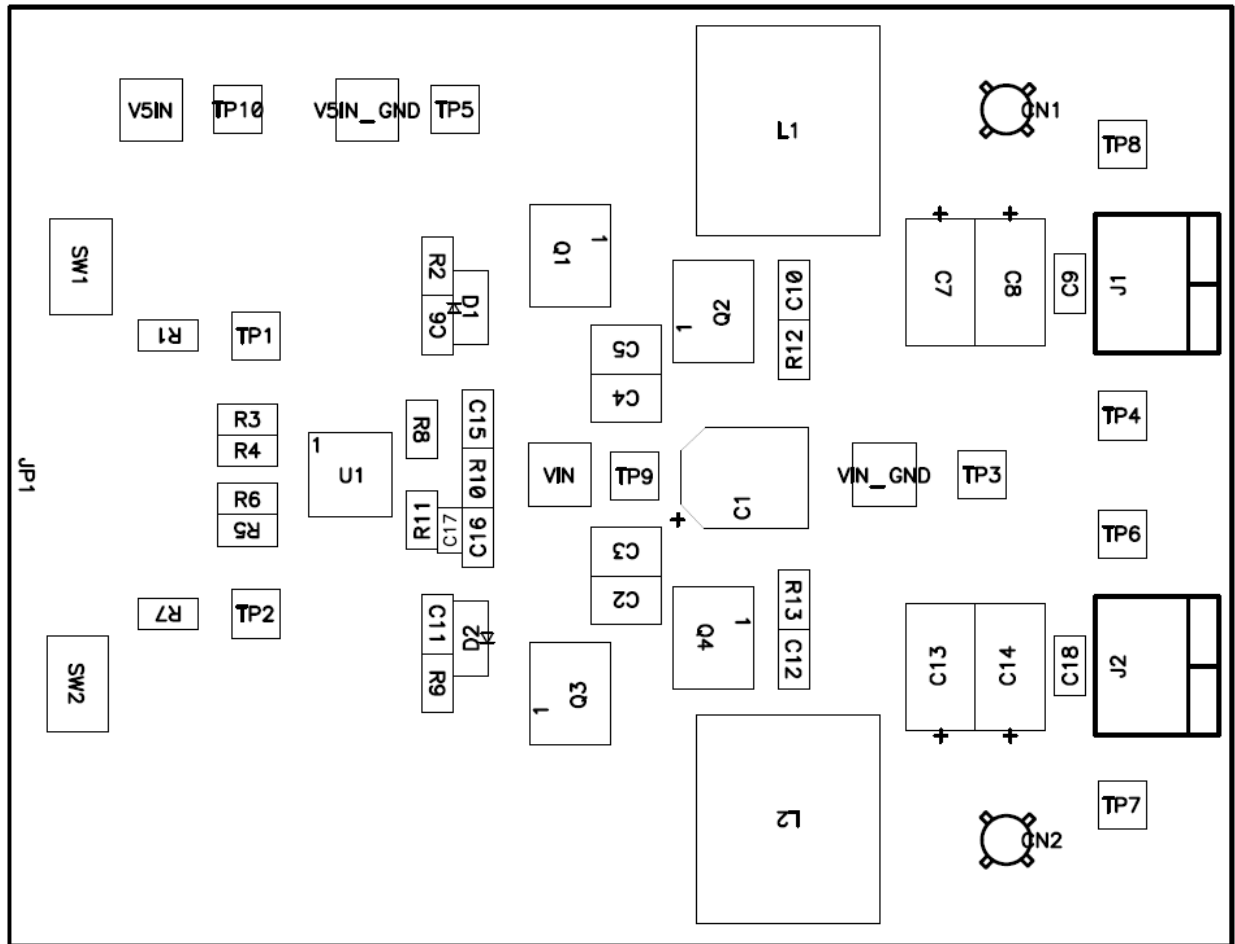


Figure 7. Top Assembly

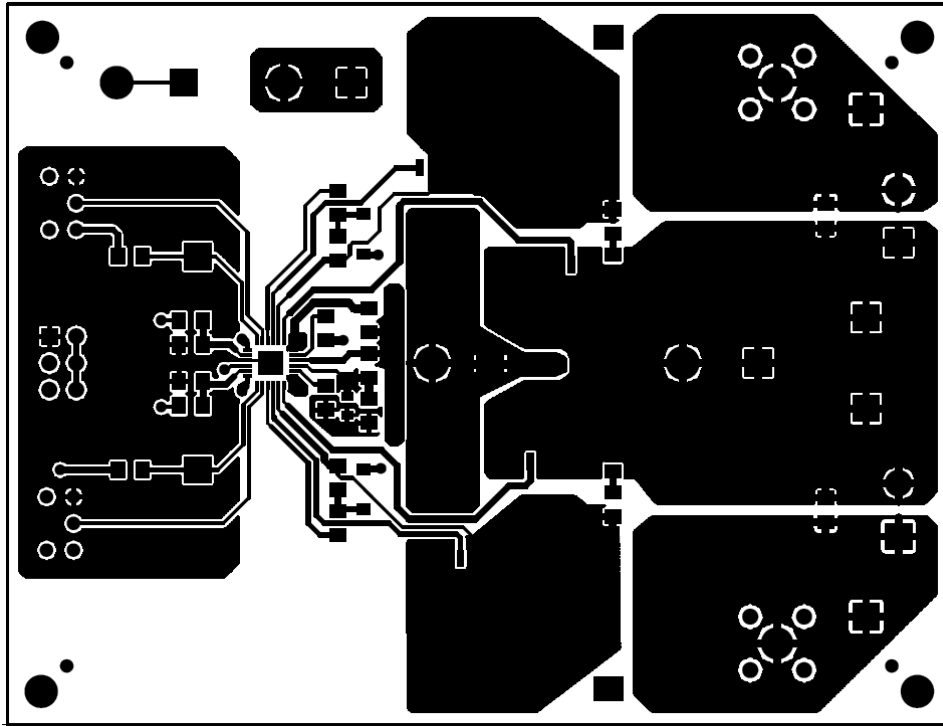


Figure 8. Top Layer

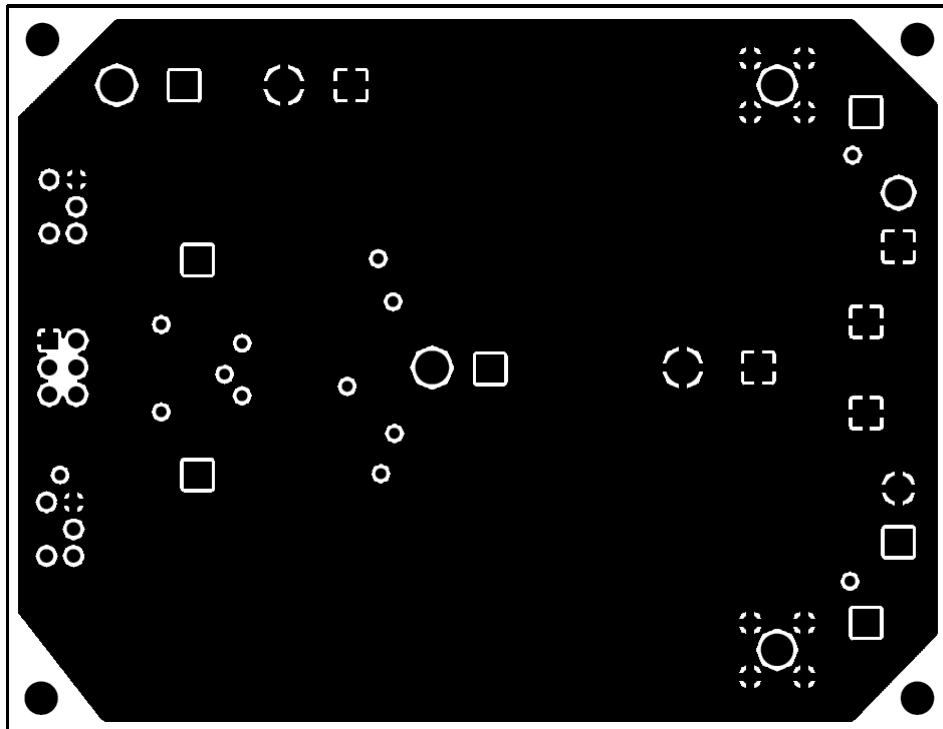


Figure 9. Inner Layer 1

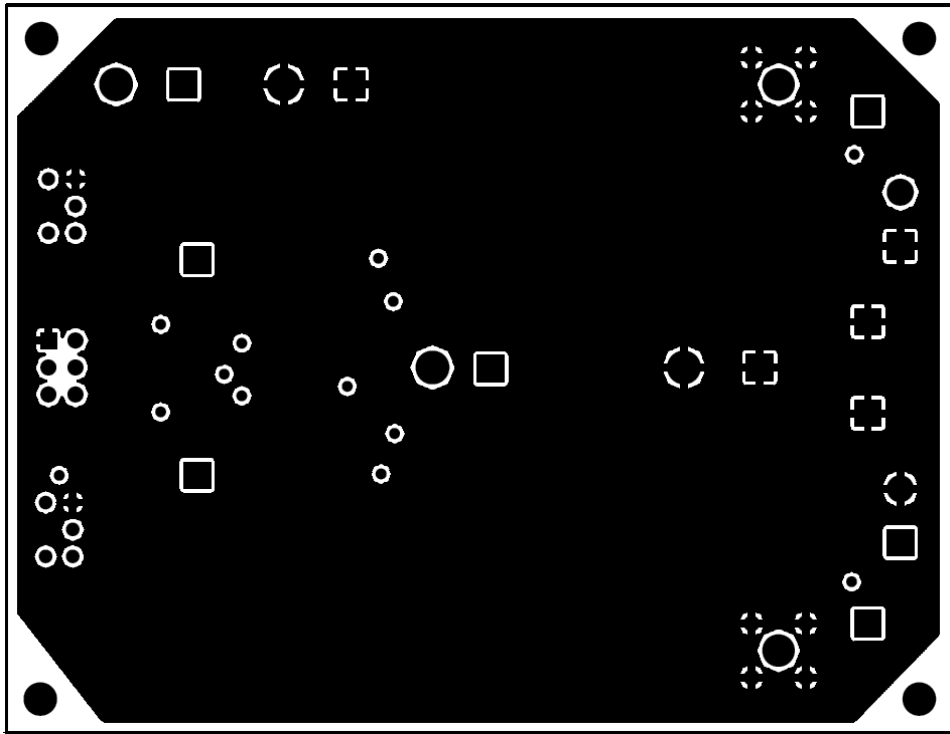


Figure 10. Inner Layer 2

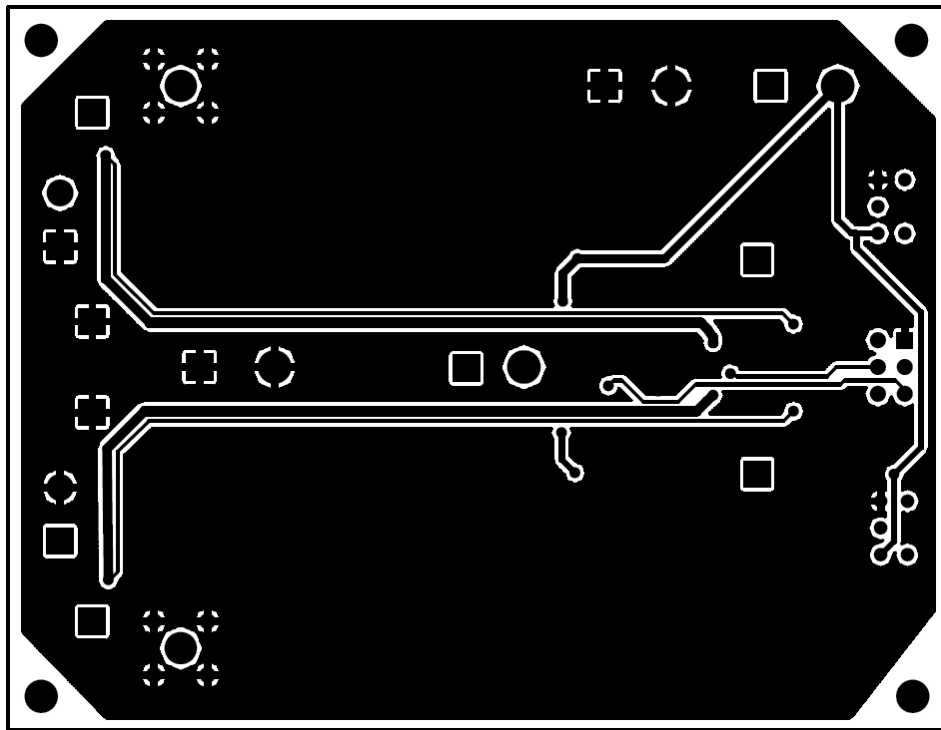


Figure 11. Bottom Layer

7. List of Materials

Table 3-1. List of Materials

| Reference Designator | QTY | Description | Size | Mfr | Part Number |
|-----------------------|-----|---|-----------------------|----------------------|---------------------------------|
| -- | 1 | Shunt, 100-mil, Black | 0.100 | 3M | 929950-00 |
| C1 | 0 | Capacitor, Aluminum | 0.26 x 0.26 inch | Any | Any |
| C13, C14 | 2 | Capacitor, POSCAP, 330 μ F, 2.5-V 18-m Ω (or 15-m Ω), 20% | 7343 | SANYO | 2R5TPE330MI or 2R5TPE330MF |
| C15 | 1 | Capacitor, Ceramic, 4.7 μ F, 6.3V, BJ, 20% | 0805 | TDK | C2012X5R0J475K |
| C16 | 1 | Capacitor, Ceramic, 1 μ F, 6.3V, BJ, 20% | 0805 | TDK | C2012X5R0J105K |
| C17 | 1 | Capacitor, Ceramic, 18pF, 50V, BJ, 20% | 0805 | Std | Std |
| C2, C3, C4, C5 | 4 | Capacitor, Ceramic, 10 μ F, 25V, BJ, 20% | 1210 | TDK / Taiyo Yuden | C3225JB1E106 / TMK325BJ106MM |
| C6, C11 | 2 | Capacitor, Ceramic, 0.1 μ F, 50V, BJ, 20% | 0805 | Std | Std |
| C7, C8 | 2 | Capacitor, POSCAP, 330 μ F, 2.5-V 15-m Ω (or 18-m Ω), 20% | 7343 | SANYO | 2R5TPE330MFor 2R5TPE330MI |
| C9, C10, C12, C18 | 0 | Capacitor, Ceramic | 0805 | Any | Any |
| CN1, CN2 | 2 | Adaptor, 3.5-mm probe clip (or 131-5031-00) | 0.2 | Tektronix | 131-4244-00 |
| D1, D2 | 0 | Diode, Schottky, 0.5A, 30V | SOD-123 | Any | Any |
| J1, J2 | 2 | Terminal Block, 2-pin, 15-A, 5.1mm | 0.40 x 0.35 inch | OST | ED1609 |
| JP1 | 1 | Header, 2x3-pin, 100mil spacing (36-pin strip) | 0.20 inch x 0.30 | Sullins | PTC36DAAN |
| L1, L2 | 2 | Inductor, 1.0uH, 20.5A, 2-m Ω | 0.496 x 0.532 inch | TOKO | FDA1254-1R0M |
| Q1, Q3 | 2 | MOSFET, N-ch, 30-V, 11-A, 12.5-m Ω | SO8 | IR | IRF7821 |
| Q2, Q4 | 2 | MOSFET, N-ch, 30-V, 13.8-A, 6.8-m Ω | SO8 | IR | IRF8113 |
| R1, R7 | 2 | Resistor, Chip, 100k Ω , 1/10W, 1% | 0805 | Std | Std |
| R12, R13 | 0 | Resistor, Chip | 0805 | Std | Std |
| R2, R9, R10 | 3 | Resistor, Chip, 3.3 Ω , 1/10W, 1% | 0805 | Std | Std |
| R3 | 1 | Resistor, Chip, 28.7k Ω , 1/10W, 1% | 0805 | Std | Std |
| R4, R6 | 2 | Resistor, Chip, 75k Ω , 1/10W, 1% | 0805 | Std | Std |
| R5 | 1 | Resistor, Chip, 73.2k Ω , 1/10W, 1% | 0805 | Std | Std |
| R8, R11 | 2 | Resistor, Chip, 6.8k Ω , 1/10W, 1% | 0805 | Std | Std |
| SW1, SW2 | 2 | Switch, ON-ON Mini Toggle | 0.28 x 0.18" | Nikkai | G12AP |
| TP1, TP2 | 2 | Test point, White, Thru hole | 0.125 x 0.125 inch | Keystone | 5012 |
| TP10 | 1 | Test point, Orange, Thru hole | 0.125 x 0.125 inch | Keystone | 5013 |
| TP3, TP4, TP5, TP6 | 4 | Test point, Black, Thru hole | 0.125 x 0.125 inch | Keystone | 5011 |
| TP7, TP8 | 2 | Test point, Yellow, Thru hole | 0.125 x 0.125 inch | Keystone | 5014 |

Table 3-2. List of Materials

| Reference Designator | QTY | Description | Size | Mfr | Part Number |
|---------------------------------|-----|---|------------------------|----------|----------------------------|
| TP9 | 1 | Test point, Red, Thru hole | 0.125 x 0.125 inch | Keystone | 5010 |
| U1 | 1 | IC, Dual Synchronous Step-Down Controller for Low Voltage Power Rails | QFN32 | TI | TPS51124RHB |
| VIN_GND, VIN, V5IN, V5IN_GND | 4 | Pin, Wiring Terminal | 0.09(D) X 0.31 inch | Mill Max | 3183-2-00-15-00- 00-080 |

8. References

1. TPS51124 Datasheet, Dual Synchronous Step-Down Controller for Low Voltage Power Rails (SLVS616)