

**LT8336**
**Low  $I_Q$  Synchronous Boost Silent Switcher  
with 2.5A, 40V Switch**

## DESCRIPTION

Demonstration circuit 2505A is a low  $I_Q$ , Silent Switcher® synchronous boost converter featuring the LT®8336. DC2505A is designed to convert an 8V to 20V source to 24V output, with up to 1.5A load current, depending on the input voltage. DC2505A operates at 2MHz switching frequency.

The DC2505A contains a selectable jumper, JP1, to aid in the selection of the desired SYNC pin mode of operation. The default setting is pulse-skipping mode of operation.

The DC2505A has an EMI filter installed. The EMI filter can be included by connecting the source to the VEMI terminal and the output to the VOUT2 terminal.

The Performance Summary section details the ratings of the DC2505A at room temperature.

The LT8336 data sheet gives a complete description of the part, operation and application information. The data sheet must be read in conjunction with this quick start guide for DC2505A.

[Design files for this circuit board are available.](#)

All registered trademarks and trademarks are the property of their respective owners.

## PERFORMANCE SUMMARY Specifications are at $T_A = 25^\circ\text{C}$

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Input Voltage		8	12	20	V
Output Voltage		23.25	24	24.75	V
Maximum Output Current	$V_{IN} = 8\text{V}$	0.6			A
	$V_{IN} = 12\text{V}$	0.9			A
	$V_{IN} = 16\text{V}$	1.2			A
	$V_{IN} = 20\text{V}$	1.5			A
Output Voltage Ripple (Peak-to-Peak)*			100		mV
Efficiency	$V_{IN} = 12\text{V}, I_{OUT} = 0.9\text{A}$		94		%
Switching Frequency			2		MHz

\*Measured Across C15

# DEMO MANUAL DC2505A

## QUICK START PROCEDURE

Easily evaluate the performance of the LT8336 with DC2505A. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. With power off, connect the input power supply to the DC2505A demo board through VIN (E1) and GND (E2) terminals. Connect the load to the terminals VOUT1 (E7) and GND (E4) on the demo board.

2. Turn on the power at the input.

**Note:** Make sure that the input voltage is always within the specification range of 8V to 20V. To operate the DC2505A demo board with higher input/output voltage, input capacitor, output capacitor with higher voltage ratings might be needed.

3. Check for the proper output voltage. If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

4. Once the proper output voltage is established, adjust the input voltage and load current within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

**Note:** When measuring the input or output voltage ripples, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the VIN (E1) and GND (E2), or VOUT1 (E7) and GND (E4) terminals. See Figure 2 for proper scope probe technique.

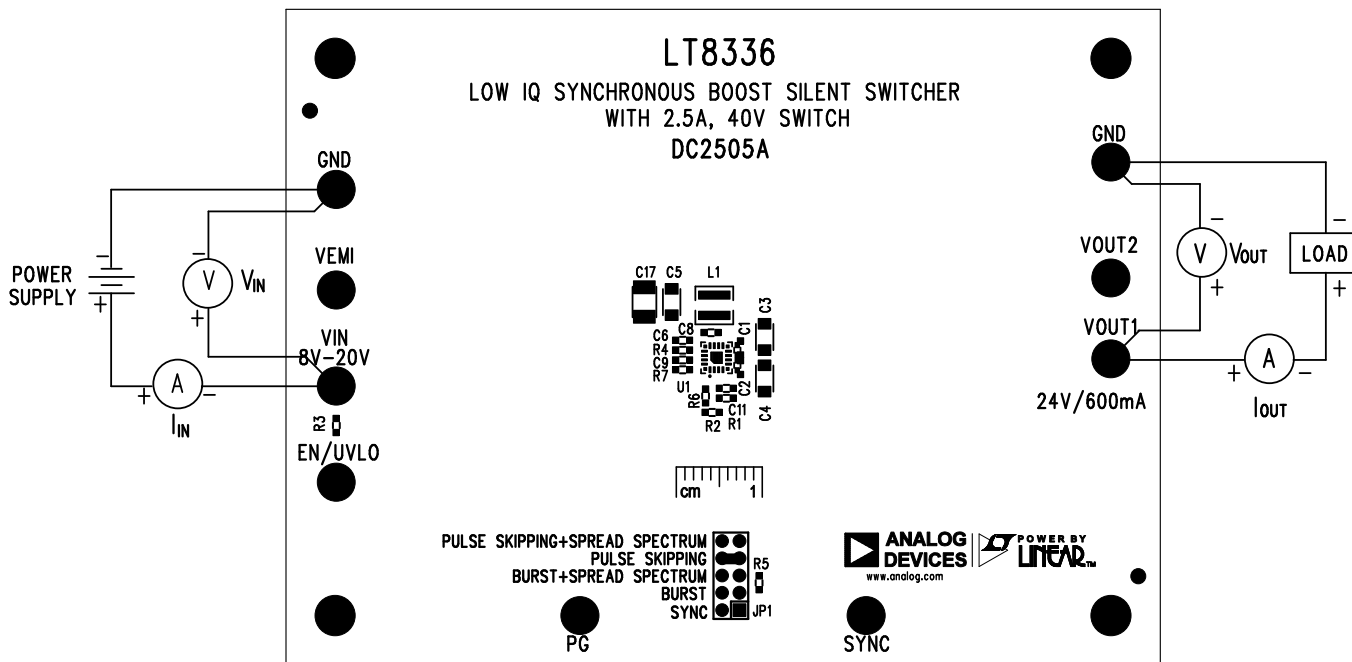


Figure 1. Proper Measurement Equipment Setup



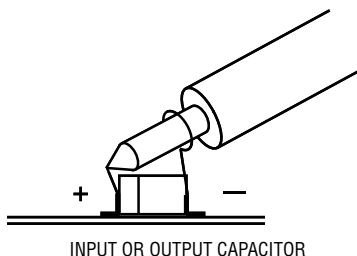


Figure 2. Proper Scope Probe Placement for Measuring Input or Output Ripple


**QUICK START PROCEDURE**

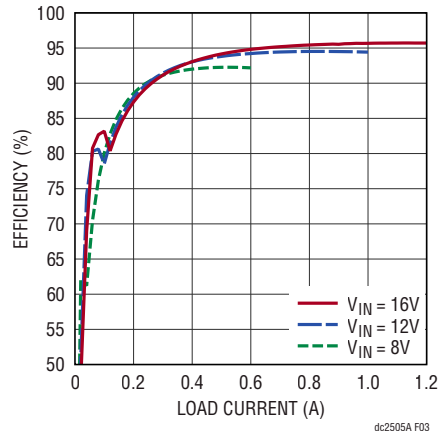


**Figure 3. Typical Efficiency Curves**

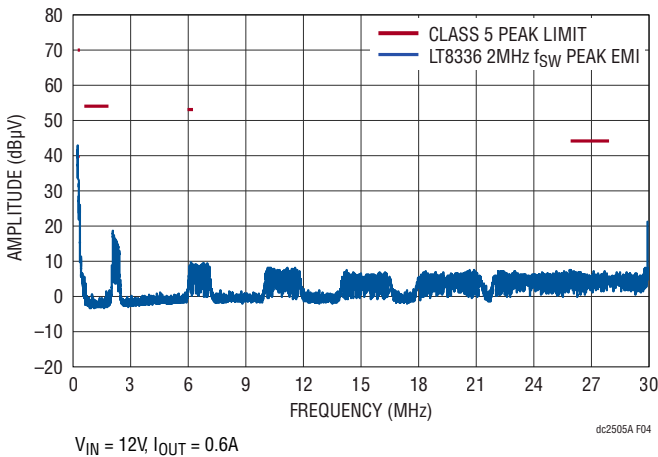


**Figure 4. Conducted Emission Test (CISPR25 Class 5 Peak)**

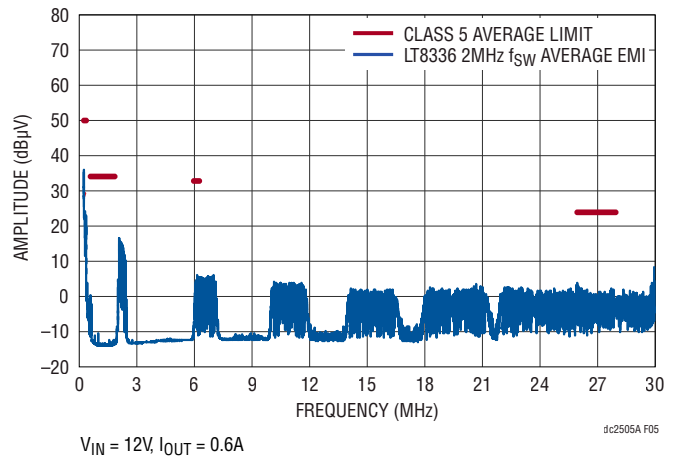

**Figure 5. Conducted Emission Test (CISPR25 Class 5 Peak Average)**

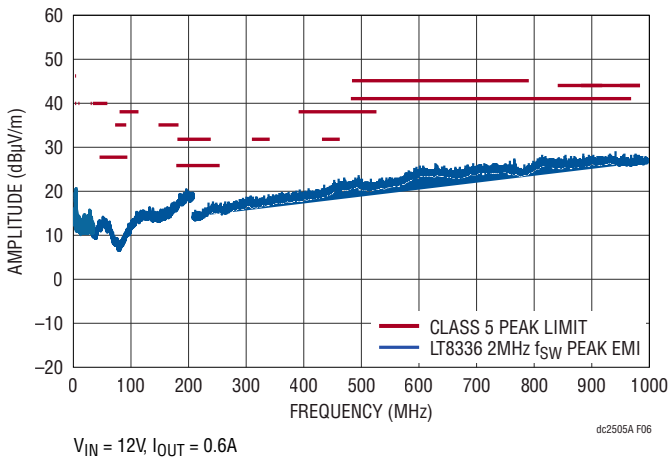

**Figure 6. Radiated Emission Test (CISPR25 Class 5 Peak)**

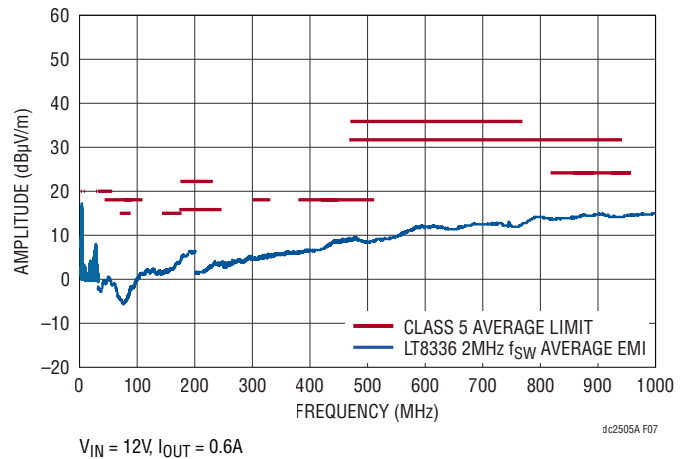


**Figure 7. Radiated Emission Test (CISPR25 Class 5 Peak Average)**

# DEMO MANUAL DC2505A

## PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
<b>Required Circuit Components</b>				
1	4	C1, C2, C6, C9	CAP, 1 $\mu$ F, X7R, 50V, 10%, 0603	AVX, 06035C105KAT2A
2	4	C3-C5, C13	CAP, 10 $\mu$ F, X7R, 50V, 10%, 1206	SAMSUNG, CL31B106KBHNNNE
3	1	C7	CAP, 68 $\mu$ F, ALUM POLY HYB, 25V, 20%, 6.3mm x 5.8mm, AEC-Q200	PANASONIC, EEHZK1E680P
4	1	C8	CAP, 0.1 $\mu$ F, X7R, 50V, 10%, 0603	AVX, 06035C104KAT2A
5	2	C14, C15	CAP, 0.1 $\mu$ F, X7R, 50V, 10%, 0402, AEC-Q200	MURATA, GCM155R71H104KE02D
6	1	FB1	IND., 0.47 $\mu$ H, PWR, SHIELDED, 30%, 3.6A, 31m $\Omega$ , 1210	WURTH ELEKTRONIK, 74479299147
7	1	FB2	IND., 600 $\Omega$ @100MHz, FERRITE BEAD, 25%, 2A, 150m $\Omega$ , 0805	WURTH ELEKTRONIK, 742792040
8	1	L1	IND., 6.8 $\mu$ H, PWR, SHIELDED, 20%, 3A, 74m $\Omega$ , 4030	WURTH ELEKTRONIK, 74438357068
9	2	R1, R3	RES., 1M $\Omega$ , 1%, 1/10W, 0603, AEC-Q200	VISHAY, CRCW06031M00FKEA
10	1	R2	RES., 43.2k, 1%, 1/10W, 0603, AEC-Q200	PANASONIC, ERJ3EKF4322V
11	1	R4	RES., 162k, 1%, 1/10W, 0603, AEC-Q200	PANASONIC, ERJ3EKF1623V
12	1	R5	RES., 49.9k, 1%, 1/10W, 0603	NIC, NRC06F4992TRF
13	1	R6	RES., 47.5k, 1%, 1/10W, 0603	VISHAY, CRCW060347K5FKEA
14	1	R7	RES., 100k, 1%, 1/10W, 0603	STACKPOLE ELECTRONICS, INC., RMCF0603FG100K
15	1	U1	IC, $\mu$ POWER SYNC. BOOST CONVERTER, LQFN-16, 40V, 2A	ANALOG DEVICES, LT8336EV#PBF
<b>Additional Demo Board Circuit Components</b>				
1	0	C17	CAP, OPTION, 1210	
2	0	C11	CAP, OPTION, 0603	
<b>Hardware</b>				
1	9	E1-E9	TEST POINT, TURRET, 0.094" MTG. HOLE, PCB 0.062" THK	MILL-MAX, 2501-2-00-80-00-00-07-0
2	1	JP1	CONN., HDR, MALE, 2x5, 2mm, VERT, ST, THT	WURTH ELEKTRONIK, 62001021121
3	4	MP1-MP4	STANDOFF, NYLON, SNAP-ON, 11.1mm	WURTH ELEKTRONIK, 702934000
4	1	XJP1	CONN., SHUNT, FEMALE, 2 POS, 2mm	WURTH ELEKTRONIK, 60800213421

**SCHEMATIC DIAGRAM**

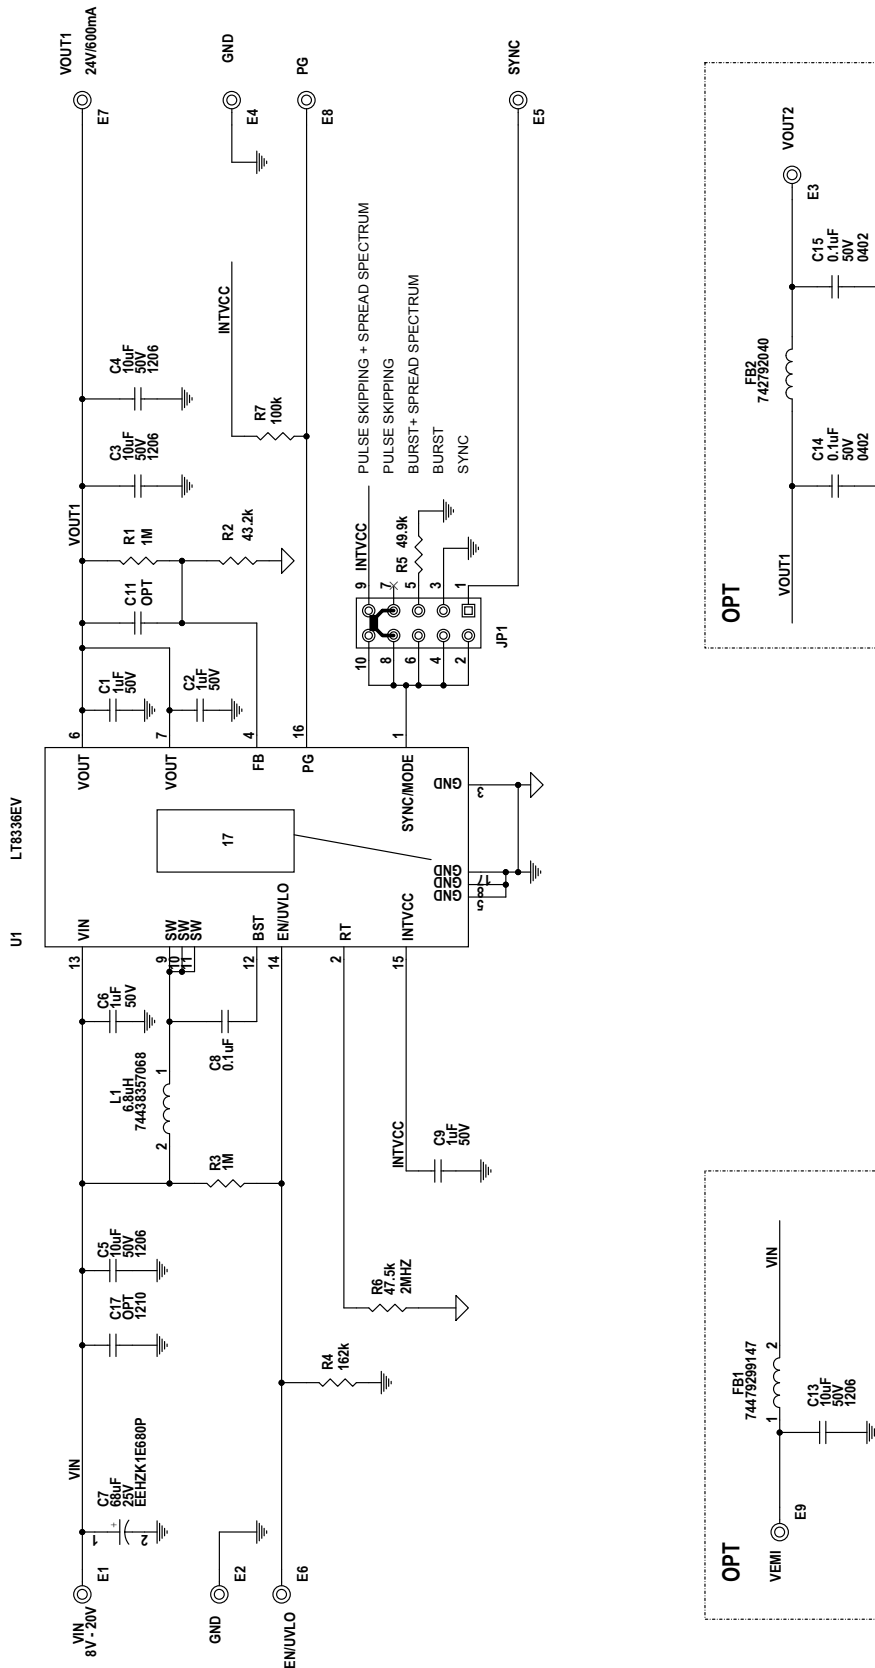



## ESD Caution

**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.