



### Electrical Specifications

**Frequency Range:** DC-894 MHz  
**Insertion Loss:** 1.5 dB Max  
**Return Loss:** 15 dB Min  
**Rejection:** >70 dB @ 1760-2668 MHz  
**Power Handling:** 20 Watts


### Mechanical

**Connector Type:** SMA (F)  
**Dimensions:** 102 x 76 X 15 mm

### Environmental

**Operating Temperature:** -40 to +85° C

### Outline Drawing:

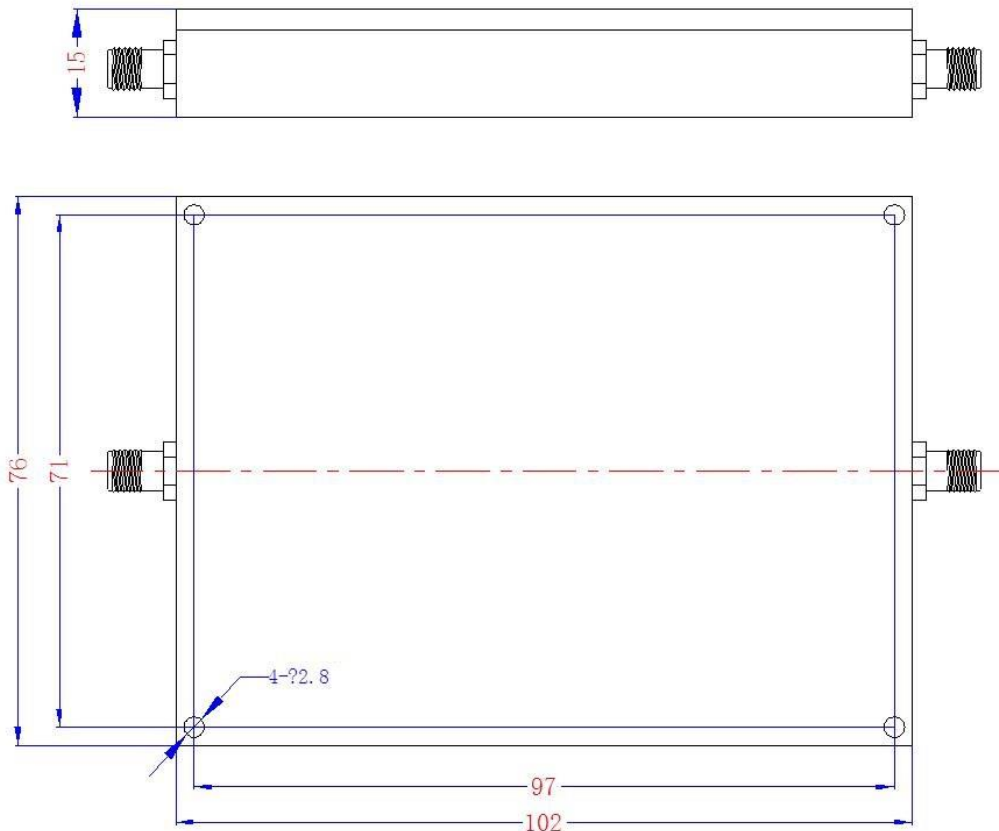

Tolerance:  $\pm 0.5$ .  
Dimension: mm