


TP0602

Micro SMD Hard Ferrite Transponder Inductor

6.6x2.3x1.75mm (2.38mH - 10.8mH)

SINGLE AXIS TRANSPONDERS INDUCTORS

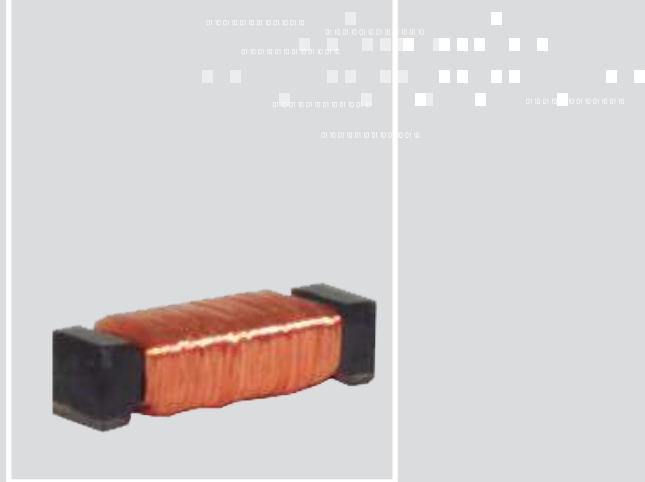

FEATURES


The TP0602 Series of Surface Mountable ferrite wound inductor is a small transponder solution for automotive applications like TPMS, Keyless Go and Keyless entry systems.

01 CHARACTERISTICS

- › Size: 6.6mm x 2.3mm x 1.75mm.
- › Good mechanical performance.
- › High sensitivity for 20KHz, 40KHz and 125KHz applications.
- › Good performance in thermal shock test.
- › Good cost/performance ratio.
- › Available high inductance version for hearing aids applications.
- › Good solution for TPMS moulded solutions.
- › The TP0602 is the smaller SMD transponder coil available in the market.
- › This component is also functional to 20kHz and 134kHz.

02 SPECIFICATIONS

DIMENSIONS AND RECOMMENDED PAD-LAYOUT (mm)

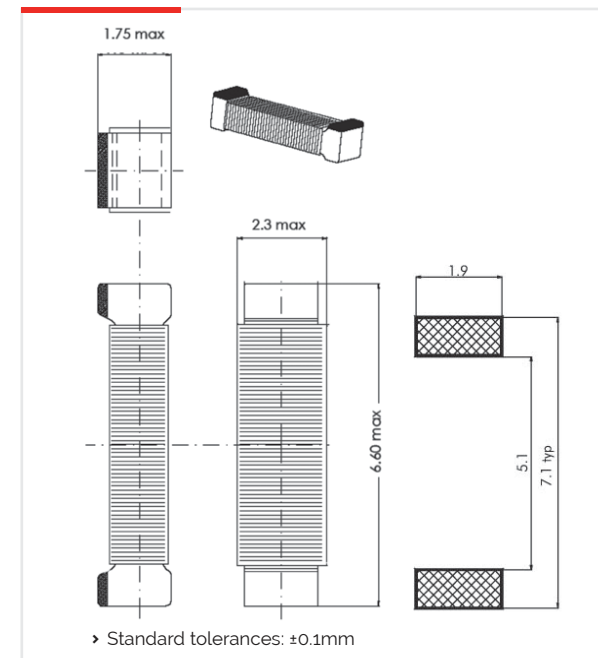

ELECTRICAL SPECIFICATIONS 20kHz

P/N	L (mH)	Toler.	Q min	SRF Min (kHz)
TP0602-124J	120	±5%	4	100
TP0602-104J	100	±5%	5.0	120
TP0602-823J	82	±5%	5.6	140
TP0602-673J	67	±5%	5.2	100
TP0602-563J	56	±5%	7.5	190
TP0602-473J	47	±5%	8.0	200
TP0602-333J	33	±5%	10	200

ELECTRICAL SPECIFICATIONS | 125kHz

P/N	L (mH)	Tolerance	Q min	SRF Min (kHz)	Sensitivity (mVpp/App/m) min
TP0602-0238J	2.38	±5%	20.7	900	16
TP0602-0491J	4.91	±5%	20.7	600	25
TP0602-0720J	7.20	±5%	18	500	30
TP0602-0900J	9.00	±5%	18	450	35

Operating and test freq: 125kHz.

SRF: Self-resonant frequency of the coil.

C: Capacitor for tuning circuits (125kHz).

This chart is a reference guide for the most common required values at working frequency of 125 kHz. Any other inductance value at LF or tighter tolerances can be provided. Please contact our sales department for any inquiry.

Sensitivity measured with Helmholtz coils H=8.36 App/m @125 kHz.

Contact us for measurement specification.

› Terminals: Ag-Ni-Sn100.

› Wire: H, 180°C, Solderable.

› Max. Operating Temperature 125°C.

› Refer to the General Features of SMD

› transponder inductors page.