

Data Stream RS485 Digital Voltage Transducer

DIN RAIL / PANEL MOUNT



CRD4510

Single Element
150 to 300 VAC Input Range



CRD4550

Two Element
150 to 300 VAC Input Range



CRD4570

Three Element
150 to 300 VAC Input Range

The **CRD4500** Series Data Stream Digital Transducers are designed for applications where AC current waveforms are not purely sinusoidal. The digital technology is used to measure voltage, current, power frequency and energy in single and three phase designs. The data is streamed over an RS485 IEEE bus which enables multiple transducers to communicate thru a single master connection. These advanced sensors are ideal for entire plant or zone monitoring. Also, the communication algorithm can be pre-ordered with ASCII based control or modified MODBUS based control.

Sensing

True RMS Voltage, Each Phase

Applications

Sub-Metering
Motor Loads
Uninterruptible Power Systems
Remote Monitoring
Load Shedding
Energy Management

Features

35mm DIN Rail or Panel Mount
Red LED - Flashes when Power is Connected
Red & Green LED Flash during Communication
24 VDC powered
Use with external current transformers
Highest precision available
Connection diagram printed on case

Regulatory Agencies



PART NUMBERS

| | | | |
|----------------|---|--|---|
| CRD4510 | - | | Single Element, AC Voltage RS485 Digital Transducer |
| CRD4550 | - | | Two Element, AC Voltage RS485 Digital Transducer |
| CRD4570 | - | | Three Element, AC RS485 Digital Transducer |

└─ **150** - 0-150 VAC
300 - 0-300 VAC
 Available up to and including 600 VAC

Note: Add an M at the end for MODBUS CRD4510-150-M


RS485 Digital Voltage Transducer

SPECIFICATIONS


| | |
|---|---|
| Basic Accuracy:0.5% | Torque Specifications:3.0 inch lbs (0.4Nm) |
| Calibration:True RMS Sensing | Response Time:250 ms. max. 0-90% FS |
| Thermal Drift:500 PPM/°C | Relative Humidity:5% to 95%, Non-Condensing |
| Operating Temperature ₁ :0°C to +60°C | Output Resolution:16 bit |
| Installation Category:CAT II | Transducer fanout on common bus:64 max. |
| Vibration Tested To:IEC 60068-2-6,1995 | Baud Rate ₃ :1200, 2400, 4800, 9600,19.2K .bps |
| Pollution Degree:2 | A/D Conversion Type:4th order Delta Sigma |
| Insulation Voltage:2500 VDC | Device Address ₃ :00 to FF |
| Altitude:2000 meter max | Data Format:ASCII |
| Frequency Range:20 Hz - 5 KHz | Supply Current:.....Typical 30mA Max 30mA |
| MTBF:Greater than 100K hours | Weight:..0.5 lbs. |
| Cleaning:Water-dampened cloth | |
| Supply Voltage ₂ :24 VDC ±10% | |
| 1) RH 5% to 95%, non-condensing 2) 0.4% max. ripple Vpp | no flow control, 1 stop bit |
| 3) Factory default settings: address 01, baud rate 9600, no parity, | |

Data Stream


B




CRD4510 Single Element, 2-Wire



CRD4550 Dual Element, 3-Wire





CRD4550 Dual Element, 3-Wire

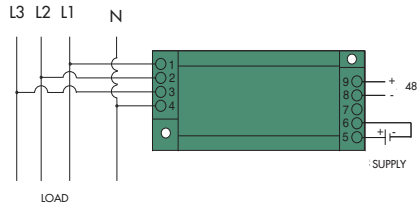


CRD4570 3 Element, 4-Wire

Connection Diagram

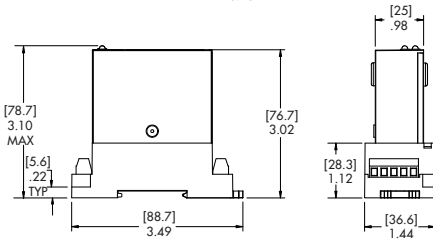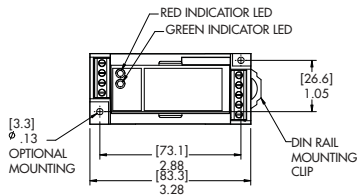

OUTLINE DRAWING

CRD485-232 RS485 to RS232 Converter Accessory Connect PC to RS485 Bus

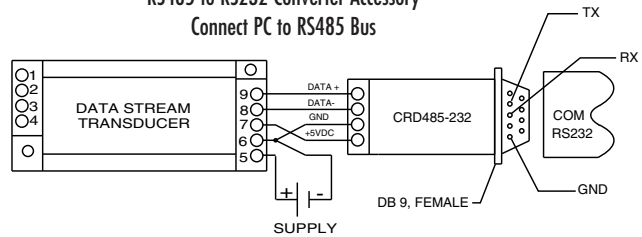

ASCII Simplified Programming Commands

A simplified data structure is used with only 6 commands required for full control of the transducer. Commands are : Read Transducer Name, Read Configuration, Set Configuration, Read Measurements, Read Energy Totalizer and Clear Energy Totalizer. For illustration, the following commands are used to read data from a CRD5170 3 Phase, 4 Wire Transducer with a device address of 00.

Command Transducer to Read Data: #00A<cr>

Transducers Response: >+[% FS Voltage_{L1-N}]+[% FS Current_{L1}]+[% FS Voltage_{L2-N}]+[% FS Current_{L2}]+[% FS Voltage_{L3-N}]+[% FS Current_{L3}].[+/- % FS Power][+/- % FS VARS][+/-Power Factor][Frequency]<cr>

Command Transducer to Read Energy Totalizer: #00W<cr>

Transducer Responds: 01[+/-KWHr][+/-KVHr][check sum]<cr>

Note: This is for illustration purposes only, See Applications Guides (Section I for complete instructions.