



ATTEND
Connect to Your Success

SPECIFICATION AND PERFORMANCE

SERIES:
115B Series

FILE:
115B Series_spec

DATE:
2012/ 12/ 12

Scope:

This specification covers the requirements for product performance, test methods and quality assurance provisions of 115B Series.

Performance and Descriptions:

The product is designed to meet the electrical, mechanical and environmental performance requirements specification. Unless otherwise specified, all tests are performed at ambient environmental conditions.

RoHS:

All material in according with the RoHS environment related substances list controlled.

MATERIAL AND FINISH

MATERIAL AND FINISH		
INSULATOR	Material	Housing: LCP UL94V-0. Black Cover: LCP UL94V-0. Black
	Plating	
CONTACT	Material	Contact: phosphor bronze C5191
	Plating	Gold plating on contact area, nickel under plating overall.
SHELL OR COVER	Material	
	Plating	
RATING		Current Rating: 0.5A per pin Voltage Rating: 30V DC/AC Operating Temperature: -40°C to +85°C Storage Temperature: -40°C to +85°C

The information contained herein is exclusive property of. Do not copy and print except that Attend accepts.

本文件係屬立威科技股份有限公司所有；非經同意，不得以任何覆寫、拷貝、翻印等方式私自據有。亦不得擅加毀損、塗改。



SPECIFICATION AND PERFORMANCE

SERIES: 115B Series
FILE: 115B Series_spec
DATE: 2012/ 12/ 12

ELECTRICAL		
Item	Requirement	Test Condition
Contact Resistance	Initial: 30 mΩ Maximum After test: 30 mΩ Maximum	(EIA 364-23) Subject mated contacts assembled in housing to 20mV maximum open circuit at 100 mA maximum The object of this test is to detail a standard method to measure the electrical resistance across a pair of mated contacts such that the insulating films, if present will not be broken or asperity melting will not occur.
Insulation Resistance	Insulation Resistance: 1000MΩMin	(EIA 364-21) Apply a 500V DC between adjacent terminals and between terminals to ground
Dielectric Withstanding Voltage	No flashover or insulation breakdown	(EIA 364-20) Apply a voltage 500V AC R.M.S for 1 minute between adjacent terminals and between terminals to ground

MECHANICAL		
Item	Requirement	Test Condition
Durability	No physical damage.	(EIA 364-09) Insertion and extraction are repeated 5000 cycles with the actually card at the speed rate of 700 min cycles/hour. Exchange the actually card every 2000cycles.

The information contained herein is exclusive property of ATTEND. Do not copy and print except that ATTEND accepts.

本文件係屬立威科技股份有限公司所有；非經同意，不得以任何覆寫、拷貝、翻印等方式私自據有。亦不得擅加毀損、塗改。



ATTEND
Connect to Your Success

SERIES: 115B Series
FILE: 115B Series_spec
DATE: 2012/ 12/ 12

SPECIFICATION AND PERFORMANCE

Vibration	No Damage Contact Resistance: 30milliohms MAX Change from initial: 30milliohms Discontinuity: 1microsecond Max.	(EIA-364-28) Amplitude: 1.52mm P-P or 1.47mm/s ² Sweep time: 10~55~10Hz in 20 minutes Duration: 12 time in each (total of 36 times) Electrical: DC 100 mA current Load shall be flowed during the test
-----------	---	---

ENVIRONMENTAL		
Item	Requirement	Test Condition
Thermal Shock	No evidence of damage.	(EIA 364-32 I) Subject mated connectors should be tested according to the condition listed below: Temperature: -25 ~ 85°C Cycles: 5 cycles Exposure time at temp. 30 minutes.
Humidity	No appearance damaged	(EIA 364-31) Mate a dummy card and expose to 60±2°C for 96 hours Relative humidity 90. Upon completion of the exposure period, the test specimens shall be conditioned at anibient room conditions for 1 to 2hours,after which the specified measurements shall be performed

The information contained herein is exclusive property of ATTEND. Do not copy and print except that Attend accepts.

本文件係屬立威科技股份有限公司所有；非經同意，不得以何覆寫、拷貝、翻印等方式私自據有。亦不得擅加毀損、塗改。



ATTEND
Connect to Your Success

SERIES:
115B Series

FILE:
115B Series_spec

DATE:
2012/ 12/ 12

SPECIFICATION AND PERFORMANCE

Heat Resistance	No appearance damaged	(EIA 364-17) Mate a dummy card and expose to 70± 2°C for 96Hr Upon completion of the exposure period,the test specimens shall be conditioned at ambient room conditions for 1 to 2Hr,after which the specified measurements shall be performed.
-----------------	-----------------------	---

SOLDER ABILITY

Item	Requirement	Test Condition
Solderability	The surface of the portion to be soldered shall at least 95% covered	(EIA 364-52) After one hour steam aging. The object of test procedure is to detail a uniform test methods for determining sim card connector solderability. The test procedure contained here utilizes the solder dip technique. It is not intended to test or evaluate solder cup, solder eyelet, other hand-soldered type or SMT type terminations.
Resistance to Soldering Heat	260°C± 5°C 10Sec	Peak temperature: 260°C± 5°C 10Sec Soldering temperature: 230°C Preheating temperature: 150~ 180°C

The information contained herein is exclusive property of. Do not copy and print except that Attend accepts.

本文件係屬立威科技股份有限公司所有；非經同意，不得以任何覆寫、拷貝、翻印等方式私自據有。亦不得擅加毀損、塗改。




ATTEND
Connect to Your Success

SERIES:
115B Series

FILE:
115B Series_spec

DATE:
2012/12/12

SPECIFICATION AND PERFORMANCE

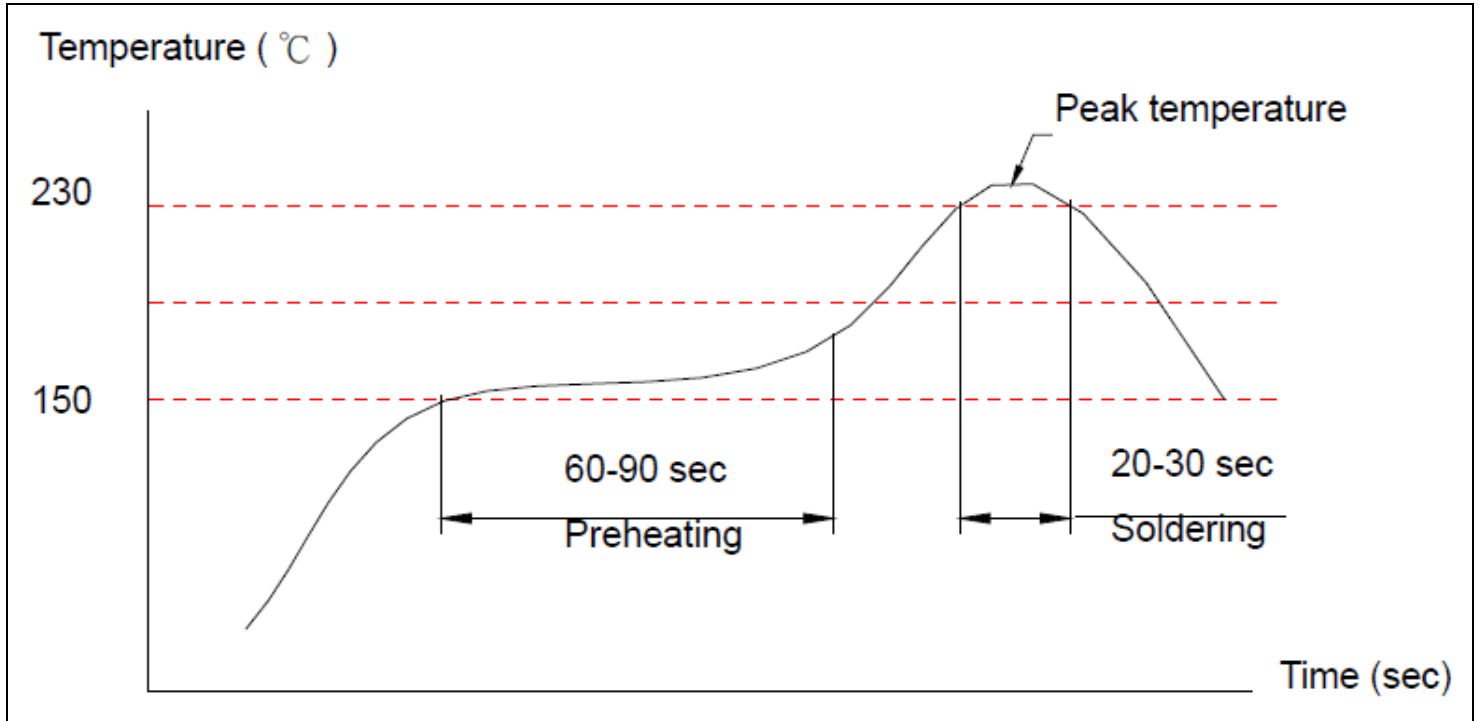

The information contained herein is exclusive property of. Do not copy and print except that Attend accepts.

本文件係屬立威科技股份有限公司所有；非經同意，不得以何覆寫、拷貝、翻印等方式私自據有。亦不得擅加毀損、塗改。