

ADJUSTABLE HIGH PRECISION SHUNT REGULATOR

■GENERAL DESCRIPTION


The **NJM2373/NJM2373A** and **NJM2376** are adjustable high precision shunt regulators.

The output voltage can be adjusted to any value between reference voltage and 14V by two extend resistors.

■PACKAGE OUTLINE



NJM2373F/AF
NJM2376F




NJM2373U/AU
NJM2376U

■FEATURES





- Operating Voltage V_{REF} to 13V
- High Precision Voltage Reference

| | |
|-------------|----------|
| NJM2373 | 1.25V±2% |
| NJM2373A/76 | 1.25V±1% |
- Minimum Input Current 80uA typ.
- Adjustable Output Voltage For
External Resistance two Parts
- Bipolar Technology
- Package Outline SOT-89 (3pin), MTP5

■BLOCK DIAGRAM

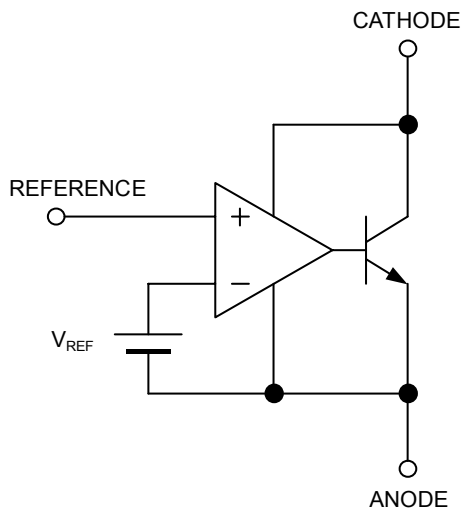

■PIN CONFIGURATION

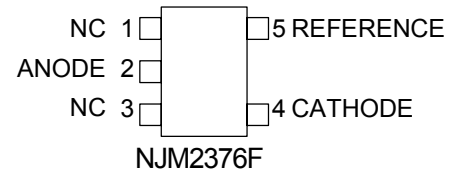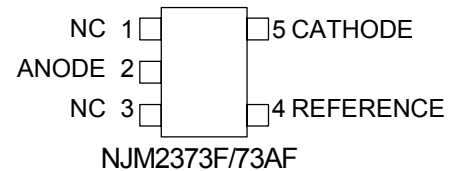

NJM2373/73A/76

■ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

| PARAMETER | SYMBOL | MAXIMUM RATINGS | UNIT |
|-----------------------------|-----------|----------------------------|------|
| Cathode Voltage | V_{KA} | +14 | V |
| Continuous Cathode Current | I_K | -30 ~ 50 | mA |
| Reference Input Current | I_{REF} | -10 ~ 0.05 | mA |
| Power Dissipation | P_D | (SOT-89) 350 (MTP5) 200 | mW |
| Operating Temperature Range | T_{OPR} | -40 ~ +85 | °C |
| Storage Temperature Range | T_{STG} | -40 ~ +150 | °C |

■RECOMMENDED OPERATING CONDITIONS (Ta=25°C)

| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNIT |
|-----------------|----------|-----------|------|------|------|
| Cathode Voltage | V_{KA} | V_{REF} | — | 13 | V |
| Cathode Current | I_K | 1 | — | 30 | mA |

■ELECTRICAL CHARACTERISTICS ($I_K=1mA$, Ta=25°C)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---|--------------------------------|---|------|------|-----------|----------|
| Reference Voltage | V_{REF} | $V_{KA}=V_{REF}$ NJM2373A (*1) | 1225 | 1250 | 1275 | mV |
| | | $V_{KA}=V_{REF}$ NJM2373A/ NJM2376 (*1) | 1237 | 1250 | 1263 | |
| Reference Voltage Change vs. Cathode Voltage Change | $\Delta V_{REF}/\Delta V_{KA}$ | $ V_{REF} \leq V_{KA} \leq 5V$ (*2) | — | — | ± 2.7 | mV/V |
| | | $5V \leq V_{KA} \leq 13V$ (*2) | — | — | ± 2.0 | mV/V |
| Reference Input Current | I_{REF} | $V_{KA}=V_{REF}$ $R1=10k\Omega$, $R2=\infty$ (*2) | — | 2.0 | 4.0 | μA |
| Minimum Input Current | I_{MIN} | $V_{KA}=V_{REF}$, $\Delta V_{REF}=\pm 1\%$ (*1) | — | 80 | 500 | μA |
| Cathode Current (Off Cond.) | I_{OFF} | $V_{KA}=13V$, $V_{REF}=0V$ (*3) | — | 0.01 | 1.0 | μA |
| Dynamic Impedance | $ Z_{KA} $ | $V_{KA}=V_{REF}$, $f \leq 1kHz$ $0.5mA \leq I_K \leq 30mA$ (*1) | — | 0.12 | — | Ω |

■TEMPERATURE CHARACTERISTICS ($I_K=1mA$, Ta= -40°C ~ 85°C)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--------------------------------|------------------|---|------|----------|------|---------|
| Reference Voltage Change | ΔV_{REF} | $V_{KA}=V_{REF}$ (*1) | — | ± 10 | — | mV |
| Reference Input Current Change | ΔI_{REF} | $V_{KA}=V_{REF}$ $R1=10k\Omega$, $R2=\infty$ (*2) | — | 0.5 | — | μA |

$|V_{REF}|$...Reference voltage includes error.

(*1): Test Circuit (Fig.1)

(*2): Test Circuit (Fig.2)

(*3): Test Circuit (Fig.3)

■TEST CIRCUIT

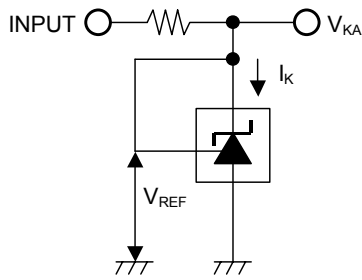


Fig.1 $V_{KA}=V_{REF}$ to test circuit

$$V_O = V_{KA} = V_{REF}$$

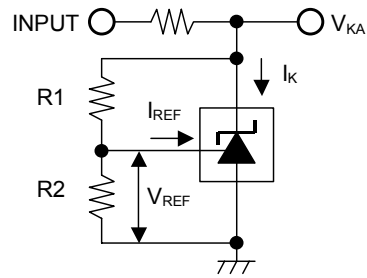


Fig.2 $V_{KA} > V_{REF}$ to test circuit

$$V_O = V_{KA} = V_{REF} \left(1 + \frac{R1}{R2} \right) + I_{REF} \times R1$$

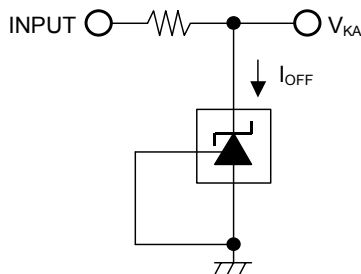


Fig.3 I_{OFF} to test circuit


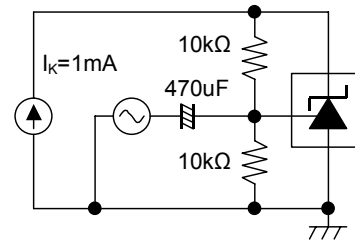








Fig.4 Gain and Phase to test circuit

■POWER DISSIPATION VS. AMBIENT TEMPERATURE

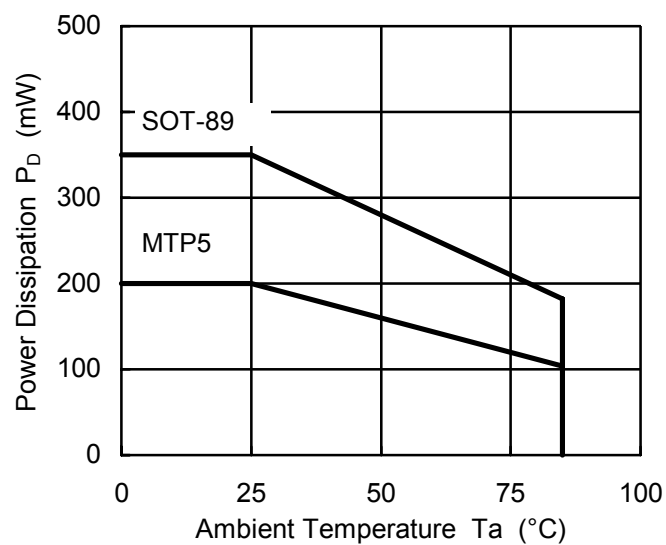


NJM2373/73A/76

■ TYPICAL CHARACTERISTICS

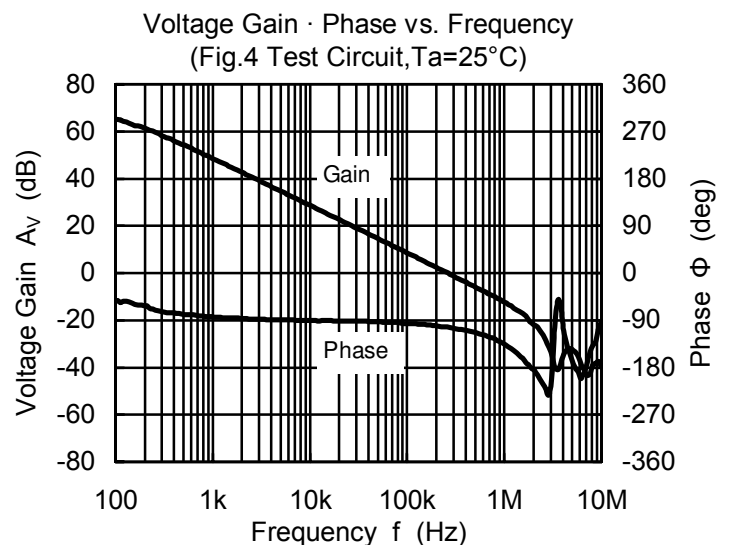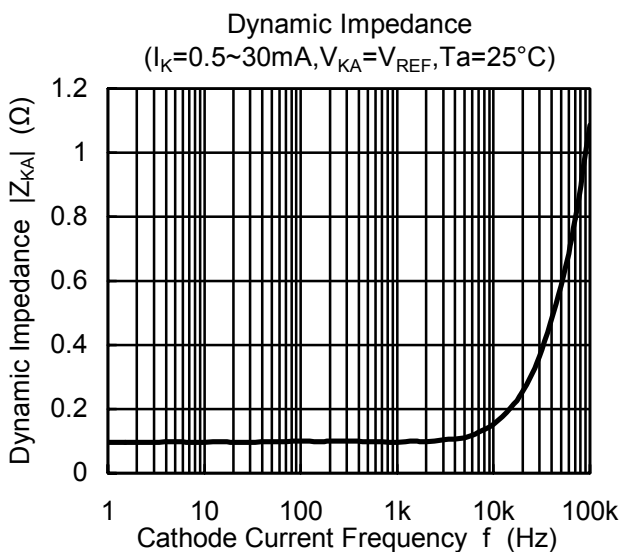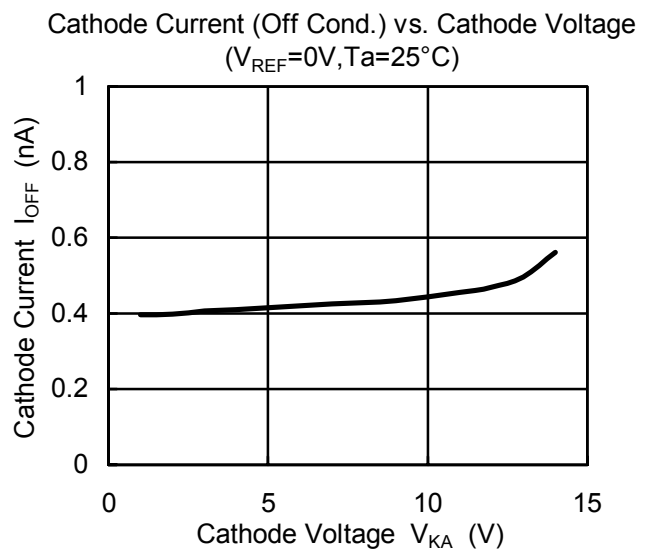
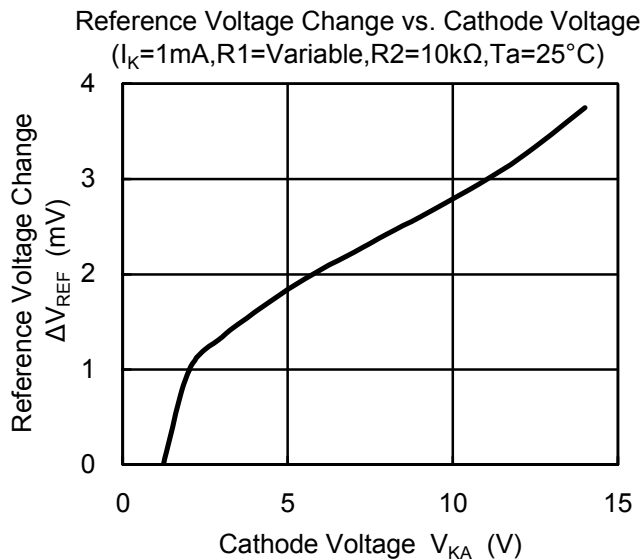
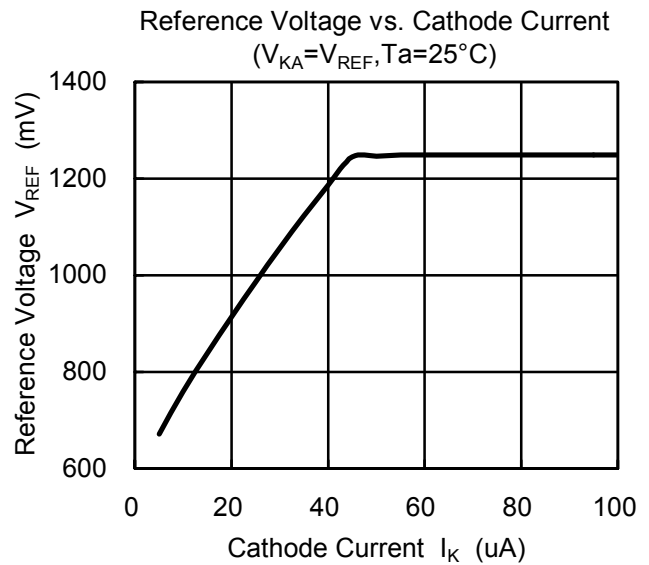
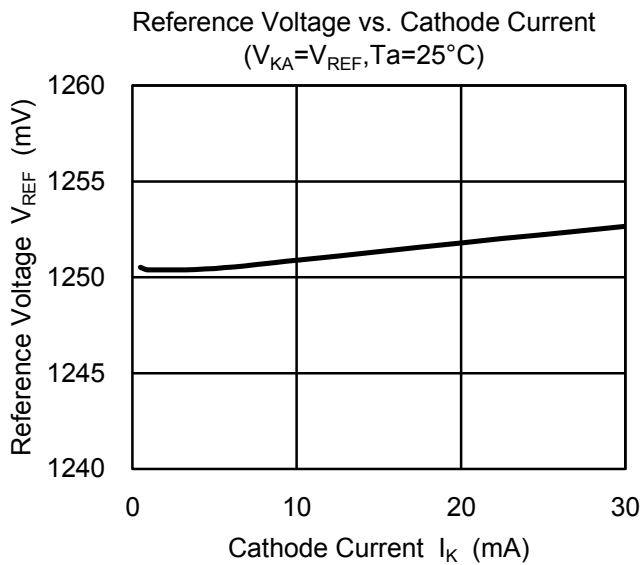


■ TYPICAL CHARACTERISTICS

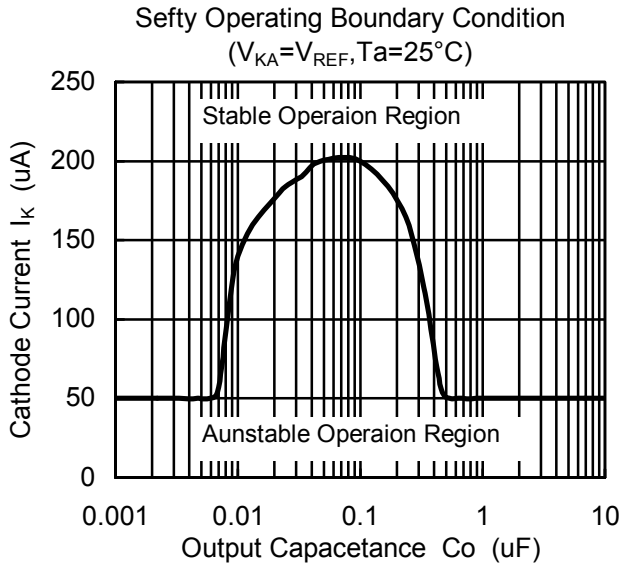

Note) Oscillation might occur while operating within the range of safety curve.

So that, it is necessary to make ample margins by taking considerations of fluctuation of the device.

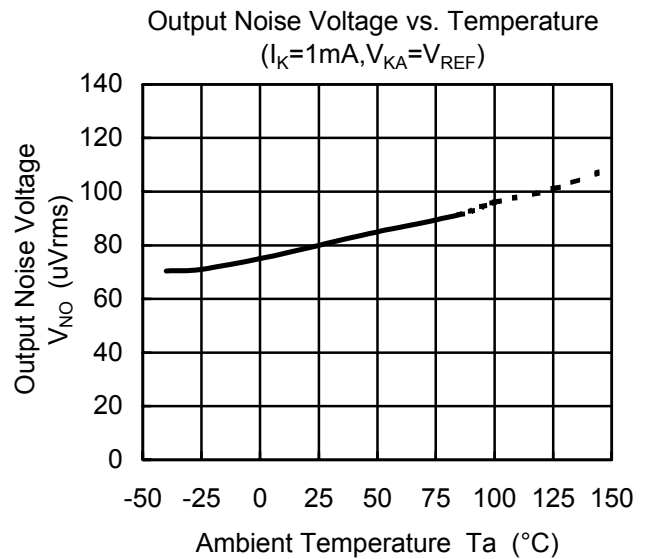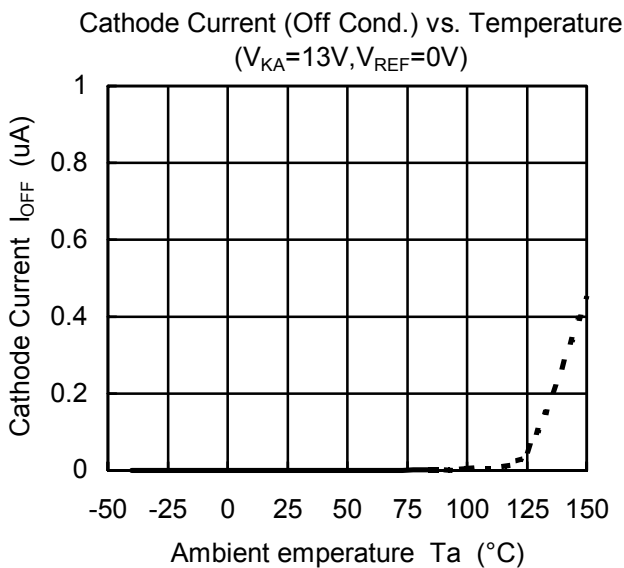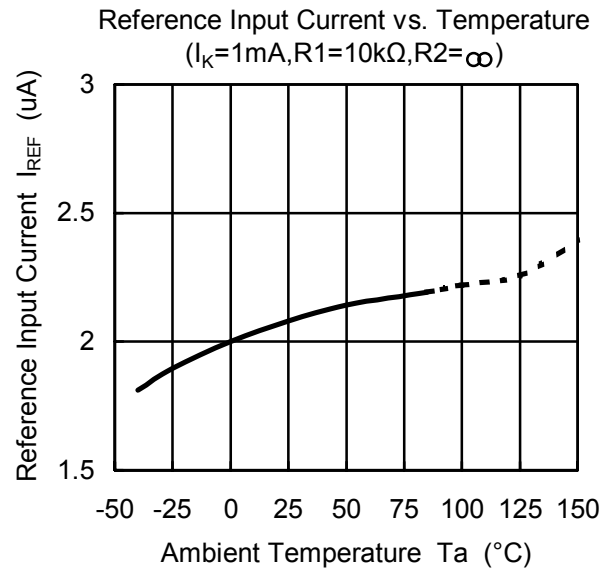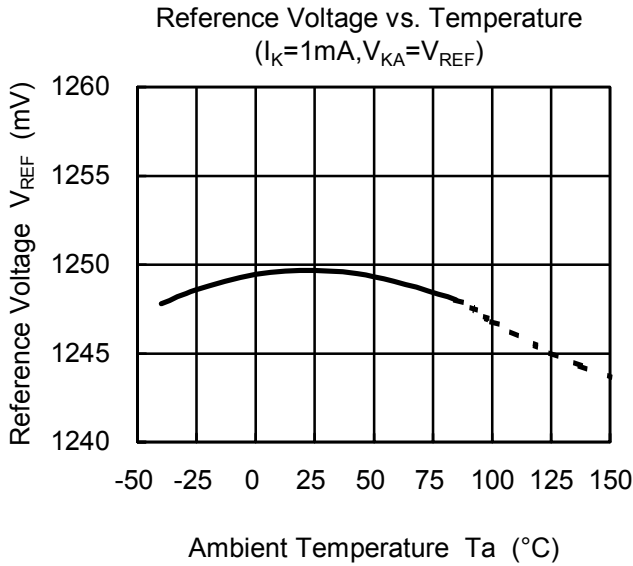

MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.