



# EVQ4313-R-01A

## 45V, 3A, Low-I<sub>Q</sub>, Synchronous Step-Down Converter with Frequency Spread Spectrum Evaluation Board, AEC-Q100 Qualified

### DESCRIPTION

The EVQ4313-R-01A evaluation board is designed to demonstrate the capabilities of the MPQ4313, a synchronous, step-down switching regulator with a configurable frequency and an integrated, internal high-side MOSFET (HS-FET) and low-side MOSFET (LS-FET). It provides up to 3A of highly efficient output current (I<sub>OUT</sub>), with current mode control for fast loop response.

The wide 3.3V to 45V input voltage (V<sub>IN</sub>) range accommodates a variety of step-down applications in automotive input environments. A 1.7μA quiescent current (I<sub>Q</sub>) in shutdown mode allows the device to be used in battery-powered applications. High power conversion

efficiency across a wide load range is achieved by scaling down the switching frequency (f<sub>SW</sub>) under light-load conditions to reduce switching and gate driver losses.

Frequency foldback helps prevent inductor current (I<sub>L</sub>) runaway during start-up. Thermal shutdown provides reliable, fault-tolerant operation. High-duty cycle and low-dropout mode are provided for automotive cold crank conditions.

The EVQ4313-R-01A is fully assembled and tested. The MPQ4313 is available in a QFN-20 (4mmx4mm) package with wettable flank, and is AEC-Q100 Grade 1 qualified.

### PERFORMANCE SUMMARY

Specifications are at T<sub>A</sub> = 25°C, unless otherwise noted.

| Parameter                                  | Condition   | Value       |
|--|---|-------------|
| Input voltage (V <sub>IN</sub> ) range     |   | 3.3V to 45V |
| Output voltage (V <sub>OUT</sub> )         | V <sub>IN</sub> = 3.3V to 45V, I <sub>OUT</sub> = 0A to 3A            | 3.3V        |
| Maximum output current (I <sub>OUT</sub> ) | V <sub>IN</sub> = 3.3V to 45V   | 3A          |
| Typical efficiency                         | V <sub>IN</sub> = 12V, V <sub>OUT</sub> = 3.3V, I <sub>OUT</sub> = 3A | 94.2%       |
| Switching frequency (f <sub>SW</sub> )     |   | 410kHz      |

### EVQ4313-R-01A EVALUATION BOARD



LxWxH (8.3cmx8.3cmx1.3cm)

| Board Number  | MPS IC Number   |
|---------------|-----------------|
| EVQ4313-R-01A | MPQ4313GRE-AEC1 |

## QUICK START GUIDE

1. Preset the power supply ( $V_{IN}$ ) between 3.3V and 45V, then turn off the power supply. Electronic loads represent a negative impedance to the regulator, setting a current too high can trigger hiccup mode.
2. If longer cables (>0.5m total) are used between the source and the evaluation board, install a damping capacitor at the input terminals, especially when  $V_{IN} \geq 24V$ .
3. Connect the power supply terminals to:
  - a. Positive (+): VEMI
  - b. Negative (-): GND
4. Connect the load terminals to:
  - a. Positive (+): VOUT
  - b. Negative (-): GND
5. After making the connections, turn on the power supply. The board should automatically start up.
6. To use the enable function, apply a digital input to the EN pin. Drive EN above 1V to turn on the regulator; drive EN below 0.85V to turn off the regulator.
7. The MPQ4313's switching frequency ( $f_{SW}$ ) can be configured by R3, the FREQ pin's resistor ( $R_{FREQ}$ ). R3 can be estimated based on the relationship between  $f_{SW}$  and  $R_{FREQ}$  (see Figure 1).

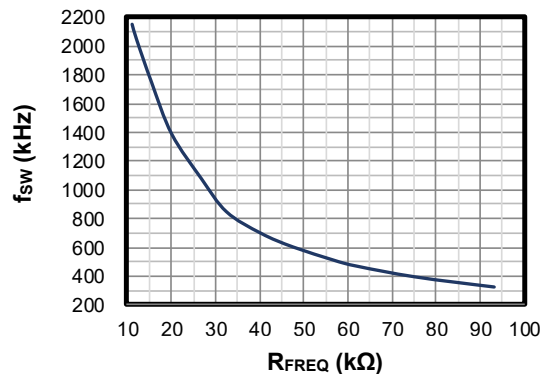


Figure 1:  $f_{SW}$  vs.  $R_{FREQ}$

8. To use the sync function, apply a 350kHz to 1000kHz external clock to the SYNCIN pin to synchronize the internal clock's rising edge.
9. The output voltage ( $V_{OUT}$ ) is set by the external resistor divider. If  $R7 = 100k\Omega$ , then  $R8$  can be calculated using Equation (1):

$$R8 = \frac{R7}{\frac{V_{OUT}}{0.815V} - 1} \quad (1)$$

Table 1 shows the recommended R7 and R8 values for common output voltages.

Table 1: Resistor Selection for Output Voltages

| $V_{OUT}$ (V) | R7 (k $\Omega$ ) | R8 (k $\Omega$ ) |
|---------------|------------------|------------------|
| 3.3           | 100 (1%)         | 32.4 (1%)        |
| 5             | 100 (1%)         | 19.1 (1%)        |

Figure 2 shows the measurement equipment set-up.

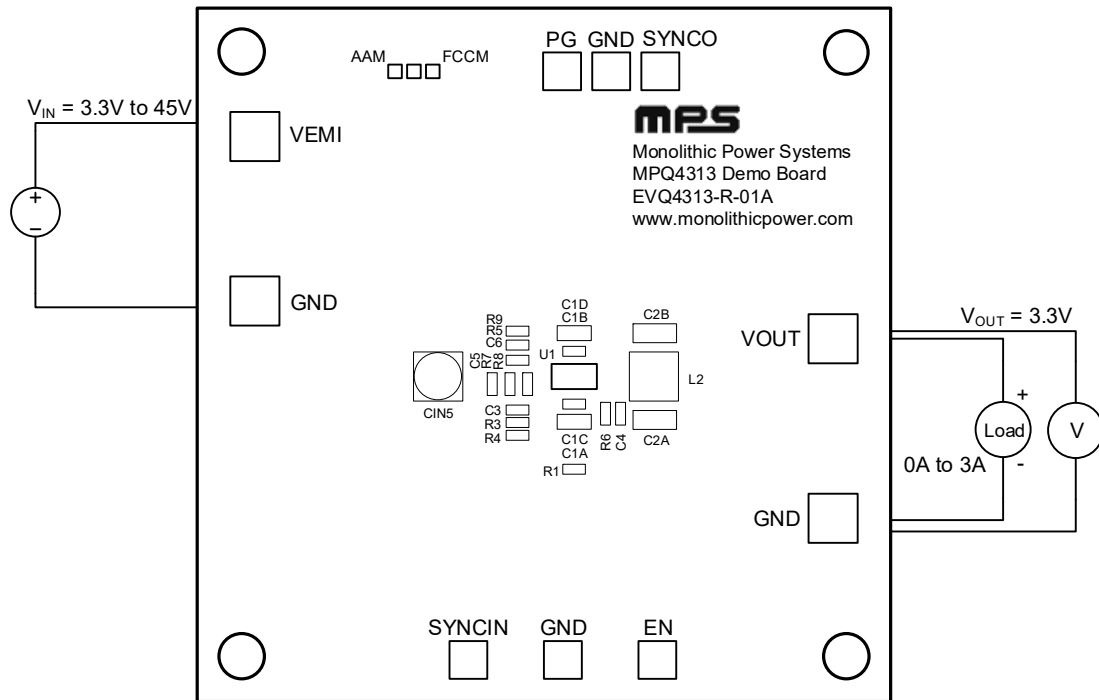


Figure 2: Measurement Equipment Set-Up

## EVALUATION BOARD SCHEMATIC


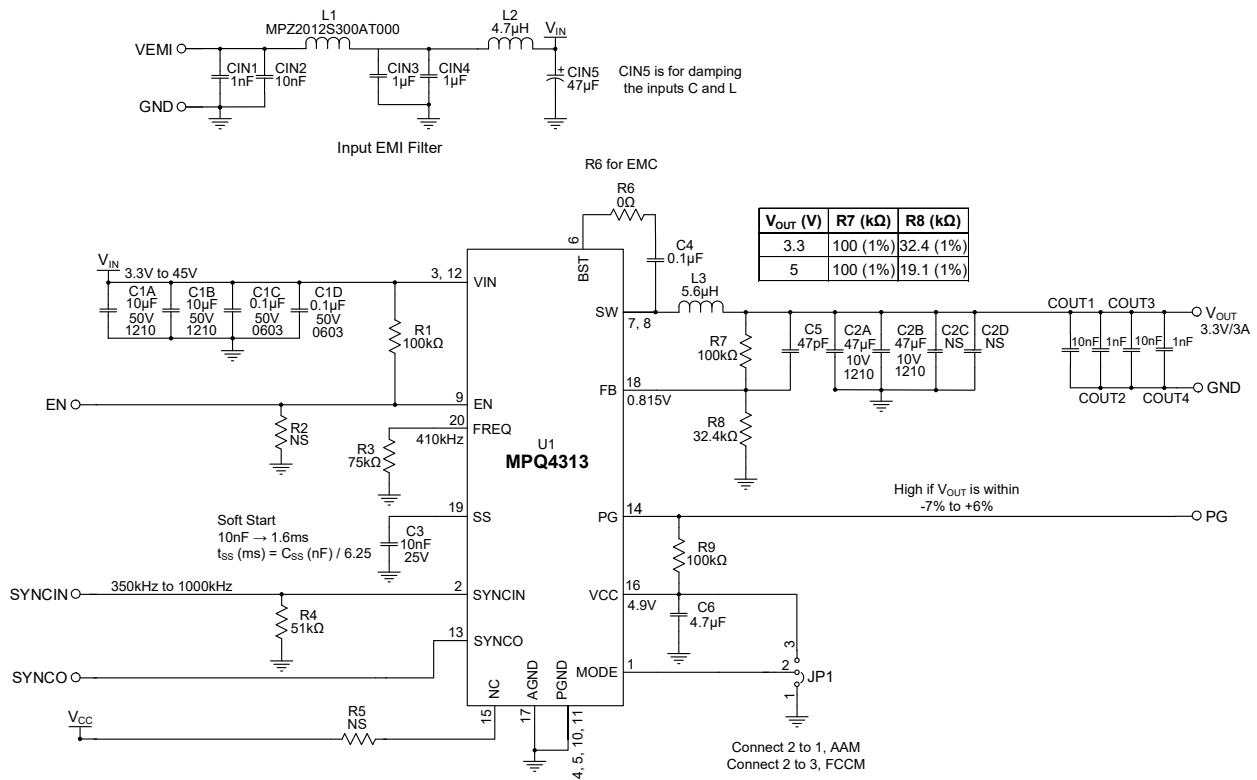


Figure 3: Evaluation Board Schematic

## PACKAGE REFERENCE

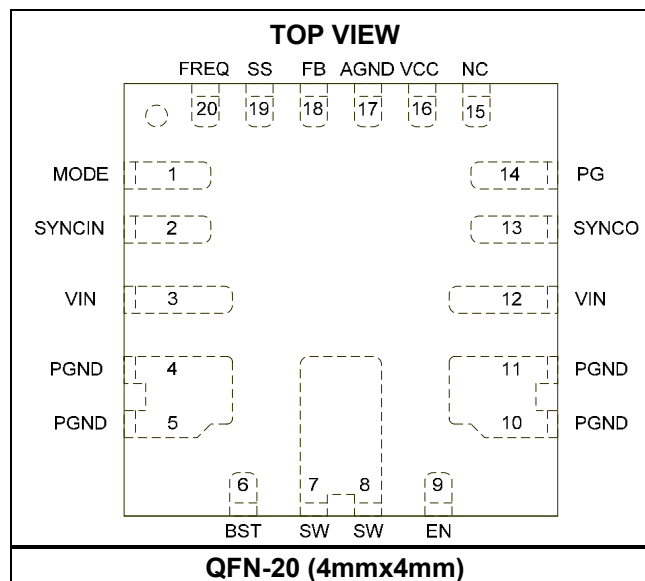

**EVQ4313-R-01A BILL OF MATERIALS**







| Qty | Ref                                  | Value          | Description                            | Package          | Manufacturer          | Manufacturer PN    |
|-----|--------------------------------------|----------------|--|------------------|-----------------------|--------------------|
| 3   | CIN1, COUT2, COUT4                   | 1nF            | Ceramic capacitor, 50V, X7R            | 0603             | Murata                | GRM216R71H102KA01  |
| 3   | CIN2, COUT1, COUT3                   | 10nF           | Ceramic capacitor, 50V, X7R            | 0603             | Murata                | GRM188R71H103KA01D |
| 2   | CIN3, CIN4                           | 1 $\mu$ F      | Ceramic capacitor, 50V, X7R            | 1206             | TDK                   | C3216X7R1H105K     |
| 1   | CIN5                                 | 47 $\mu$ F     | Aluminum capacitor, 63V                | SMD              | Panasonic             | EEHZA1J470P        |
| 2   | C1A, C1B                             | 10 $\mu$ F     | Ceramic capacitor, 50V, X7R            | 1210             | Murata                | GRM32ER71H106KA12L |
| 2   | C1C, C1D                             | 0.1 $\mu$ F    | Ceramic capacitor, 50V, X7R            | 0603             | Murata                | GCJ188R71H104KA12D |
| 2   | C2A, C2B                             | 47 $\mu$ F     | Ceramic capacitor, 10V, X5R            | 1210             | Murata                | GRM32ER61A476KE20L |
| 1   | C3                                   | 10nF           | Ceramic capacitor, 25V, X7R            | 0603             | Murata                | GRM188R71E103KA01D |
| 1   | C4                                   | 0.1 $\mu$ F    | Ceramic capacitor, 50V, X7R            | 0603             | Murata                | GRM188R71H104KA93D |
| 1   | C5                                   | 47pF           | Ceramic capacitor, 50V, C0G            | 0603             | TDK                   | C1608C0G1H470J     |
| 1   | C6                                   | 4.7 $\mu$ F    | Ceramic capacitor, 10V, X5R            | 0603             | Murata                | GRM188R61A475KE15D |
| 1   | L1                                   | 30m $\Omega$   | Magnetic bead, 6A                      | 0805             | TDK                   | MPZ2012S300AT000   |
| 1   | L2                                   | 4.7 $\mu$ H    | Inductor, 31.5m $\Omega$ , 6A          | SMD              | Cyntec                | VCMT063T-4R7MN5T   |
| 1   | L3                                   | 5.6 $\mu$ H    | Inductor, 14.5m $\Omega$ , 9.9A        | SMD              | Coilcraft             | XAL6060-562MEC     |
| 3   | R1, R7, R9                           | 100k $\Omega$  | Film resistor, 1%                      | 0603             | Yageo                 | RC0603FR-07100KL   |
| 1   | R3                                   | 75k $\Omega$   | Film resistor, 1%                      | 0603             | Yageo                 | RC0603FR-0775KL    |
| 1   | R4                                   | 51k $\Omega$   | Film resistor, 1%                      | 0603             | Yageo                 | RC0603FR-0751KL    |
| 1   | R6                                   | 0 $\Omega$     | Film resistor, 1%                      | 0603             | Yageo                 | RC0603FR-070RL     |
| 1   | R8                                   | 32.4k $\Omega$ | Film resistor, 1%                      | 0603             | Yageo                 | RC0603FR-0732K4L   |
| 4   | C2C, C2D, R2, R5                     | NS             |  |                  |                       |                    |
| 1   | JP1                                  | 2.54mm         | Test pin, 3-pin                        | DIP              | Any                   |                    |
| 4   | VEMI, GND, VOUT, GND                 | 2mm            | Golden pin                             | DIP              | Custom <sup>(1)</sup> |                    |
| 7   | SYNCIN, ICS, PG, SYNCO, EN, GND, GND | 1mm            | Golden pin                             | DIP              | Custom <sup>(1)</sup> |                    |
| 1   | U1                                   | MPQ4313        | 45V, 3A, step-down converter, AEC-Q100 | QFN-20 (4mmx4mm) | MPS                   | MPQ4313GRE-AEC1    |

**Note:**

1) Contact an MPS FAE for more information regarding custom pins.







## EVB TEST RESULTS

Performance curves and waveforms are tested on the evaluation board,  $V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $C_{OUT} = 2 \times 47\mu F$ ,  $L = 5.6\mu H$ ,  $f_{SW} = 410kHz$ ,  $T_A = 25^\circ C$ , unless otherwise noted.

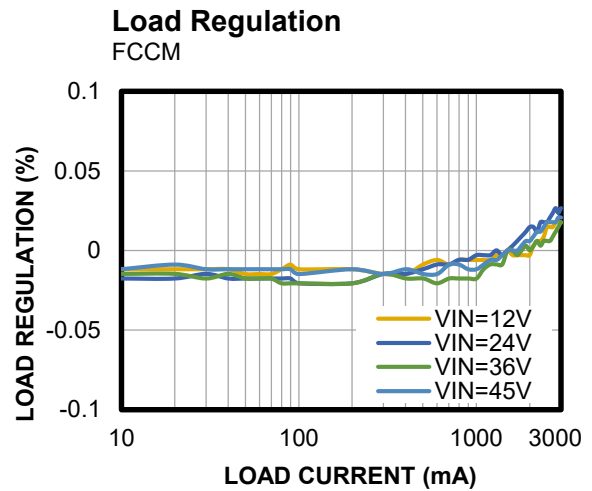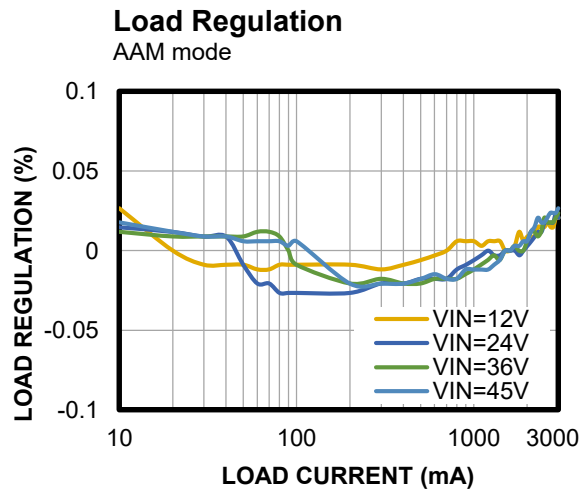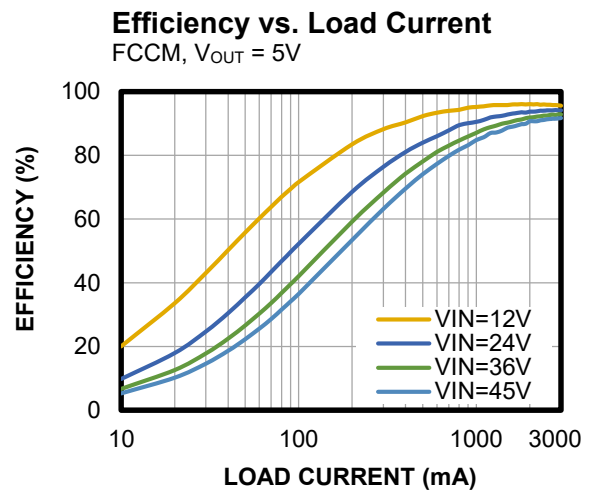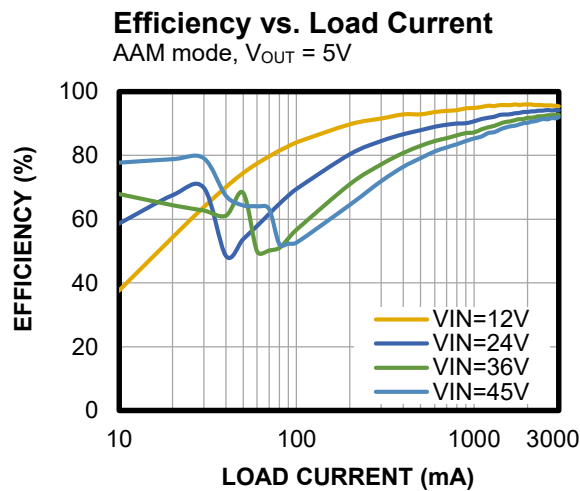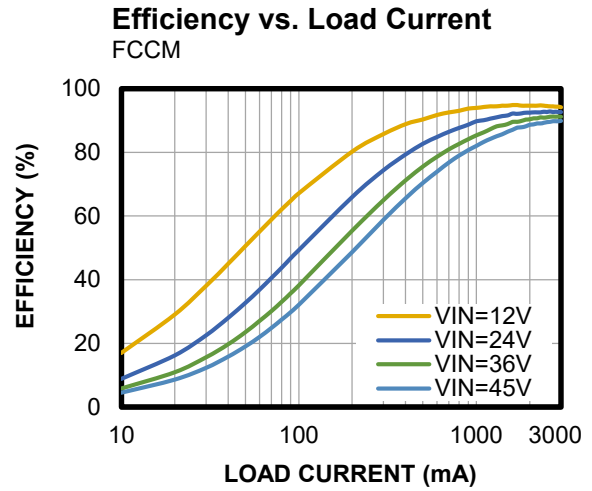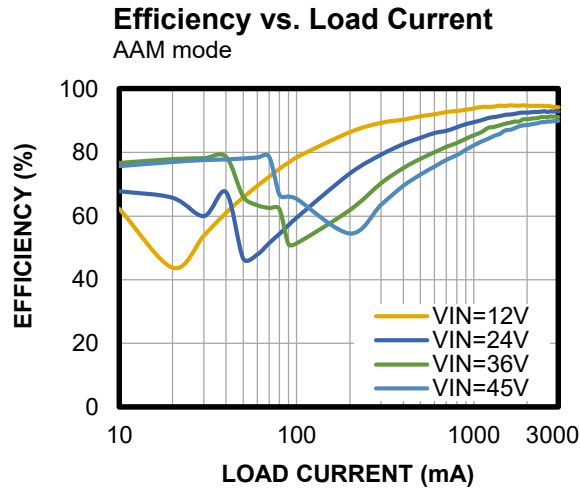

## EVB TEST RESULTS (continued)

Performance curves and waveforms are tested on the evaluation board,  $V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $C_{OUT} = 2 \times 47\mu F$ ,  $L = 5.6\mu H$ ,  $f_{SW} = 410kHz$ ,  $T_A = 25^\circ C$ , unless otherwise noted.

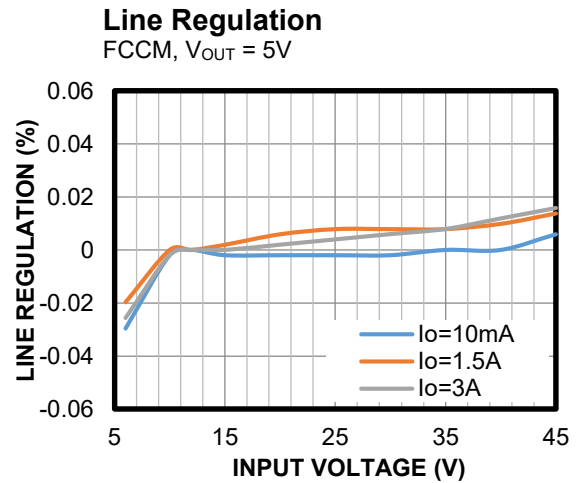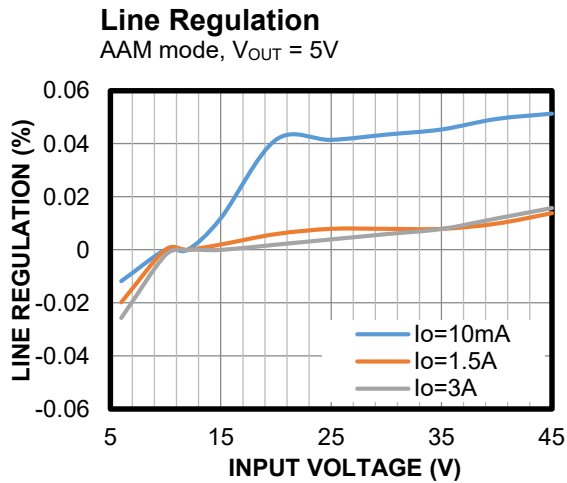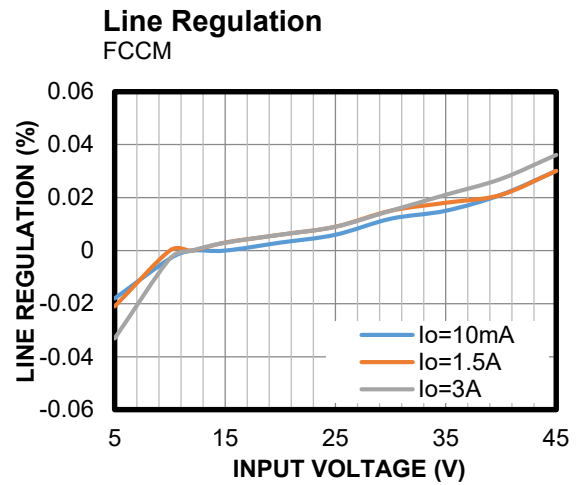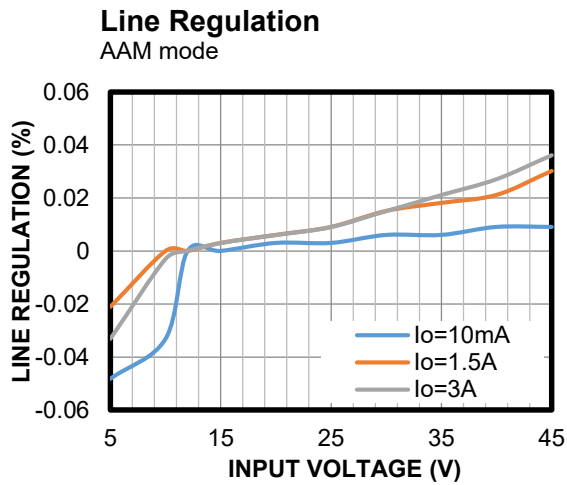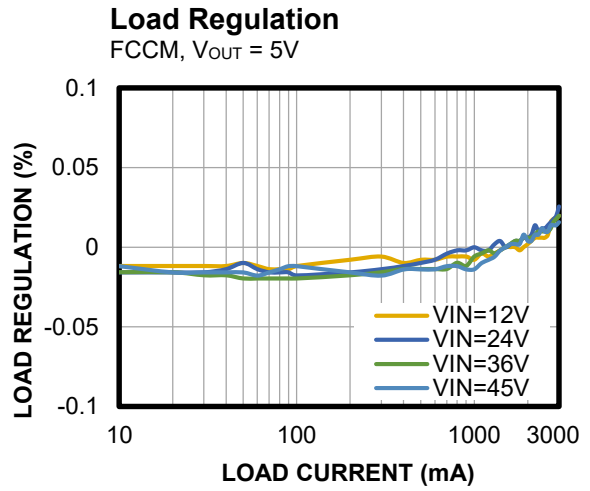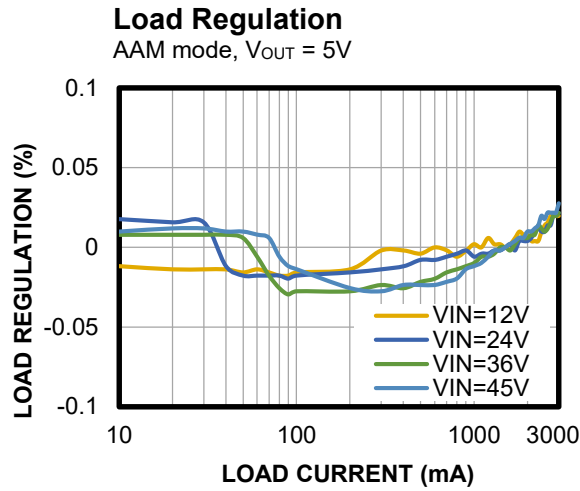


## EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board,  $V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $C_{OUT} = 2 \times 47\mu F$ ,  $L = 5.6\mu H$ ,  $f_{SW} = 410kHz$ ,  $T_A = 25^\circ C$ , unless otherwise noted.


### Case Temperature Rise

$V_{OUT} = 3.3V$

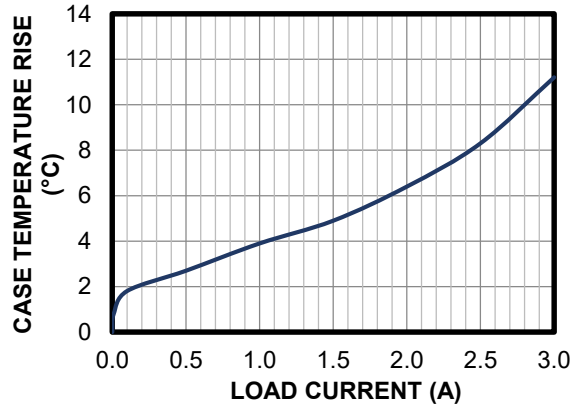


### Case Temperature Rise

$V_{OUT} = 5V$

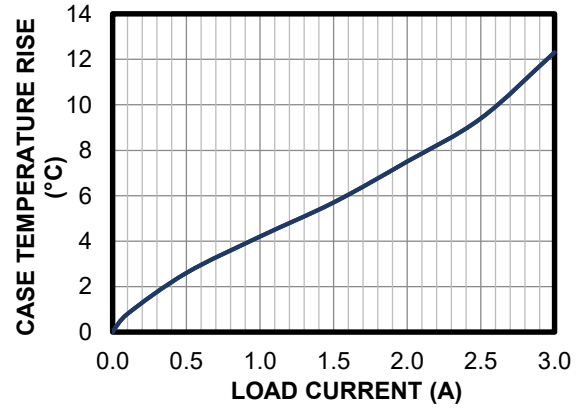


### $f_{SW}$ vs. $V_{IN}$

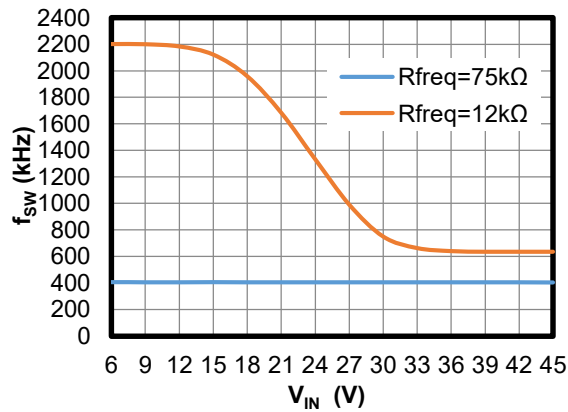

### Low-Dropout Mode

$V_{OUT} = 5V$

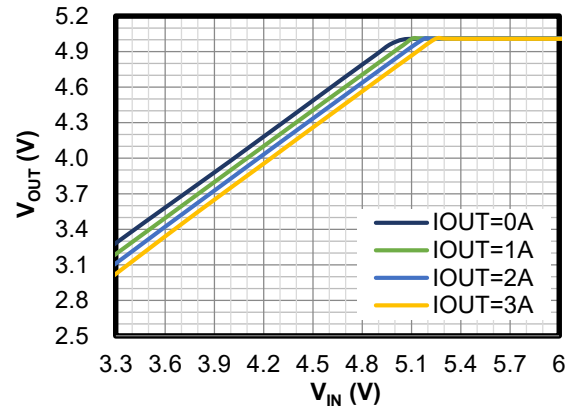




## EVB TEST RESULTS (continued)

Performance curves and waveforms are tested on the evaluation board,  $V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $C_{OUT} = 2 \times 47\mu F$ ,  $L = 5.6\mu H$ ,  $f_{SW} = 410kHz$ ,  $T_A = 25^\circ C$ , unless otherwise noted.


### CISPR25 Class 5 Peak Conducted Emissions

150kHz to 108MHz

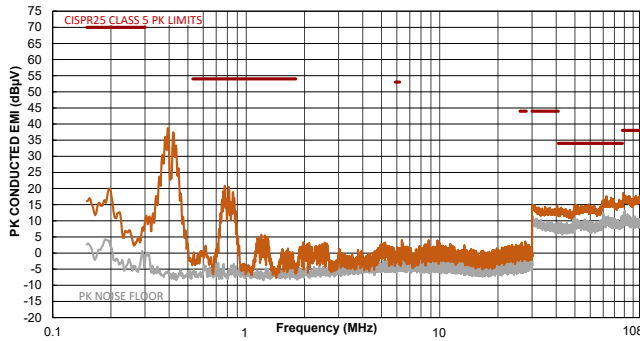


### CISPR25 Class 5 Average Conducted Emissions

150kHz to 108MHz

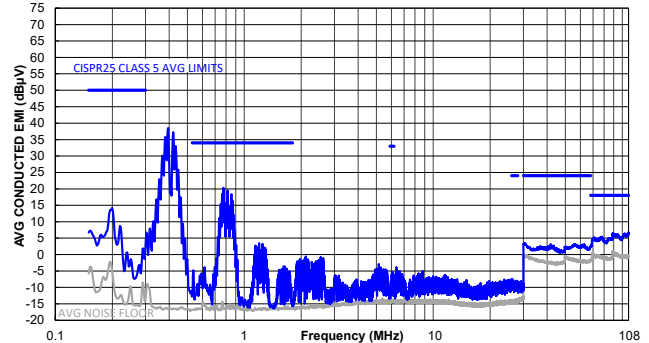


### CISPR25 Class 5 Peak Radiated Emissions

150kHz to 30MHz

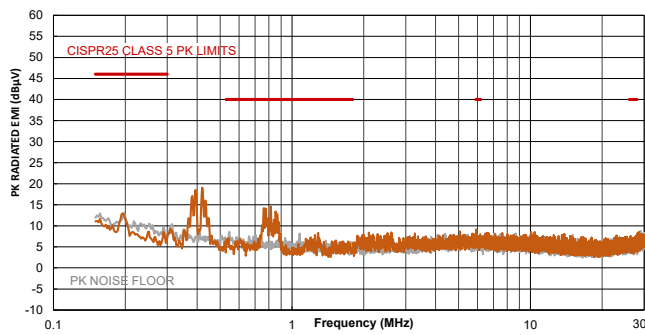


### CISPR25 Class 5 Average Radiated Emissions

150kHz to 30MHz

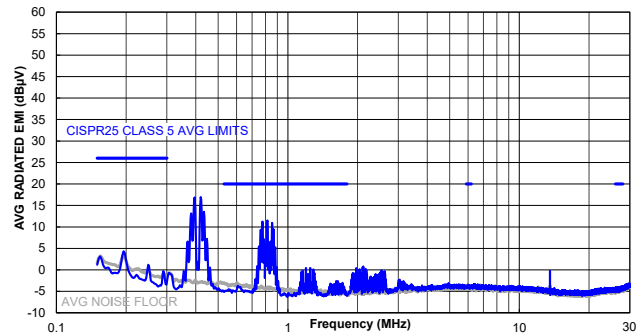


### CISPR25 Class 5 Peak Radiated Emissions

Horizontal, 30MHz to 1GHz

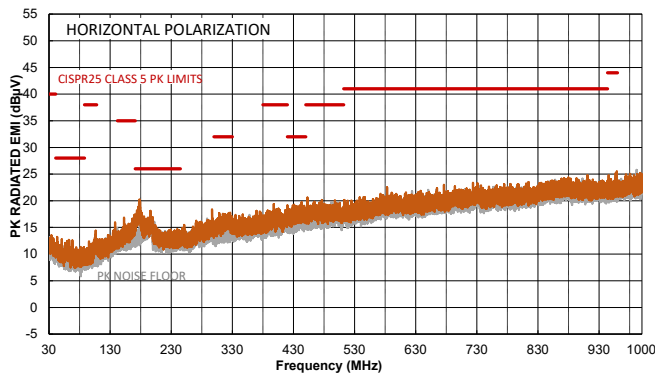

### CISPR25 Class 5 Average Radiated Emissions

Horizontal, 30MHz to 1GHz

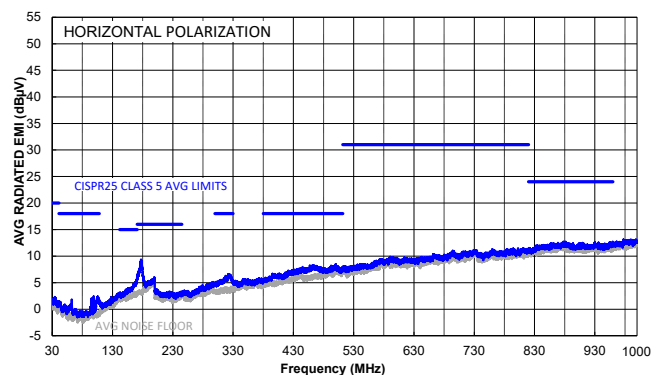


## EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board,  $V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $C_{OUT} = 2 \times 47\mu F$ ,  $L = 5.6\mu H$ ,  $f_{SW} = 410kHz$ ,  $T_A = 25^\circ C$ , unless otherwise noted.


### CISPR25 Class 5 Peak Radiated Emissions

Vertical, 30MHz to 1GHz

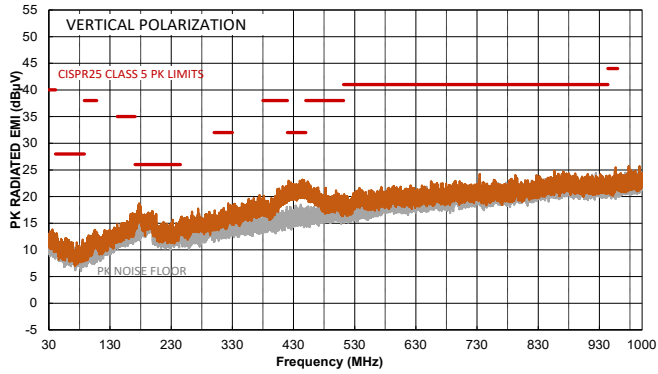

### CISPR25 Class 5 Average Radiated Emissions

Vertical, 30MHz to 1GHz

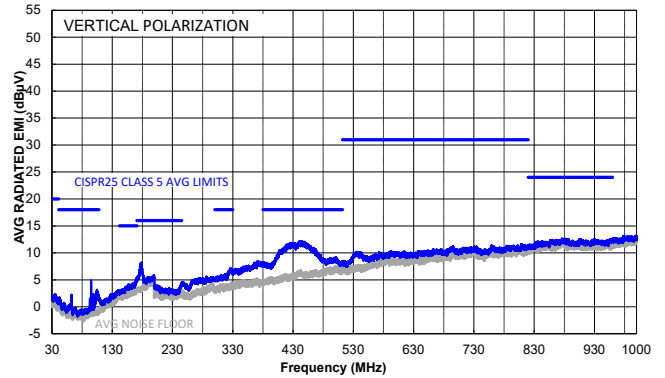


## EVB TEST RESULTS (continued)

Performance curves and waveforms are tested on the evaluation board,  $V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $C_{OUT} = 2 \times 47\mu F$ ,  $L = 5.6\mu H$ ,  $f_{sw} = 410kHz$ ,  $T_A = 25^\circ C$ , unless otherwise noted.


### Steady State

$I_{OUT} = 0A$ , AAM mode

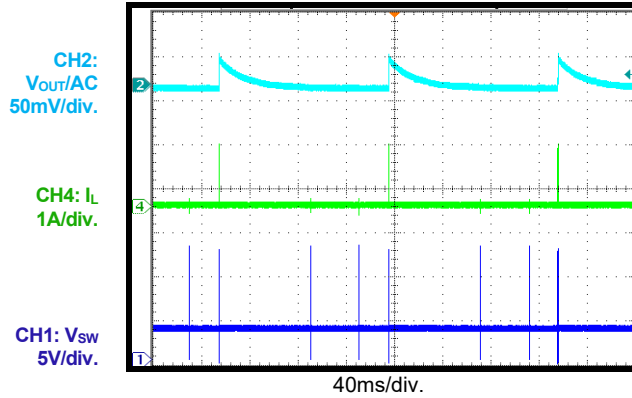


### Steady State

$I_{OUT} = 0A$ , FCCM

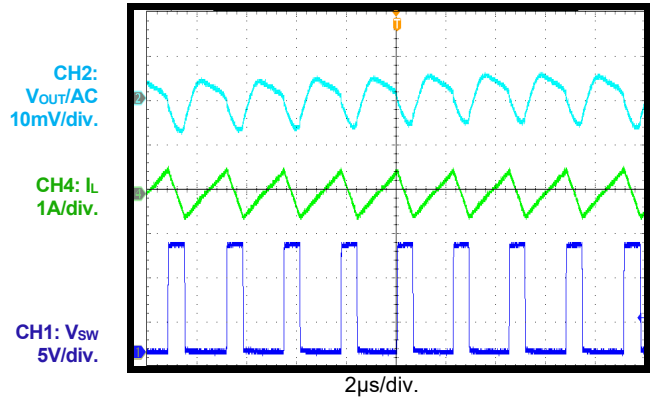


### Steady State

$I_{OUT} = 3A$

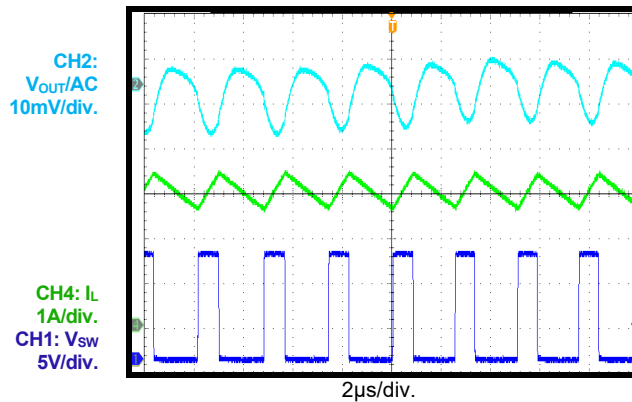


### Start-Up through VIN

$I_{OUT} = 0A$ , AAM mode

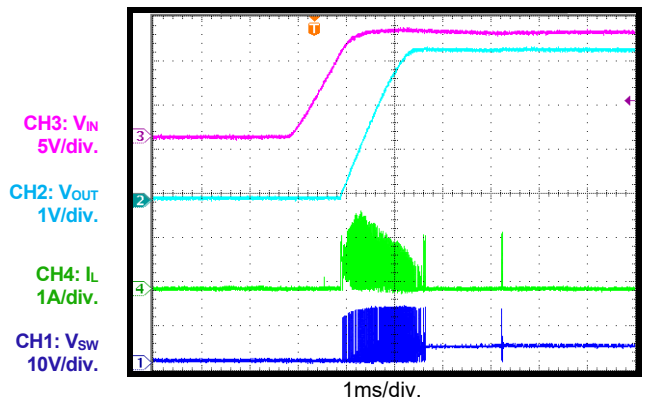


### Start-Up through VIN

$I_{OUT} = 0A$ , FCCM

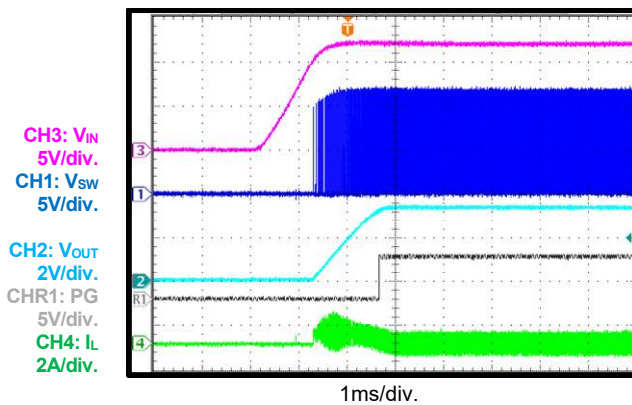

### Start-Up through VIN

$I_{OUT} = 3A$

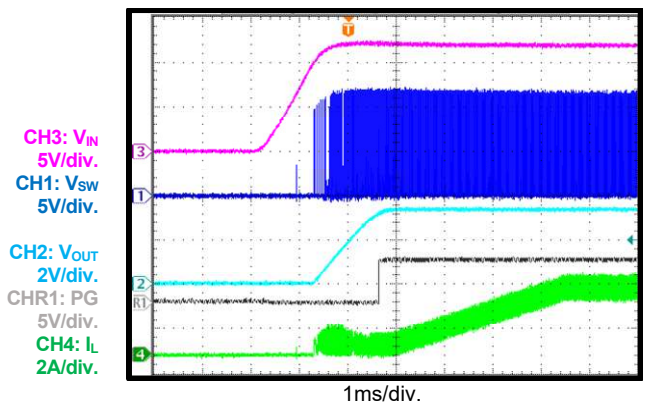


## EVB TEST RESULTS (continued)

Performance curves and waveforms are tested on the evaluation board,  $V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $C_{OUT} = 2 \times 47\mu F$ ,  $L = 5.6\mu H$ ,  $f_{SW} = 410kHz$ ,  $T_A = 25^\circ C$ , unless otherwise noted.


### Shutdown through VIN

$I_{OUT} = 0A$ , AAM mode

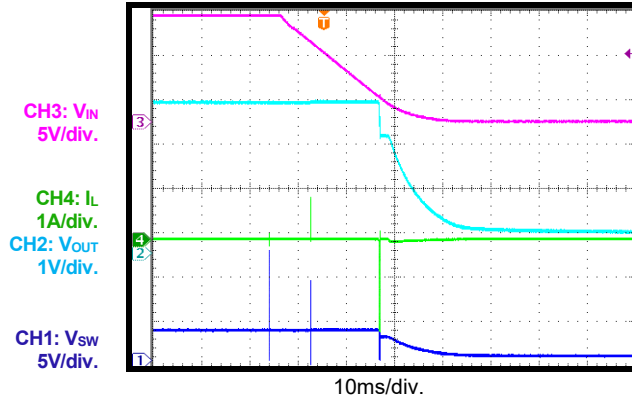


### Shutdown through VIN

$I_{OUT} = 0A$ , FCCM

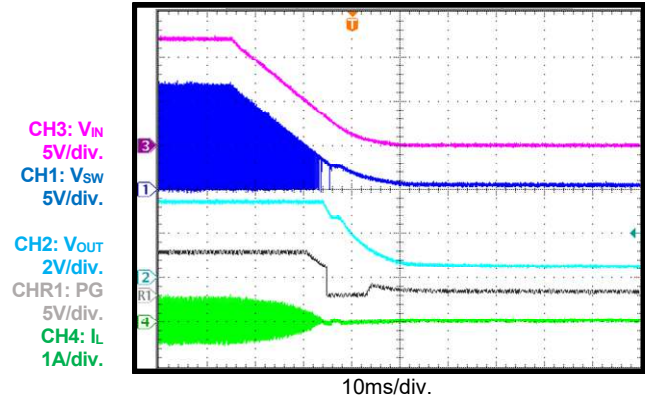


### Shutdown through VIN

$I_{OUT} = 3A$

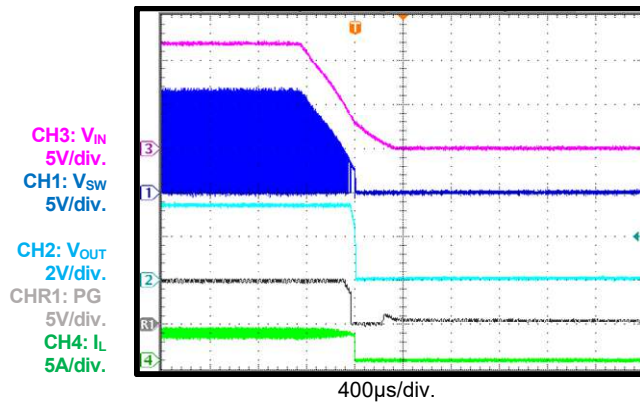


### Start-Up through EN

$I_{OUT} = 0A$ , AAM mode

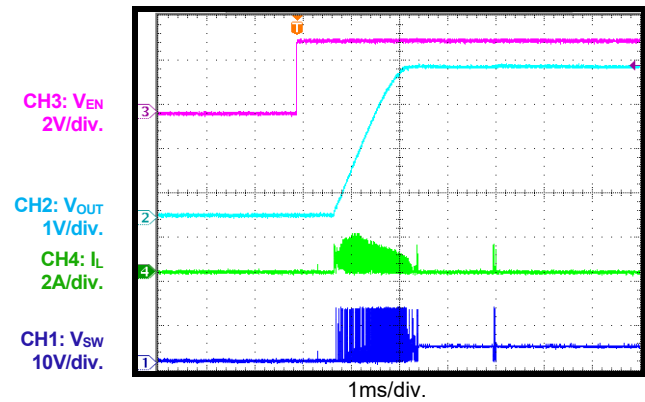


### Start-Up through EN

$I_{OUT} = 0A$ , FCCM

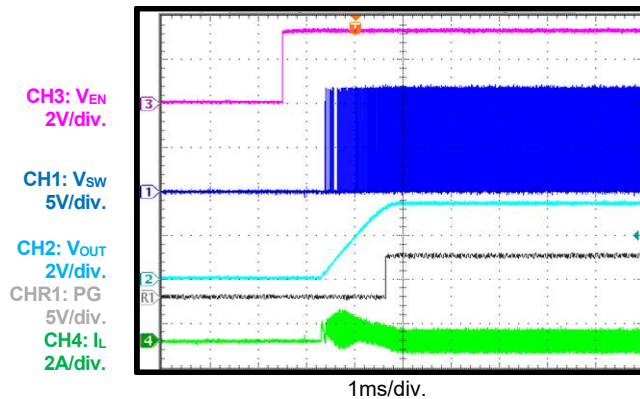

### Start-Up through EN

$I_{OUT} = 3A$

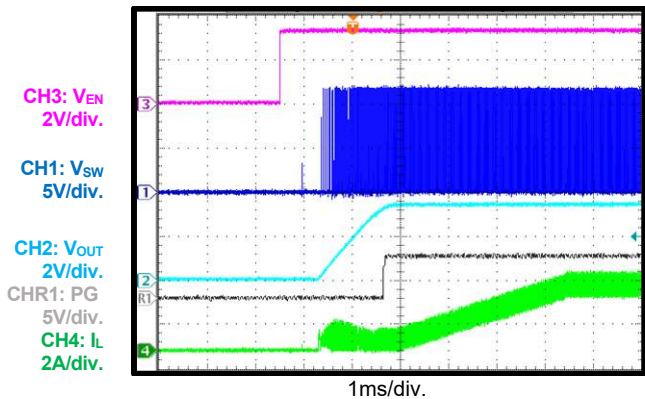


## EVB TEST RESULTS (continued)

Performance curves and waveforms are tested on the evaluation board,  $V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $C_{OUT} = 2 \times 47\mu F$ ,  $L = 5.6\mu H$ ,  $f_{SW} = 410kHz$ ,  $T_A = 25^\circ C$ , unless otherwise noted.


### Shutdown through EN

$I_{OUT} = 0A$ , AAM mode

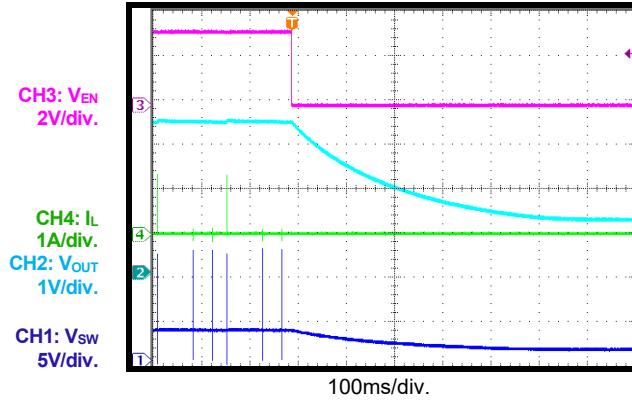


### Shutdown through EN

$I_{OUT} = 0A$ , FCCM

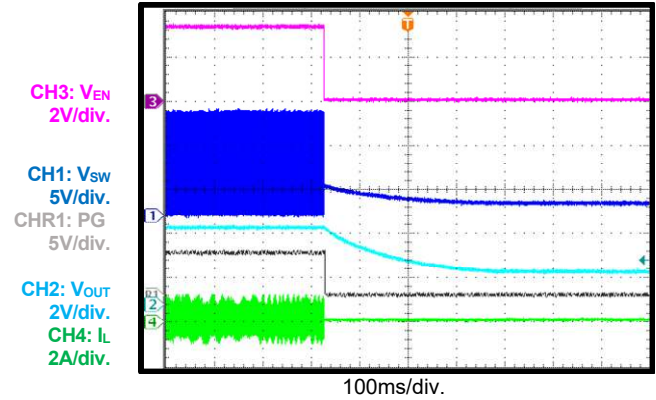


### Shutdown through EN

$I_{OUT} = 3A$

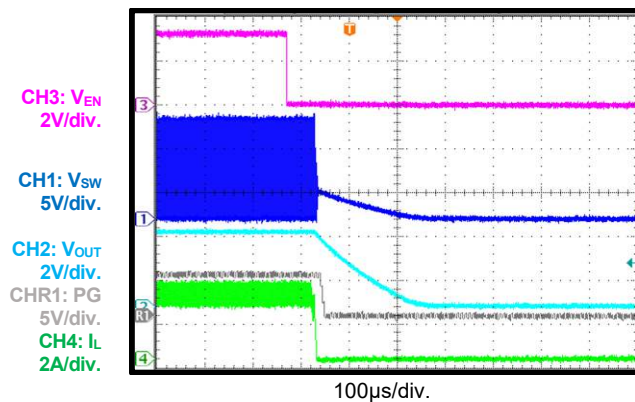


### SCP Entry

$I_{OUT} = 0A$ , AAM mode

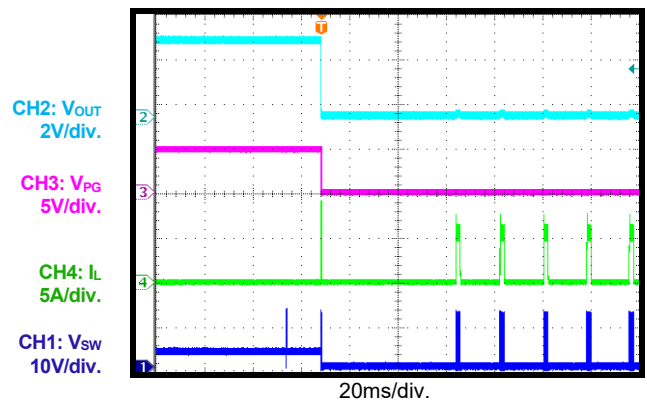


### SCP Entry

$I_{OUT} = 0A$ , FCCM

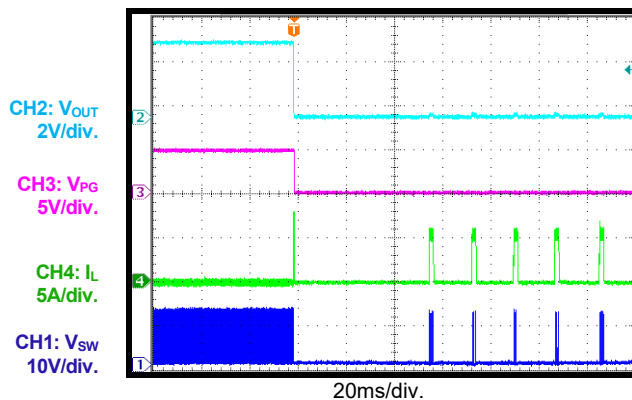

### SCP Entry

$I_{OUT} = 3A$

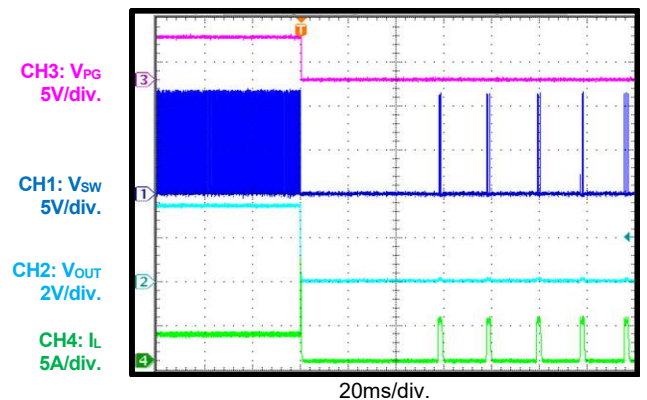




## EVB TEST RESULTS (continued)

Performance curves and waveforms are tested on the evaluation board,  $V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $C_{OUT} = 2 \times 47\mu F$ ,  $L = 5.6\mu H$ ,  $f_{SW} = 410kHz$ ,  $T_A = 25^\circ C$ , unless otherwise noted.


### SCP Recovery

$I_{OUT} = 0A$ , AAM mode

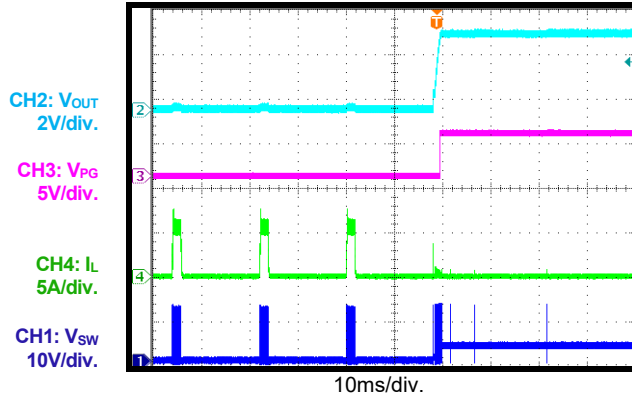


### SCP Recovery

$I_{OUT} = 0A$ , FCCM

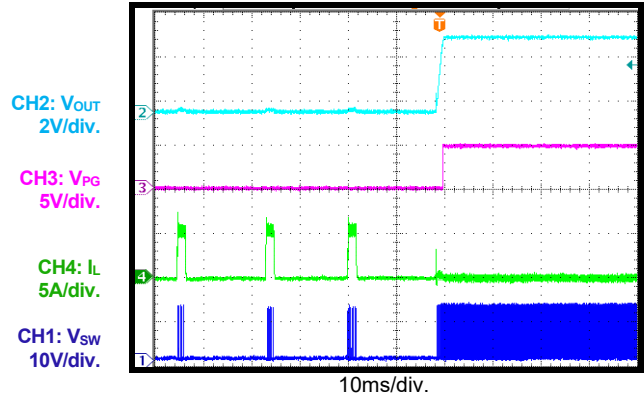


### SCP Recovery

$I_{OUT} = 3A$

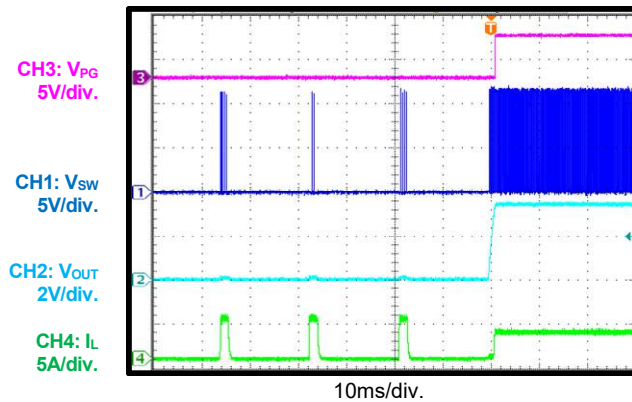


### SCP Steady State

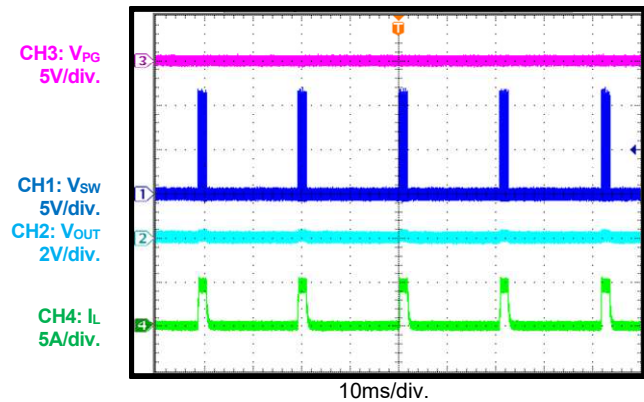


### Load Transient

$I_{OUT} = 1.5A$  to  $3A$

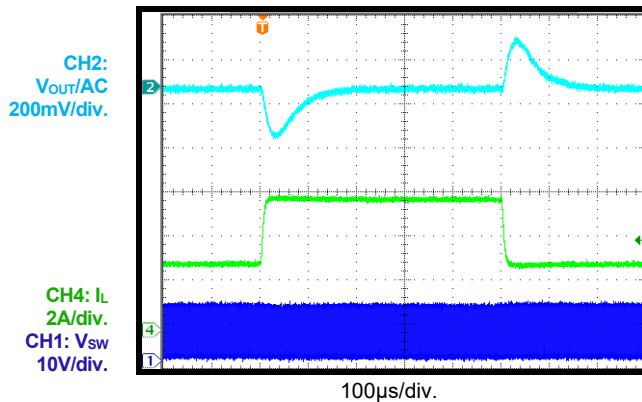

### SYNC Operation

$I_{OUT} = 3A$ , SYNC frequency = 350kHz

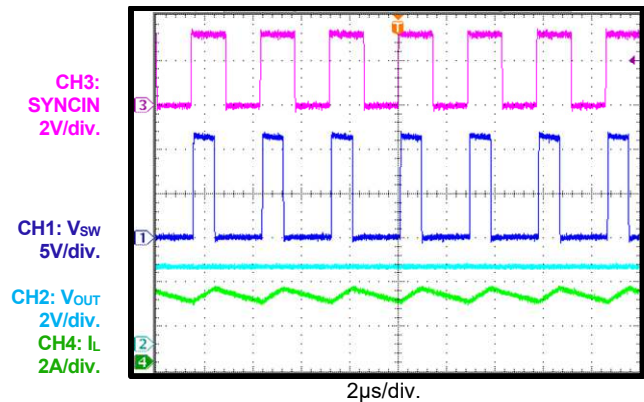


## EVB TEST RESULTS (continued)

Performance curves and waveforms are tested on the evaluation board,  $V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $C_{OUT} = 2 \times 47\mu F$ ,  $L = 5.6\mu H$ ,  $f_{sw} = 410kHz$ ,  $T_A = 25^\circ C$ , unless otherwise noted.

### SYNC Operation

$I_{OUT} = 3A$ , SYNC frequency = 1000kHz

CH3: SYNCIN  
2V/div.  
CH1:  $V_{sw}$   
5V/div.  
CH2:  $V_{out}$   
2V/div.  
CH4:  $I_L$   
2A/div.

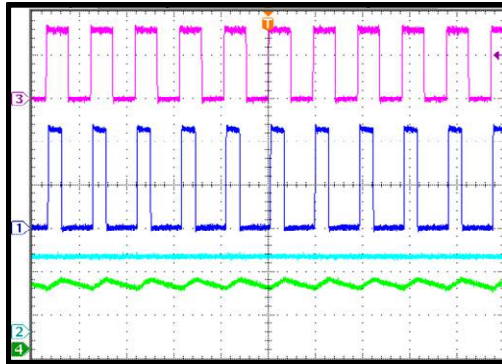


1µs/div.

### SYNCO Operation

$I_{OUT} = 3A$ , SYNC frequency = 350kHz

CH1:  $V_{sw}$   
5V/div.  
CH2:  $V_{out}$   
1V/div.  
CH4:  $I_L$   
1A/div.  
CH3: SYNCO  
2V/div.

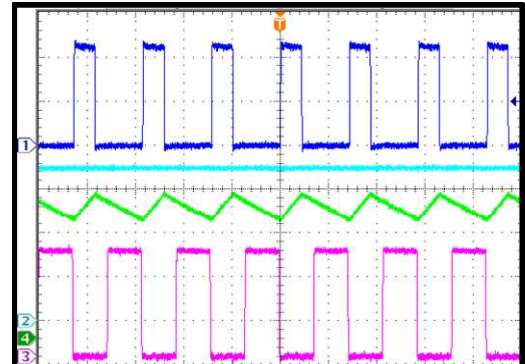


2µs/div.

### SYNCO Operation

$I_{OUT} = 3A$ , SYNC frequency = 530kHz

CH1:  $V_{sw}$   
5V/div.  
CH2:  $V_{out}$   
1V/div.  
CH4:  $I_L$   
1A/div.  
CH3: SYNCO  
2V/div.

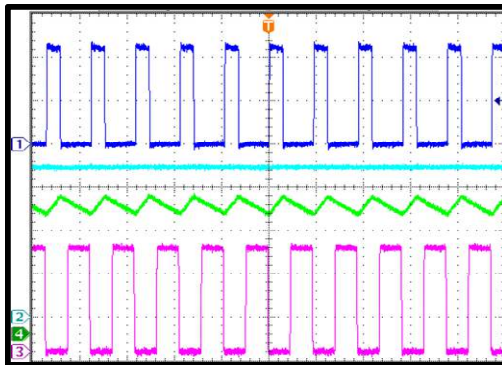


2µs/div.

### PG in Start-Up through VIN

$I_{OUT} = 0A$ , AAM mode

CH3:  $V_{in}$   
5V/div.  
CH2:  $V_{out}$   
2V/div.  
CH4:  $V_{PG}$   
2V/div.  
CH1:  $V_{sw}$   
10V/div.

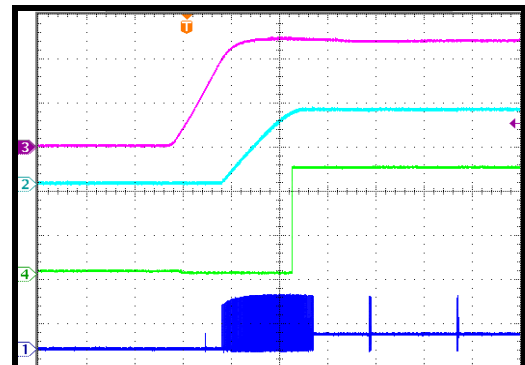


1ms/div.

### PG in Start-Up through VIN

$I_{OUT} = 3A$

CH3:  $V_{in}$   
5V/div.  
CH2:  $V_{out}$   
2V/div.  
CH4:  $V_{PG}$   
2V/div.  
CH1:  $V_{sw}$   
5V/div.

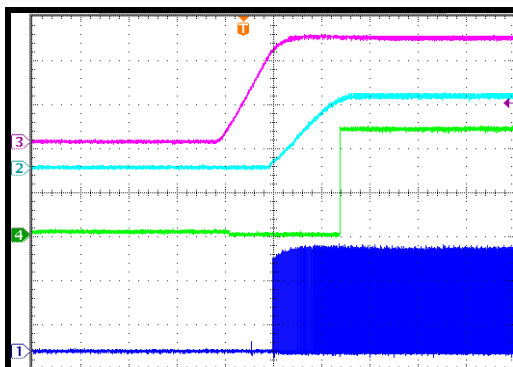


1ms/div.

### PG in Shutdown through VIN

$I_{OUT} = 0A$ , AAM mode

CH3:  $V_{in}$   
5V/div.  
CH2:  $V_{out}$   
2V/div.  
CH4:  $V_{PG}$   
2V/div.  
CH1:  $V_{sw}$   
5V/div.

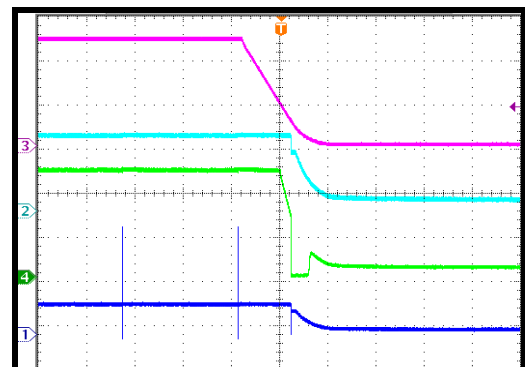


20ms/div.

## EVB TEST RESULTS (continued)

Performance curves and waveforms are tested on the evaluation board,  $V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $C_{OUT} = 2 \times 47\mu F$ ,  $L = 5.6\mu H$ ,  $f_{sw} = 410kHz$ ,  $T_A = 25^\circ C$ , unless otherwise noted.


### PG in Shutdown through VIN

$I_{OUT} = 3A$

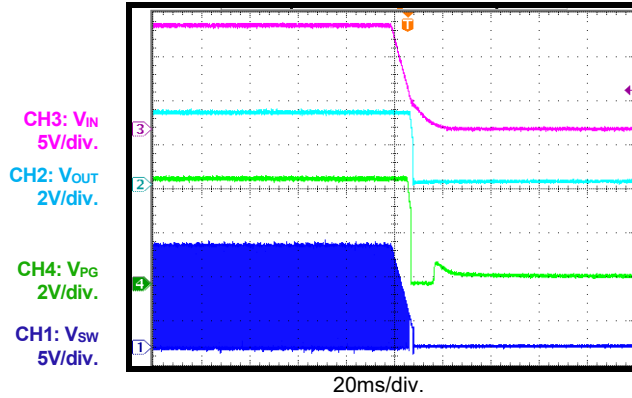


### PG in Start-Up through EN

$I_{OUT} = 0A$ , AAM mode

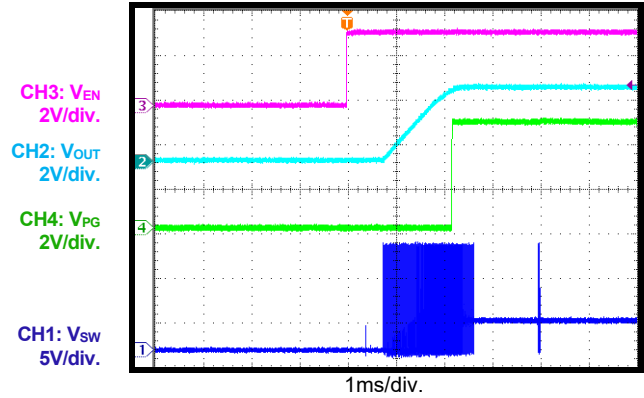


### PG in Start-Up through EN

$I_{OUT} = 3A$

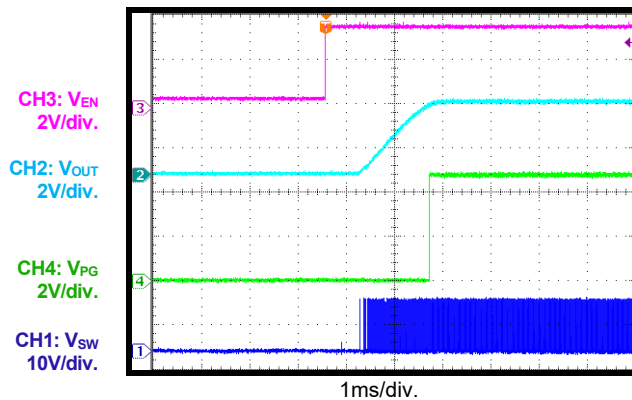


### PG in Shutdown through EN

$I_{OUT} = 0A$ , AAM mode

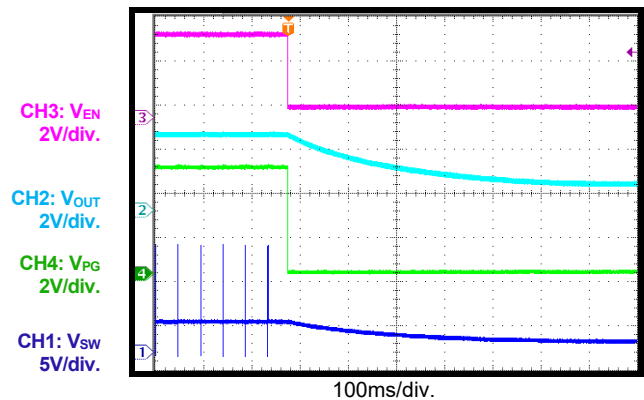


### PG in Shutdown through EN

$I_{OUT} = 3A$

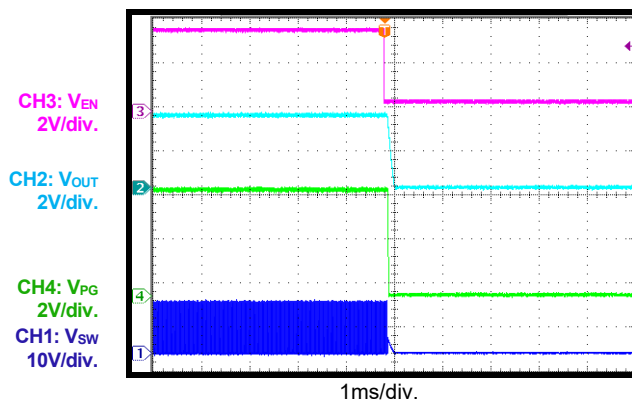

### Low-Dropout Mode

$V_{IN} = 3.3V$ ,  $V_{OUT}$  set to 3.3V,  $I_{OUT} = 0A$

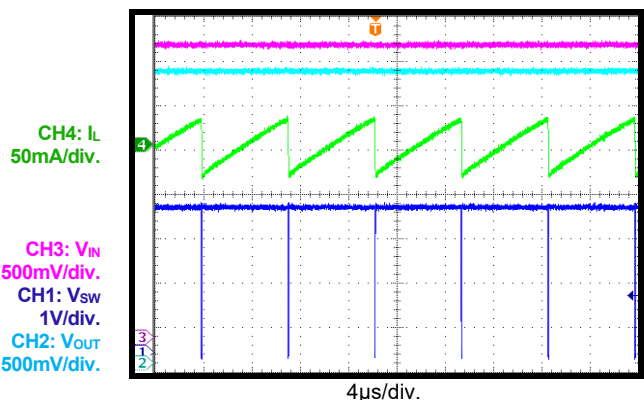




## EVB TEST RESULTS (continued)

Performance curves and waveforms are tested on the evaluation board,  $V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $C_{OUT} = 2 \times 47\mu F$ ,  $L = 5.6\mu H$ ,  $f_{sw} = 410kHz$ ,  $T_A = 25^\circ C$ , unless otherwise noted.


### Low-Dropout Mode

$V_{IN} = 3.3V$ ,  $V_{OUT}$  set to 3.3V,  $I_{OUT} = 3A$

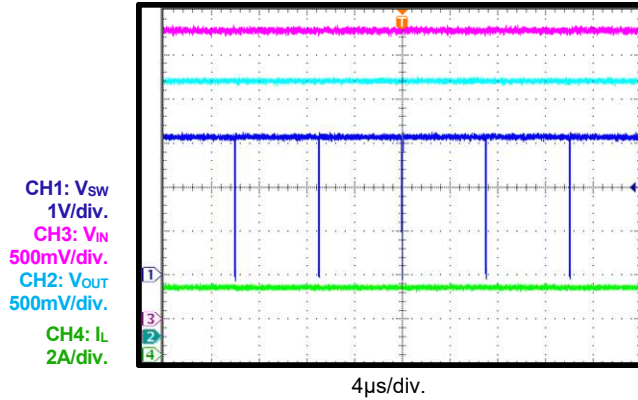


### Load Dump

$V_{IN} = 12V$  to 36V,  $I_{OUT} = 3A$

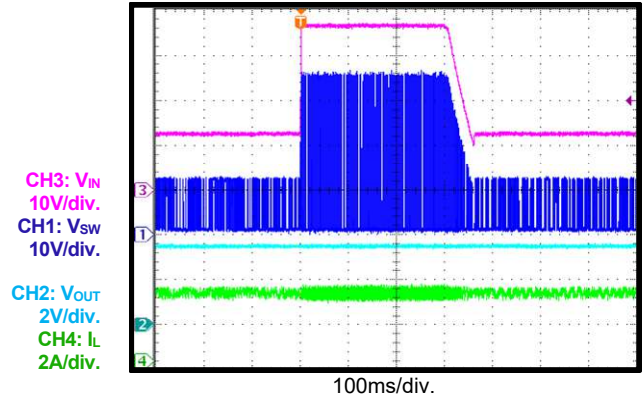


### Cold Crank

$V_{IN} = 12V$  to 3.3V to 5V,  $I_{OUT} = 3A$

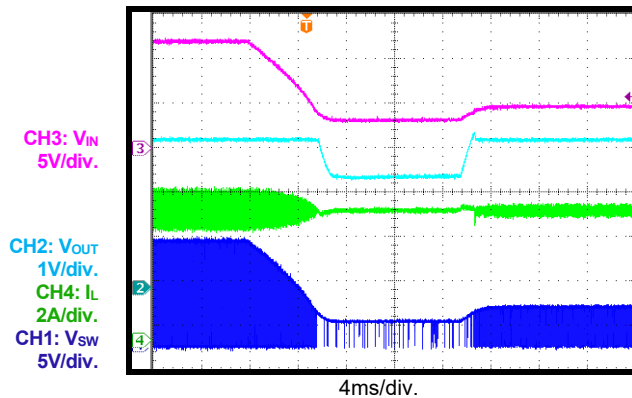


### $V_{IN}$ Ramping Up and Down

$I_{OUT} = 0.1A$

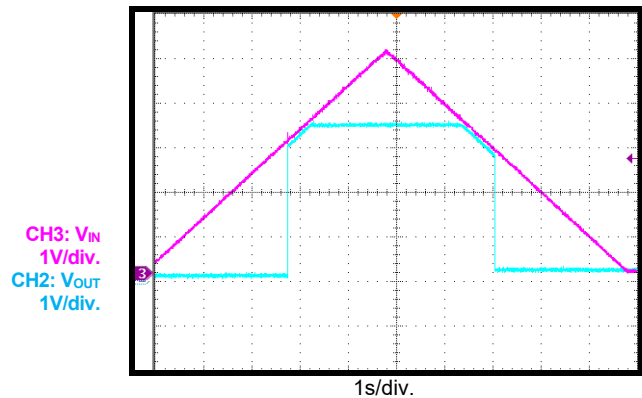


### $V_{IN}$ Ramping Down and Up

$I_{OUT} = 1mA$

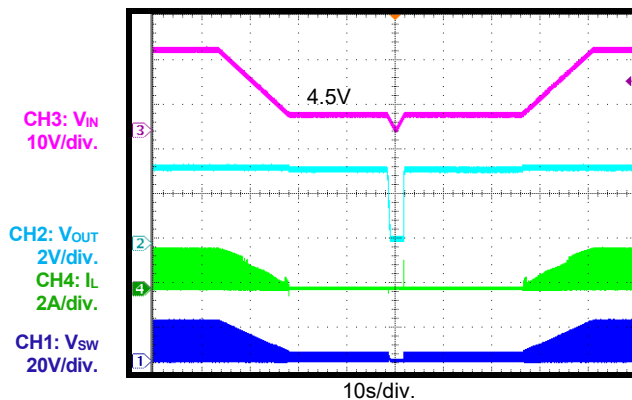

### $V_{IN}$ Ramping Down and Up

$I_{OUT} = 3A$

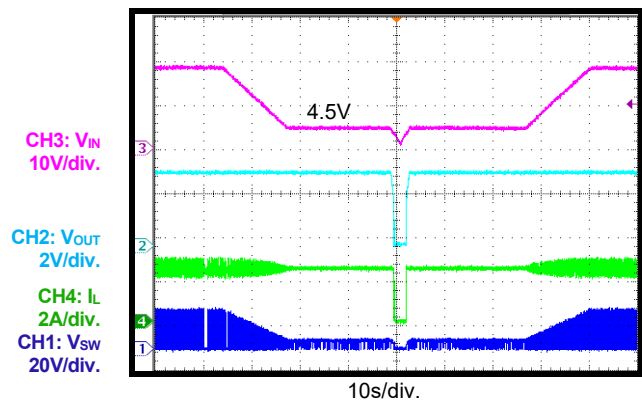

PCB LAYOUT (2)

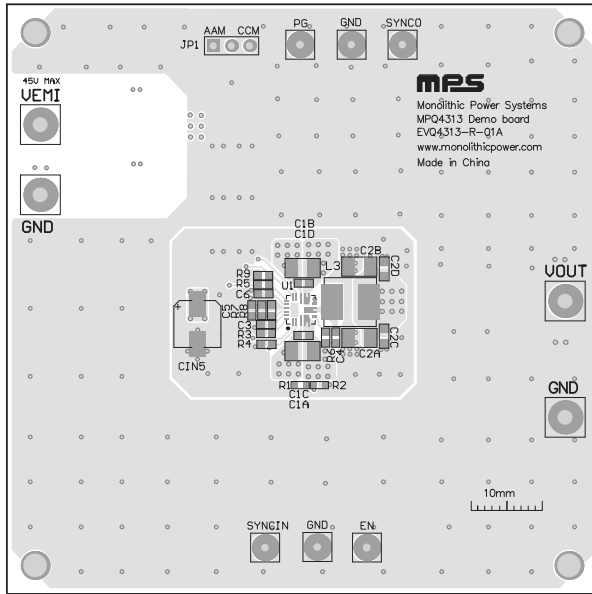


Figure 4: Top Silk and Top Layer

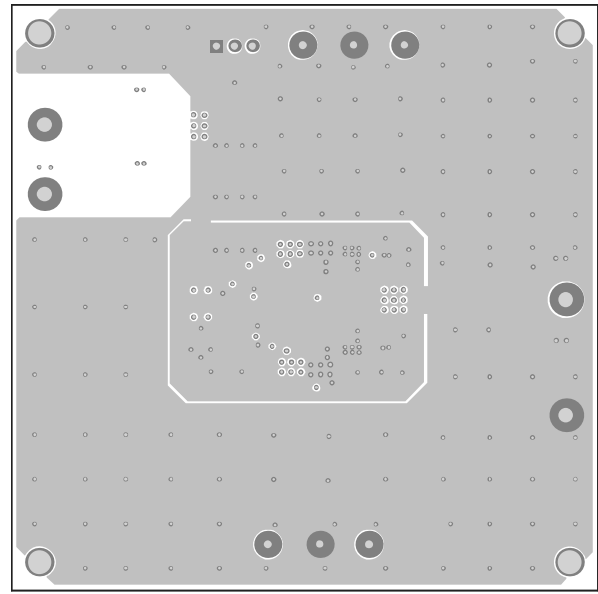


Figure 5: Mid-Layer 1

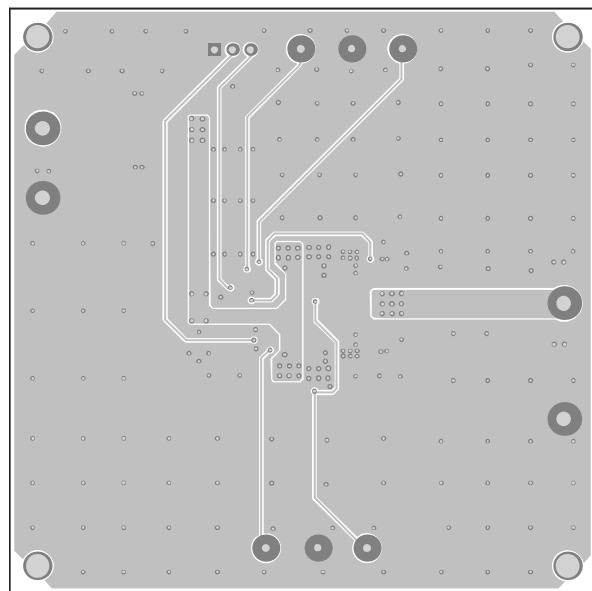


Figure 6: Mid-Layer 2

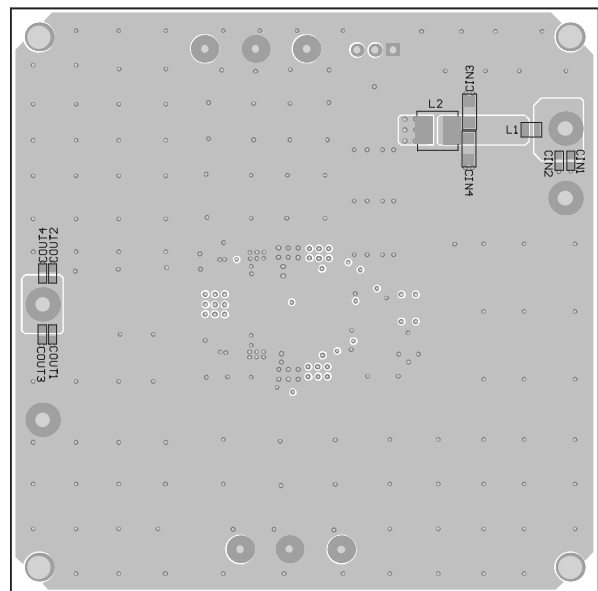


Figure 7: Bottom Layer and Bottom Silk

Note:

- 2) The copper thickness is 2oz.

## REVISION HISTORY

| Revision # | Revision Date | Description     | Pages Updated |
|------------|---------------|-----------------|---------------|
| 1.0        | 5/26/2022     | Initial Release | -             |

**Notice:** The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.