

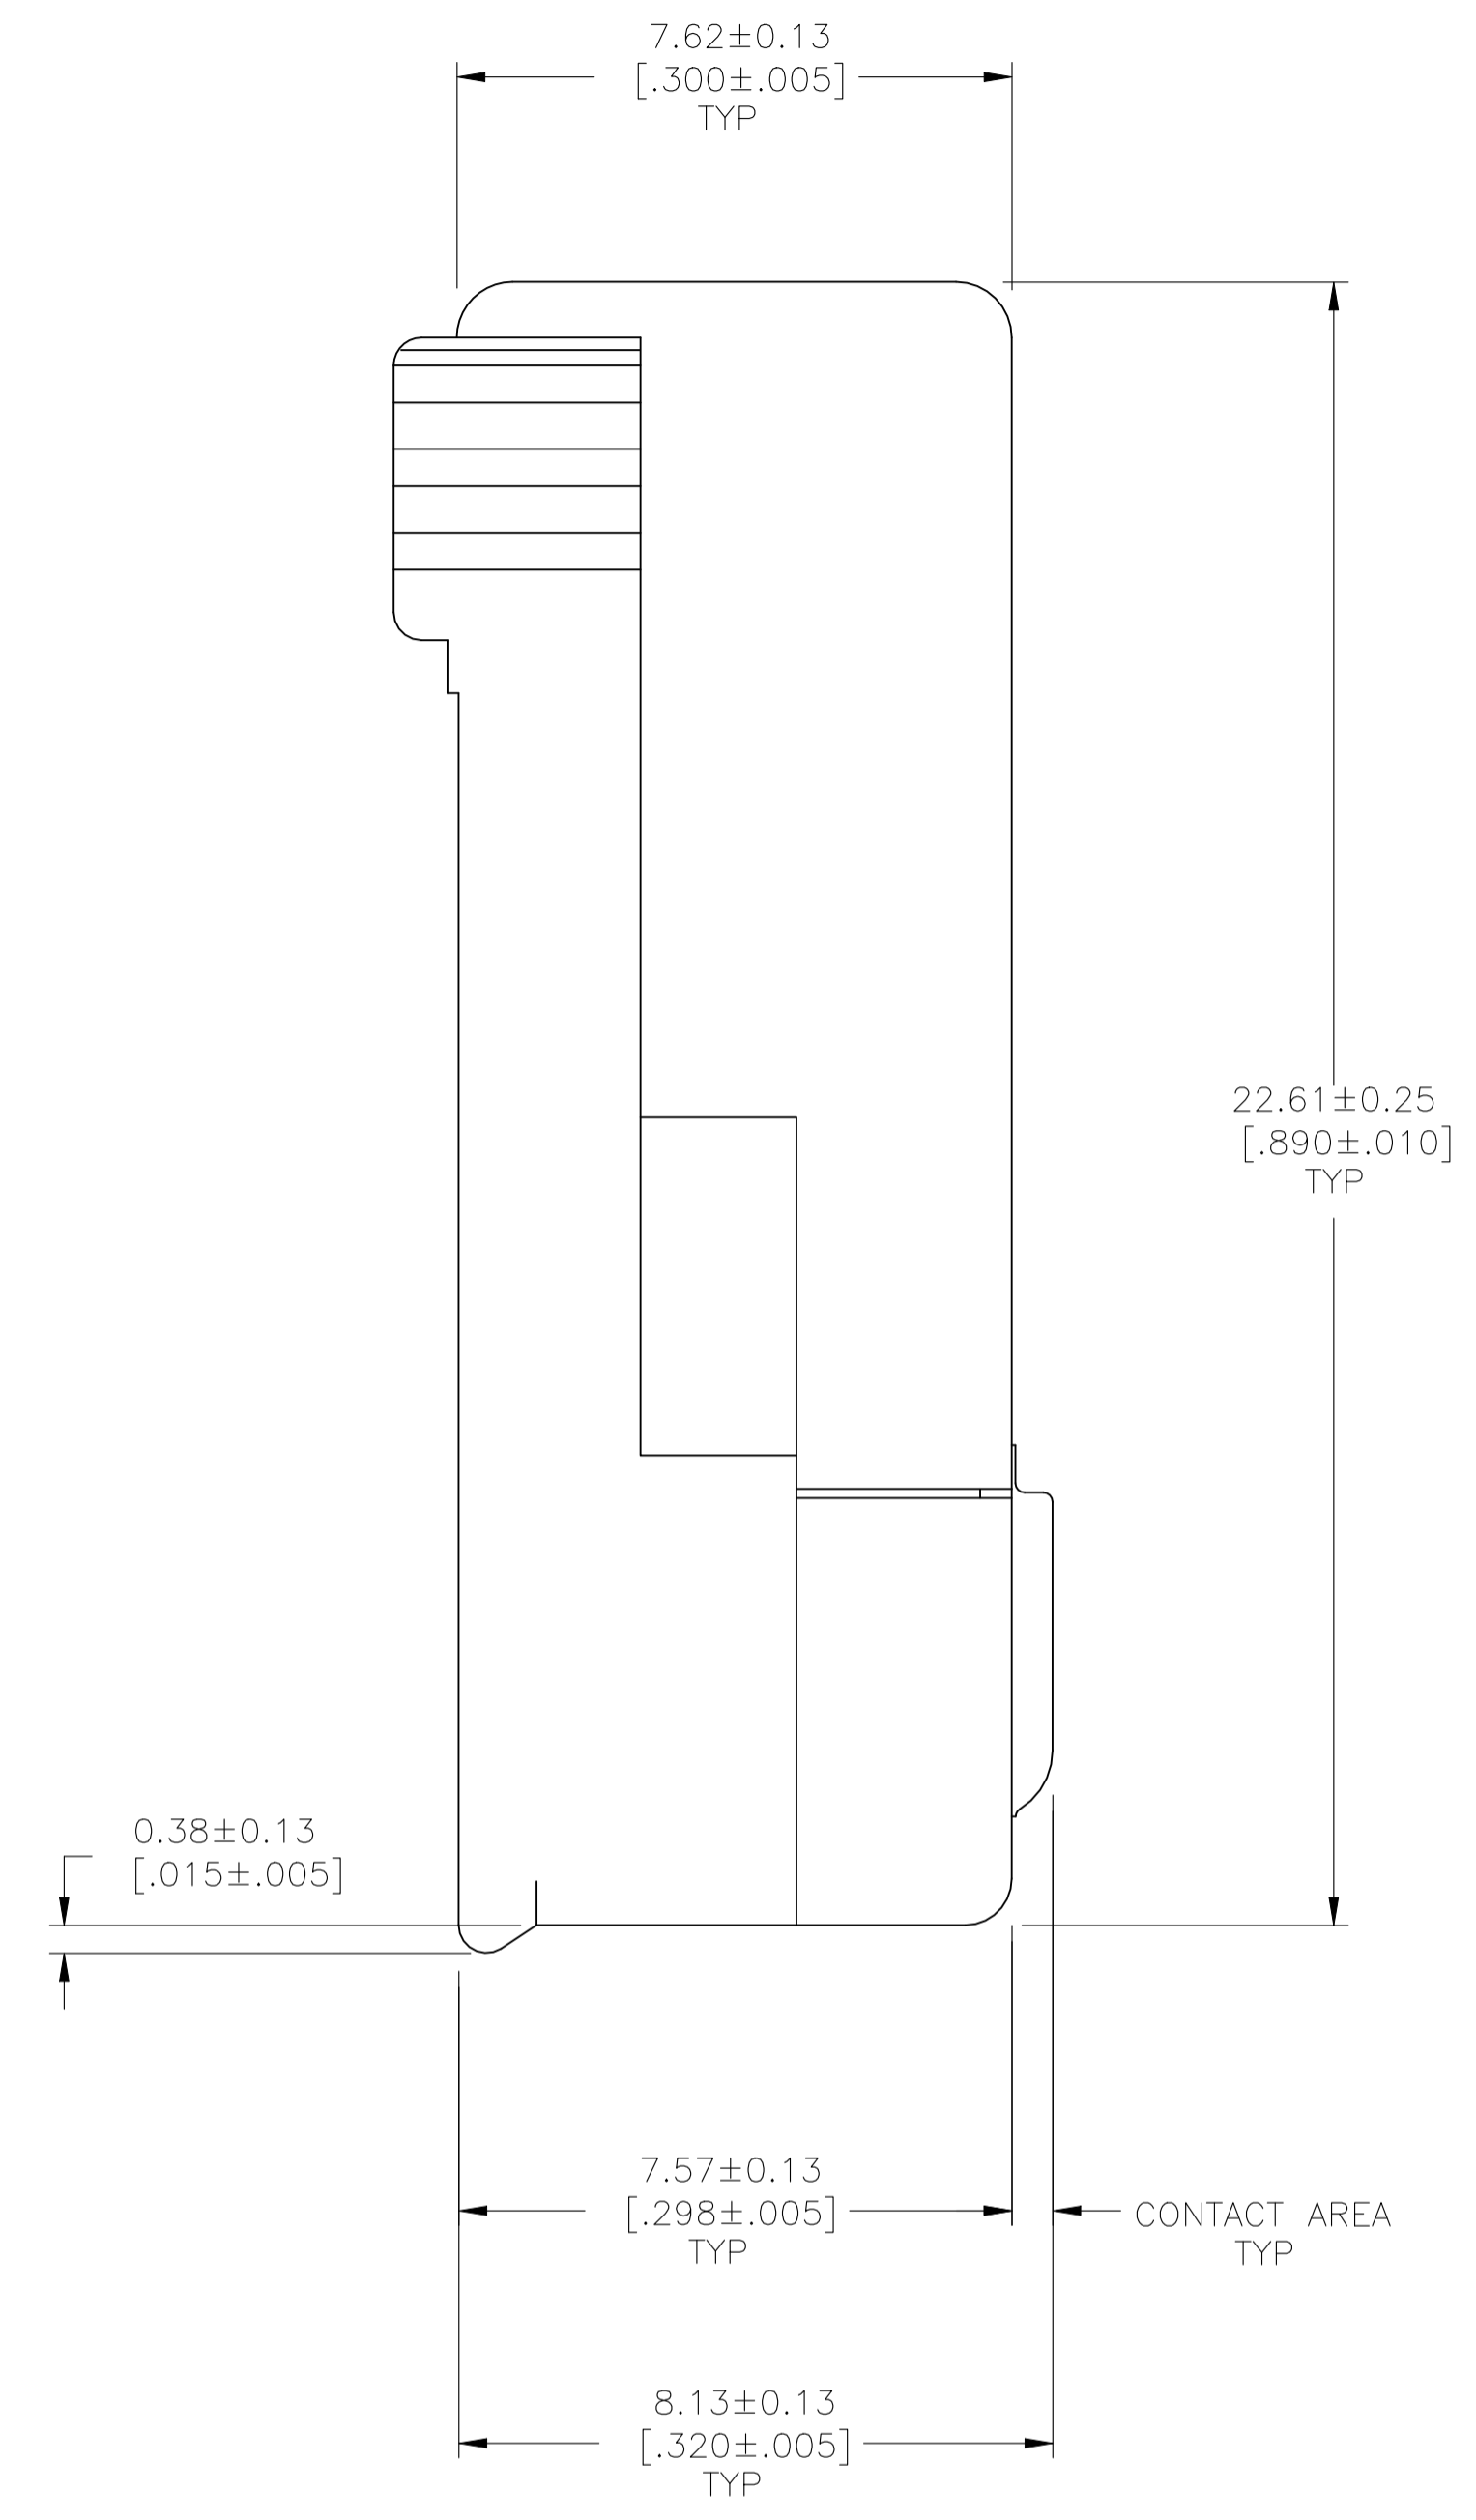


REVISIONS					
P	LTR	DESCRIPTION	DATE	DRN	APVD
P1		REVISED AS PER ECN-22-179784	17OCT2022	KH	SZ

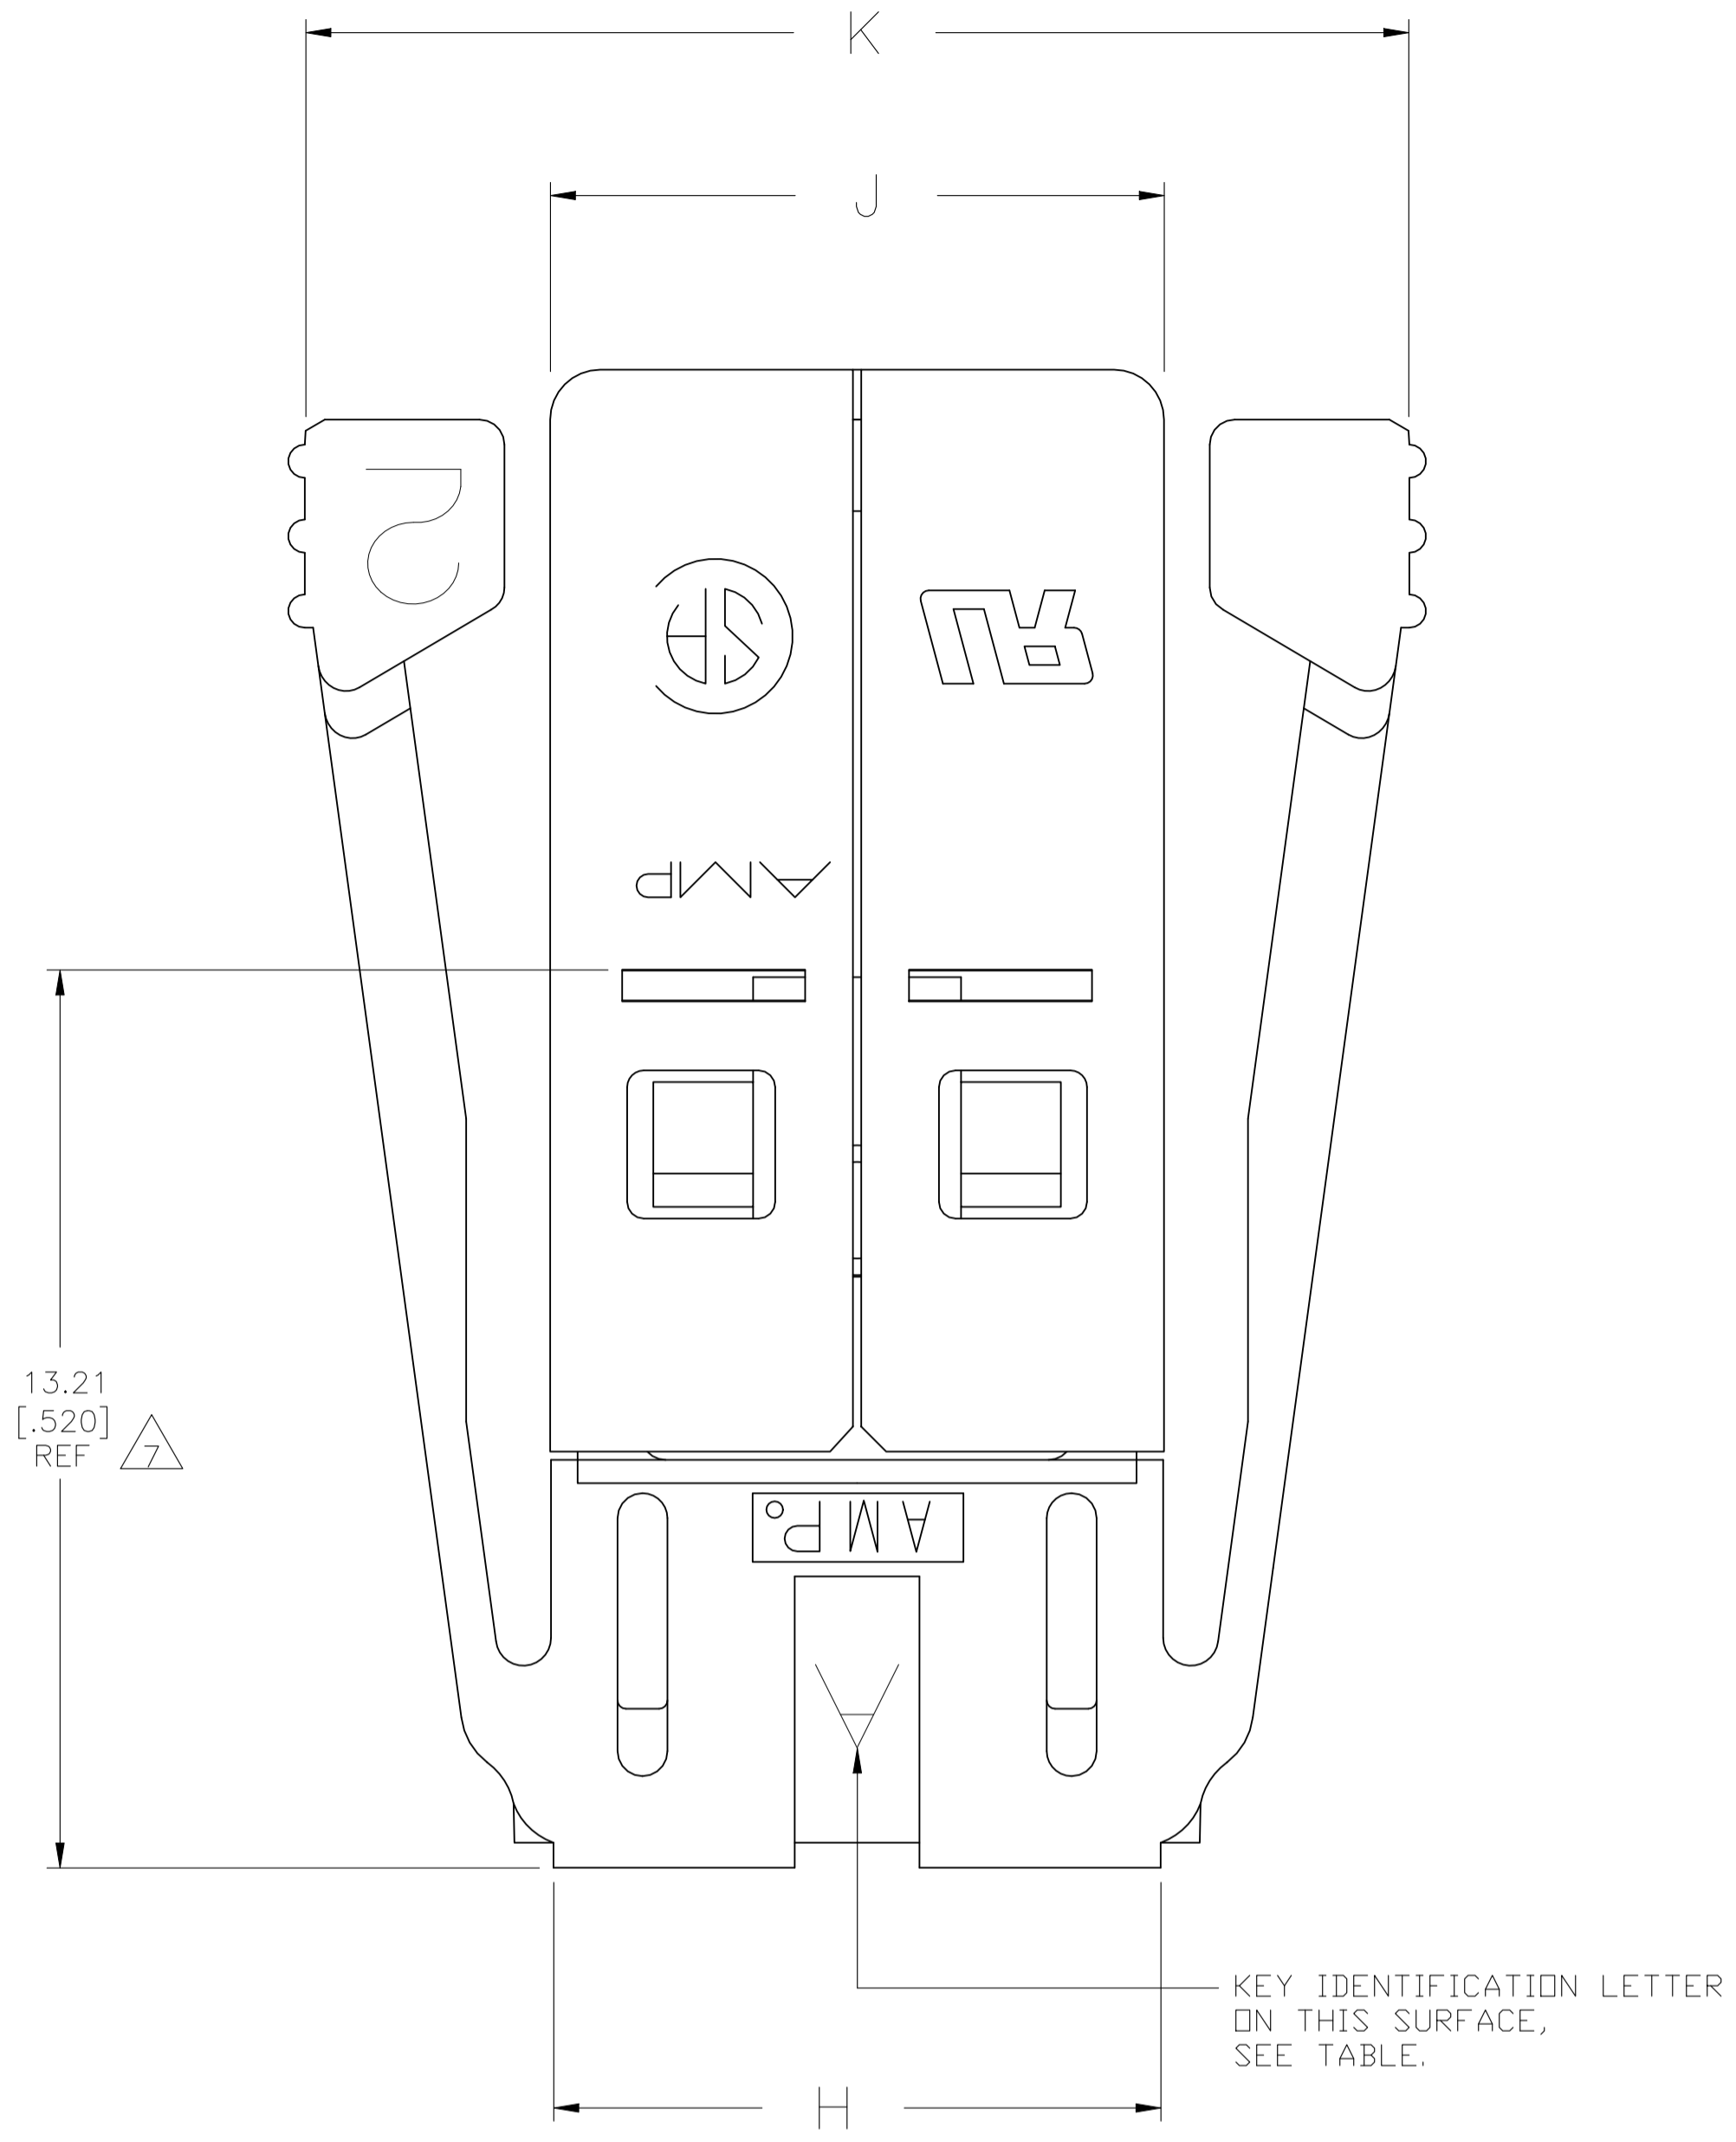

- PREFIX AND SUFFIX NUMBERS MUST MATCH THOSE ON RECEPTACLE FOR PARTS TO MATE.
- MATERIAL:**
HOUSING- POLYCARBONATE
CONTACT- COPPER ALLOY
SHIELD- BRASS
- FINISH:**
HOUSING- BROWN
CONTACT- 0.00203[.000080] MIN COPPER OVER ENTIRE PART,
0.00254[.000100] MIN NICKEL OVER ENTIRE PART,
0.00002[.000001] MIN GOLD OVER ENTIRE PART,
0.00254[.000100] GOLD OVER CONTACT AREA.
SHIELD- BRIGHT TIN 0.00076[.000030] MIN OVER 0.00127[.000050] MIN NICKEL.
- CABLES MUST MEET AMP DRAWING SPECIFICATION 520471.
- CABLES MUST MEET AMP DRAWING SPECIFICATION 520475.
- CABLES MUST MEET AMP DRAWING SPECIFICATION 520477.
- INSERTION DEPTH INTO RECEPTACLE.
- BULK CABLE IS NOT AVAILABLE FROM AMP INC.
- FOR TERMINATION OF 24 AWG, 7 STRANDED, FLAT RIBBON CABLE WITH 1.27[.050] NOMINAL O.D. CONDUCTOR INSULATION PER LISTED DRAWING SPECIFICATIONS.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

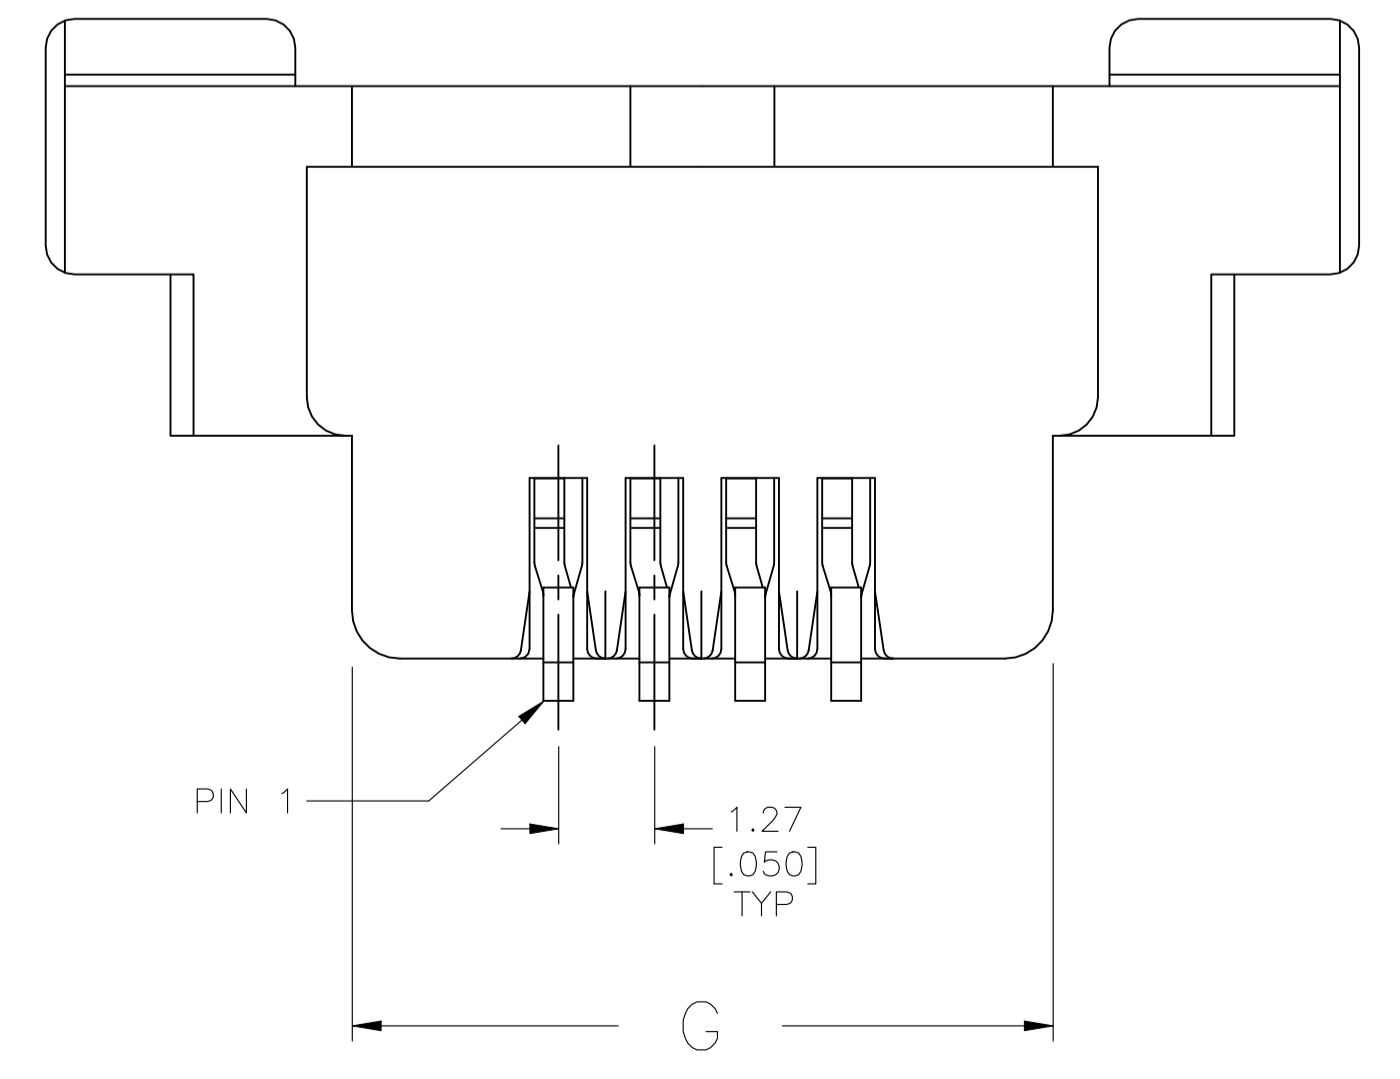

OBSOLETE	32.11 [1.264]	24.76 [.975]	25.70 [1.012]	24.59 [.968]	16	E	△5-1761192-6
OBSOLETE	21.95 [.864]	14.60 [.575]	15.54 [.612]	14.43 [.568]	8	E	△5-1761192-3
	16.87 [.664]	9.52 [.375]	10.46 [.412]	9.35 [.368]	4	E	△4 5-1761192-1
OBSOLETE	16.87 [.664]	9.52 [.375]	10.46 [.412]	9.35 [.368]	4	D	△4 4-1761192-1
	16.87 [.664]	9.52 [.375]	10.46 [.412]	9.35 [.368]	4	C	△4 3-1761192-1
△10 OBSOLETE	21.95 [.864]	14.60 [.575]	15.54 [.612]	14.43 [.568]	8	A	△5 1-1761192-3
OBSOLETE	16.87 [.664]	9.52 [.375]	10.46 [.412]	9.35 [.368]	4	A	△4 4-1761192-1
	K	J	H	G	NO OF POSN	KEY I.D. LETTER	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN B MCMASIER 27APR2004
CIR C ROHDE 27APR2004
APVD M. WALMSLEY 27APR2004

TE Connectivity

PLUG ASSEMBLY, SPECIAL, FLAT CABLE, 50 SERIES, SDL

PRODUCT SPEC 108-2047
APPLICATION SPEC 114-2086

SIZE: A1
WEIGHT: 0.000000
CUSTOMER DRAWING

SCALE: 10:1
SHEET: 1 of 1
REV: P1