

DATASHEET

Integra

SR4L049-L • lamiiANT[®]
SR4L049-R • lamiiANT[®]



Features

- Antenna for 3G and 4G applications
- LTE, GSM, CDMA, DCS, PCS, WCDMA, UMTS, HSPDA, GPRS, EDGE, IMT
- Corner placement with Left and Right variants
- Surface Mounted Device (SMD) with omnidirectional radiation pattern
- Supplied on Tape and Reel for automated manufacturing
- Automotive temperature rating
- Ultra-compact 23 x 8 x 3.3mm
- Suited for high data-rates using MIMO antennas

Contents

| | | |
|--------------|--|-----------|
| 1. | Description | 2 |
| 2. | Applications | 2 |
| 3. | General data | 2 |
| 4. | Part number | 3 |
| 5. | RF characteristics | 3 |
| 6. | RF performance | 4 |
| 6.1. | Return loss | 4 |
| 6.2. | VSWR | 4 |
| 6.3. | Efficiency | 5 |
| 6.4. | Antenna pattern | 6 |
| 6.5. | Optimising antenna efficiency | 10 |
| 7. | Antenna dimensions | 11 |
| 8. | Schematic symbol and pin definition | 12 |
| 9. | Host PCB footprint | 12 |
| 10. | Electrical interface | 13 |
| 10.1. | Transmission line | 13 |
| 10.2. | Matching circuit | 13 |
| 11. | Antenna integration guide | 14 |
| 11.1. | Antenna placement | 14 |
| 11.2. | Host PCB layout | 15 |
| 11.3. | Host PCB clearance | 15 |
| 11.4. | Diversity | 15 |
| 12. | Reference board | 16 |
| 12.1. | Reference board matching circuit | 16 |
| 13. | Soldering | 17 |
| 14. | Hazardous material regulation conformance | 17 |
| 15. | Packaging | 17 |
| 15.1. | Optimal storage conditions | 17 |
| 15.2. | Tape characteristics | 18 |
| 15.3. | Reel dimensions | 19 |
| 15.4. | Box dimensions | 19 |
| 15.5. | Bag properties | 20 |
| 15.6. | Reel label information | 20 |

1. Description

The high-performance of the Integra antenna assists with passing PTCRB certification and other wireless standards. The antenna has been designed into both MIMO and single antenna systems. The corner placement of the antenna on the host PCB minimizes space requirements and gives consistent radiation patterns. This product specification shows the antenna performance across all frequency bands.

2. Applications

- MIMO and single antenna systems
- Pico base-stations
- 4G Mi-Fi Routers
- Medical equipment
- CCTV (Closed Circuit TV) over cellular
- Communications for Drones
- OBD2 and automotive systems
- Remote monitoring

3. General data

| | |
|------------------------------|--|
| FREQUENCY | 791-960MHz 1710-2170MHz 2300-2400MHz 2500-2690MHz |
| POLARIZATION | Linear |
| OPERATING TEMPERATURE | -40°C to 140°C |
| ENVIRONMENTAL CONDITION TEST | ISO16750-4 5.1.1.1/5.1.2.1/5.3.2 |
| IMPEDANCE WITH MATCHING | 50 Ω |
| WEIGHT | <2.5g |
| ANTENNA TYPE | SMD |
| DIMENSIONS | 23.0 x 8.0 x 3.3 (mm) |

4. Part number

INTEGRA LEFT
SR4L049-L



INTEGRA RIGHT
SR4L049-R



5. RF characteristics


| | 791-960MHZ | 1710-2170MHZ |
|-----------------------|------------|--------------|
| PEAK GAIN | 1.9dBi | 3.0dBi |
| AVERAGE GAIN (LINEAR) | -1.5dBi | -2.0dBi |
| AVERAGE EFFICIENCY | >70% | >60% |
| MAXIMUM RETURN LOSS | -7.8dB | -5.0dB |
| MAXIMUM VSWR | 2.3:1 | 3.6:1 |

| | 2300-2400MHZ | 2500-2690MHZ |
|-----------------------|--------------|--------------|
| PEAK GAIN | 3.3dBi | 3.5dBi |
| AVERAGE GAIN (LINEAR) | -2.0dBi | -2.60dBi |
| AVERAGE EFFICIENCY | >60% | >50% |
| MAXIMUM RETURN LOSS | -9.7dB | -4.5dB |
| MAXIMUM VSWR | 1.9:1 | 4.1:1 |


All data measured on Antenna's evaluation PCB Part
No. SR4L049-EVB-1

6. RF performance


6.1. Return loss

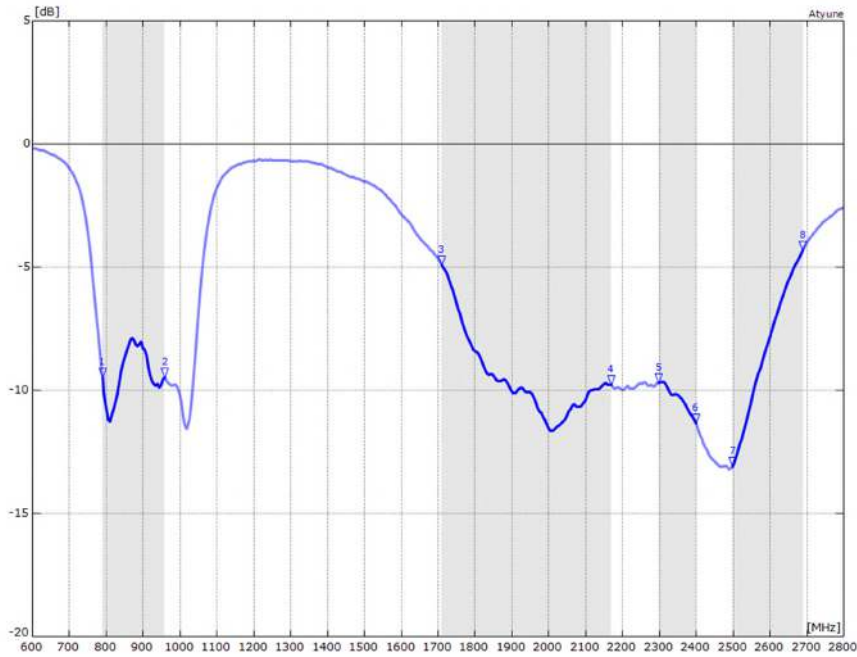

6.2. VSWR

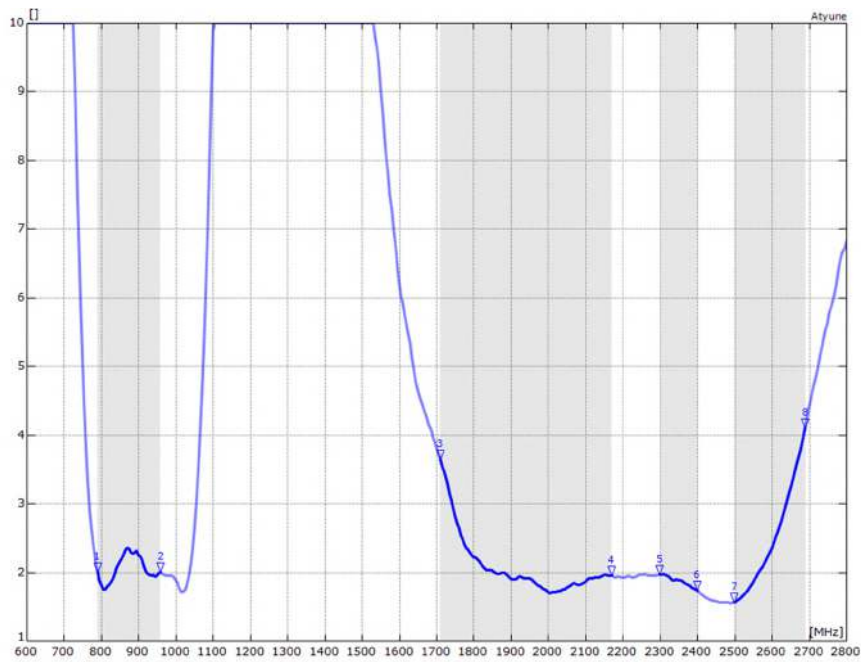


6.3. Efficiency

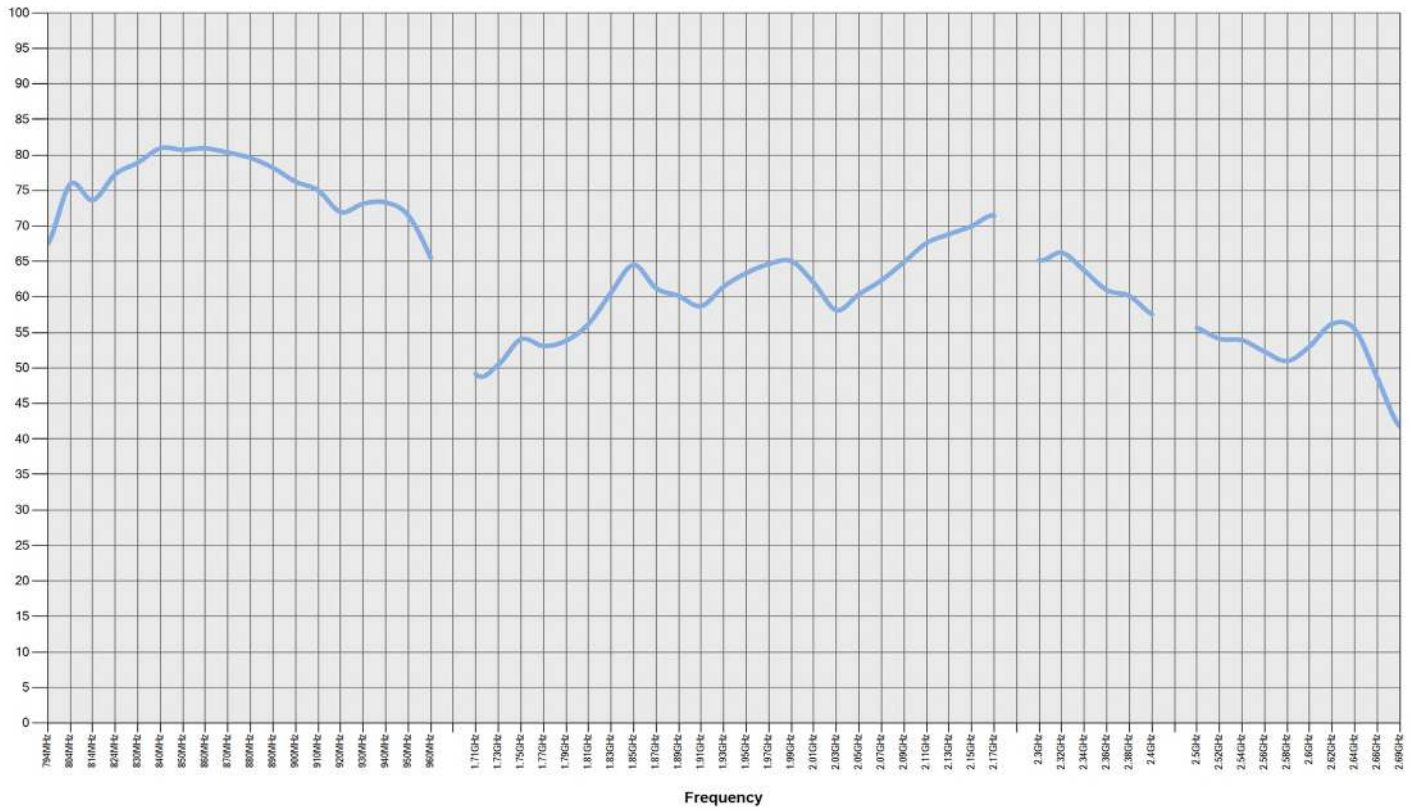


6.4. Antenna pattern

6.4.1. 791 MHz – 960 MHz


3D pattern at 880MHz

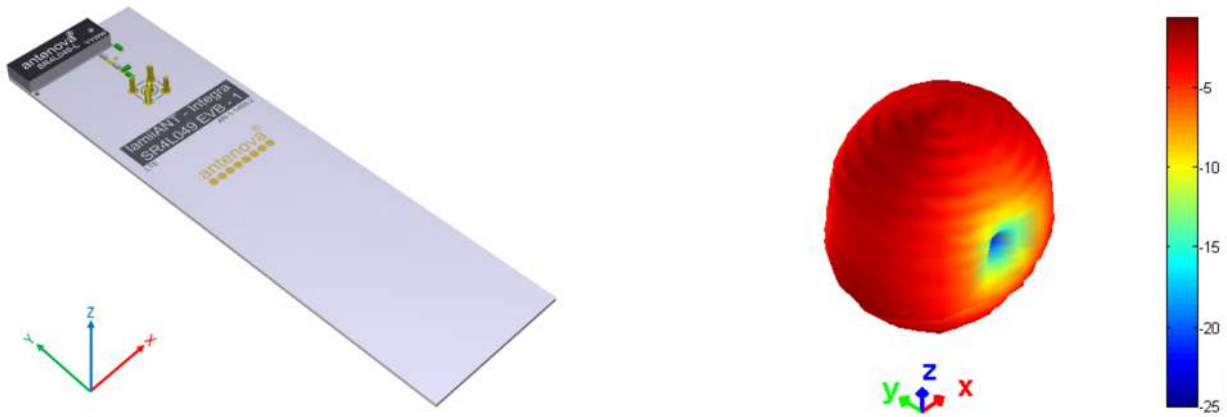


XY

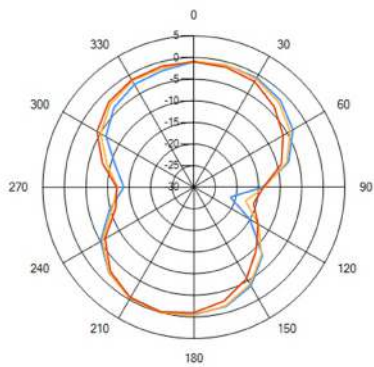

XZ

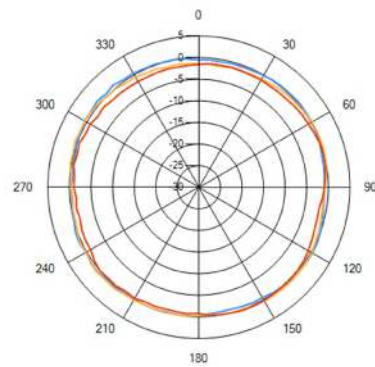


YZ

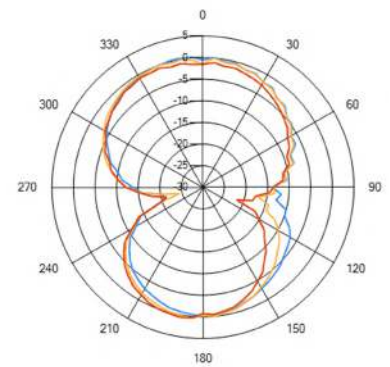


— 794MHz — 880MHz — 960MHz

6.4.2. 1710 MHz – 2170 MHz


3D pattern at 1990MHz

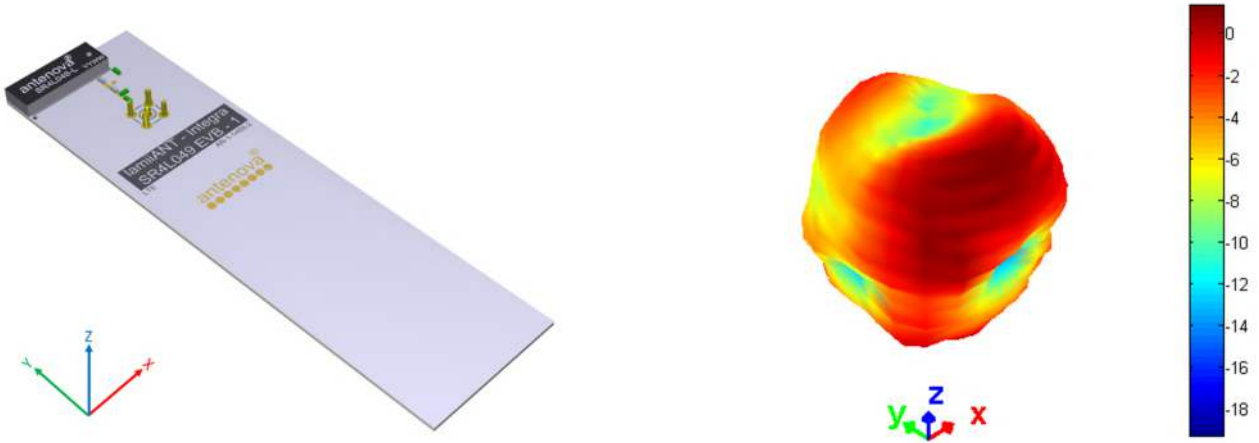


XY

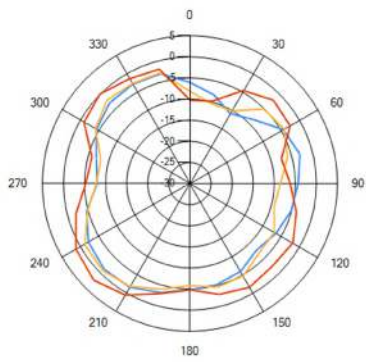

XZ

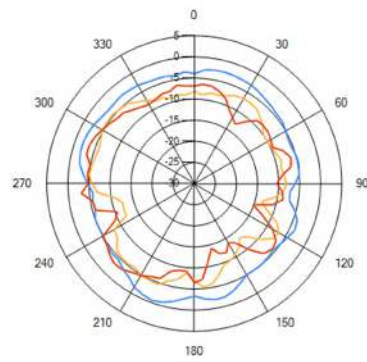


YZ

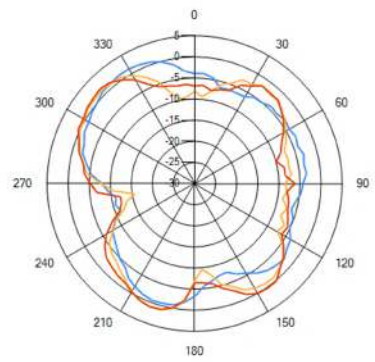


— 1.71GHz — 1.99GHz — 2.17GHz

6.4.3. 2300 MHz – 2400 MHz


3D pattern at 2350MHz

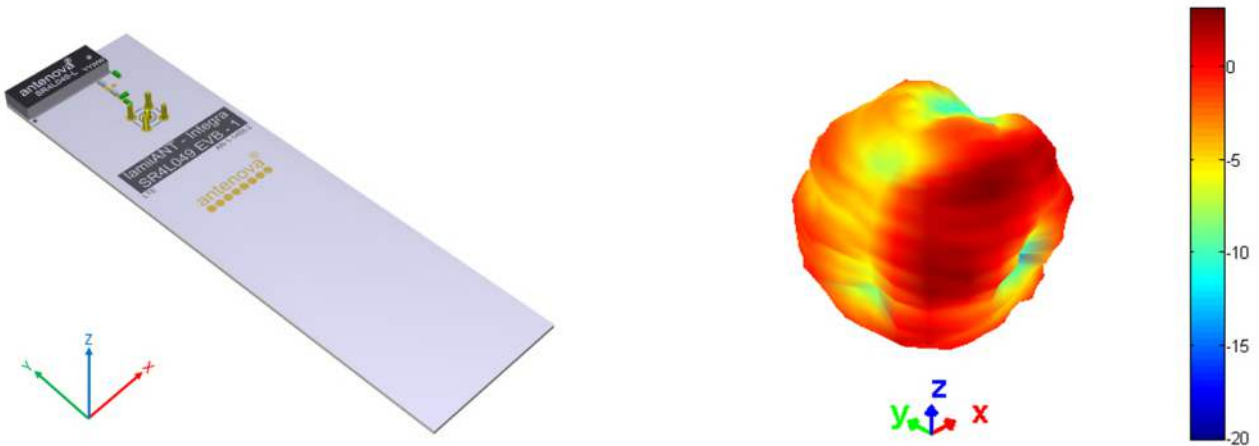


XY

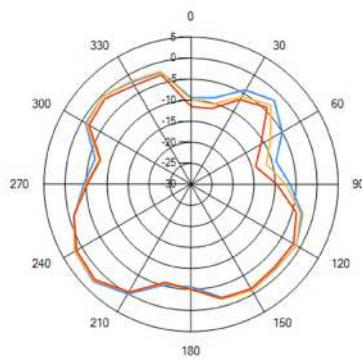

XZ

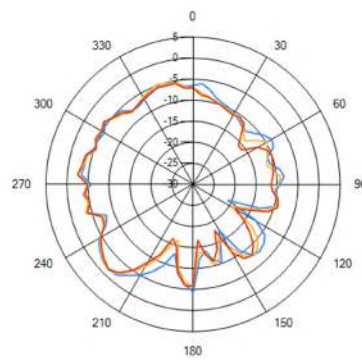


YZ

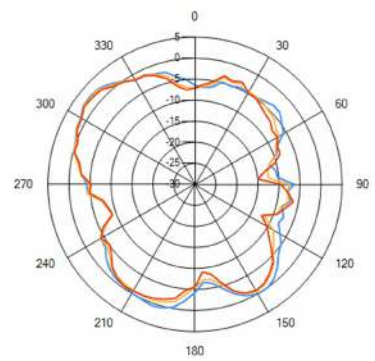


— 2.3GHz — 2.36GHz — 2.4GHz

6.4.4. 2500 MHz – 2690 MHz


3D pattern at 2600MHz

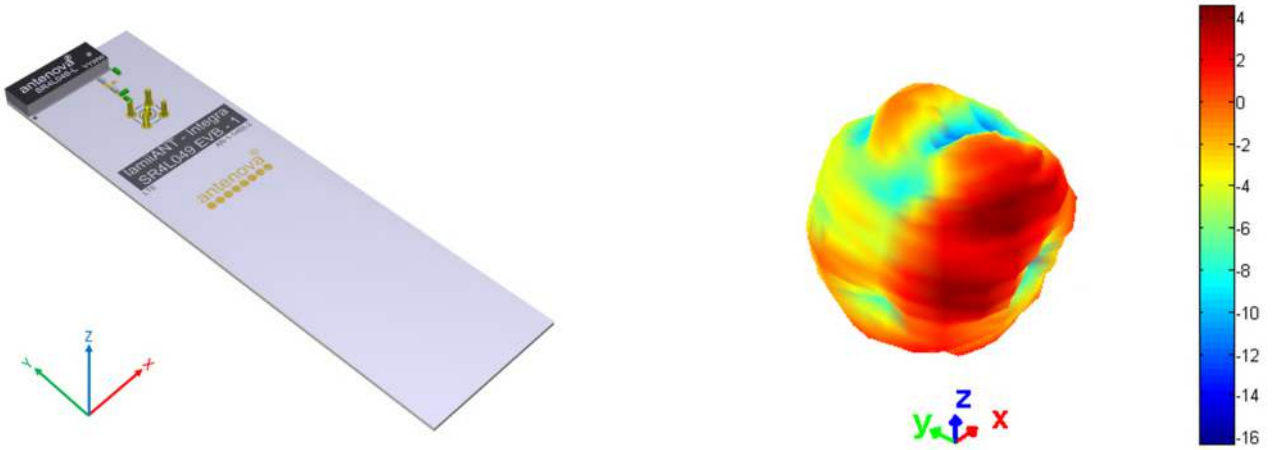


XY

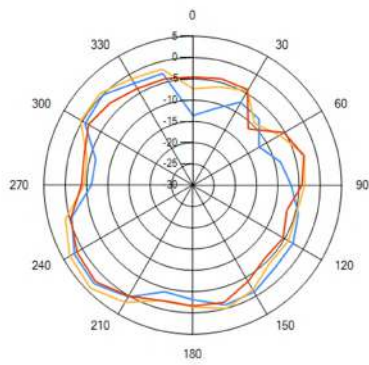

XZ

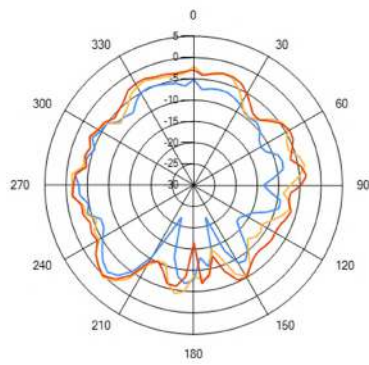

YZ

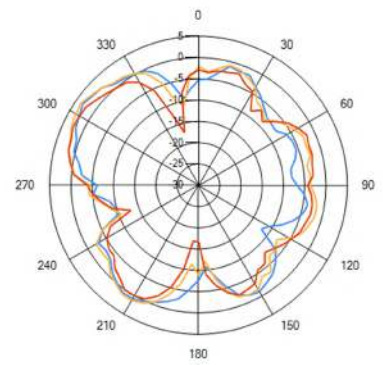

— 2.5GHz — 2.6GHz — 2.69GHz

6.5. Optimising antenna efficiency

All SMD cellular antennas require a ground plane on the host PCB for best radiation efficiency, especially in the sub-GHz bands. On an ideal PCB the antenna needs the ground plane length to be greater than a quarter wavelength of the lowest frequency used. If the ground plane is less than this, the efficiency will be reduced. E.g. to calculate the wavelength of 791MHz:


$$\lambda = \frac{c}{f} = \frac{3 \times 10^8}{791 \times 10^6} = 379 \text{mm}$$

$$\frac{1}{4} \lambda = 95 \text{mm}$$

In practise, the optimum PCB length will be slightly greater than $\frac{1}{4}$ wavelength + antenna + clearance area, for Integra that optimum PCB length is 125mm.





7. Antenna dimensions

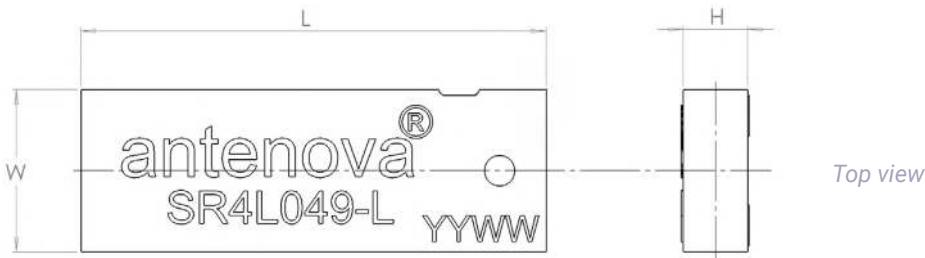

| L | W | H |
|-----------|----------|----------|
| Length | Width | Height |
| 23.0 ±0.1 | 8.0 ±0.1 | 3.3 ±0.1 |


All dimensions in (mm)
 -L and -R Dimensions are the same

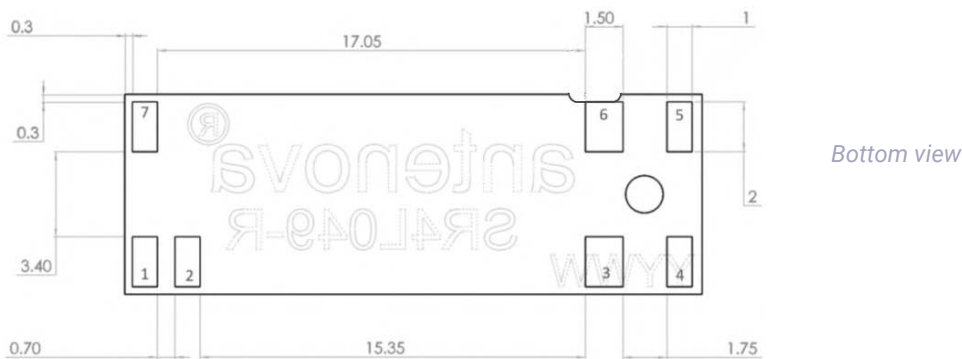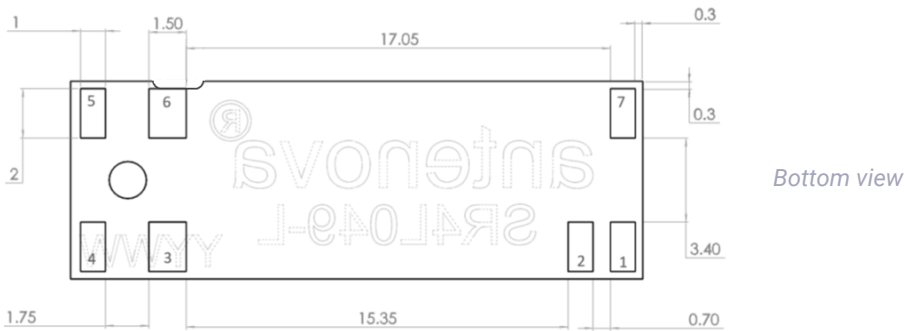

8. Schematic symbol and pin definition


The circuit symbol for the antenna is shown below. The antenna has 7 pins with only 4 as functional. All other pins are for mechanical strength.

| PIN | DESCRIPTION |
|---------|---|
| 3 | Feed (Transceiver port) |
| 4 | T1 (Return/Tuning) |
| 5, 6, 7 | NC (Not used, mechanical only) |
| 1, 2 | SC (Pins 1 and 2 short circuit on host PCB) |

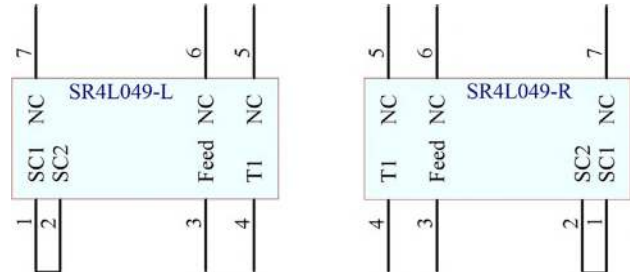

9. Host PCB footprint

The recommended host PCB footprint is below.

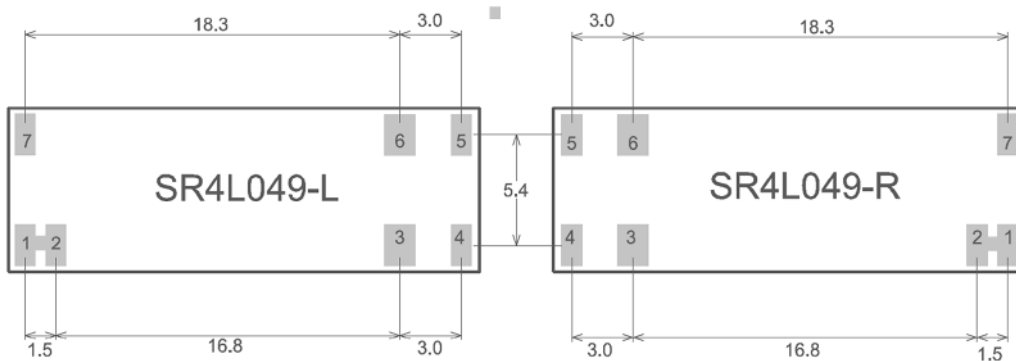

Pads 1, 2, 4, 5, 7 = 2.0 x 1.0 (mm)

Pads 3, 6 = 2.0 x 1.5 (mm)

10. Electrical interface

10.1. Transmission line

All transmission lines should be designed to have a characteristic impedance of 50Ω.

- The length of each transmission lines should be kept to a minimum
- All other parts of the RF system like transceivers, power amplifiers, etc, should also be designed to have a 50 Ω impedance


A co-planar transmission line can be designed using an online transmission line calculator tool, such as:

<https://blog.antenova.com/rf-transmission-line-calculator>

The PCB thickness, copper thickness and substrate dielectric constant are entered, then the tool calculates the transmission line width and gaps on either side of the track to give a 50 Ω impedance.

10.2. Matching circuit

The antenna requires a matching circuit that must be optimized for each product. The matching circuit will require up to six components and the following circuit should be designed into the host PCB. Not all components may be required but should be included as a precaution. The matching network should be placed close to the antenna feed to ensure it is optionally effective in tuning the antenna.

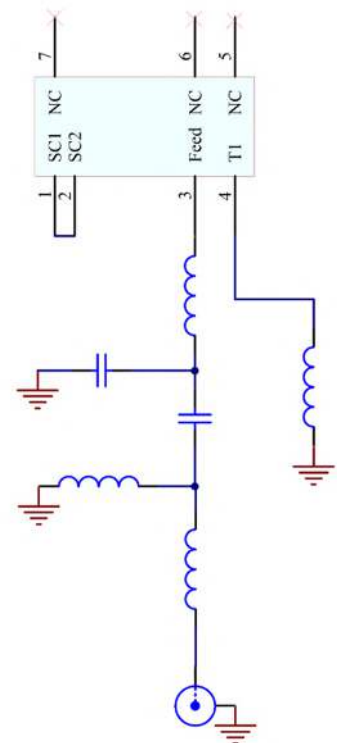


11. Antenna integration guide

We recommend the following during the design phase to maximise antenna performance and minimize noise:

- Minimum 4 layer PCB
- Route signals and power internally where possible
- Flood all layers with ground
- Knit ground on all layers together with plenty of vias

Follow placement guidance carefully, in addition Antenova provide technical support to help you through all stages of your design. Register for an account on <https://ask.antenova.com/> to access technical support.

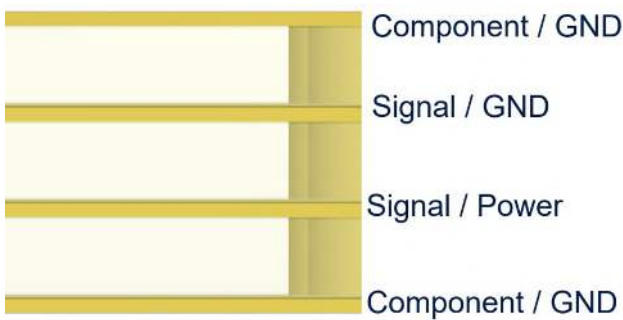


11.1. Antenna placement


The best position for the antenna is in the corner of the short side of the PCB. This allows the longer side of the PCB to be a ground plane, a long ground plane improves the antenna's efficiency. The Antenova placement tool can be used to advise on antenna placement, see:

<https://blog.antenova.com/intelligent-antenna-selection-and-placement-tool-antenova>

Horizontal placement

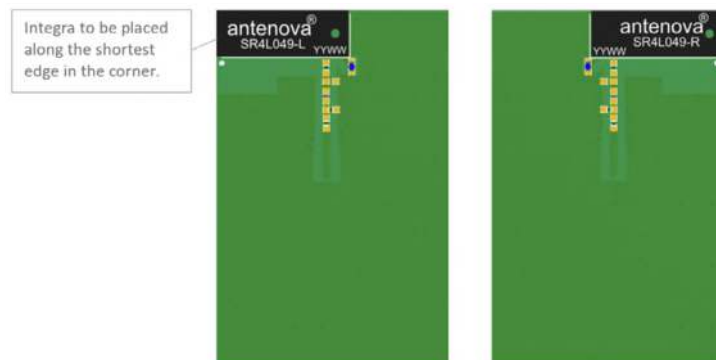


Vertical placement

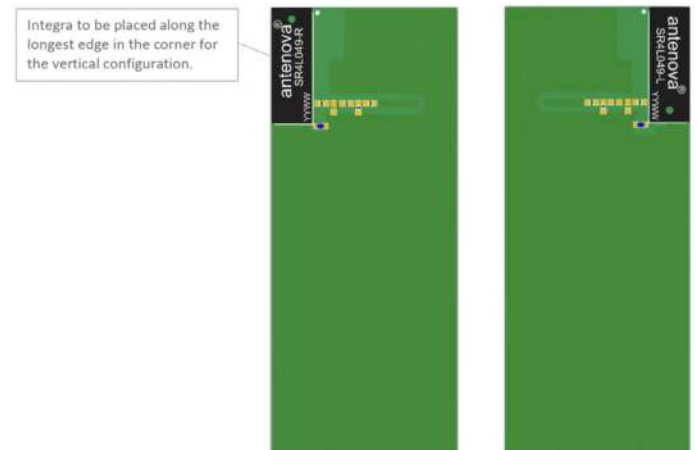

Vertical placement optimal minimum GND length required is $\geq 100\text{mm}$

11.2. Host PCB layout

The host PCB must be designed using the PCB footprint shown with the correct clearances. An example of the PCB layout shows the antenna footprint. Please note this clearance area is critical to the performance of the antenna and must be applied through all layers of the PCB.

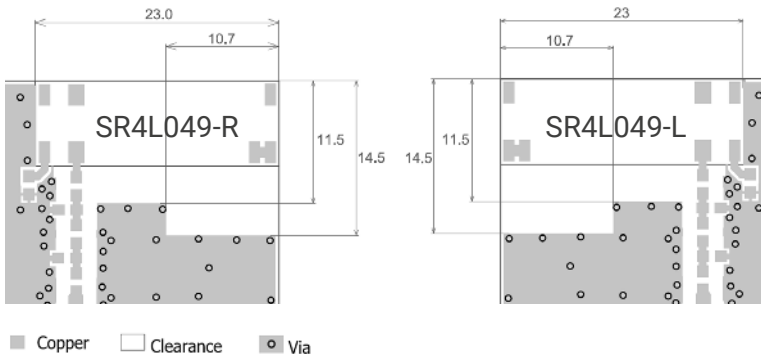


All dimensions in (mm)

11.3. Host PCB clearance

The diagram below shows the antenna footprint and clearance through all layers on the PCB. Only the antenna pads and connections to feed and GND are present within this clearance area.

Placement of components and GND with traces adjacent to the antenna should maintain a minimum clearance of 15mm from either side. The antenna should therefore be placed in the corner to only have one side affected.

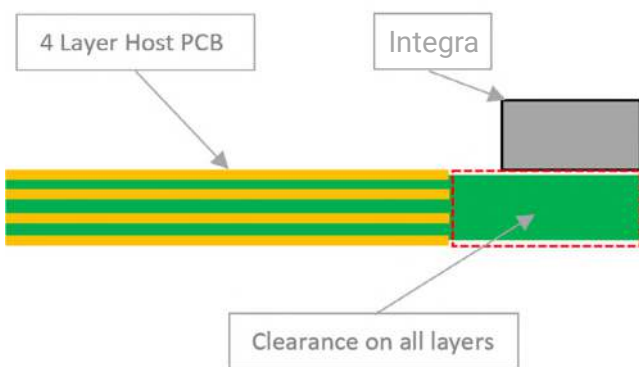

11.4. Diversity

The Integra antenna is suitable for use in diversity antennas. To implement a diversity antenna, follow the guidance given in the Diversity Antennas app note. This can be downloaded from Antenova.com.

12. Reference board


A reference board is used for evaluating the antenna SR4L049-L and it includes a SMA female connector. (Part number: SR4L049-EVB-1)

To order a reference board please see antenna.com



12.1. Reference board matching circuit

| DESIGNATOR | TYPE | VALUE | DESCRIPTION |
|------------|-----------|-------|-----------------------|
| L1 | Inductor | 4.7nH | Murata LQG15HN series |
| L2, C2 | NA | DNP | Not Fitted |
| C1 | Capacitor | 1.2pF | Murata GJM15 series |
| L3 | Inductor | 2.2nH | Murata LQG15HN series |
| L4 | Inductor | 3.3nH | Murata LQG15HN series |

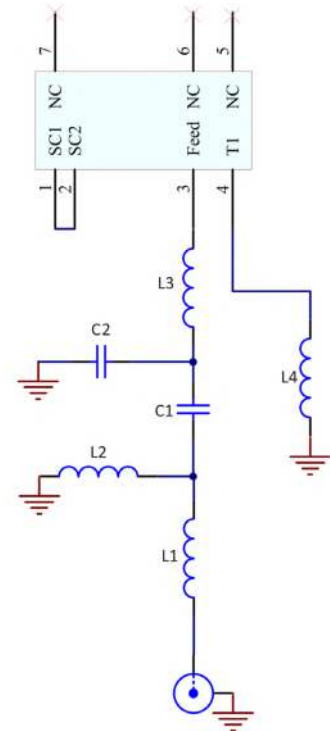

13. Soldering

This antenna is suitable for lead free soldering. The reflow profile should be adjusted to suit the device, oven and solder paste, while observing the following conditions:

- For leaded soldering, the maximum temperature should not exceed 240 °C.
- For lead free soldering, a maximum temperature of 255 °C for no more than 20 seconds is permitted.
- The antenna should not be exposed to temperatures exceeding 120 °C more than 3 times during the soldering process.

14. Hazardous material regulation conformance

The antenna has been tested to conform to RoHS and REACH requirements. A certificate of conformance is available from Antenova's website.

15. Packaging


15.1. Optimal storage conditions

| | |
|---------------|---|
| TEMPERATURE | -10°C to 40°C |
| HUMIDITY | Less than 75% RH |
| SHELF LIFE | 24 Months |
| STORAGE PLACE | Away from corrosive gas and direct sunlight |
| PACKAGING | Reels should be stored in unopened sealed manufacturer's plastic packaging. |
| MSL LEVEL | 1 |

Note: Storage of open reels of antennas is not recommended due to possible oxidization of pads on antennas. If short term storage is necessary, then it is highly recommended that the bag containing the antenna reel is re-sealed and stored in conditions as described in the table above.

The shelf life of the antenna is 2 years provided the factory seal on the package has not been broken.

15.2. Tape characteristics

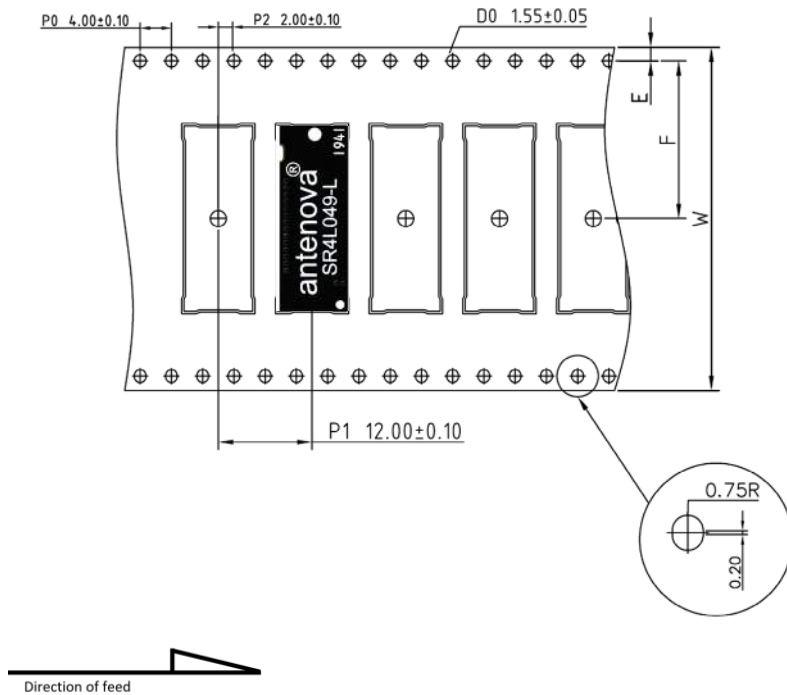


| P0 | P1 | P2 | D0 |
|------------|-------------|------------|------------|
| 4.00 ± 0.1 | 12.00 ± 0.1 | 2.00 ± 0.1 | 1.55 ± 0.1 |

| E | F | W |
|------------|--------------|-------------|
| 1.75 ± 0.1 | 20.20 ± 0.15 | 44.00 ± 0.3 |

All dimensions in (mm)

| QUANTITY | LEADING SPACE | TRAILING SPACE |
|-----------------|--------------------------|--------------------------|
| 1000 pcs / reel | 30 blank antenna holders | 30 blank antenna holders |


15.3. Reel dimensions

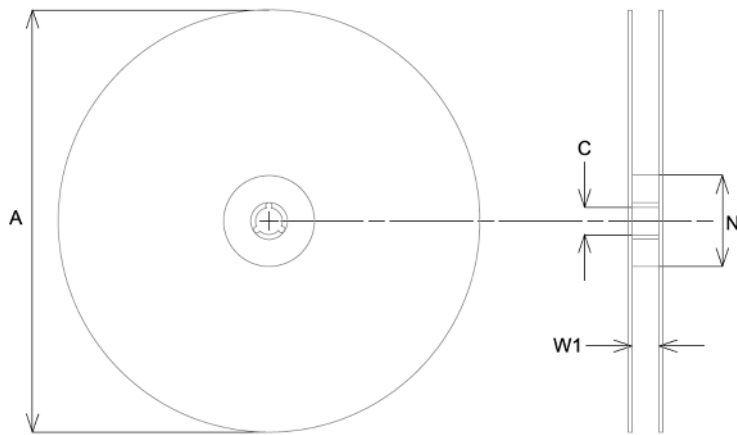

| A | C | N | W1 |
|-------------|------------|------------|----------|
| 330.0 ± 2.0 | 13.0 ± 0.5 | 80.0 ± 0.2 | 44 ± 0.3 |

All dimensions in (mm)

15.4. Box dimensions

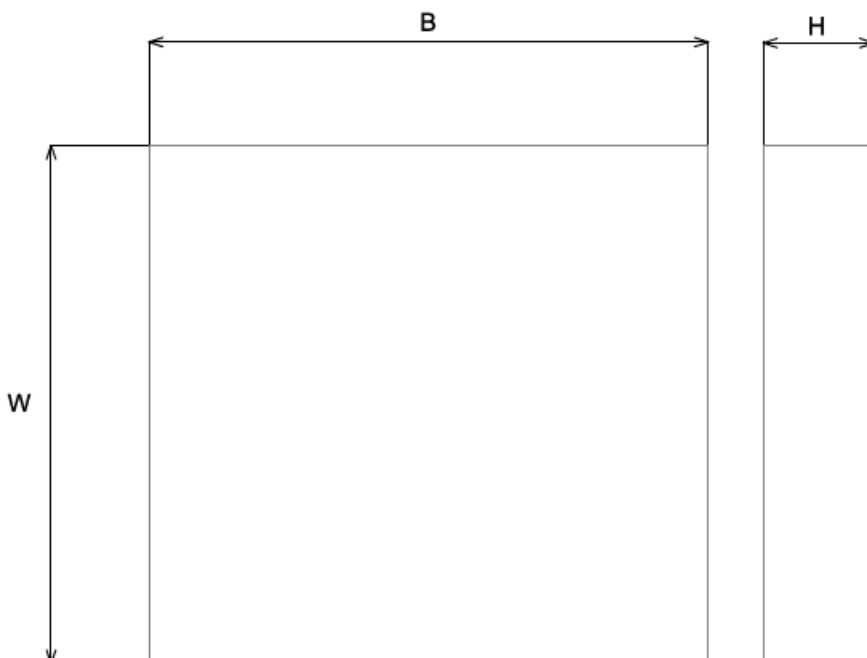

| WIDTH (W) | BREADTH (B) | HEIGHT (H) |
|-----------|-------------|------------|
| 350mm | 340mm | 65mm |

15.5. Bag properties

Reels are supplied in protective plastic packaging.

15.6. Reel label information



Quality statements

Antenova’s products conform to REACH and RoHS legislation. For our statements regarding these and other quality standards, please see antenova.com.



Antenova reserves all rights to the contents of this document. Antenova gives no warranties based solely on the accuracy or completeness of the contents of this document and reserves the right to make changes to the specifications of the products described herein at any time and without notice.

Datasheet version

2.01 released Aug 31st 2021

2.02 released Apr 22th 2022

Antenna design, integration and test resources

Product designers – the details contained in this datasheet will help you to complete your embedded antenna design. Please follow our technical advice carefully to obtain optimum antenna performance.

We aim to support our customers to create high performance wireless products. You will find a wealth of design resources, calculators and case studies to aid your design on our website.

Antenova's design laboratories are equipped with the latest antenna design tools and test chambers. We provide antenna design, test and technical integration services to help you complete your design and obtain the required certifications.

If you cannot find the antenna you require in our product range, please contact us to discuss creating a custom antenna to meet your exact requirements.

Share knowledge with RF experts around the world.

ask.antenna is a global forum for designers and engineers working with wireless technology.

[VISIT ASK.ANTENNA](https://www.ask.antenna.com)

Visit [antenna.com](https://www.antenna.com)

Order antenna samples and evaluation boards, and read our antenna resources

[VISIT ANTENNA.COM](https://www.antenna.com)

Request a volume quotation for antennas:

sales@antenna.com

Global headquarters

Antenna Ltd, 2nd Floor Titan Court, 3 Bishop Square, Hatfield, AL10 9NA

+44 (0) 1707 927589