
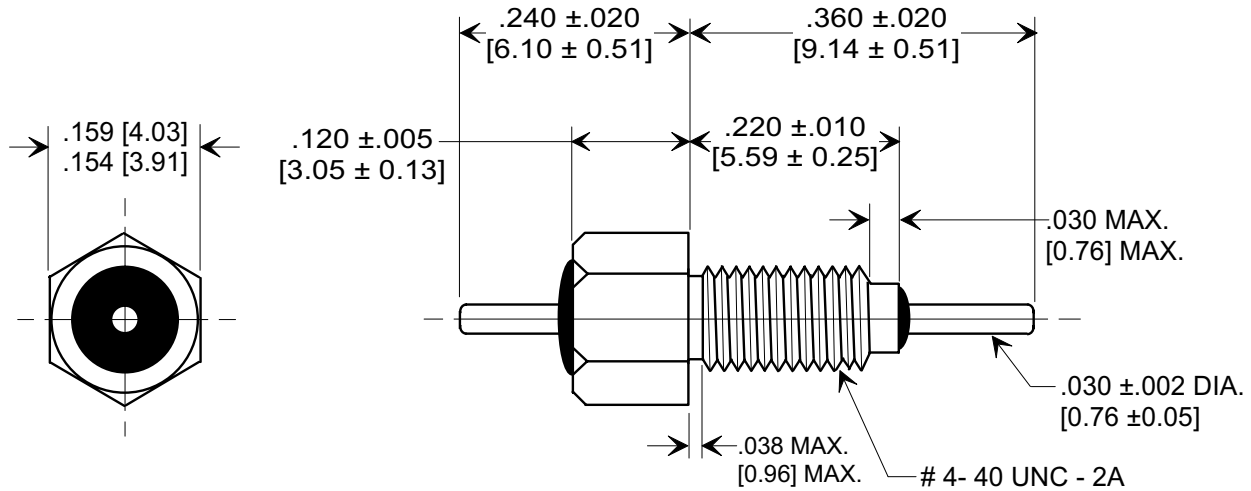




# MARKETING SALES DRAWING

Electrical Testing  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**



### MOUNTING HARDWARE

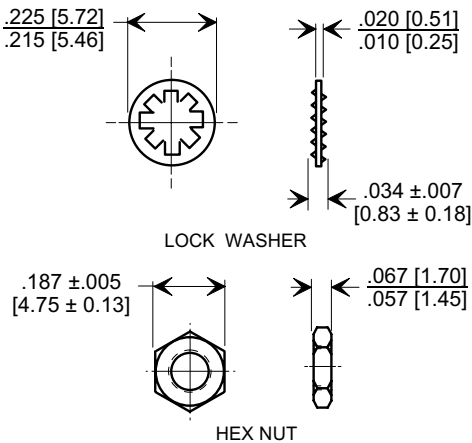

### Notes:

1. Operating temperature range : -55°C to +125°C.
2. Silver plated case, lead and mounting hardware.
3. Max.recommended mounting torque : 2.0 lb. - in.
4. Max. recommended soldering temperature : 260°C.  
See installation recommendations.
5. Nut and lock washer included.
6. Tusonix Standard part number: 4400-035.  
Tusonix RoHS compliant part number: 4400-035 LF.  
Customer must specify Standard or RoHS part number when ordering.
7. Part Marking: Trademark and variation stamped on hex flats:  
Standard Part, Black Ink. RoHS compliant part, green ink for identification.

CAP.(pf)	TOLERANCE	DC WORKING VOLTAGE		I.R. MIN. @ 100 (VDC.)	DWV (VDC)	DC CURRENT (AMPS)	MIN. NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220				
		85°C	125°C				1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
10,000	GMV	70	50	10 G Ω	150	10	4	21	35	50	60

X-2015 Rev-0	<b>REVISION RECORD</b>				<b>TUSONIX</b> TUCSON, ARIZONA	--TOLERANCES-- Unless Otherwise Specified		Title <b>BUSHING STYLE EMI FILTER</b>		
	Original Release C.O. <b>20011102-1-02</b>	<b>0</b>				DECIMAL ± NOTED				
	VARS 035,036,037 & 1MHZ COLUMN ADDED. L.E. 1-1-07-90	<b>1</b>	RDN TO COMP FMT & ADDED METRIC. S.M. 11-08-01			ANGLES ±		Drawn S.M. 11-08-01	Scale 5 X	
	<b>5591</b>	<b>2</b>	REVISED DWG. DRAWING MADE FOR EACH VAR. S.M. 11-19-02					Approved B.Mc. 11-08-01		
	<b>3</b>	20021113-1-06 REVISED AND ADDED NOTES. S.M. 11-04-05		<b>A</b>	<b>4400-035</b>					
	<b>4</b>	20051102-1-02								