



插頭部件 (Plug Component)			頭部削皮尺寸 (Plug strip dimension)			線材規格(Wire Spec.)	尾部削皮尺寸 (Terminal roj & Strip)			尾部處理 (Terminal Component)		
顏色(Color)	零件描述(Component)	數量(Q'ty)	內削(Strip)	外削(Roj)	顏色(Color)	SJT 12AWG/3C 105°C 黑色(Black) 線長: (Length) 2499.4 ^{+50.8} _{-12.7}	外削(Roj)	內削(Strip)	顏色(Color)	顏色(Color)	零件描述(Component)	數量(Q'ty)
35P黑色 90A+2A Black	FM-520L (20A 125V-) (NEMA L5-20P)	1	6 ⁺¹ ₋₀	20±1	黑/Black(L)		20±1	5 ⁺¹ ₋₀	黑/Black(L)	35P黑色 90A+2A Black	FM-319 (20A 250V-) (IEC 320 C19)	1
銅本色 (Copper)	大電流端子 (Heavy Duty Terminal)	1	6 ⁺¹ ₋₀	20±1	白/White(N)		20±1	5 ⁺¹ ₋₀	白/White(N)	鍍線 (Nickel-Plated)	母插端子 Receptacle Terminals	3
銅本色 (Copper)	大電流端子 (Heavy Duty Terminal)	1	6 ⁺¹ ₋₀	20±1	綠/Green(E)		20±1	5 ⁺¹ ₋₀	綠/Green(E)	黑色(Black)	FM-319兩件式內襯 (FM-319 Inner Body)	1
銅本色 (Copper)	大電流端子 (Heavy Duty Terminal)	1										
白色(White)	FM-520L零件式內襯 (FM-520L Inner Body)	1										


23.39-22.225
19.05-18.372

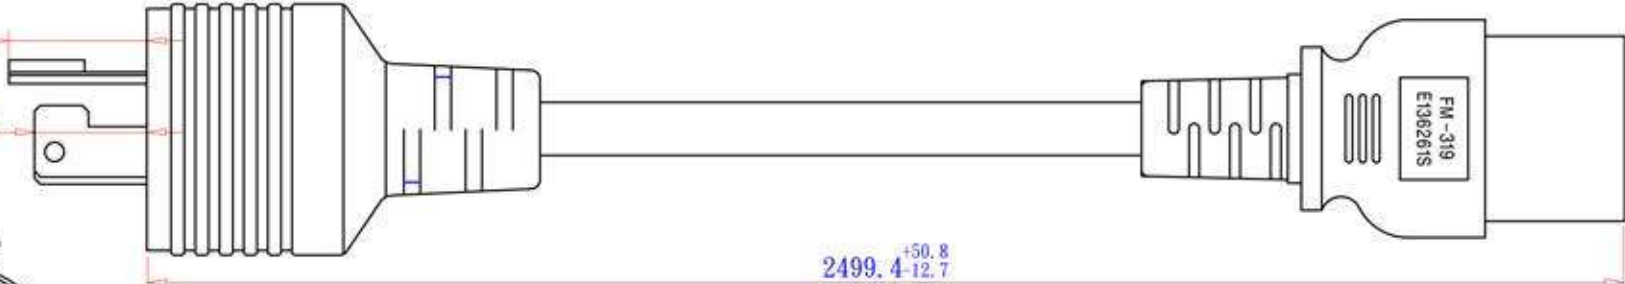

插頭端面圖
(Dimensions of Plug Face)

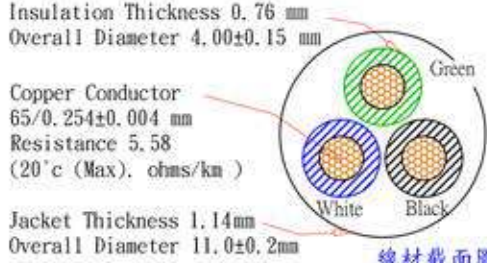

線材截面圖
(Wire Cross-Section)

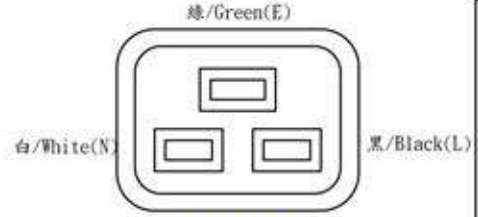

插頭端面圖
(Dimensions of Plug Face)

包裝方式(Packing)	
扎線方式 (Bulk Pack)	每 10 條一扎 Per 10 pcs/Ties
紙箱尺寸 (Carton Size)	480 X 320 X 250
包裝數量 (Packing Qty)	PCS
標籤(Label)	Cord Set 15A Indoor Label

1. 高壓測試:1500V/1Sec <3mA
(Hi-Pot Test:1500v/1Sec <3mA)

電線印字內容 Wire Printed	使用充實線材 四印字 (Un-Fillers, Gravure)	紙箱等頭標碼 Shipping Mark
V E322763 (UL) SJT 12AWG(3.31mm ²)x3C VW-1 105°C 300V /FT c(UL) SJT 12AWG(3.31mm ²)x3C FT2 105°C 300V -LF- (UL) SJT 12AWG(3.31mm ²)x3C VW-1 105°C 300V E77975 WONDERFUL-D CSA SJT 12AWG(3.31mm ²)x3C FT2 105°C 300V LL43774 -F- -LF-		◊ CnC ◊

SIGNATURE	NAME	DATE
APPROVED		
M.F.G. CHECKED		
Q.A. CHECKED		
DRAWN	楊承正	2011/12/01
CUSTOMER		

REV	DATE	DESCRIPTION	SYMBOL
00	2011/12/01	新版發行	楊承正
PART No.		800-12-38D-BL-08.2F	
DWG No.			

CnC Tech. LLC
Industrial Cable and Connector Technology