




版次 REV	变更内容 MODIFICATION	变更日期 UPDATE DATE	签名 SIGNATURE

受控文件

Type B

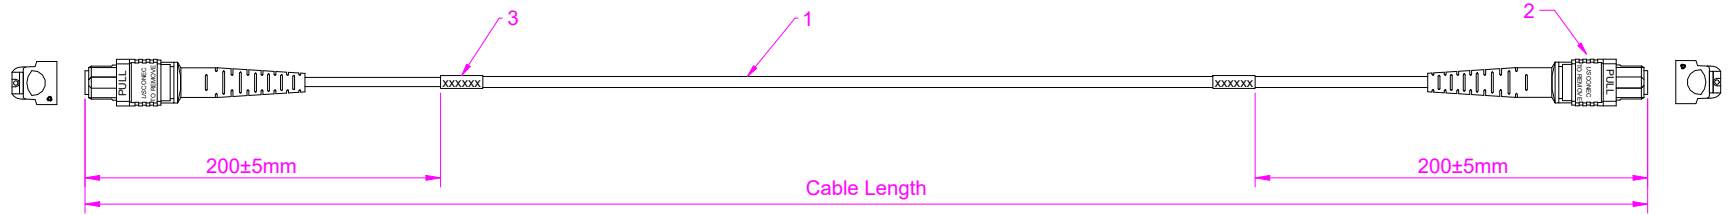

- NOTES:
1. Insertion loss $\leq 0.5\text{dB}$
 2. Return loss $\geq 30\text{ dB}$
 3. 当光缆总长米数小于0.5M时，主缆只需在中间加一个线标



Blue1 Orange2 Green3 Brown4 Grey5 White6 Red7 Black8 Yellow9 Violet10 Pink11 Aqua12

Aqua1 Pink2 Violet3 Yellow4 Black5 Red6 White7 Grey8 Brown9 Green10 Orange11 Blue12

Cable Length	Tolerance
Cable Length < 1M	5cm
1M ≤ Cable Length < 15M	10cm
15M ≤ Cable Length < 30M	15cm
Cable Length ≥ 30M	Cable Length * 1%

3	2	Cable label	线标(25*30mm)
2	2	MTP/UPC Female MM 12 Fibers 3.0mm Connector (Aqua Housing Black Boot)	MTP/UPC 多模 母头 3.0mm 12芯接头 (青绿色外壳 黑色尾套)
1	A/R	OD:3.0mm, Multimode 50/125 OM3-300, 12Fibers Micro Cable, OFNP, Color:Aqua	Ø3.0mm, 多模 OM3-300, 12芯青绿色迷你缆, OFNP

ITEM	QTY	P/N	SPECIFICATIONS	规格
------	-----	-----	----------------	----

	制图 DRAW	YUFENG XIE	日期 DATE	25-07-2022	TITLE: Fiber Optic Patch Cord MTP/UPC-MTP/UPC 12Fibers Multimode				
	审核 CHECK	WEN ZHOU LIAO	批准 APPROVED	Zhenlong Yu					