

# Integrated Driver and MOSFET with Integrated Current Monitor

## NCP303151A

### Description

The NCP303151A integrates a MOSFET driver, high-side MOSFET and low-side MOSFET into a single package.


The driver and MOSFETs have been optimized for high-current DC-DC buck power conversion applications. The NCP303151A integrated solution greatly reduces package parasitics and board space compared to a discrete component solution.

### Features

- Capable of Average Currents up to 50 A
- 30 V / 30 V Breakdown Voltage MOSFETs for Higher Long Term Reliability
- High-Performance, Universal Footprint, Copper-Clip 5 mm x 6 mm PQFN Package
- Capable of Switching at Frequencies up to 1 MHz
- Compatible with 3.3 V or 5 V PWM Input
- Responds Properly to 3-level PWM Inputs
- Precise Current Monitoring
- Option for Zero Cross Detection with 3-level PWM
- Internal Bootstrap Diode
- Catastrophic Fault Detection
  - ◆ Thermal Flag (OTP) for Over-Temperature Condition
  - ◆ Over-Current Protection FAULT (OCP)
  - ◆ Under-Voltage Lockout (UVLO) on VCC and PVCC
- Supports Intel® Power State 4


### Applications

- Desktop & Notebook Microprocessors
- Graphic Cards
- Routers and Switches



PQFN39  
 MN SUFFIX  
 CASE 483BF

### MARKING DIAGRAM



NCP303151A = Specific Device Code  
 A = Assembly Location  
 WL = Wafer Lot  
 YY = Year  
 WW = Work Week

### ORDERING INFORMATION

| Device          | Package | Shipping†          |
|-----------------|---------|--------------------|
| NCP303151AMNTXG | PQFN39  | 3000 / Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

# NCP303151A

## DIAGRAMS

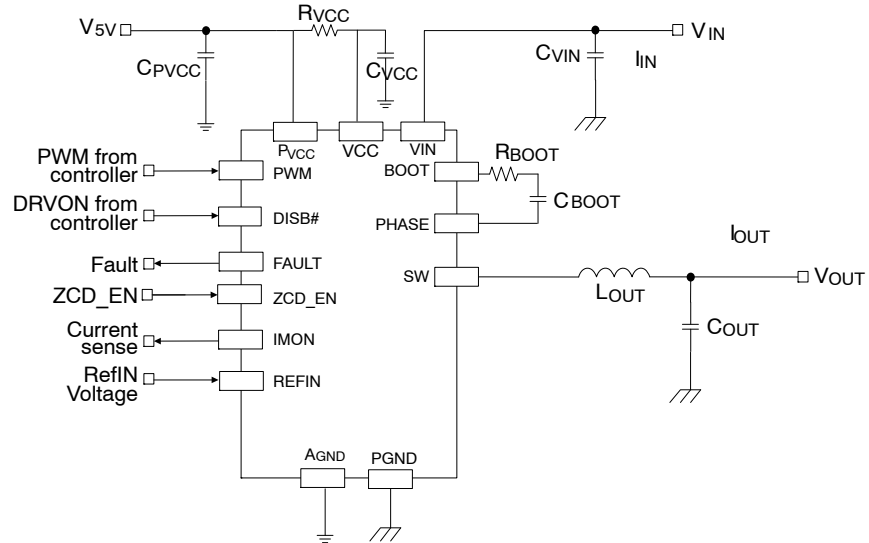


Figure 1. Application Diagram

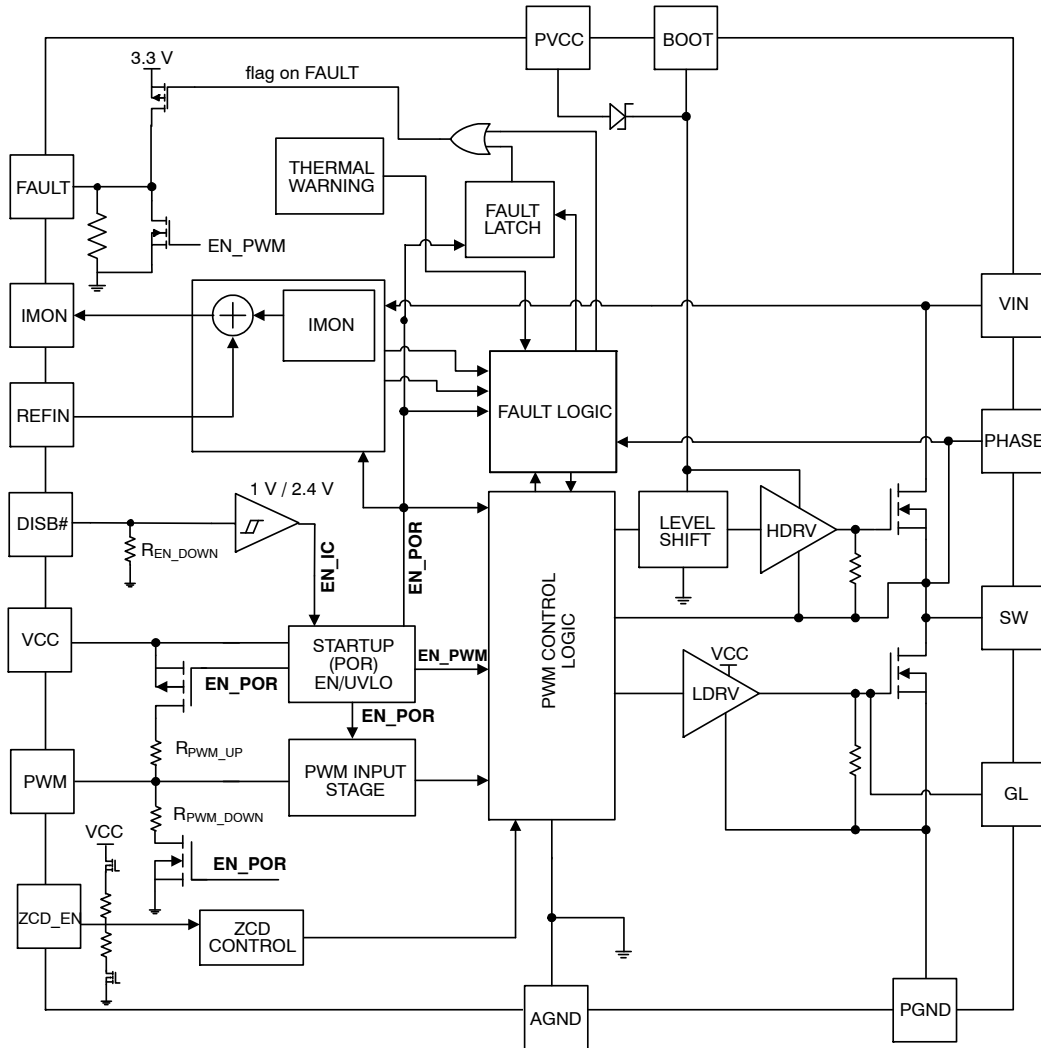


Figure 2. Block Diagram

# NCP303151A

## PINOUT DIAGRAM

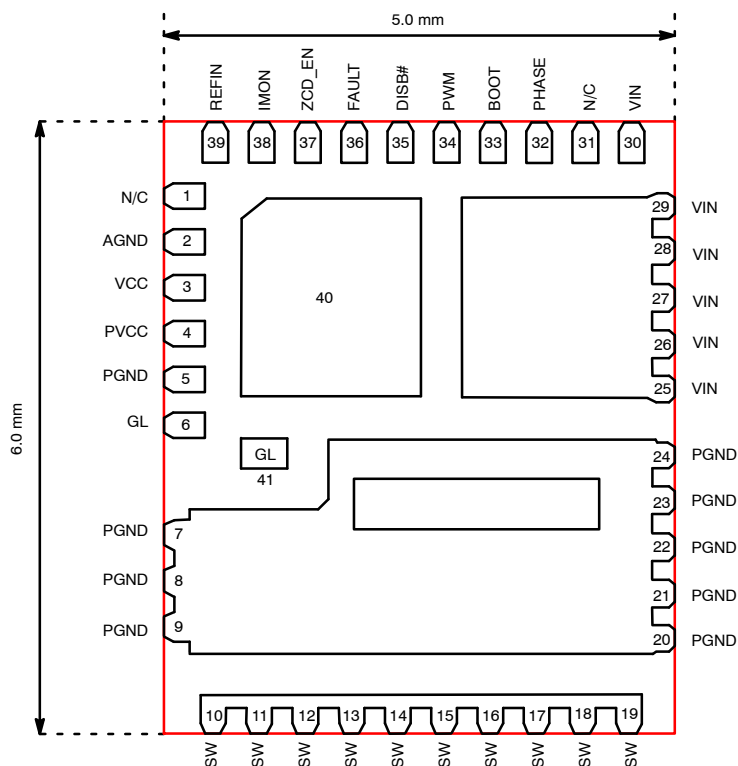


Figure 3. Top View

Table 1. PIN LIST AND DESCRIPTIONS

| Pin No.    | Symbol | Description   |
|------------|--------|---|
| 1          | NC     | No connect.   |
| 2          | AGND   | Analog Ground for the analog portions of the IC and for substrate.  |
| 3          | VCC    | Power Supply input for all analog control functions   |
| 4          | PVCC   | Power Supply input for LS Gate Driver and Boot Diode.   |
| 5, 40      | PGND   | Reserved for PVCC de-coupling capacitor return.   |
| 6, 41      | GL     | Low-Side Gate Monitor.  |
| 7-9, 20-24 | PGND   | Power ground connection for Power Stage high current path.  |
| 10-19      | SW     | Switching node junction between high-and low-side MOSFETs   |
| 25-30      | VIN    | Input Voltage to Power Stage.   |
| 31         | NC     | No connect.   |
| 32         | PHASE  | Return Connection for BOOT capacitor.   |
| 33         | BOOT   | Supply for high-side MOSFET gate driver. A capacitor from BOOT to PHASE supplies the charge to turn on the n-channel high side MOSFET. During the freewheeling interval (LS MOSFET on) the high side capacitor is recharged by an internal diode. |
| 34         | PWM    | PWM input to gate driver IC.  |
| 35         | DISB#  | Output disable pin. When this pin is pulled to a logic high level, the driver is enabled. There is an internal pull-down resistor on this pin.  |
| 36         | FAULT  | FAULT Reporting Pin   |
| 37         | ZCD_EN | Zero Current Detection Function Enable  |
| 38         | IMON   | Current Monitor Output (output is referenced to REFIN) – 5 $\mu$ A/A  |
| 39         | REFIN  | Referenced voltage used for IMON feature. DC input voltage supplied by external source (not generated on SPS driver IC)   |

# NCP303151A

**Table 2. ABSOLUTE MAXIMUM RATINGS** (Electrical Information – all signals referenced to PGND unless noted otherwise)

| Pin Name / Parameter |                                   | Min  | Max             | Unit |
|----------------------|-----------------------------------|------|-----------------|------|
| VCC, PVCC            |                                   | -0.3 | 6               | V    |
| VIN                  |                                   | -0.3 | 25              | V    |
| BOOT (DC)            |                                   | -0.3 | 32              | V    |
| BOOT to PHASE (DC)   |                                   | -0.3 | 7               | V    |
| VSW, PHASE (DC)      |                                   | -0.3 | 25              | V    |
| VSW, PHASE (< 5 ns)  |                                   | -5   | 25              | V    |
| All Other Pins       |                                   | -0.3 | $V_{VCC} + 0.3$ | V    |
| ESD                  | Human Body Model, JESD22-A114     | 2000 |                 | V    |
|                      | Charged Device Model, JESD22-C101 | 1000 |                 | V    |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

**Table 3. THERMAL INFORMATION**

| Rating   | Symbol           | Value       | Unit |
|--|------------------|-------------|------|
| Thermal Resistance (under On Semi SPS Thermal Board) | $\theta_{JA}$    | 12.4        | °C/W |
|  | $\theta_{J-PCB}$ | 1.8         | °C/W |
| Operating Junction Temperature Range (Note 1)        | $T_J$            | -40 to +150 | °C   |
| Operating Ambient Temperature Range                  | $T_A$            | -40 to +125 | °C   |
| Maximum Storage Temperature Range                    | $T_{STG}$        | -55 to +150 | °C   |
| Moisture Sensitivity Level                           | MSL              | 1           |      |

1. The maximum package power dissipation must be observed.
2. JESD 51-5 (1S2P Direct-Attach Method) with 0 LFM
3. JESD 51-7 (1S2P Direct-Attach Method) with 0 LFM

**Table 4. RECOMMENDED OPERATING CONDITIONS**

| Parameter                 | Pin Name  | Conditions  | Min | Typ | Max | Unit |
|---------------------------|-----------|---|-----|-----|-----|------|
| Supply Voltage Range      | VCC, PVCC |   | 4.5 | 5.0 | 5.5 | V    |
| Conversion Voltage        | VIN       |   | 4.5 | 12  | 16  | V    |
| Continuous Output Current |           | $F_{SW} = 1 \text{ MHz}, V_{IN} = 12 \text{ V}, V_{OUT} = 1.0 \text{ V}, T_A = 25^\circ\text{C}$  |     |     | 45  | A    |
|                           |           | $F_{SW} = 300 \text{ kHz}, V_{IN} = 12 \text{ V}, V_{OUT} = 1.0 \text{ V}, T_A = 25^\circ\text{C}$                                      |     |     | 50  | A    |
| Peak Output Current       |           | $F_{SW} = 500 \text{ kHz}, V_{IN} = 12 \text{ V}, V_{OUT} = 1.0 \text{ V},$<br>Duration = 10 ms, Period = 1 s, $T_A = 25^\circ\text{C}$ |     |     | 80  | A    |
| Junction Temperature      |           |   | -40 |     | 125 | °C   |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

**Table 5. ELECTRICAL CHARACTERISTICS**

( $V_{VCC} = 5.0 \text{ V}, V_{VIN} = 12 \text{ V}, V_{DISB\#} = 2.0 \text{ V}, C_{VCC} = 0.1 \mu\text{F}$  unless specified otherwise) Min/Max values are valid for the temperature range  $-40^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$  unless noted otherwise, and are guaranteed by test, design or statistical correlation.

| Parameter                 | Symbol        | Conditions                             | Min | Typ  | Max | Unit          |
|---------------------------|---------------|--|-----|------|-----|---------------|
| <b>VCC SUPPLY CURRENT</b> |               |  |     |      |     |               |
| No switching              |               | DISB# = 5 V, PWM = 0 V                 | -   | 8    | -   | mA            |
| Disabled                  |               | DISB# = 0 V, SW = 0 V                  | -   | 120  | -   | $\mu\text{A}$ |
| UVLO Threshold            | $V_{UVLO}$    | VCC rising                             | 3.8 | 4.1  | 4.2 | V             |
| UVLO Hysteresis           | $UVLO_{Hyst}$ |  | -   | 0.17 | -   | V             |
| POR Delay to Enable IC    | $T_{D\_POR}$  | VCC UVLO rising to internal PWM enable |     |      | 125 | $\mu\text{s}$ |

# NCP303151A

**Table 5. ELECTRICAL CHARACTERISTICS**

( $V_{CC} = 5.0\text{ V}$ ,  $V_{IN} = 12\text{ V}$ ,  $V_{DISB\#} = 2.0\text{ V}$ ,  $C_{VCC} = 0.1\ \mu\text{F}$  unless specified otherwise) Min/Max values are valid for the temperature range  $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$  unless noted otherwise, and are guaranteed by test, design or statistical correlation.

| Parameter                 | Symbol      | Conditions  | Min | Typ | Max  | Unit          |
|---------------------------|-------------|---|-----|-----|------|---------------|
| <b>DISB# INPUT</b>        |             |   |     |     |      |               |
| Pull-Down Resistance      |             |   | -   | 130 | -    | k $\Omega$    |
| High-Level Input Voltage  | $V_{UPPER}$ |   | 2.7 | -   | -    | V             |
| Low-Level Input Voltage   | $V_{LOWER}$ |   | -   | -   | 0.65 | V             |
| Enable Propagation Delay  |             | PWM=GND, Delay Between EN from LOW to HIGH to GL from LOW to HIGH – Slow EN Setting | 16  | 26  | 32   | $\mu\text{s}$ |
| Disable Propagation Delay |             | PWM=GND, Delay Between EN from HIGH to LOW to GL from HIGH to LOW – Fast EN setting | -   | 43  | 109  | ns            |

**PWM INPUT** ( $T_A=25^{\circ}\text{C}$ ,  $V_{CC} / P_{VCC}=5\text{ V}$ ,  $f_{SW}=1\text{ MHz}$ ,  $I_{OUT}=10\text{ A}$ )

|  |                    |   |      |      |      |            |
|--|--------------------|---|------|------|------|------------|
| Input High Voltage                                   | $V_{PWM\_HI}$      |   | 2.35 | 2.45 | 2.55 | V          |
| Mid-State Voltage Upper Threshold                    | $V_{TRI\_HI}$      |   | 2.05 | 2.2  | 2.3  | V          |
| Mid-State Voltage Lower Threshold                    | $V_{TRI\_LO}$      |   | 0.9  | 1.0  | 1.1  | V          |
| Input Low Voltage                                    | $V_{PWM\_LO}$      |   | 0.65 | 0.75 | 0.85 | V          |
| Pull-Up Impedance                                    | $R_{UP\_PWM}$      |   | -    | 21   | -    | k $\Omega$ |
| Pull-Down Impedance                                  | $R_{DOWN\_PWM}$    |   | -    | 10   | -    | k $\Omega$ |
| 3-State Open Voltage                                 | $V_{PWM\_HIZ}$     |   | 1.4  | 1.65 | 1.85 | V          |
| Non-overlap Delay, Leading Edge                      | $T_{DEADON}$       | GL $\leq 0.5\text{ V}$ to SW $> 1.2\text{ V}$ . PWM Transition 0 $\rightarrow$ 1    |      | 7    |      | ns         |
| Non-overlap Delay, Trailing Edge                     | $T_{DEADOFF}$      | SW $\leq 1.2\text{ V}$ to GL $\geq 0.5\text{ V}$ , PWM Transition 1 $\rightarrow$ 0 |      | 6    |      | ns         |
| PWM Propagation Delay, Rising                        | $T_{PD\_PHGLL}$    | PWM Going HIGH to GL Going LOW, $V_{IH\_PWM}$ to 90% GL                             | -    | 17   | 20   | ns         |
| PWM Propagation Delay, Falling                       | $T_{PD\_PLGHL}$    | PWM Going LOW to GH Going LOW, $V_{IL\_PWM}$ to 90% GH                              | -    | 26   | 30   | ns         |
| Exiting PWM Mid-state Propagation Delay, Mid-to-Low  | $T_{PWM\_EXIT\_L}$ | PWM (from Tri-State) going LOW to GL going HIGH, $V_{IL\_PWM}$ to 10% GL            | -    | 20   | 30   | ns         |
| Exiting PWM Mid-state Propagation Delay, Mid-to-High | $T_{PWM\_EXIT\_H}$ | PWM (from Tri-State) going HIGH to SW going HIGH, $V_{IH\_PWM}$ to 10% SW           | -    | 27   | 30   | ns         |
| PWM High to 3-State hold Off Time                    | $T_{D\_HOLDOFF1}$  | PWM Going High to HS Going Off  | 20   | 43   | 50   | ns         |
| PWM Low to 3-State hold Off Time                     | $T_{D\_HOLDOFF2}$  | PWM Going Low to LS Going Off   | 20   | 36   | 50   | ns         |
| HS minimal turn on time                              | $T_{ON\_MIN\_HS}$  | SW gate rising 10% to falling 10%   |      | 37   |      | ns         |
| LS minimal turn on time                              | $T_{ON\_MIN\_LS}$  | LS gate rising 10% to falling 10%   |      | 33   |      | ns         |
| HS minimal turn off time                             | $T_{OFF\_MIN\_HS}$ | SW gate falling 10% to rising 10%   |      | 31   |      | ns         |
| LS minimal turn off time                             | $T_{OFF\_MIN\_LS}$ | LS gate falling 10% to rising 10%   |      | 51   |      | ns         |

**FAULT FLAG OUTPUT VOLTAGE/CURRENT**

|                             |               |  |   |     |   |    |
|-----------------------------|---------------|--|---|-----|---|----|
| FAULT Report Output Voltage | $V_{FAULT}$   |  | 3 | -   | - | V  |
| Fault Report Delay time     | $T_{DEFAULT}$ |  | - | 100 | - | ns |

**IMON**

|                                    |                    |   |   |    |   |     |
|------------------------------------|--------------------|---|---|----|---|-----|
| HS off to LS On Blanking Stop Time | $T_{BLANK\_HSOFF}$ | IMON Blanking Time for PWM transition 1 $\rightarrow$ 0                                     | - | 90 | - | ns  |
| HS on to LS Off Blanking Stop Time | $T_{BLANK\_HSON}$  | IMON Blanking Time for PWM transition 0 $\rightarrow$ 1                                     | - | 70 | - | ns  |
| IMON Amplifier Gain BW             | $BW_{IMON}$        | $L=150\text{ nH}$ , $V_{IN}=12\text{ V}$ , $V_{OUT}=1.0\text{ V}$ , $f_{SW}=800\text{ kHz}$ | - | 5  | - | MHz |

# NCP303151A

**Table 5. ELECTRICAL CHARACTERISTICS**

( $V_{CC} = 5.0\text{ V}$ ,  $V_{IN} = 12\text{ V}$ ,  $V_{DISB\#} = 2.0\text{ V}$ ,  $C_{VCC} = 0.1\text{ }\mu\text{F}$  unless specified otherwise) Min/Max values are valid for the temperature range  $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$  unless noted otherwise, and are guaranteed by test, design or statistical correlation.

| Parameter  | Symbol   | Conditions  | Min   | Typ  | Max   | Unit               |
|--|--|---|-------|------|-------|--------------------|
| <b>IMON</b>  |  |   |       |      |       |                    |
| IMON Propagation Delay Time  | $T_{DELAY}$  | $L=150\text{ nH}$ , $V_{IN}=12\text{ V}$ , $V_{OUT}=1.0\text{ V}$ ,<br>$f_{SW}=800\text{ kHz}$ , IMON Peak to IL Peak | –     | 60   | 75    | ns                 |
| <b>IMON OPERATING RANGE (<math>T_A = T_J = -40^{\circ}\text{C}</math> to <math>125^{\circ}\text{C}</math>, <math>V_{CC} = 4.5\text{ V}</math> to <math>5.5\text{ V}</math>, <math>V_{IN} = 4.5 - 20\text{ V}</math>)</b> |  |   |       |      |       |                    |
| Dynamic range at IMON pin  | $V_{IMON}$   |   | 0.6   |      | 2.3   | V                  |
| <b>IMON ACCURACY (<math>T_A = 25^{\circ}\text{C}</math> to <math>125^{\circ}\text{C}</math>, <math>V_{CC}/P_{VCC} = 5\text{ V}</math>, <math>V_{IN} = 12\text{ V}</math>) (Note 4)</b>                                   |  |   |       |      |       |                    |
| $I_{MON\_SLOPE}$   | $I_{MON\_SLOPE}$   | $I_{OUT} = -10\text{ A}$ to $30\text{ A}$   | 4.75  | 5.00 | 5.25  | $\mu\text{A/A}$    |
| $V_{IMON\_10A}$  | $R_{IMON}=1\text{ k}\Omega$<br>resistor placed from IMON to REFIN.<br>Current Monitor Voltage ( $V_{IMON}-REFIN$ ) | $I_{OUT}=10\text{ A}$ , Voltage is Referenced to REFIN Pin  | 46.5  | 50   | 53.5  | mV                 |
| $V_{IMON\_20A}$  |  | $I_{OUT} = 20\text{ A}$ , Voltage is Referenced to REFIN Pin  | 95    | 100  | 105   | mV                 |
| $V_{IMON\_30A}$  |  | $I_{OUT} = 30\text{ A}$ , Voltage is Referenced to REFIN Pin  | 142.5 | 150  | 157.5 | mV                 |
| $V_{IMON\_40A}$  |  | $I_{OUT} = 40\text{ A}$ , Voltage is Referenced to REFIN Pin  | 190   | 200  | 210   | mV                 |
| <b>BOOTSTRAP DIODE</b>   |  |   |       |      |       |                    |
| Forward Voltage  | $V_F$  | Forward Bias Current = $10\text{ mA}$   | –     | 350  | –     | mV                 |
| Breakdown Voltage  | $V_R$  |   | 30    |      |       | V                  |
| <b>LOW-SIDE DRIVER</b>   |  |   |       |      |       |                    |
| Output Impedance, Sourcing   | $R_{SOURCE\_GL}$   | Source Current= $100\text{ mA}$   | –     | 0.64 | –     | $\Omega$           |
| Output Impedance, Sinking  | $R_{SINK\_GH}$   | Sink Current= $100\text{ mA}$   | –     | 0.29 | –     | $\Omega$           |
| <b>OVER-TEMPERATURE WARNING FAULT</b>  |  |   |       |      |       |                    |
| Over-Temperature Warning Accuracy  |  | Driver IC Temperature   | 136   | 140  | 143   | $^{\circ}\text{C}$ |
| OTW Hysteresis   |  | Driver IC Temperature   |       | 15   |       | $^{\circ}\text{C}$ |
| <b>HS CYCLE-BY-CYCLE POSITIVE I-LIMIT</b>  |  |   |       |      |       |                    |
| I-limit comparator input-output propagation delay.   | $t_{D\_ILimit-COMP}$   | Input Signal = $380\text{ mV}$ ,<br>$dv/dt = 0.2\text{ mV/nsec}$ .  |       | 60   |       | ns                 |
| I-limit Blanking Time  | $t_{BLANK\_ILimit}$  | De-glitch filter (blanking) time for I-limit comparator trip  |       | 33   |       | ns                 |
| Over-Current Limit   | $I_{LIM}$  |   | 74    | 80   | 86    | A                  |
| OCP Hysteresis   | $I_{LIM\_HYS}$   |   |       | 8    |       | A                  |
| <b>NEGATIVE OVER-CURRENT (NOCP) FAULT</b>  |  |   |       |      |       |                    |
| NOCP Trip LOW Level  | $I_{NOCP\_LOW}$  |   |       | –50  |       | A                  |
| <b>ZCD_EN INPUT</b>  |  |   |       |      |       |                    |
| Pull-Up Impedance  | $R_{UP\_PWM}$  |   | –     | 21   | –     | $\text{k}\Omega$   |
| Pull-Down Impedance  | $R_{DOWN\_PWM}$  |   | –     | 10   | –     | $\text{k}\Omega$   |
| 3-State Open Voltage   | $V_{PWM\_HIZ}$   |   | 1.4   | 1.65 | 1.85  | V                  |
| ZCD_EN input Voltage High  | $V_{ZCD\_HI}$  |   | 2.25  | 2.4  | 2.55  | V                  |
| ZCD_EN input Voltage Mid-state   | $V_{ZCD\_MID}$   |   | 1.4   | –    | 2.0   | V                  |
| ZCD_EN input Voltage Low   | $V_{ZCD\_LO}$  |   | 0.75  | 0.8  | 0.85  | V                  |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Imon performance is guaranteed by independent ATE testing of High-side and Low-side slope and offset

# NCP303151A

## TYPICAL CHARACTERISTICS

(Tests at  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 5\text{ V}$ ,  $V_{IN} = 12\text{ V}$ , and  $V_O = 1\text{ V}$  unless otherwise specified)

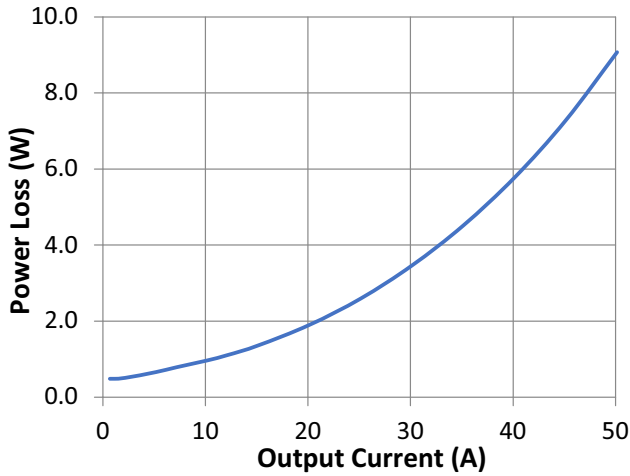


Figure 4. Power Loss vs. Output Current

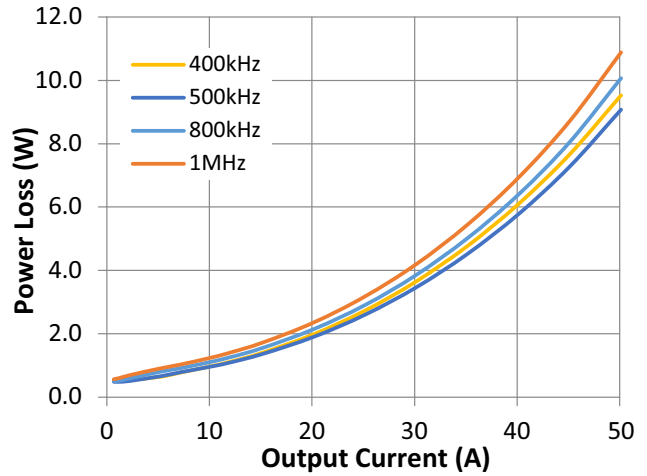


Figure 5. Power Loss vs. Switching Frequency

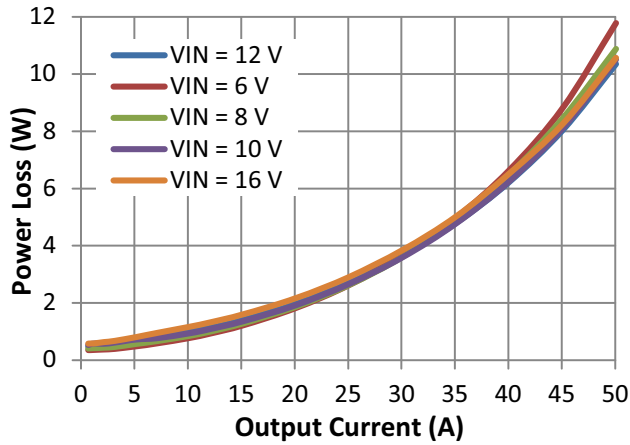


Figure 6. Power Loss vs. Input Voltage

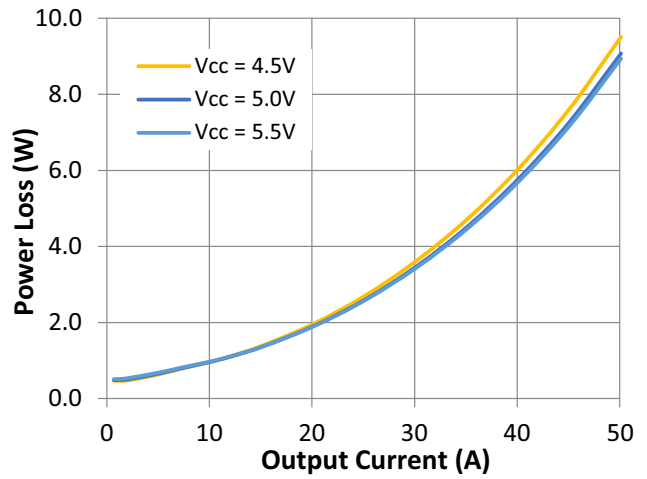


Figure 7. Power Loss vs. Driver Voltage

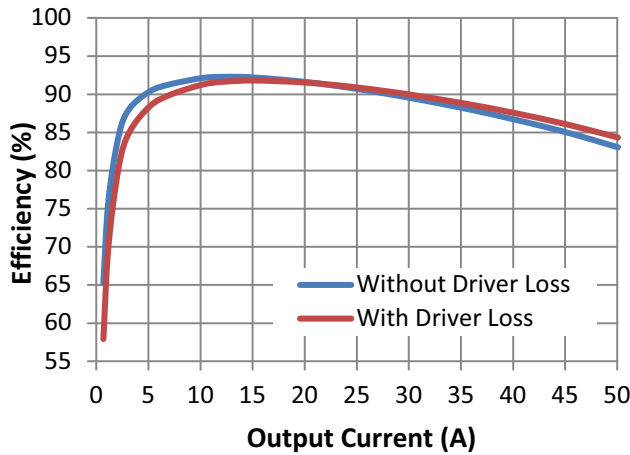


Figure 8. Efficiency vs. Output Load

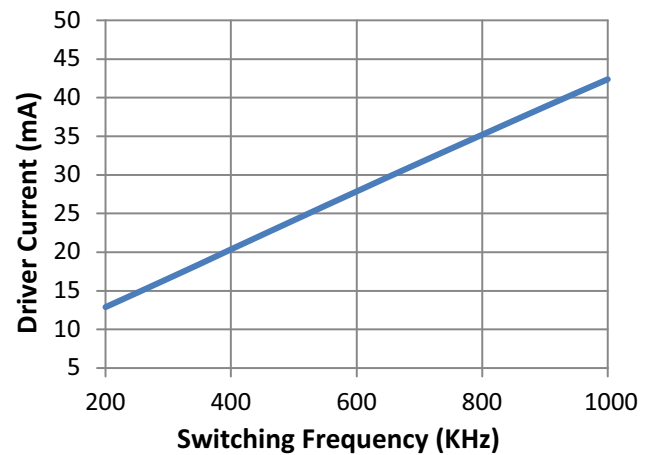


Figure 9. Driver Supply Current vs. Switching Frequency

# NCP303151A

## TYPICAL CHARACTERISTICS

(Tests at  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 5\text{ V}$ ,  $V_{IN} = 12\text{ V}$ , and  $V_O = 1\text{ V}$  unless otherwise specified)

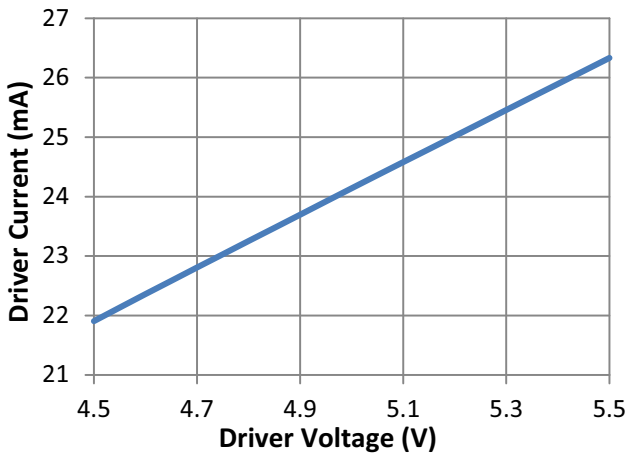


Figure 10. Driver Current vs. Driver Voltage

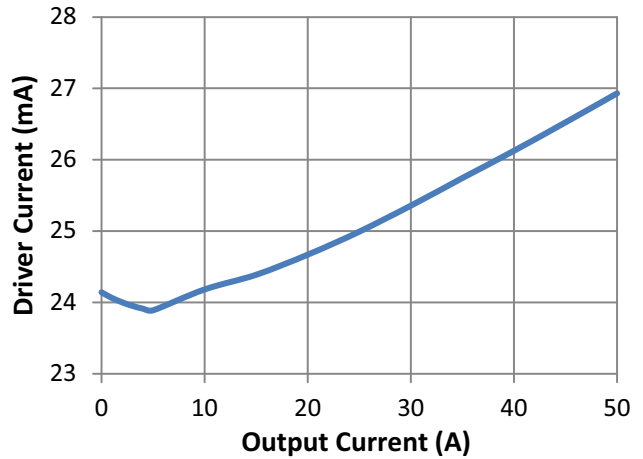


Figure 11. Driver Current vs. Output Current

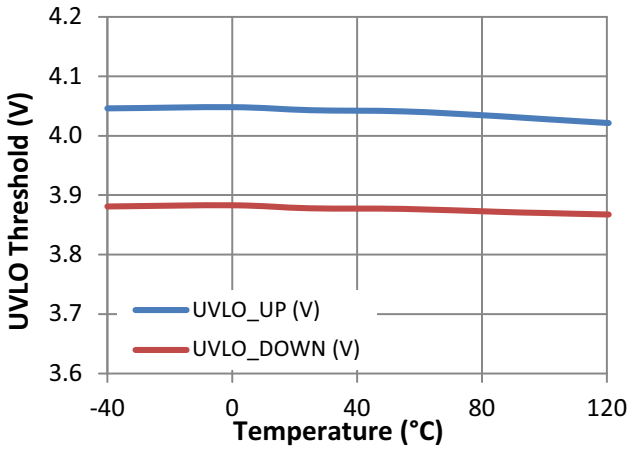


Figure 12. UVLO Threshold vs. Temperature

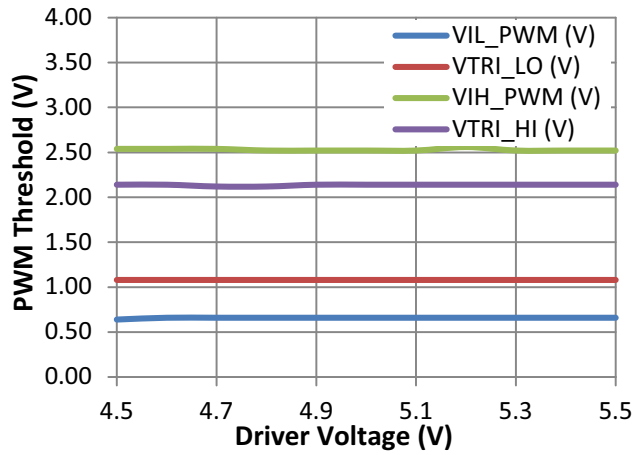


Figure 13. PWM Threshold vs. Driver Voltage

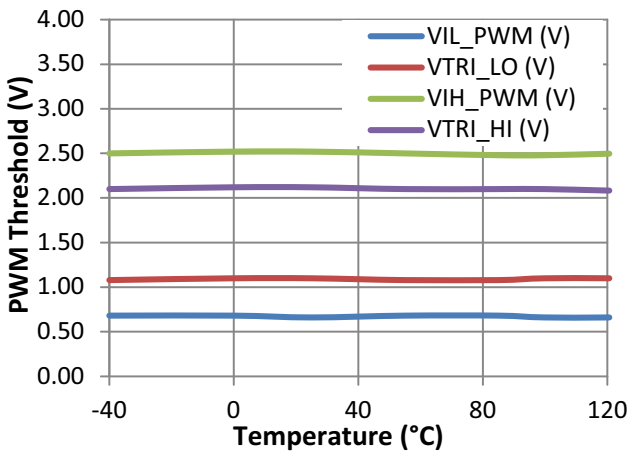


Figure 14. PWM Threshold vs. Temperature

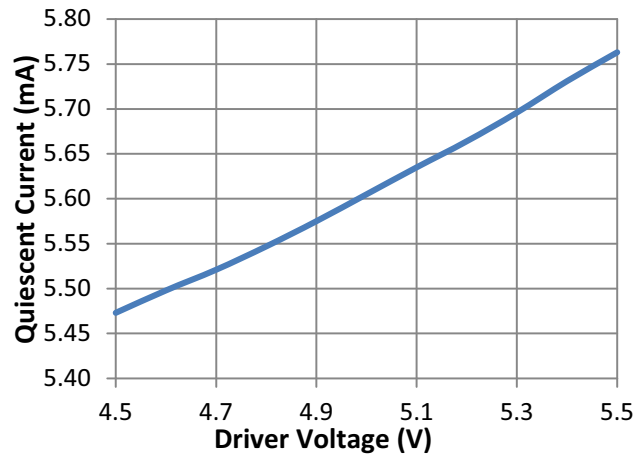


Figure 15. Driver Current vs. Switching Frequency



# NCP303151A

## TYPICAL CHARACTERISTICS

(Tests at  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 5\text{ V}$ ,  $V_{IN} = 12\text{ V}$ , and  $V_O = 1\text{ V}$  unless otherwise specified)

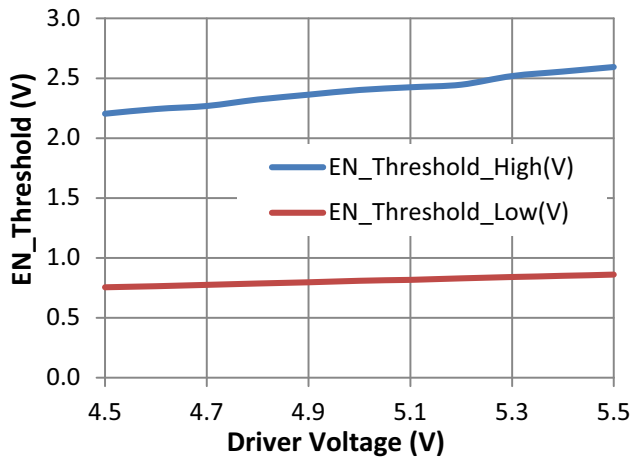


Figure 16. EN Threshold vs. Supply Voltage

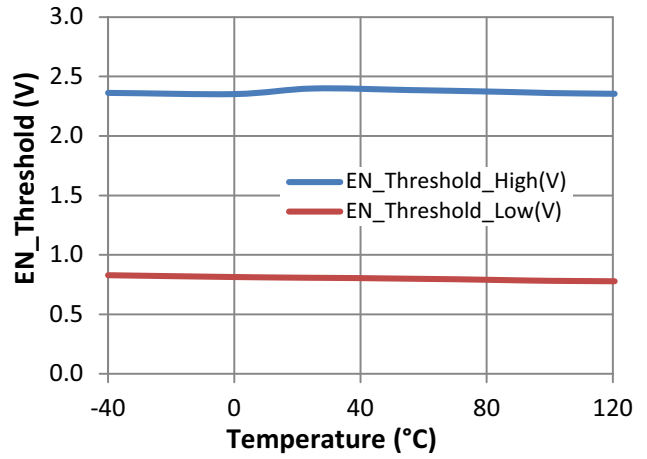


Figure 17. EN Threshold vs. Supply Voltage

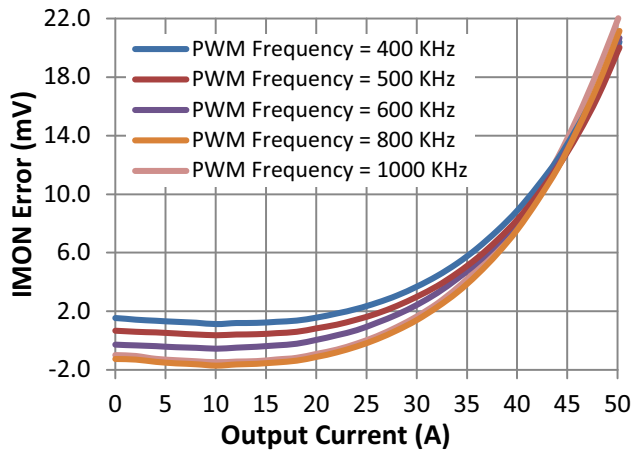


Figure 18.  $I_{MON}$  Accuracy vs. Frequency

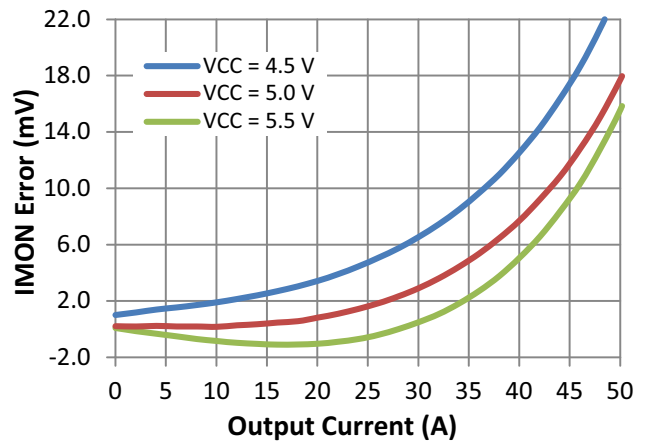


Figure 19.  $I_{MON}$  Accuracy vs.  $V_{CC}$

## FUNCTIONAL DESCRIPTION

The SPS NCP303151A is a driver plus MOSFET module optimized for the synchronous buck converter topology. A PWM input signal is required to properly drive the high-side and the low-side MOSFETs. The part is capable of driving speed up to 1 MHz.

### DISB# and UVLO

The SPS NCP303151A is enabled by both DISB# pin input signal and VCC UVLO. Table 6 summarizes the enable and disable logics. With DISB# low and VCC UVLO, SPS is fully shut down. If VCC is ready but DISB# is low, SPS goes into sleep mode with very low Quiescent current, where only critical circuitry are alive. The part should also read fuses/program itself during this state.

**Table 6. UVLO AND DRIVER STATE**

| VCC UVLO | DISB#  | Driver State  |
|----------|--------|---|
| 0        | X      | Full driver shutdown (GH, GL=0), requires 40 $\mu$ s for start-up   |
| 1        | 0      | Partial driver shutdown (GH, GL=0), requires 30 $\mu$ s for startup |
| 1        | 1      | Enabled (GH/GL follow PWM)  |
| X        | Open/0 | Disabled (GH, GL=0)   |

NCP303151A needs 40  $\mu$ s time to go from fully shutdown mode to power ready mode. The time is 30  $\mu$ s to go from partial shutdown mode to power ready mode. Before power is ready, FAULT pin is strongly pulled low with a 50  $\Omega$  resistor. As a result, FAULT pin can also be used as a power ready indicator.

### Zero Current Detect Enable Input (ZCD\_EN)

The ZCD\_EN pin is a logic input pin with an internal voltage divider connected to VCC.

When ZCD\_EN is set low, the NCP303151A will operate in synchronous rectifier (PWM) mode. This means that negative current can flow in the LS MOSFET if the load current is less than 1/2 delta current in the inductor. When ZCD\_EN is set high, Zero Current Detect PWM (ZCD\_PWM) mode will be enabled.

With ZCD\_EN set high, if PWM falls to less than VPWM\_HI, but stays above VPWM\_LO, GL will go high after the non-overlap delay, and stay high for the duration of the ZCD Blanking time. Once this timer has elapsed, VSW will be monitored for zero current, and GL will be pulled low when zero current is detected.

With ZCD\_EN set mid (open), if the PWM goes to low, GL will go high after the non-overlap delay, and stay high for the duration of the ZCD Blanking time. Once this timer has elapsed, VSW will be monitored for zero current, and GL will be pulled low when zero current is detected.

### PWM


The PWM Input pin is a tri-state input used to control the HS MOSFET ON/OFF state. It also determines the state of the LS MOSFET. See Table 7 for logic operation with ZCD\_EN.

There is a minimum PWM pulse width, typical at 37 ns (SW gate rising 10% to falling 10%), if the PWM input pulse width is shorter than that, the driver will extend the pulse width to 37 ns. If the PWM input is shorter than 5 ns, the driver will ignore it.

**Table 7. LOGIC TABLE**

| INPUT TRUTH TABLE |        |     |    |     |
|-------------------|--------|-----|----|-----|
| DISB#             | ZCD_EN | PWM | GH | GL  |
| L                 | X      | X   | L  | L   |
| H                 | H      | H   | H  | L   |
| H                 | H      | L   | L  | H   |
| H                 | H      | MID | L  | ZCD |
| H                 | L      | H   | H  | L   |
| H                 | L      | L   | L  | H   |
| H                 | L      | MID | L  | L   |
| H                 | MID    | H   | H  | L   |
| H                 | MID    | L   | L  | ZCD |
| H                 | MID    | MID | L  | L   |

# NCP303151A

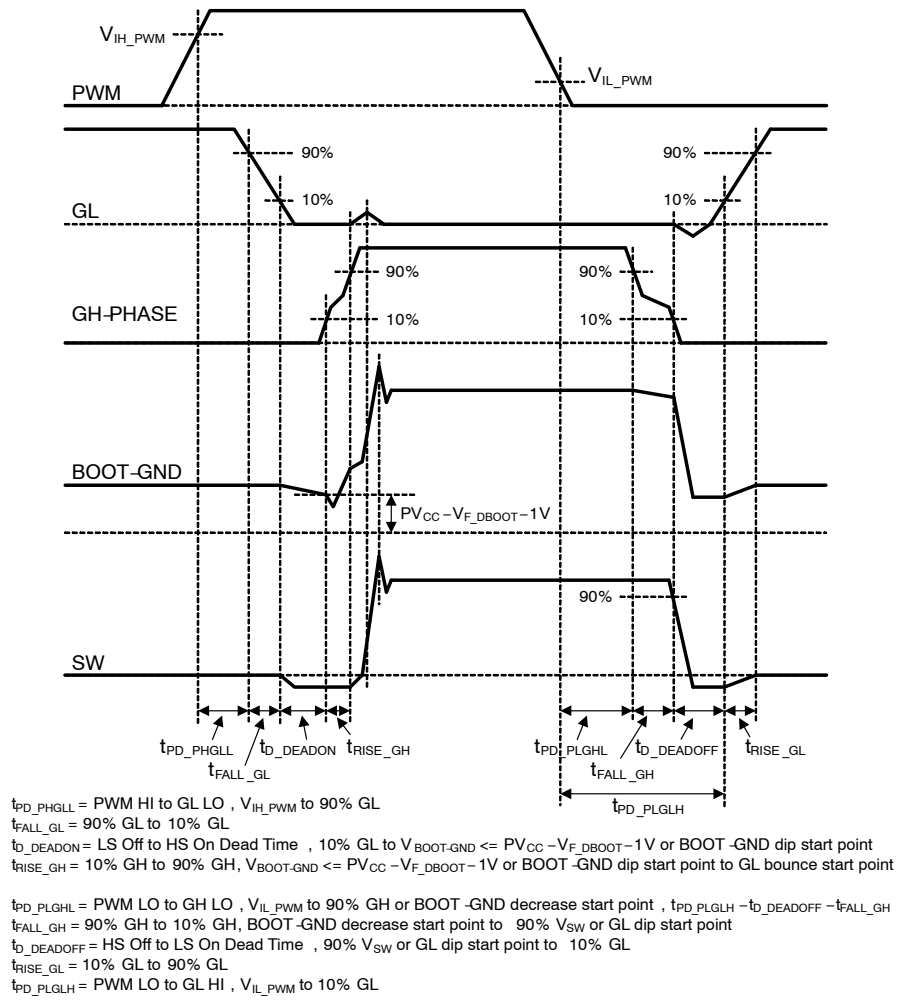

**Figure 20. PWM Timing Diagram**

# NCP303151A

## For Use with Controllers with 3-State PWM and No Zero Current Detection Capability:

This section describes operation with controllers that are capable of 3 states in their PWM output and relies on the NCP303151A to conduct zero current detection during discontinuous conduction mode (DCM).

The ZCD\_EN pin needs to either be set to 5 V or left disconnected. The NCP303151A has an internal voltage divider connected to VCC that will set ZCD\_EN to the logic mid state if this pin is left disconnected.

### A. When ZCD\_EN is set to high.

To operate the buck converter in continuous conduction mode (CCM), PWM needs to switch between the logic high and low states. To enter into DCM, PWM needs to be switched to the mid-state. Whenever PWM transitions to mid-state, GH turns off and GL turns on. GL stays on for the duration of the ZCD blanking timers. Once this timer expires, the NCP303151A monitors the inductor current and

turns GL off when the inductor current exceeds the ZCD threshold. By turning off the LS FET, the body diode of the LS FET allows any positive current to go to zero but prevents negative current from conducting.

There are three scenarios:

1. PWM from high to mid,  
Inductor current goes to zero before the ZCD blanking timer, GL is on and current goes to negative until the timer expires.
2. PWM from high to mid,  
ZCD blanking timer expires before inductor current goes to zero, GL is on until inductor current reaches zero.
3. PWM from mid to low to mid,  
ZCD blanking timer starts when PWM goes from mid to low, GL turns on. After PWM goes back to mid, driver will wait for the timer to expire to turn off GL.

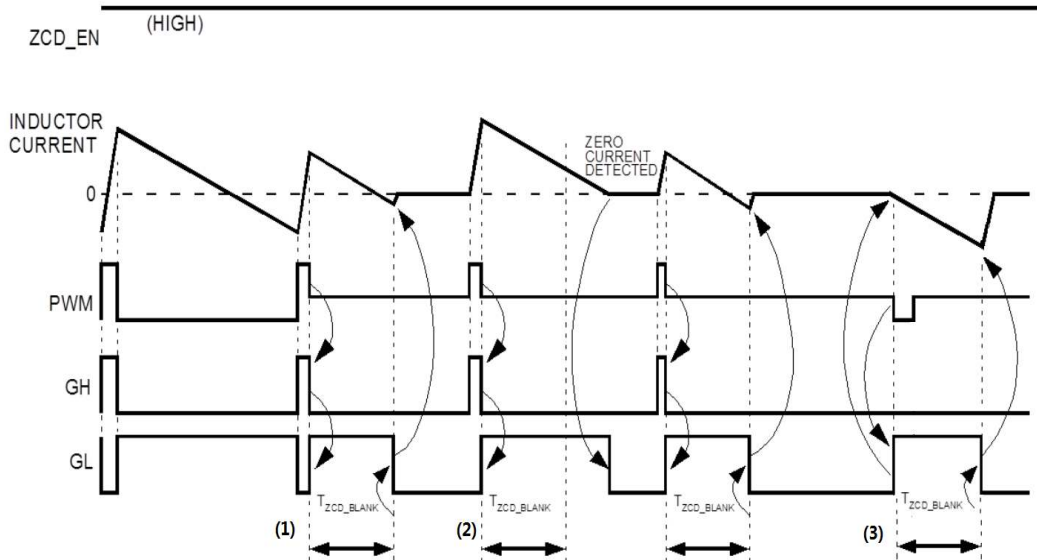


Figure 21. Timing Diagram – 3-state PWM Controller, No ZCD (a)

### B. When ZCD\_EN is set to mid (open).

With this setting, NCP303151A monitors the inductor current when PWM goes from high to low and turns off the GL when the inductor current exceeds the ZCD threshold

# NCP303151A

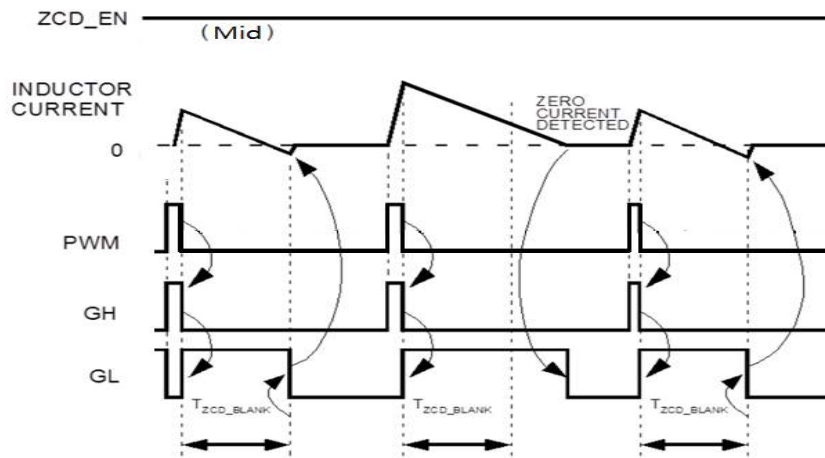


Figure 22. Timing Diagram – 3-state PWM Controller, No ZCD (b)

## For Use with Controllers with 3-State PWM and Zero Current Detection Capability:

This section describes operation with controllers that are capable of 3 PWM output levels and have zero current detection during discontinuous conduction mode (DCM). The ZCD\_EN pin needs to be pulled low.

To operate the buck converter in continuous conduction mode (CCM), PWM needs to switch between the logic high

and low states. During DCM, the controller is responsible for detecting when zero current has occurred, and then notifying the NCP303151A to turn off the LS FET. When the controller detects zero current, it needs to set PWM to mid-state, which causes the NCP303151A to pull both GH and GL to their off states without delay.

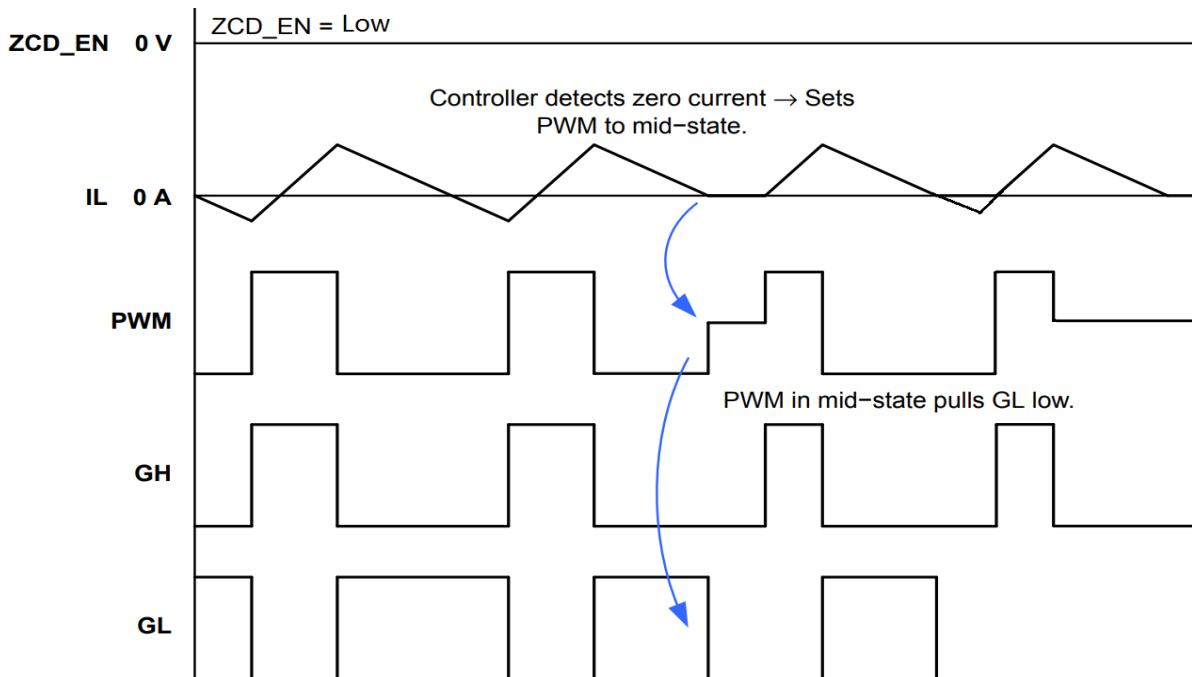


Figure 23. Timing Diagram – 3-state PWM Controller, with ZCD

## Power Sequence

NCP303151A requires four (4) input signals to conduct normal switching operation: VIN, VCC, PWM, and DISB#. All combinations of power sequences are available. The below example of a power sequence is for a reference application design:

- From no input signals
  - > VCC On: Typical 5 VDC
  - > DISB# HIGH: Typical 5 VDC
  - > VIN On: Typical 16 VDC
  - > PWM Signaling: 3.3 V HIGH/ 0 V LOW

The VIN pins are tied to the system main DC power rail.

The DISB# pin can be tied to the VCC rail with an external pull-up resistor and it will maintain HIGH once the VCC rail turns on. Or the DISB# pin can be directly tied to the PWM controller for other purposes.

## High-Side Driver

The high-side driver (HDRV) is designed to drive a floating N-channel MOSFET (Q1). The bias voltage for the high-side driver is developed by a bootstrap supply circuit, consisting of the internal Schottky diode and external bootstrap capacitor (C<sub>BOOT</sub>). During startup, the SW node is held at PGND, allowing C<sub>BOOT</sub> to charge to VCC through the internal bootstrap diode. When the PWM input goes HIGH, HDRV begins to charge the gate of the high-side MOSFET (internal GH pin). During this transition, the charge is removed from the C<sub>BOOT</sub> and delivered to the gate of Q1. As Q1 turns on, SW rises to V<sub>IN</sub>, forcing the BOOT pin to V<sub>IN</sub> + V<sub>BOOT</sub>, which provides sufficient V<sub>GS</sub> enhancement for Q1. To complete the switching cycle, Q1 is turned off by pulling HDRV to SW. C<sub>BOOT</sub> is then recharged to VCC when the SW falls to PGND. HDRV output is in phase with the PWM input. The high-side gate is held LOW when the driver is disabled or the PWM signal is held within the 3-state window for longer than the 3-state hold-off time, t<sub>D\_HOLD-OFF</sub>.

## Low-Side Driver

The low-side driver (LDRV) is designed to drive the gate-source of a ground referenced low R<sub>DS(ON)</sub> N-channel MOSFET (Q2). The bias for LDRV is internally connected between VCC and PGND. When the driver is enabled, the driver's output is 180° out of phase with the PWM input. When the driver is disabled, LDRV is held LOW.

## Dead-Times

The driver IC design ensures minimum MOSFET dead times, while eliminating potential shoot-through (cross-conduction) currents. To ensure optimal module efficiency, body diode conduction times must be reduced to the low nano-second range during CCM and DCM operation. Delay circuitry is added to prevent gate overlap during both the low-side MOSFET off to high-side MOSFET on transition and the high-side MOSFET off to low-side MOSFET on transition.

## Boot Capacitor Refresh

NCP303151A monitors the low Boot-SW voltage. If DISB# and VCC are ready, but the voltage across the boot capacitor voltage is lower than 3.1 V, NCP303151A ignores the PWM input signal and starts the boot refresh circuit. The boot refresh circuit turns on the low side MOSFET with a 100 ns~200 ns narrow pulse in every 7~14 μs until Boot-SW voltage is above 3.8 V.


## Current Monitor (IMON)

The SPS current monitor accurately senses high-side and low-side MOSFET currents. The currents are summed together to replicate the output filter inductor current. The signal is reported from the SPS module in the form of a 5 μA/A current signal (I<sub>IMON-REFIN</sub>). The IMON signal will be referenced to an externally supplied signal (REFIN) and differentially sensed by an external analog/ digital PWM controller.

The motivation for the IMON feature is to replace the industry standard output filter DCR sensing, or output current sense using an external precision resistor. Both techniques are lossy and lead to reduced system efficiency. Inductor DCR sensing is also notoriously inaccurate for low value DCR inductors. Figure x shows a comparison between conventional inductor DCR sensing and the unique IMON feature.

The accuracy on IMON signal is ±5 % from 10 A to 30 A output current. For the SPS module, parameters that can affect IMON accuracy are tightly controlled and trimmed at the MOSFET/IC production stage. The user can easily incorporate the IMON feature and accuracy replacing the traditional current sensing methods in multi-phase applications.

# NCP303151A

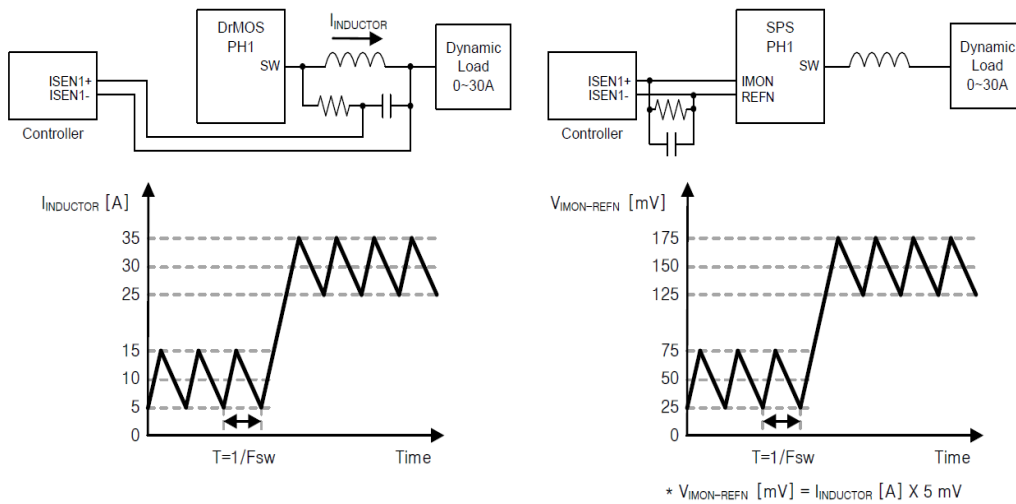

**Figure 24. DrMOS with Inductor DCR Sensing vs. SPS with IMON**

### Fault Flag (FAULT)

Before power is ready, FAULT pin is strongly pulled low with a 50 Ω resistor. This pin is used as a module fault flag pin if there is OCP, OTW.

### Over-Temperature Warning (OTW)

An over temperature event is considered catastrophic in nature. OTW raises fault flag HIGH once it exceeds 140°C temperature. Driver still responds to PWM commands. Once the IC falls below 125°C, fault flag is cleared internally by driver IC.

### Over-Current Protection (OCP)

The NCP303151A has cycle-by-cycle over-current protection. If current exceeds the OCP threshold, HS FET is gated off regardless of PWM command. HS FET cannot be gated on again until the current is less than the OCP threshold with a hysteresis.

Fault flag will be pulled HIGH after 10 consecutive cycle-by-cycle OCPs are detected. Fault flag will clear once OCP is NOT detected. Module never shuts down nor does it disable HDRV/LDRV (but driver will still truncate HS on time when PWM=HIGH and ILIM is detected).

### Negative-OCP

The NCP303151A can detect large negative inductor current and protect the low side MOSFET. Once this Negative current threshold is detected the driver module takes control and truncates LS on-time pulse (LS FET is gated off regardless of PWM command). The driver will stay in this state till one of two things happen 1) 200 ns expires in which case if the PWM pin is commanding the driver to turn on LS, the driver will respond and NOCP will again be monitored 2) PWM commands HS on in which case the driver will immediately turn on HS regardless of the 200 ns Timer.



## APPLICATION INFORMATION

**Decoupling Capacitor for VCC**

For the supply input (VCC pin), local decoupling capacitor is required to supply the peak driving current and to reduce noise during switching operation. Use at least 0.68 ~ 2.2  $\mu\text{F}$ / 0402 ~ 0603/ X5R ~ X7R multi-layer ceramic capacitor for the power rail. Keep this capacitor close to the VCC pin and AGND copper planes. If it needs to be located on the bottom side of board, put through-hole vias on each pad of the decoupling capacitor to connect the capacitor pad on bottom with VCC pin on top.

The supply voltage range on VCC is 4.5 V ~ 5.5 V, typically 5 V for normal applications.

**Bootstrap Circuit**

The bootstrap circuit uses a charge storage capacitor ( $C_{\text{BOOT}}$ ). A bootstrap capacitor of 0.1 ~ 0.22  $\mu\text{F}$ / 0402 ~ 0603/ X5R ~ X7R is usually appropriate for most switching applications. A series bootstrap resistor may be needed for specific applications to lower high-side MOSFET switching speed. The boot resistor is required when the SPS is switching above 20 V  $V_{\text{IN}}$ ; when it is effective at controlling  $V_{\text{SW}}$  overshoot.  $R_{\text{BOOT}}$  value from zero to 6  $\Omega$  is typically recommended to reduce excessive voltage spike and ringing on the SW node. A higher  $R_{\text{BOOT}}$  value can cause lower efficiency due to high switching loss of high-side MOSFET.

Do not add a capacitor or resistor between the BOOT pin and GND.

It is recommended to add a PCB place holder for a small size 1 nF ~ 1  $\mu\text{F}$  capacitor close to the REFIN pin and AGND to reduce switching noise injection.

It is also recommended to add a small 10 ~ 47 pF capacitor in parallel with the IMON resistor from IMON to REFIN. This capacitor can help reduce switching noise coupling onto the IMON signal. The place of the IMON resistor and cap should be close to the controller, not the SPS to improve the sensing accuracy.

**PCB Layout Guideline**

All of the high-current paths; such as VIN, SW, VOUT, and GND coppers; should be short and wide for low parasitic inductance and resistance. This helps achieve a more stable and evenly distributed current flow, along with enhanced heat radiation and system performance.

Input ceramic bypass capacitors must be close to the VIN and PGND pins. This reduces the high-current power loop inductance and the input current ripple induced by the power MOSFET switching operation.

An output inductor should be located close to the NCP303151A to minimize the power loss due to the SW copper trace. Care should also be taken so the inductor dissipation does not heat the SPS.

PowerTrench MOSFETs are used in the output stage and are effective at minimizing ringing due to fast switching. In most cases, no RC snubber on SW node is required. If a snubber is used, it should be placed close to the SW and PGND pins. The resistor and capacitor of the snubber must

be sized properly to not generate excessive heating due to high power dissipation.

Decoupling capacitor on VCC and BOOT capacitor should be placed as close as possible to the VCC ~ AGND and BOOT ~ PHASE pin pairs to ensure clean and stable power supply. Their routing traces should be wide and short to minimize parasitic PCB resistance and inductance.

The board layout should include a placeholder for small-value series boot resistor on BOOT ~ PHASE. The boot-loop size, including series  $R_{\text{BOOT}}$  and  $C_{\text{BOOT}}$ , should be as small as possible.

A boot resistor may be required and it is effective to control the high-side MOSFET turn-on slew rate and SW voltage overshoot.  $R_{\text{BOOT}}$  can improve noise operating margin in synchronous buck designs that may have noise issues due to ground bounce or high positive and negative VSW ringing. Inserting a boot resistance lowers the SPS module efficiency. Efficiency versus switching noise must be considered.  $R_{\text{BOOT}}$  values from 0.5  $\Omega$  to 6.0  $\Omega$  are typically effective in reducing VSW overshoot.

The VIN and PGND pins handle large current transients with frequency components greater than 100 MHz. If possible, these pins should be connected directly to the VIN and board GND planes. The use of thermal relief traces in series with these pins is not recommended since this adds extra parasitic inductance to the power path. This added inductance in series with either the VIN or PGND pin degrades system noise immunity by increasing positive and negative  $V_{\text{SW}}$  ringing.

PGND pad and pins should be connected to the GND copper plane with multiple vias for stable grounding. Poor grounding can create a noisy and transient offset voltage level between PGND and AGND. This could lead to faulty operation of gate driver and MOSFETs.

Ringing at the BOOT pin is most effectively controlled by close placement of the boot capacitor. Do not add any additional capacitors between BOOT to PGND. This may lead to excess current flow through the BOOT diode, causing high power dissipation.


Put multiple vias on the VIN and VOUT copper areas to interconnect top, inner, and bottom layers to evenly distribute current flow and heat conduction. Do not put too many vias on the SW copper to avoid extra parasitic inductance and noise on the switching waveform. As long as efficiency and thermal performance are acceptable, place only one SW node copper on the top layer and put no vias on the SW copper to minimize switch node parasitic noise. Vias should be relatively large and of reasonably low inductance. Critical high-frequency components; such as  $R_{\text{BOOT}}$ ,  $C_{\text{BOOT}}$ , RC snubber, and bypass capacitors; should be located as close to the respective SPS module pins as possible on the top layer of the PCB. If this is not feasible, they can be placed on the board bottom side and their pins connected from bottom to top through a network of low-inductance vias.




# NCP303151A

## PACKAGE DIMENSIONS


### PQFN39 5X6, 0.45P CASE 483BF ISSUE B



TOP VIEW




FRONT VIEW

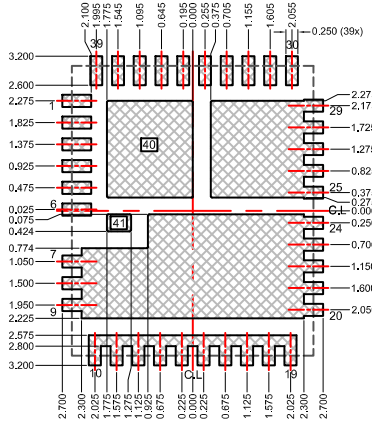


LAND PATTERN RECOMMENDATION\*

\*FOR ADDITIONAL INFORMATION ON OUR PB-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.



DETAIL A  
SCALE: 2:1

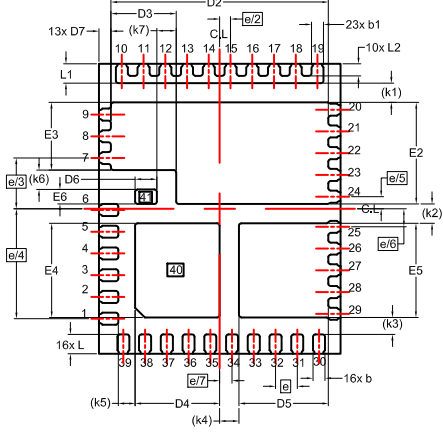

BOTTOM VIEW  
(SCALE: 2X)

NOTES: UNLESS OTHERWISE SPECIFIED

- A) DOES NOT FULLY CONFORM TO JEDEC REGISTRATION MO-220, DATED MAY/2005.
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS DO NOT INCLUDE BURRS OR MOLD FLASH. MOLD FLASH OR BURRS DOES NOT EXCEED 0.10MM.
- D) DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.

| DIM | MILLIMETERS |      |       |
|-----|-------------|------|-------|
|     | MIN.        | NOM. | MAX.  |
| A   | 0.70        | 0.75 | 0.80  |
| A1  | 0.00        | -    | 0.05  |
| A3  | 0.15        | 0.20 | 0.25  |
| b   | 0.20        | 0.25 | 0.30  |
| b1  | 0.20        | 0.25 | 0.30  |
| D   | 4.90        | 5.00 | 5.100 |
| D2  | 4.40        | 4.50 | 4.60  |
| D3  | 1.25        | 1.35 | 1.45  |
| D4  | 1.65        | 1.75 | 1.85  |
| D5  | 1.75        | 1.85 | 1.95  |
| D6  | 0.35        | 0.45 | 0.55  |
| D7  | 0.15        | 0.25 | 0.35  |
| E   | 5.90        | 6.00 | 6.10  |
| E2  | 2.00        | 2.10 | 2.20  |
| E3  | 1.30        | 1.40 | 1.50  |
| E4  | 1.85        | 1.95 | 2.05  |
| E5  | 1.85        | 1.95 | 2.05  |
| E6  | 0.20        | 0.30 | 0.40  |
| e   | 0.450 BSC   |      |       |
| e/2 | 0.225 BSC   |      |       |
| e/3 | 1.050 BSC   |      |       |
| e/4 | 2.275 BSC   |      |       |
| e/5 | 0.250 BSC   |      |       |
| e/6 | 0.375 BSC   |      |       |
| e/7 | 0.255 BSC   |      |       |
| L   | 0.30        | 0.40 | 0.50  |
| L1  | 0.30        | 0.40 | 0.50  |
| L2  | 0.15        | 0.25 | 0.35  |
| k1  | 0.40 REF    |      |       |
| k2  | 0.40 REF    |      |       |
| k3  | 0.35 REF    |      |       |
| k4  | 0.40 REF    |      |       |
| k5  | 0.35 REF    |      |       |
| k6  | 0.40 REF    |      |       |
| k7  | 0.40 REF    |      |       |

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application, Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that onsemi was negligent regarding the design or manufacture of the part. onsemi is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:  
 Email Requests to: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)  
 onsemi Website: [www.onsemi.com](http://www.onsemi.com)

TECHNICAL SUPPORT  
 North American Technical Support:  
 Voice Mail: 1 800-282-9855 Toll Free USA/Canada  
 Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:  
 Phone: 00421 33 790 2910  
 For additional information, please contact your local Sales Representative