


# ezPyro™ TO I<sup>2</sup>C Pyroelectric Infrared Flame Sensor

## Introduction

This thin film digital pyroelectric sensor for flame detection combines high quality sensors with a high level of configurable electronic integration in an industry standard TO-39 package. High sensitivity combined with fast response times ensure rapid and accurate flame detection. The high dynamic range allows detection of small and large flames, nearby or over larger distances. These sensors integrate a digital, current mode read-out offering high responsivity over the full frequency range of flame flicker (3-30 Hz). Programmable gain and filtering offer maximum flexibility in system design. Industry standard I<sup>2</sup>C communication enables plug-and-play connectivity to microcontrollers and allows easy tuning and calibration. Broadcom sensors are very stable over time ensuring a long and maintenance-free operational lifespan. Various optical filter options are available. These sensors can also be daisy-chained to allow synchronized sampling across devices and offer various low power modes.

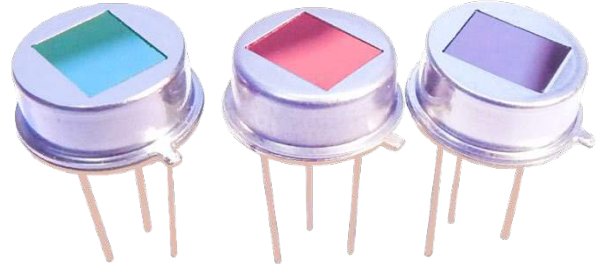

### Sensor Characteristics

Filter aperture	5.2 mm x 4.2 mm
Element size	1.0 mm x 1.0 mm
Sensor Package	TO-39
D* (typ.) <sup>1</sup>	Tbc
NEP (typ.) <sup>1</sup>	Tbc
Time Constant	~10ms (10-20 Hz peak)
Field of View	>100°

### Electrical Characteristics

Supply voltage	1.75 to 3.6 V
Supply current (typ.)	1 to 23 $\mu$ A
Digital I/O	I <sup>2</sup> C (FM+ compatible)
ADC	15-23bit $\Delta\Sigma$ ADC @1ksp
Operating Temperature	-40 to +85 °C
Storage Temperature	-40 to +110 °C
Sensor read-out	Current mode
	Gain / digital filtering / sampling rate / power modes
	Configurable


1) Measured without filter @ 500K, 10 Hz, room temperature

## Field of View

For V across horizontal window aperture


For V across vertical window aperture

For V across diagonal window aperture

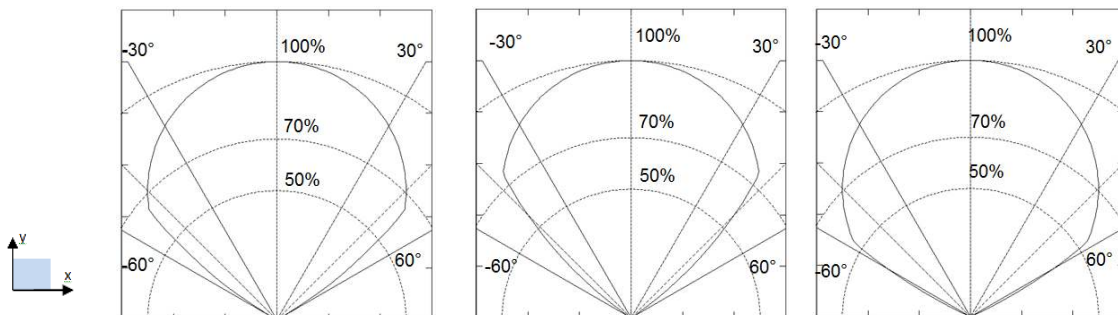

Note: Normalised polar plots show typical FoV along x,y axis and diagonal with 4.48 $\mu$ m/620nm filter applied, with infrared source being a blackbody radiator at 500 K temperature.

## Mechanical Drawing

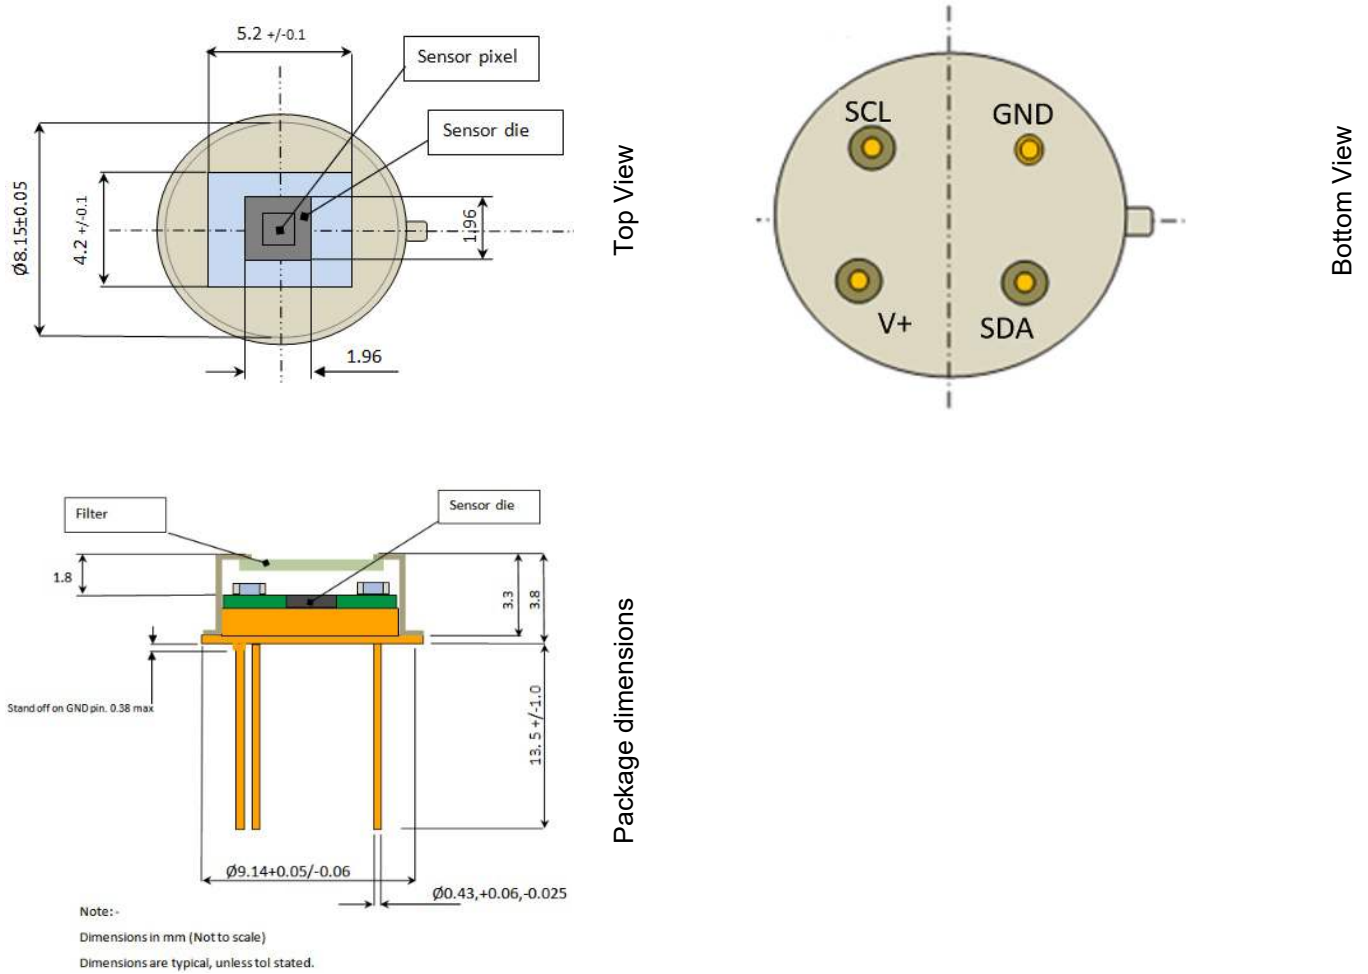

## Filter Information

Part number (marking)	AFBR-S6EPR44212	AFBR-S6EPR44252	AFBR-S6EPR44112	AFBR-S6EPR44352
Filter name	3.91 $\mu\text{m}$ bandpass	4.48 $\mu\text{m}$ bandpass	5.0 $\mu\text{m}$ cut on	2.77 $\mu\text{m}$ bandpass
Cut on wavelength typical ( $\mu\text{m}$ )	3.865	4.17	5.0	2.425
Cut off wavelength typical ( $\mu\text{m}$ )	3.955	4.79	—	3.115

Filters block up to 8  $\mu\text{m}$ .

Broadcom, the pulse logo, and Connecting everything are among the trademarks of Broadcom and/or its affiliates in the United States, certain other countries, and/or the EU.

Copyright © 2022 by Broadcom. All Rights Reserved.

The term “Broadcom” refers to Broadcom Inc. and/or its subsidiaries. For more information, please visit [www.broadcom.com](http://www.broadcom.com).

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

AFBR-S6EPRTO1F-DS100