

Ratings

Voltage: 600 V
 Temperature: -40~105 °C
 Flammability: FT2

Conductor

Conductor count: 4
 Gauge: 26 AWG 0.13 mm²
 Material: tinned copper strands
 Strand size: Ø 0.08 mm x 26
 Resistance at 20 °C: 150 Ω /km max

Insulator

Material: mPPE
 Color: red, black, white, yellow
 Diameter: Ø 1 ±0.10 mm
 Average thickness: 0.25 mm
 Minimum thickness: 0.2 mm
 Resistance at 20 °C: 100 MΩ /km min

Shield

Type: foil
 Material: aluminum mylar
 Coverage: 100%



Outer jacket

Material: mPPE, 85A
 Color: black
 Diameter: Ø 4.1 ±0.20 mm
 Average thickness: 0.79 mm
 Minimum thickness: 0.55 mm

Wire marking: E339579 UL AWM STYLE 21509 26 AWG 105°C
 600V --- cUL AWM I A 105°C 600V FT2 TENSILITY

Bend radius

Minimum: 6 times diameter (24.6 mm)

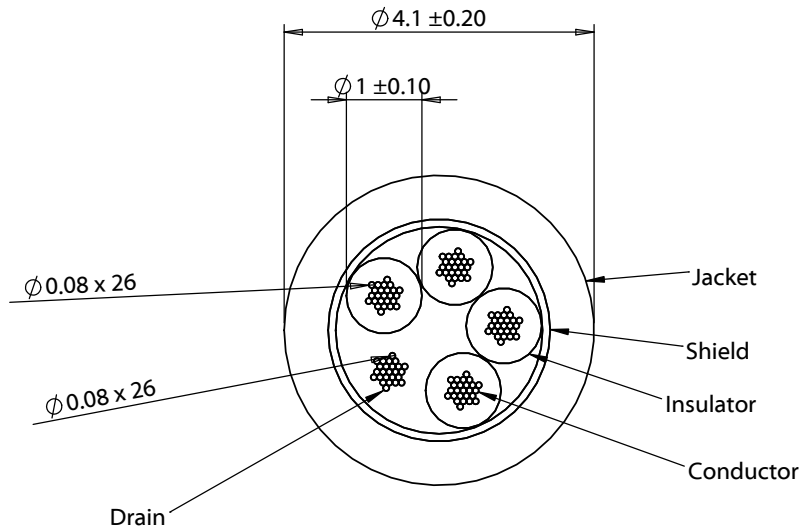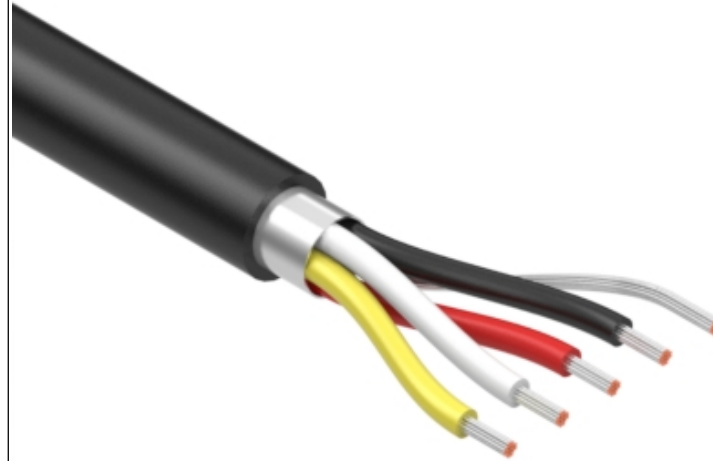

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	4/20/2020	Initial release	JC <small>Digitally signed by JC Date: 2020.04.21 11:59:03 -07'00'</small>		
			Verified:	Phthalate and halogen free	Size:
			AW <small>Digitally signed by AW Date: 2020.04.22 09:32:43 -07'00'</small>	Description:	A
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Wire, 4C TS, 26 AWG, 21509, 600V, 105C, 4.1 mm, shielded, FT2, mPPE	Part number: 30-01442
					Scale: 10:1
					☉ ◻
					Sheet 1 of 1

5

4

3

2

1