

AM/FM car radio tuner IC with intelligent selectivity system (ISS)

Features

FM part


- RF AGC generation by RF and IF detection
- I/Q mixer for 1st FM IF 10.7 MHz with image rejection
- 2 programmable IF-gain stages
- Mixer for 2nd IF 450 kHz
- Internal 450 kHz bandpass filter with three bandwidths controlled by ISS
- Fully integrated FM-demodulator with noise cancellation

AM part

- Wide and narrow AGC generation
- Preamplifier and mixer for 1st IF 10.7 MHz, AM up conversion
- Mixer for 2nd IF 450 kHz
- Integrated AM demodulator
- Output for AM stereo decoder

Additional features

- VCO for wide tuning range
- High performance fast PLL for RDS system
- IF counter for AM and FM with search stop signal
- Quality detector for level, deviation, adjacent channel and multi path

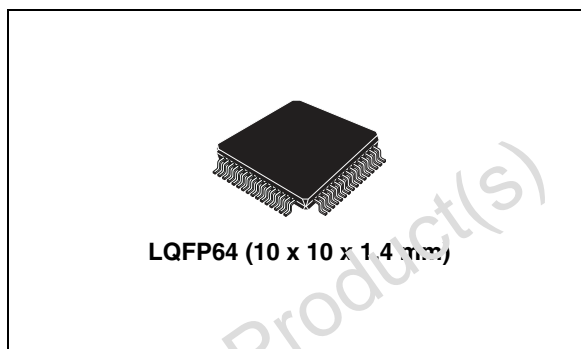

- Quality detection informations as analog signals external available
- ISS (intelligent selectivity system) for cancellation of adjacent channel and noise influences
- Adjacent channel mute
- Fully electronic alignment
- All functions I²C bus controlled
- ISS filter status information I²C bus readable

Description

The TDA7512 is a high performance tuner circuit for AM/FM car radio. It contains mixer, IF amplifier, demodulator for AM and FM, quality detection, ISS filter and PLL synthesizer with IF counter on a single chip. Use of BiCMOS technology allows the implementation of several tuning functions and a minimum of external components.

Table 1. Device summary

| Order code | Package | Packing |
|------------|---------|---------|
| E-TDA7512 | LQFP64 | Tray |

Contents

| | | |
|----------|--|-----------|
| 1 | Block diagram | 6 |
| 2 | Pin description | 7 |
| 3 | Electrical specifications | 10 |
| 3.1 | Absolute maximum ratings | 10 |
| 3.2 | Thermal data | 10 |
| 3.3 | Electrical characteristics | 10 |
| 3.4 | Electrical characteristics (with f_{RF} , f_{MOD} in different conditions) | 16 |
| 3.5 | Electrical characteristics (additional parameters) | 17 |
| 4 | Functional description | 19 |
| 4.1 | FM section | 19 |
| 4.1.1 | Mixer1, AGC and 1.IF | 19 |
| 4.1.2 | Mixer2, limiter and demodulator | 19 |
| 4.1.3 | Quality detection and ISS | 19 |
| 4.1.4 | Soft mute control | 20 |
| 4.2 | AM section | 21 |
| 4.3 | PLL and IF counter section | 21 |
| 4.3.1 | PLL frequency synthesizer block | 21 |
| 4.3.2 | Frequency generation for phase comparison | 22 |
| 4.3.3 | Three state phase comparator | 22 |
| 4.3.4 | Charge pump current generator | 22 |
| 4.3.5 | Inlock detector | 22 |
| 4.3.6 | Low noise CMOS Op-amp | 22 |
| 4.3.7 | IF counter block | 22 |
| 4.3.8 | The IF-counter mode | 23 |
| 4.3.9 | Sampling timer | 23 |
| 4.3.10 | Intermediate frequency main counter | 23 |
| 4.3.11 | Adjustment of the measurement sequence time | 23 |
| 4.3.12 | Adjust of the frequency value | 24 |
| 4.4 | I ² C bus interface | 24 |
| 4.4.1 | Data transition | 24 |
| 4.4.2 | Start condition | 24 |

| | | |
|-------------------|-------------------------------------|-----------|
| 4.4.3 | Stop condition | 24 |
| 4.4.4 | Acknowledge | 24 |
| 4.4.5 | Data transfer | 24 |
| 4.4.6 | Device addressing | 24 |
| 4.4.7 | Write operation | 25 |
| 4.4.8 | Read operation | 25 |
| 5 | Software specification | 26 |
| 5.1 | Address organization | 26 |
| 5.2 | Control register function | 27 |
| 5.3 | Data byte specification | 30 |
| 6 | Package information | 42 |
| Appendix A | Block diagrams | 43 |
| Appendix B | Application notes | 47 |
| 7 | Revision history | 48 |

List of tables

| | | |
|-----------|--|----|
| Table 1. | Device summary | 1 |
| Table 2. | Pin description | 7 |
| Table 3. | Absolute maximum ratings | 10 |
| Table 4. | Thermal data | 10 |
| Table 5. | Electrical characteristics | 10 |
| Table 6. | Electrical characteristics (with f_{RF} , f_{MOD} in different conditions) | 16 |
| Table 7. | Electrical characteristics (additional parameters) | 17 |
| Table 8. | Address organization | 26 |
| Table 9. | Control register function | 27 |
| Table 10. | Subaddress | 29 |
| Table 11. | Addr 0 charge pump control | 30 |
| Table 12. | Addr 1 PLL counter 1 (LSB) | 30 |
| Table 13. | Addr 2 PLL counter 2 (MSB) | 31 |
| Table 14. | Addr 3,4 TV1,2 (offset referred to tuning voltage PIN28) | 31 |
| Table 15. | Addr 5 IF counter control 1 | 32 |
| Table 16. | Addr 6 IF counter control 2 | 32 |
| Table 17. | Addr 7 AM control | 33 |
| Table 18. | Addr 8 quality ISS filter | 33 |
| Table 19. | Addr 9 quality detection adjacent channel | 34 |
| Table 20. | Addr 10 quality detection multipath | 34 |
| Table 21. | Addr 11 quality deviation detection | 35 |
| Table 22. | Addr 12 softmute control 1 | 36 |
| Table 23. | Addr 13 softmute control 2 | 36 |
| Table 24. | Addr 14 VCODIV/PLLREF | 37 |
| Table 25. | Addr 15 FM AGC | 37 |
| Table 26. | Addr 16 AM AGC | 38 |
| Table 27. | Addr 17 FM demodulator fine adjust | 39 |
| Table 28. | Addr 18 S-meter slider | 39 |
| Table 29. | Addr 19 IF GAIN/Crystal adjust | 40 |
| Table 30. | Addr 20 tank adjust | 40 |
| Table 31. | Addr 21 I/Q FM mixer1 adjust | 41 |
| Table 32. | Addr 22 test control 1 | 41 |
| Table 33. | Addr 23 test control 2 | 41 |
| Table 34. | Addr 24 Test Control 3 | 41 |
| Table 35. | Addr 25 test control 4 | 41 |
| Table 36. | Block diagram quality detection principle (without overdeviation correction) | 45 |
| Table 37. | Input signals modes | 45 |
| Table 38. | Part list (application and measurement circuit) | 45 |
| Table 39. | Document revision history | 48 |


List of figures

| | | |
|-----------|---|----|
| Figure 1. | Block diagram | 6 |
| Figure 2. | Pin connection (top view) | 7 |
| Figure 3. | Software specification | 26 |
| Figure 4. | LQFP64 mechanical data and package dimensions | 42 |
| Figure 5. | Block diagram I/Q mixer | 43 |
| Figure 6. | Block diagram VCO | 43 |
| Figure 7. | Block diagram keying AGC | 44 |
| Figure 8. | Block diagram ISS function | 44 |
| Figure 9. | Application circuit | 46 |

Obsolete Product(s) - Obsolete Product(s)

1 Block diagram

Figure 1. Block diagram

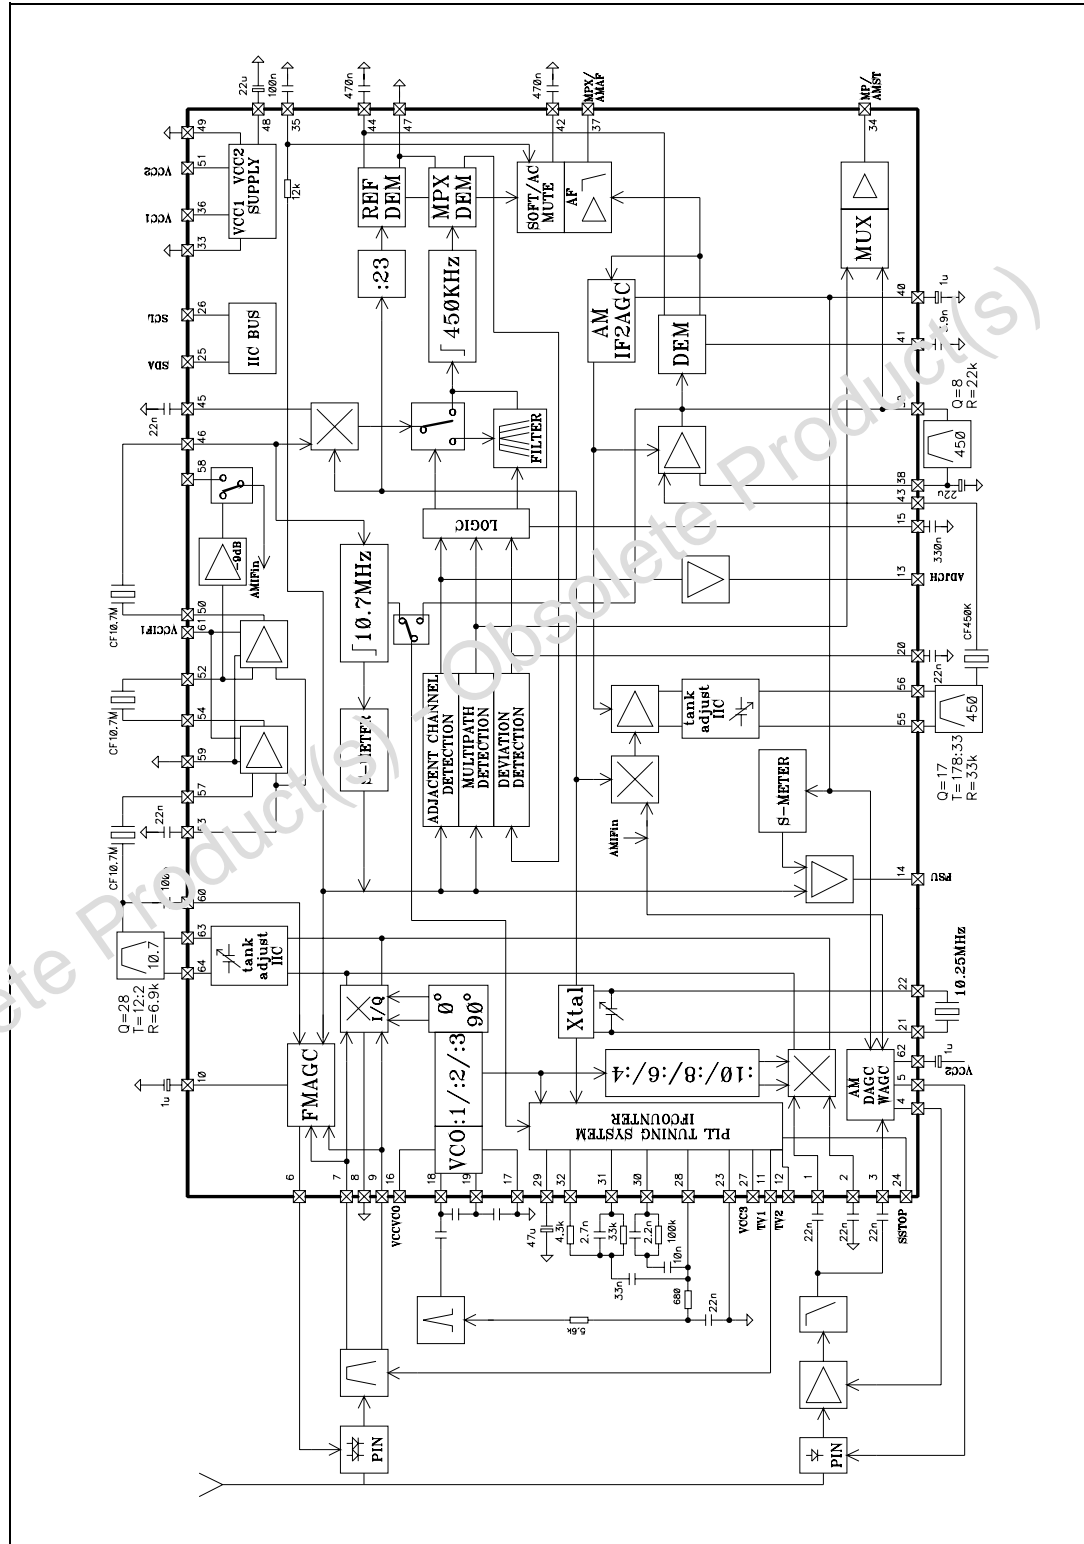

2 Pin description

Figure 2. Pin connection (top view)

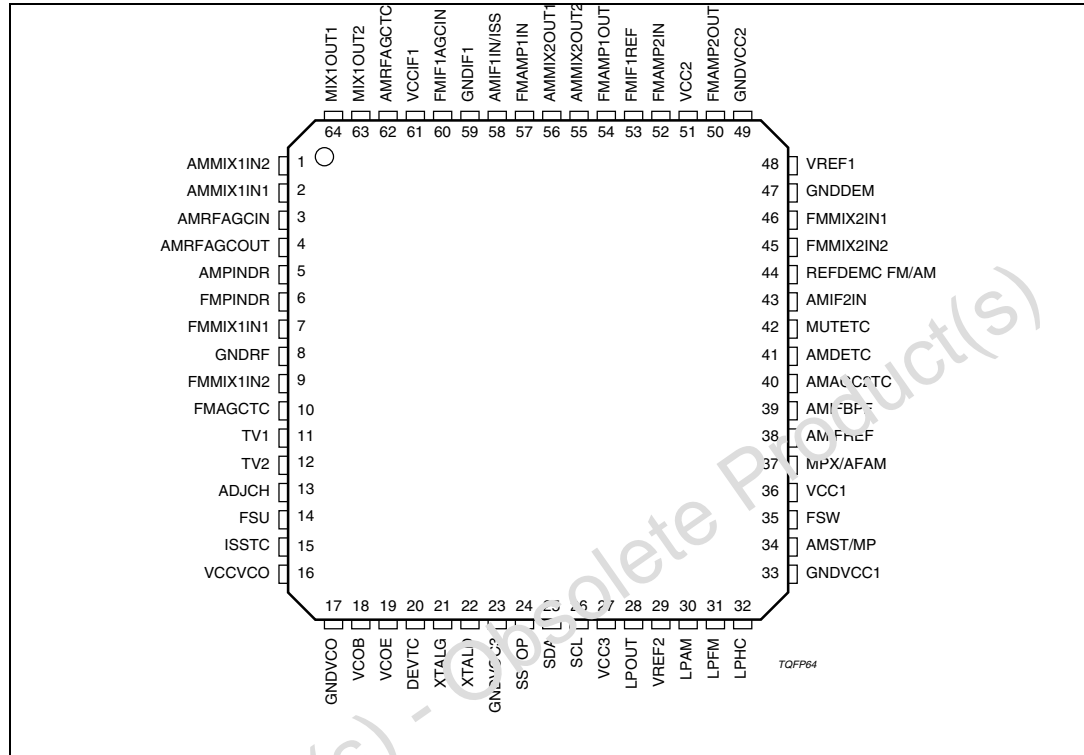


Table 2. Pin description

| N° | Pin name | Function |
|----|------------|---------------------------------|
| 1 | AMMIX1IN2 | AM Input2 Mixer1 |
| 2 | AMMIX1IN1 | AM Input1 Mixer1 |
| 3 | AMRFAGCIN | Input AM RF AGC |
| 4 | AMRFAGCOUT | Output AM RF AGC |
| 5 | AMPINDR | AM PIN diode driver output |
| 6 | FMPINDR | FM PIN diode driver output |
| 7 | FMMIX1IN1 | FM input1 mixer1 |
| 8 | GNDRF | RF ground |
| 9 | FMMIX1IN2 | FM input2 mixer1 |
| 10 | FMAGCTC | FM AGC time constant |
| 11 | TV1 | Tuning voltage preselection1 |
| 12 | TV2 | Tuning voltage preselection2 |
| 13 | ADJCH | Ident. adjacent channel output |
| 14 | FSU | Unweighted Fieldstrength output |

Table 2. Pin description (continued)

| N° | Pin name | Function |
|----|------------------|---|
| 15 | ISSTC | Time constant for ISS filter switch |
| 16 | VCCVCO | VCO supply |
| 17 | GNDVCO | VCO ground |
| 18 | VCOB | VCO input base |
| 19 | VCOE | VCO output emitter |
| 20 | DEVTC | Deviation detector time constant |
| 21 | XTALG | Crystal oscillator to MOS gate |
| 22 | XTALD | Crystal oscillator to MOS drain |
| 23 | GNDVCC3 | VCC3 ground |
| 24 | SSTOP | Search stop output |
| 25 | SDA | I ² C bus data |
| 26 | SCL | I ² C bus clock |
| 27 | VCC3 | Supply tuning voltage |
| 28 | LPOUT | Op. amp. output to PLL loop filters |
| 29 | VREF2 | Voltage reference for PLL op. amp. |
| 30 | LPAM | Op. amp. input to PLL loop filters AM |
| 31 | LPFM | Op. amp. input to PLL loop filters FM |
| 32 | LPHC | High current PLL loop filter input |
| 33 | GNDVCC1 | Digital ground |
| 34 | AMS/MP | AM stereo out / ident. multipath output |
| 35 | FSW | Weighted Fieldstrength output |
| 36 | VCC1 | Digital supply |
| 37 | MPX/AFAM | MPX output / AM AF output |
| 38 | AMIFREF | Reference voltage AM IF amp. |
| 39 | AMIFBPF | AM IF filter |
| 40 | AMAGC2TC | AM AGC2 time constant |
| 41 | AMDETC | AM detector capacitor |
| 42 | MUTETC | Softmute time constant |
| 43 | AMIF2IN | Input AM IF2 |
| 44 | REFDEMC FM/AM | Demodulator reference FM/AM |
| 45 | FMMIX2IN2 | FM IF1 MIX2 input1 |
| 46 | FMMIX2IN1 | FM IF1 MIX2 input2 |
| 47 | GNDDEM | Ground FM demodulator |
| 48 | VREF1 | Reference 5V |

Table 2. Pin description (continued)

| N° | Pin name | Function |
|----|-------------|--------------------------------|
| 49 | GNDVCC2 | Analog ground |
| 50 | FMAMP2OUT | FM IF1 amplifier2 output |
| 51 | VCC2 | Analog supply |
| 52 | FMAMP2IN | FM IF1 amplifier2 input |
| 53 | FMIF1REF | FM IF1 amplifier reference |
| 54 | FMAMP1OUT | FM IF1 amplifier1 output |
| 55 | AMMIX2OUT2 | AM tank 450 kHz |
| 56 | AMMIX2OUT1 | AM tank 450 kHz |
| 57 | FMAMP1IN | FM IF1 amplifier1 Input |
| 58 | AMIF1IN/ISS | AM IF1 input/ISS filter status |
| 59 | GNDIF1 | FM IF1 ground |
| 60 | FMIF1AGCIN | FM IF1 AGC input |
| 61 | VCCIF1 | IF1 supply |
| 62 | AMRFAGCTC | AM RF AGC Time constant |
| 63 | MIX1OUT2 | MIX tank 10.7 MHz |
| 64 | MIX1OUT1 | MIX tank 10.7 MHz |

3 Electrical specifications

3.1 Absolute maximum ratings

Table 3. Absolute maximum ratings

| Symbol | Parameter | Value | Unit |
|-----------|---------------------|-------------|------|
| V_S | Supply voltage | 10.5 | V |
| T_{amb} | Ambient temperature | -40 to 85 | °C |
| T_{stg} | Storage temperature | -55 to +150 | °C |

3.2 Thermal data

Table 4. Thermal data

| Symbol | Parameter | Value | Unit |
|-----------------|--|---------|------|
| $R_{th(j-amb)}$ | Thermal resistance junction to ambient | 68 max. | °C/W |

3.3 Electrical characteristics

$T_{amb} = +25\text{ °C}$, $V_{CC1} = V_{CC2} = V_{CC3} = V_{CCVCO} = V_{CCMIX1} = V_{CCIF1} = 8.5\text{ V}$, $f_{RF} = 98\text{ MHz}$,
 $dev. = 40\text{ kHz}$, $f_{MOD} = 1\text{ kHz}$, $f_{IF1} = 10.7\text{ MHz}$, $f_{IF2} = 450\text{ kHz}$, $f_{crystal} = 10.25\text{ MHz}$, in
 application circuit, unless otherwise specified.

Table 5. Electrical characteristics

| Symbol | Parameter | Test condition | Min. | Typ. | Max. | Unit |
|---------------|------------------------|----------------|------|------|------|------|
| Supply | | | | | | |
| V_{CC1} | Digital supply voltage | - | 7.5 | 8.5 | 10 | V |
| V_{CC2} | Analog supply voltage | - | 7.5 | 8.5 | 10 | V |
| V_{CC3} | Analog tuning voltage | - | 7.5 | 8.5 | 10 | V |
| V_{CCVCO} | VCO supply voltage | - | 7.5 | 8.5 | 10 | V |
| V_{CCMIX1} | MIX1 supply voltage | - | 7.5 | 8.5 | 10 | V |
| V_{CCMIX2} | MIX2 supply voltage | - | 7.5 | 8.5 | 10 | V |
| V_{CCIF1} | IF1 supply voltage | - | 7.5 | 8.5 | 10 | V |
| I_{CC1} | Supply current | FM ON | - | 7.5 | - | mA |
| I_{CC1} | Supply current | AM ON | - | 10 | - | mA |
| I_{CC2} | Supply current | FM ON / VCO:3 | - | 70 | - | mA |
| I_{CC2} | Supply current | AM ON | - | 70 | - | mA |
| I_{CC3} | Supply current | - | - | 2 | - | mA |
| I_{CCVCO} | Supply current | - | - | 9 | - | mA |

Table 5. Electrical characteristics (continued)

| Symbol | Parameter | Test condition | Min. | Typ. | Max. | Unit |
|--|---------------------------------|--|------|-------|---------------------------------------|------|
| I _{CCMIX1} | Supply current | FM ON | - | 8 | - | mA |
| I _{CCMIX1} | Supply current | AM ON | - | 7 | - | mA |
| I _{CCMIX2} | Supply current | AM ON | - | 7 | - | mA |
| I _{CCIF1} | Supply current | - | - | 6 | - | mA |
| Reference voltages | | | | | | |
| V _{REF1} | Internal reference voltage | I _{REF1} = 0 mA | - | 5 | - | V |
| V _{REF2} | Internal reference voltage | I _{REF2} = 0 mA | - | 2.5 | - | V |
| Wide band RF AGC | | | | | | |
| V ₇₋₉ | Lower threshold start | V ₁₀ = 2.5 V | - | 85 | - | dBμV |
| V ₇₋₉ | Upper threshold start | V ₁₀ = 2.5 V | - | 98 | - | dBμV |
| Narrow band IF & Keying AGC | | | | | | |
| V ₆₀ | Lower threshold start | KAGC = off, V ₇₋₉ = 0 mV _{RMS} | - | 86 | - | dBμV |
| V ₆₀ | Upper threshold start | KAGC = off, V ₇₋₉ = 0 mV _{RMS} | - | 98 | - | dBμV |
| V ₆₀ | Lower threshold start with KAGC | KAGC = max, V ₇₋₉ = 0 mV _{RMS} , Δf _{IF} = 300 kHz | - | 98 | - | dBμV |
| V ₃₅ | Startpoint KAGC | KAGC = max, V ₇₋₉ = 0 mV _{RMS} , Δf _{IF} = 300 kHz f _{IF1} generate FSW level at V ₃₅ | - | 3.6 | - | V |
| D | Control range KAGC | ΔV ₃₅ = +0.4V | - | 16 | - | dB |
| R _{IN} | Input resistance | - | - | 10 | - | kΩ |
| C _{IN} | Input capacitance | - | - | 2.5 | - | pF |
| AGC time constant output | | | | | | |
| V ₁₀ | Max. AGC output voltage | V ₇₋₉ = 0 mV _{RMS} | - | - | V _{REF1} +V _{BE} | V |
| V ₁₀ | Min. AGC output voltage | V ₇₋₉ = 50 mV _{RMS} | - | - | 0.5 | V |
| I ₁₀ | Min. AGC charge current | V ₇₋₉ = 0 mV _{RMS} , V ₁₀ = 2.5 V | - | -12.5 | - | μA |
| I ₁₀ | Max. AGC discharge current | V ₇₋₉ = 50 mV _{RMS} , V ₁₀ = 2.5 V | - | 1.25 | - | mA |
| AGC pin diode driver output | | | | | | |
| I ₆ | AGC OUT, current min. | V ₇₋₉ = 0 mV _{RMS} , V ₆ = 2.5 V | - | 50 | - | μA |
| I ₆ | AGC OUT, current max. | V ₇₋₉ = 50 mV _{RMS} , V ₆ = 2.5 V | - | -20 | - | mA |
| I/Q Mixer1 (10.7 MHz) | | | | | | |
| R _{IN} | Input resistance | differential | - | 10 | - | kΩ |
| C _{IN} | Input capacitance | differential | - | 4 | - | pF |
| R _{OUT} | Output resistance | differential | 100 | - | - | kΩ |

Table 5. Electrical characteristics (continued)

| Symbol | Parameter | Test condition | Min. | Typ. | Max. | Unit |
|--|---------------------------------------|---|------|------|------|-------------------|
| $V_{7,9}$ | Input dc bias | - | - | 3.2 | - | V |
| g_m | Conversion transconductance | - | - | 17 | - | mS |
| F | Noise figure | 400 Ω generator resistance | - | 3 | - | dB |
| CP _{1dB} | 1 dB compression point | referred to diff. mixer input | - | 100 | - | dB μ V |
| IIP3 | 3 rd order intermodulation | - | - | 122 | - | dB μ V |
| IQG | I/Q gain adjust | G | -1 | - | +1 | % |
| IQP | I/Q phase adjust | PH | -7 | - | +8 | ° |
| IRR | Image rejection ratio | ratio wanted/image | 30 | 40 | - | dB |
| IRR | Image rejection ratio | with gain and phase adjust | 40 | 46 | - | dB |
| IF1 Amplifier1 +2 (10.7 MHz) | | | | | | |
| G_{min} | Min. gain | IFG | - | 18 | - | dB |
| G_{max} | Max. gain | IFG | - | 26 | - | dB |
| R_{IN} | Input resistance | - | - | 330 | - | Ω |
| R_{OUT} | Output resistance | - | - | 330 | - | Ω |
| CP _{1dB} | 1 dB compression point | referred to 330 Ω input | - | 105 | - | dB μ V |
| IIP3 | 3 rd order Intermodulation | referred to 330 Ω input | - | 126 | - | dB μ V |
| Mixer2 (450 kHz) | | | | | | |
| R_{IN} | Input impedance | - | - | 330 | - | Ω |
| V_{46} | Max. input voltage | - | - | 900 | - | mV _{RMS} |
| V_{48} | Limiting sensitivity | S/N = 20 dB | - | 25 | - | μ V |
| G | Mixer gain | - | - | 18 | - | dB |
| Limiter 1 (450 kHz) | | | | | | |
| $G_{Limiter}$ | Gain | - | - | 80 | - | dB |
| Demodulator, audio output | | | | | | |
| THD | | Dev.= 75 kHz, $V_{46} = 10$ mV _{RMS} | - | - | 0.1 | % |
| V_{MPX} | MPX output signal | Dev.= 75 kHz | - | 500 | - | mV _{RMS} |
| R_{OUT} | Output resistance | - | - | 50 | - | Ω |
| $ \Delta V _{min}$ | DC offset fine adjust | DEM, MENA=1 | - | 8.5 | - | mV |
| $ \Delta V _{max}$ | DC offset fine adjust | DEM, MENA=1 | - | 264 | - | mV |
| S/N | | Dev.= 40 kHz, $V_{46} = 10$ mV _{RMS} | - | 76 | - | dB |
| QUALITY DETECTION | | | | | | |
| S-meter, unweighted Fieldstrength | | | | | | |
| V_{46} | Min. input voltage MIX2 | - | - | 10 | - | μ V |

Table 5. Electrical characteristics (continued)

| Symbol | Parameter | Test condition | Min. | Typ. | Max. | Unit |
|--|--------------------------|-------------------------------------|------|------|------|-------|
| V ₁₄ | Fieldstrength output | V ₄₆ = 0V _{RMS} | - | 0.1 | - | V |
| V ₁₄ | Fieldstrength output | V ₄₆ = 1V _{RMS} | - | 4.9 | - | V |
| ΔV ₁₄ | voltage per decade | SMSL = 0 | - | 1 | - | V |
| ΔV ₁₄ | voltage per decade | SMSL = 1 | - | 1.5 | - | V |
| ΔV ₁₄ | S-meter offset | SL, SMSL=1 | -15 | | 15 | dB |
| R _{OUT} | Output resistance | - | - | 200 | - | Ω |
| TK | Temp coeff. | - | - | 0 | - | ppm/K |
| S-meter, weighted Fieldstrength | | | | | | |
| V ₃₅ | Fieldstrength output | V ₄₆ = 0V _{RMS} | - | 2.5 | - | V |
| V ₃₅ | Fieldstrength output | V ₄₆ = 1V _{RMS} | - | 4.9 | - | V |
| R _{OUT} | Output resistance | - | - | 12 | - | kΩ |
| Adjacent Channel Gain | | | | | | |
| G _{min} | Gain minimum | ACG=0 | - | 32 | - | dB |
| G _{max} | Gain maximum | ACG=1 | - | 38 | - | dB |
| Adjacent channel filter | | | | | | |
| f _{HP} | -3 dB frequency highpass | ACF=0 | - | 100 | - | kHz |
| f _{BP} | Centre frequency | ACF=1 | - | 100 | - | kHz |
| f _{20dB} | Attenuation 20 dB | | - | 70 | - | kHz |
| Adjacent channel output | | | | | | |
| V ₁₃ | Output voltage low | - | - | 0.1 | - | V |
| V ₁₃ | Output voltage high | - | - | 4.9 | - | V |
| R _{OUT} | Output resistance | - | - | 4 | - | kΩ |
| Multipath channel gain | | | | | | |
| G _{min} | Gain minimum | MPG=0 | - | 12 | - | dB |
| G _{max} | Gain maximum | MPG=1 | - | 23 | - | dB |
| Multipath bandpass filter | | | | | | |
| f _{Lower} | Centre frequency low | MPF=0 | - | 19 | - | kHz |
| f _{Upper} | Centre frequency up | MPF=1 | - | 31 | - | kHz |
| Q | Quality factor | - | 5 | - | 10 | - |
| Multipath output | | | | | | |
| V ₃₄ | Output voltage low | - | - | 0.1 | - | V |
| V ₃₄ | Output voltage high | - | - | 4.9 | - | V |
| R _{OUT} | Output resistance | - | - | 2.5 | - | kΩ |

Table 5. Electrical characteristics (continued)

| Symbol | Parameter | Test condition | Min. | Typ. | Max. | Unit |
|--|----------------------------|--|------|------|------|---------------|
| ISS (intelligent Selectivity System) | | | | | | |
| Filter 450 kHz | | | | | | |
| f_{centre} | Centre frequency | $f_{\text{REF_intern}} = 450 \text{ kHz}$ | - | 450 | - | kHz |
| BW 3 dB | Bandwidth, -3 dB | ISS80 = 1 | - | 80 | - | kHz |
| BW 20 dB | Bandwidth, -20 dB | ISS80 = 1 | - | 150 | - | kHz |
| BW 3 dB | Bandwidth, -3 dB | ISS80 = 0 | - | 120 | - | kHz |
| BW 20 dB | Bandwidth, -20 dB | ISS80 = 0 | - | 250 | - | kHz |
| BW 3 dB | Bandwidth weather band | ISS30 = 1 | - | 30 | - | kHz |
| BW 20 dB | -20 dB weather band | ISS30 = 1 | - | 80 | - | kHz |
| Adjacent channel ISS filter threshold | | | | | | |
| V_{NTH} | Internal low threshold | ACNTH | - | 0 | - | V |
| V_{NTH} | Internal high threshold | ACNTH | - | 0.3 | - | V |
| V_{WTH} | Internal low threshold | ACWTH | - | 0.25 | - | V |
| V_{WTH} | Internal high threshold | ACWTH | - | 0.95 | - | V |
| Multipath threshold | | | | | | |
| V_{THMP} | Internal low threshold | MPTH | - | 0.50 | - | V |
| V_{THMP} | Internal high threshold | MPTH | - | 1.25 | - | V |
| ISS filter time constant | | | | | | |
| I_{15} | Charge current low mid | TISS, ISSCTL = 1 | - | -74 | - | μA |
| I_{15} | Charge current high mid | TISS, ISSCTL = 1 | - | -60 | - | μA |
| I_{15} | Charge current low narrow | TISS, ISSCTL = 1 | - | -124 | - | μA |
| I_{15} | Charge current high narrow | TISS, ISSCTL = 1 | - | -110 | - | μA |
| I_{15} | Discharge current low | TISS, ISSCTL = 0 | - | 1 | - | μA |
| I_{15} | Discharge current high | TISS, ISSCTL = 0 | - | 15 | - | μA |
| V_{15} | Low voltage | ISSCTL = 0 | - | 0.1 | - | V |
| V_{15} | High voltage | ISSCTL = 1 | - | 4.9 | - | V |
| ISS filter switch threshold | | | | | | |
| V_{15} | Threshold ISS on | ISSCTL = 0 | - | 3 | - | V |
| V_{15} | Threshold ISS off | ISSCTL = 0 | - | 1 | - | V |
| V_{15} | Threshold ISS narrow on | ISSCTL = 0 | - | 4 | - | V |
| V_{15} | Threshold ISS narrow off | ISSCTL = 0 | - | 2 | - | V |
| I_{20} | Charge current low | TDEV | - | -20 | - | μA |
| I_{20} | Charge current high | TDEV | - | -34 | - | μA |

Table 5. Electrical characteristics (continued)

| Symbol | Parameter | Test condition | Min. | Typ. | Max. | Unit |
|-----------------------------|--|---|------|-------|------|------------------------|
| I_{20} | Discharge current low | TDEV | - | 6 | - | μA |
| I_{20} | Discharge current high | TDEV | - | 20 | - | μA |
| DEV_{WTH} | Internal low threshold | DWTH | - | 30 | - | kHz |
| DEV_{WTH} | Internal high threshold | DWTH | - | 75 | - | kHz |
| $\text{RATIO}_{\text{min}}$ | Referred to threshold | DTH | - | 1 | - | - |
| $\text{RATIO}_{\text{max}}$ | Referred to threshold | DTH | - | 1.5 | - | - |
| Softmute | | | | | | |
| V_{ANT} | Upper startpoint | SMTH, SMD, SLOPE = 0 | - | 10 | - | $\text{dB}\mu\text{V}$ |
| V_{ANT} | lower startpoint | SMTH, SMD, SLOPE = 0 | - | 3 | - | $\text{dB}\mu\text{V}$ |
| a_{SMmin} | Min. softmute depth | SMD, SLOPE = 0, $\text{SMTH}_{\text{Upper}}$ | - | 15 | - | dB |
| a_{SMmax} | Max. softmute depth | SMD, SLOPE = 0, $\text{SMTH}_{\text{Upper}}$ | - | 36 | - | dB |
| a_{SMTHISS} | Mute depth threshold for ISS filter on | SMCTH | 0.2 | - | 2 | dB |
| V_{ACTH} | Internal AC mute threshold | ACM | 60 | - | 340 | mV |
| a_{SMAC} | AC mute depth | ACMD | 4 | - | 10 | dB |
| I_{42} | Charge current | - | - | -47.5 | - | μA |
| I_{42} | Discharge current | - | - | 2.5 | - | μA |
| S/N over all | | | | | | |
| S/N | Signal to noise ratio | $V_{\text{ANT_min}} = 60 \text{ dB}\mu\text{V}$, dev.= 40 kHz, LP=15 kHz de-emphasis t = 50 μs | 66 | - | - | dB |

3.4 Electrical characteristics (with f_{RF} , f_{MOD} in different conditions)

$T_{amb} = +25\text{ }^{\circ}\text{C}$, $V_{CC1} = V_{CC2} = V_{CC3} = V_{CCVCO} = V_{CCMIX1} = V_{CCMIX2} = 8.5\text{ V}$, $f_{RF} = 1\text{ MHz}$, $f_{MOD} = 400\text{ Hz}$ at 30 % AM $f_{IF1} = 10.7\text{ MHz}$, $f_{IF2} = 450\text{ kHz}$, $f_{crystal} = 10.25\text{ MHz}$, in application circuit, (unless otherwise noted, V_{INRF} antenna input).

Table 6. Electrical characteristics (with f_{RF} , f_{MOD} in different conditions)

| Symbol | Parameter | Test condition | Min. | Typ. | Max. | Unit |
|------------------------------------|--|---|------------|--------------------------|------|------------------------|
| Global | | | | | | |
| $V_{ANT\ min}$ | Max. sensitivity | Ref.: $V_{INRF} = 60\text{ dB}\mu\text{V}$, | - | 19 | - | $\text{dB}\mu\text{V}$ |
| $V_{ANT\ us}$ | Usable sensitivity | (S+N)/N = 20 dB | 30 | 26 | - | $\text{dB}\mu\text{V}$ |
| ΔV_{ANT} | IF2 AGC Range | Ref.: $V_{INRF} = 60\text{ dB}\mu\text{V}$, | 56 | - | - | dB |
| (S+N)/N | Signal to Noise Ratio | Ref.: $V_{INRF} = 60\text{ dB}\mu\text{V}$ | 50 | 30 | - | dB |
| a_{IF} | IF rejection | Ref: $V_{INRF} = 60\text{ dB}\mu\text{V}$, IF1 = 10.7 MHz IF2 = 450 kHz | 100 100 | - | - | dB dB |
| f_{AF} | Frequency response | Ref.: $V_{INRF} = 60\text{ dB}\mu\text{V}$, $\Delta V_{AF} = -3\text{ dB}$ | - | 3.6 | - | kHz |
| THD | Total Harmonic Distortion | $V_{INRF} = 60\text{ dB}\mu\text{V}$, m = 0.8 m = 0.3 $V_{INRF} = 120\text{ dB}\mu\text{V}$, m = 0.8 m = 0.3 | - | 0.5 0.3 1.0 0.3 | - | % |
| V_{37} | Output level | $V_{INRF} = 60\text{ dB}\mu\text{V}$ | - | 220 | - | mV_{RMS} |
| V_{34} | Output level | $V_{INRF} = 60\text{ dB}\mu\text{V}$, m=off | - | 190 | - | mV_{RMS} |
| V_3 | Min. RF AGC threshold Max. RF AGC threshold | WAGC | - | 90 109 | - | $\text{dB}\mu\text{V}$ |
| V_{58} | Min. IF AGC threshold Max. IF AGC threshold | WAGC | - | 90 109 | - | $\text{dB}\mu\text{V}$ |
| V_{53} | Min. DAGC threshold Max. DAGC threshold | DAGC | - | 74 96 | - | $\text{dB}\mu\text{V}$ |
| I_{40max} | AGC2 charge current | seek | - | 160 | - | μA |
| CCR | Charge current ratio | seek/seek off | - | 30 | - | - |
| AGC voltage driver output | | | | | | |
| V_4 | Max. AGC output voltage | - | 3.5 | - | - | V |
| V_4 | Min. AGC output voltage | - | - | - | 0.5 | V |
| I_{I4} | AGC current | - | - | 100 | - | μA |
| AGC pin diode driver output | | | | | | |
| I_5 | AGC driver current | - | - | -2 | - | mA |

Table 6. Electrical characteristics (with f_{RF} , f_{MOD} in different conditions) (continued)

| Symbol | Parameter | Test condition | Min. | Typ. | Max. | Unit |
|-----------------------------|---------------------------------------|-------------------------------|------|------|------|------------|
| AM Mixer1 (10.7 MHz) | | | | | | |
| R_{IN} | Input resistance | differential | - | 1.2 | - | k Ω |
| C_{IN} | Input capacitance | differential | - | 4 | - | pF |
| R_{OUT} | Output impedance | differential | 100 | | - | k Ω |
| CP_{1dB} | 1 dB compression point | referred to diff. mixer input | - | 115 | - | dB μ V |
| IIP3 | 3 rd order intermodulation | - | - | 132 | - | dB μ V |
| F | Noise figure | - | - | 8 | - | dB |
| A | Gain | - | - | 26 | - | dB |
| C_{min} | Min. capacitance step | IF1T | - | 0.55 | - | pF |
| C_{max} | Max. capacitance | IF1T | - | 8.25 | - | pF |
| C_{31-64} | | IF1T | - | 2 | - | pF |
| AM Mixer2 (450 kHz) | | | | | | |
| R_{58} | Input resistance | - | - | 10 | - | k Ω |
| C_{58} | Input capacitance | - | - | 2.5 | - | pF |
| CP_{1dB} | 1 dB compression point | referred to diff. mixer input | - | 120 | - | dB μ V |
| IIP3 | 3 rd order intermodulation | - | - | 132 | - | dB μ V |
| F | Noise figure | - | - | 12 | - | dB |
| A | Max. gain | Mixer2 tank output | - | 34 | - | dB |
| ΔA | Gain control range | - | - | 20 | - | dB |
| C_{min} | Min. cap step | IF2T | - | 1.6 | - | pF |
| C_{max} | Max. cap | IF2T | - | 24 | - | pF |
| C_{55-56} | | IF2T | - | 2 | - | pF |

3.5 Electrical characteristics (additional parameters)

Table 7. Electrical characteristics (additional parameters)

| Symbol | Parameter | Test condition | Min. | Typ. | Max. | Unit |
|--|---------------------|--------------------|------|-------|-----------------|------------|
| Output of tuning voltages (TV1,TV2) | | | | | | |
| V_{OUT} | Output voltage | TVO | 0.5 | - | $V_{CC3} - 0.5$ | V |
| R_{OUT} | Output impedance | - | - | 20 | - | k Ω |
| Crystal reference oscillator | | | | | | |
| f_{LO} | Reference frequency | $C_{Load} = 15$ pF | - | 10.25 | - | MHz |
| C_{Step} | Min. cap step | Crystal | - | 0.75 | - | pF |

Table 7. Electrical characteristics (additional parameters) (continued)

| Symbol | Parameter | Test condition | Min. | Typ. | Max. | Unit |
|--|----------------------------|---|-----------------|------------------|------|---------------|
| C_{max} | Max. cap | Crystal | - | 23.25 | - | pF |
| $\Delta f/f$ | Deviation versus VCC2 | $\Delta V_{CC2} = 1 \text{ V}$ | - | 1.5 | - | ppm/V |
| $\Delta f/f$ | Deviation versus temp | $-40^\circ\text{C} < T < +85^\circ\text{C}$ | - | 0.2 | - | ppm/K |
| I²C bus interface | | | | | | |
| f_{SCL} | Clock frequency | - | - | - | 400 | kHz |
| V_{IL} | Input low voltage | - | - | - | 1 | V |
| V_{IH} | Input high voltage | - | 3 | - | - | V |
| I_{IN} | Input current | - | -5 | - | 5 | μA |
| V_O | Output acknowledge voltage | $I_O = 1.6 \text{ mA}$ | - | - | 0.4 | V |
| Loop filter input/output | | | | | | |
| $-I_{IN}$ | Input leakage current | $V_{IN} = \text{GND}, PD_{OUT} = \text{Tristate}$ | 0.1 | - | 0.1 | μA |
| I_{IN} | Input leakage current | $V_{IN} = V_{REF1}$ $PD_{OUT} = \text{Tristate}$ | -0.1 | - | 0.1 | μA |
| V_{OL} | Output voltage Low | $I_{OUT} = -0.2 \text{ mA}$ | - | 0.05 | 0.5 | V |
| V_{OH} | Output voltage High | $I_{OUT} = 0.2 \text{ mA}$ | $V_{CC3} - 0.5$ | $V_{CC3} - 0.05$ | - | V |
| I_{OUT} | Output current, sink | $V_{OUT} = 1 \text{ V to } V_{CC3} - 1 \text{ V}$ | - | - | 10 | mA |
| I_{OUT} | Output current, source | $V_{OUT} = 1 \text{ V to } V_{CC3} - 1 \text{ V}$ | -10 | - | - | mA |
| Voltage controlled oscillator (VCO) | | | | | | |
| f_{VCOmin} | Minimum VCO frequency | - | 50 | - | - | MHz |
| f_{VCOmax} | Maximum VCO frequency | - | - | - | 260 | MHz |
| C/N | Carrier to Noise | $f_{VCO} = 200 \text{ MHz}, \Delta f = 1 \text{ kHz},$ $B = 1 \text{ Hz}, \text{ closed loop}$ | - | 80 | - | dBc |
| SSTOP output (open collector) | | | | | | |
| V_{24L} | Output voltage low | $I_{24} = -200 \mu\text{A}$ | - | 0.2 | 0.5 | V |
| V_{24H} | Output voltage high | - | - | - | 5 | V |
| $-I_{24}$ | Output leakage current | $V_{24} = 5 \text{ V}$ | -0.1 | - | 0.1 | μA |
| I_{24} | Output current, sink | $V_{24} = 0.5 \text{ V to } 5 \text{ V}$ | - | - | 1 | mA |

4 Functional description

4.1 FM section

4.1.1 Mixer1, AGC and 1.IF

FM quadrature I/Q-mixer converts FM RF to IF1 of 10.7 MHz. The mixer provides inherent image rejection and wide dynamic range with low noise and large input signal performance. The mixer1 tank can be adjusted by software (IF1T). For accurate image rejection the gain- and phase-error generated as well in mixer as VCO stage can be compensated by software (G,PH)

It is capable of tuning the US FM, US weather, Europe FM, Japan FM and East Europe FM bands

- US FM = 87.9 to 107.9 MHz
- US weather = 162.4 to 162.55 MHz
- Europe FM = 87.5 to 108 MHz
- Japan FM = 76 to 91 MHz
- East Europe FM = 65.8 to 74 MHz

The AGC operates on different sensitivities and bandwidths in order to improve the input sensitivity and dynamic range. AGC thresholds are programmable by software (RFAGC,IFAGC,KAGC). The output signal is a controlled current for double pin diode attenuator.

Two 10.7 MHz programmable amplifiers (IFG1, IFG2) correct the IF ceramic insertion loss and the costumer level plan application.

4.1.2 Mixer2, limiter and demodulator

In this 2. mixer stage the first 10.7 MHz IF is converted into the second 450 kHz IF. A multi-stage limiter generates signals for the complete integrated demodulator without external tank. MIX output DC offset versus noise DC level is correctable by software (DEM).

4.1.3 Quality detection and ISS

Fieldstrength

Parallel to mixer2 input a 10.7 MHz limiter generates a signal for digital IF counter and a fieldstrength output signal. This internal unweighted fieldstrength is used for keying AGC, adjacent channel and multipath detection and is available at PIN14 (FSU) after +6 dB buffer stage. The behavior of this output signal can be corrected for DC offset (SL) and slope (SMSL). The internal generated unweighted fieldstrength is filtered at PIN35 and used for softmute function and generation of ISS filter switching signal for weak input level (sm).

Adjacent channel detector

The input of the adjacent channel detector is AC coupled from internal unweighted fieldstrength. A programmable highpass or bandpass (ACF) and amplifier (ACG) as well as rectifier determines the influences. This voltage is compared with adjustable comparator1 thresholds (ACWTH, ACNTH). The output signal of this comparator generates a DC level at PIN15 by programmable time constant. Time control (TISS) for a present adjacent channel

is made by charge and discharge current after comparator1 in an external capacitance. The charge current is fixed and the discharge current is controlled by I²C Bus. This level produces digital signals (ac, ac+) in an additional comparator4. The adjacent channel information is available as analog output signal after rectifier and +8 dB output buffer.

Multipath detector

The input of the multipath detector is AC coupled from internal unweighted fieldstrength. A programmable bandpass (MPF) and amplifier (MPG) as well as rectifier determines the influences. This voltage is compared with an adjustable comparator2 thresholds (MPTH). The output signal of this comparator2 is used for the "Milano" effect. In this case the adjacent channel detection is switched off. The "Milano" effect is selectable by I²C bus (MPOFF). The multipath information is available as analog output signal after rectifier and +8 dB output buffer.

450 kHz IF narrow bandpass filter (ISS filter)

The device gets an additional second IF narrow bandpass filter for suppression of noise and adjacent channel signal influences. This narrow filter has three switchable bandwidths, narrow range of 80 kHz, mid range of 120 kHz and 30 kHz for weather band information. Without ISS filter the IF bandwidth (wide range) is defined only by ceramic filter chain. The filter is switched in after mixer2 before 450 kHz limiter stage. The centre frequency is matching to the demodulator center frequency.

Deviation detector

In order to avoid distortion in audio output signal the narrow ISS filter is switched OFF for present overdeviation. Hence the demodulator output signal is detected. A lowpass filtering and peak rectifier generates a signal that is defined by software controlled current (TDEV) in an external capacitance. This value is compared with a programmable comparator3 thresholds (DWTH, DTH) and generates two digital signals (dev, dev+). For weak signal condition deviation threshold is proportional to FSU.

ISS switch logic

All digital signals coming from adjacent channel detector, deviation detector and softmute are acting via switching matrix on ISS filter switch. The IF bandpass switch mode is controlled by software (ISSON, ISS30, ISS80, CTLOFF). The switch ON of the IF bandpass is also available by external manipulation of the voltage at PIN15. Two application modes are available (APPM). The conditions are described in [Table 5](#).

4.1.4 Soft mute control

The external fieldstrength signal at PIN35 is the reference for mute control. The startpoint and mute depth are programmable (SMTH, SMD) in a wide range. The time constant is defined by external capacitance. Additional adjacent channel mute function is supported. A highpass filter with -3 dB threshold frequency of 100 kHz, amplifier and peak rectifier generates an adjacent noise signal from MPX output with the same time constant for softmute. This value is compared with comparator 5 thresholds (ACM). For present strong adjacent channel the MPX signal is additional attenuated (ACMD).

4.2 AM section

The up/down conversion is combined with gain control circuit sensing three input signals, narrow band information at PIN39, up conversion signal (IFAGC) at PIN58 and wide band information (RFAGC) at PIN3. This gain control gives two output signals. The first one is a current for pin diode attenuator and the second one is a voltage for preamplifier. Time constant of RF- and IF-AGC is defined by internal 100k resistor and external capacitor at PIN 62. The intervention points for AGC (DAGC, WAGC) are programmable by software. In order to avoid a misbehavior of AGC intervention point it is important to know that the DAGC threshold has to be lower than WAGC threshold!

The oscillator frequency for upconversion-mixer1 is generated by dividing the FM VCO frequency after VCO (VCO) and AM predivider (AMD). It is possible to put in a separate narrow bandpass filter before mixer2 at PIN58. In this case input P58 needs the DC-operation point from PIN53 via resistance matched with filter impedance. Additionally it is possible to use second 10,7 MHz ceramic filter by internal switch between mixer2 input and PIN 52. This feature increases 900 kHz attenuation.

In mixer2 the IF1 is down converted into the IF2 450 kHz. After filtering by ceramic filter a 450 kHz amplifier is included with an additional gain control of IF2 below DAGC threshold. Time constant is defined by capacitance at PIN40

Mixer1 and mixer2 tanks are software controlled adjustable (IF1T, IF2T).

The demodulator is a peak detector to generate the audio output signal.

A separate output is available for AMIF stereo (AMST).

4.3 PLL and IF counter section

4.3.1 PLL frequency synthesizer block

This part contains a frequency synthesizer and a loop filter for the radio tuning system. Only one VCO is required to build a complete PLL system for FM world tuning and AM up conversion. For auto search stop operation an IF counter system is available.

The counter works in a two stages configuration. The first stage is a swallow counter with a two modulus (32/33) pre counter. The second stage is an 11-bit programmable counter.

The circuit receives the scaling factors for the programmable counters and the values of the reference frequencies via an I²C bus interface. The reference frequency is generated by an adjustable internal (Crystal) oscillator followed by the reference divider. The main reference and step-frequencies are free selectable (RC, PC).

Output signals of the phase detector are switching the programmable current sources. The loop filter integrates their currents to a DC voltage.

The values of the current sources are programmable by 6 bits also received via the I²C bus (A, B, CURRH, LPF).

To minimize the noise induced by the digital part of the system, a special guard configuration is implemented.

The loop gain can be set for different conditions by setting the current values of the charge pump generator.

4.3.2 Frequency generation for phase comparison

The RF signals applies a two modulus counter (32/33) pre-scaler, which is controlled by a 5-bit A-divider. The 5-bit register (PC0 to PC4) controls this divider. In parallel the output of the prescaler connects to an 11-bit B-divider. The 11-bit PC register (PC5 to PC15) controls this divider

Dividing range:

$$f_{VCO} = [33 \times A + (B + 1 - A) \times 32] \times f_{REF}$$

$$f_{VCO} = (32 \times B + A + 32) \times f_{REF}$$

Important: For correct operation: $A \leq 32$; $B \geq A$

4.3.3 Three state phase comparator

The phase comparator generates a phase error signal according to phase difference between f_{SYN} and f_{REF} . This phase error signal drives the charge pump current generator.

4.3.4 Charge pump current generator

This system generates signed pulses of current. The phase error signal decides the duration and polarity of those pulses. The current absolute values are programmable by A register for high current and B register for low current.

4.3.5 Inlock detector

Switching the charge pump in low current mode can be done either via software or automatically by the inlock detector, by setting bit LDENA to "1".

After reaching a phase difference about lower than 40 ns the charge pump is forced in low current mode. A new PLL divider alternation by I²C bus will switch the charge pump in the high current mode.

4.3.6 Low noise CMOS Op-amp

An internal voltage divider at pin VREF2 connects the positive input of the low noise op-amp. The charge pump output connects the negative input. This internal amplifier in cooperation with external components can provide an active filter. The negative input is switchable to three input pins, to increase the flexibility in application. This feature allows two separate active filters for different applications.

While the high current mode is activated LPHC output is switched on.

4.3.7 IF counter block

The aim of IF counter is to measure the intermediate frequency of the tuner for AM and FM mode. The input signal for FM and AM up conversion is the same 10.7 MHz IF level after limiter. AM 450 kHz signal is coming from narrow filtered IF2 before demodulation. A switch controlled by IF counter mode (IFCM) is choosing the input signal for IF counter.

The grade of integration is adjustable by eight different measuring cycle times. The tolerance of the accepted count value is adjustable, to reach an optimum compromise for search speed and precision of the evaluation.

4.3.8 The IF-counter mode

The IF counter works in 3 modes controlled by IFCM register.

4.3.9 Sampling timer

A sampling timer generates the gate signal for the main counter. The basically sampling time are in FM mode 6.25 kHz ($t_{TIM}=160 \mu s$) and in AM mode 1 kHz ($t_{TIM}=1ms$). This is followed by an asynchronous divider to generate several sampling times.

4.3.10 Intermediate frequency main counter

This counter is a 11 - 21-bit synchronous auto reload down counter. Five bits (CF) are programmable to have the possibility for an adjust to the centre frequency of the IF-filter. The counter length is automatic adjusted to the chosen sampling time and the counter mode (FM, AM-UPC, AM).

At the start the counter will be loaded with a defined value which is an equivalent to the divider value ($t_{Sample} \times f_{IF}$).

If a correct frequency is applied to the IF counter frequency input at the end of the sampling time the main counter is changing its state from 0h to 1FFFFFFh.

This is detected by a control logic and an external search stop output is changing from LOW to HIGH. The frequency range inside which a successful count result is adjustable by the EW bits.

$$t_{CNT} = (CF + 1696+1) / f_{IF} \quad \text{FM mode}$$

$$t_{CNT} = (CF + 10688+1) / f_{IF} \quad \text{AM up conversion mode}$$

$$t_{CNT} = (CF + 488+1) / f_{IF} \quad \text{AM mode}$$

Counter result succeeded:

$$t_{TIM} \geq t_{CNT} - t_{ERR}$$

$$t_{TIM} \leq t_{CNT} + t_{ERR}$$

Counter result failed:

$$t_{TIM} > t_{CNT} + t_{ERR}$$

$$t_{TIM} < t_{CNT} - t_{ERR}$$

t_{TIM} = IF timer cycle time (sampling time)

t_{CNT} = IF counter cycle time

t_{ERR} = discrimination window (controlled by the EW registers)

The IF counter is only started by inlock information from the PLL part. It is enabled by software (IFENA).

4.3.11 Adjustment of the measurement sequence time

The precision of the measurements is adjustable by controlling the discrimination window. This is adjustable by programming the control registers EW.

The measurement time per cycle is adjustable by setting the registers IFS.

4.3.12 Adjust of the frequency value

The center frequency of the discrimination window is adjustable by the control registers CF.

4.4 I²C bus interface

The TDA7512 supports the I²C bus protocol. This protocol defines any device that sends data onto the bus as a transmitter, and the receiving device as the receiver. The device that controls the transfer is a master and device being controlled is the slave. The master will always initiate data transfer and provide the clock to transmit or receive operations.

4.4.1 Data transition

Data transition on the SDA line must only occur when the clock SCL is LOW. SDA transitions while SCL is HIGH will be interpreted as START or STOP condition.

4.4.2 Start condition

A start condition is defined by a HIGH to LOW transition of the SDA line while SCL is at a stable HIGH level. This "START" condition must precede any command and initiate a data transfer onto the bus. The device continuously monitors the SDA and SCL lines for a valid START and will not response to any command if this condition has not been met.

4.4.3 Stop condition

A STOP condition is defined by a LOW to HIGH transition of the SDA while the SCL line is at a stable HIGH level. This condition terminates the communication between the devices and forces the bus-interface of the device into the initial condition.

4.4.4 Acknowledge

Indicates a successful data transfer. The transmitter will release the bus after sending 8 bits of data. During the 9th clock cycle the receiver will pull the SDA line to LOW level to indicate it receive the eight bits of data.

4.4.5 Data transfer

During data transfer the device samples the SDA line on the leading edge of the SCL clock. Therefore, for proper device operation the SDA line must be stable during the SCL LOW to HIGH transition.

4.4.6 Device addressing

To start the communication between two devices, the bus master must initiate a start instruction sequence, followed by an eight bit word corresponding to the address of the device it is addressing.

The most significant 6 bits of the slave address are the device type identifier.

The TDA7512 device type is fixed as "110001".

The next significant bit is used to address a particular device of the previous defined type connected to the bus.

The state of the hardwired PIN41 defines the state of this address bit. So up to two devices could be connected on the same bus. When PIN41 is connected to VCC2 the address bit "1" is selected. In this case the AM part doesn't work. Otherwise the address bit "0" is selected (FM and AM is working). Therefore a double FM tuner concept is possible.

The last bit of the start instruction defines the type of operation to be performed:

- When set to "1", a read operation is selected
- When set to "0", a write operation is selected

The TDA7512 connected to the bus will compare their own hardwired address with the slave address being transmitted, after detecting a START condition. After this comparison, the TDA7512 will generate an "acknowledge" on the SDA line and will do either a read or a write operation according to the state of R/W bit.

4.4.7 Write operation

Following a START condition the master sends a slave address word with the R/W bit set to "0". The device will generate an "acknowledge" after this first transmission and will wait for a second word (the word address field). This 8-bit address field provides an access to any of the 32 internal addresses. Upon receipt of the word address the TDA7512 slave device will respond with an "acknowledge". At this time, all the following words transmitted to the TDA7512 will be considered as Data. The internal addresses will be automatically incremented. After each word receipt the TDA7512 will answer with an "acknowledge".

4.4.8 Read operation

If the master sends a slave address word with the R/W bit set to "1", the TDA7512 will transmit one 8-bit data word. This data word includes the following informations:

bit0 (ISS filter, 1 = ON, 0 = OFF)

bit1 (ISS filter bandwidth, 1 = 80 kHz, 0 = 120 kHz)

bit2 (MPOUT, 1 = multipath present, 0 = no multipath)

bit3 (1 = PLL is locked in, 0 = PLL is locked out).

bit4 (fieldstrength indicator, 1 = lower as softmute threshold, 0 = higher as softmute threshold)

bit5 (adjacent channel indicator, 1 = adjacent channel present, 0 = no adjacent channel)

bit6 (deviation indicator, 1 = strong overdeviation present, 0 = no strong overdeviation)


bit7 (deviation indicator, 1 = overdeviation present, 0 = no overdeviation)

5 Software specification

The interface protocol comprises:

- start condition (S)
- chip address byte
- subaddress byte
- sequence of data (N bytes + Acknowledge)
- stop condition (P)

Figure 3. Software specification

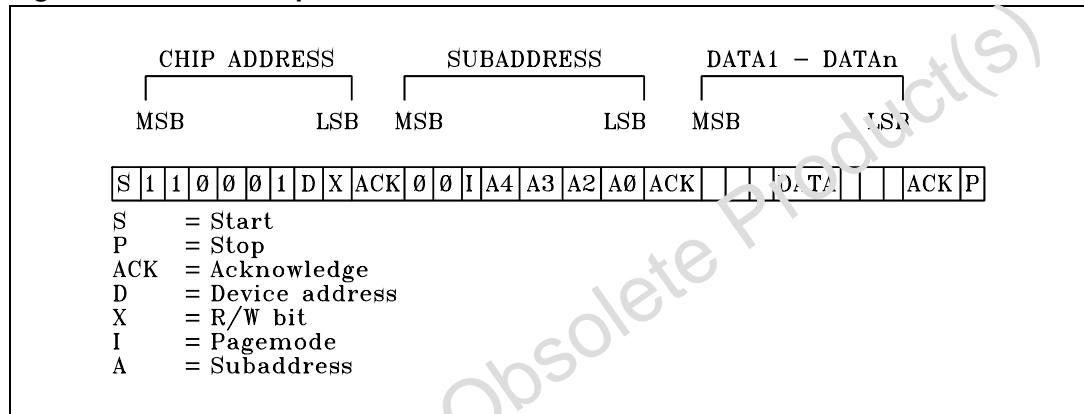

5.1 Address organization

Table 8. Address organization

| Function | Addr | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|------|--------|--------|--------|--------|--------|-------|-------|--------|
| CHARGE PUMP | 0 | LDENA | CURRH | B1 | B0 | A3 | A2 | A1 | A0 |
| PLL COUNTER | 1 | PC7 | PC6 | PC5 | PC4 | PC3 | PC2 | PC1 | PC0 |
| | 2 | PC15 | PC14 | PC13 | PC12 | PC11 | PC10 | PC9 | PC8 |
| TV1 | 3 | TV107 | TV106 | TV105 | TV104 | TV103 | TV102 | TV101 | TV100 |
| TV2 | 4 | TV207 | TV206 | TV205 | TV204 | TV203 | TV202 | TV201 | TV200 |
| IFC CTRL 1 | 5 | LM | CASF | IFCM1 | IFCM0 | IFENA | IFS2 | IFS1 | IFS0 |
| IFC CTRL 2 | 6 | EW2 | EW1 | EW0 | CF4 | CF3 | CF2 | CF1 | CF0 |
| AM CTL | 7 | - | - | - | - | AMD1 | AMD0 | AMST | AMSEEK |
| QUALITYISS | 8 | TISS2 | TISS1 | TISS0 | TVWB | ISS30 | ISS80 | ISSON | CTLOFF |
| QUALITY AC | 9 | ACNTH1 | ACNTH0 | ACWTH2 | ACWTH1 | ACWTH0 | ACG | ACF | - |
| QUALITY MP | 10 | MPAC | APPM2 | APPM1 | MPTH1 | MPTH0 | MPG | MPF | MPOFF |
| QUALITYDEV | 11 | BWCTL | DTH1 | DTH0 | DWTH1 | DWTH0 | TDEV2 | TDEV1 | TDEV0 |
| MUTE1 | 12 | MENA | SMD3 | SMD2 | SMD1 | SMD0 | SMTH2 | SMTH1 | SMTH0 |

Table 8. Address organization (continued)

| Function | Addr | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------------|------|-------|--------|-------|-------|--------|--------|--------|--------|
| MUTE2 | 13 | F100K | ACM3 | ACM2 | ACM1 | ACM0 | ACMD1 | ACMD0 | SMCTH |
| VCO/PLLREF | 14 | LPF | AMON | RC2 | RC1 | RC0 | VCOD2 | VCOD1 | VCOD0 |
| FMAGC | 15 | - | KAGC2 | KAGC1 | KAGC0 | IFAGC1 | IFAGC0 | RFAGC1 | RFAGC0 |
| AMAGC | 16 | DAGC3 | DAGC2 | DAGC1 | DAGC0 | WAGC3 | WAGC2 | WAGC1 | WAGC0 |
| DEM ADJ | 17 | DNB1 | DNB0 | DEM5 | DEM4 | DEM3 | DEM2 | DEM1 | DEM0 |
| LEVEL | 18 | ODSW | AMIN | SMSL | SL4 | SL3 | SL2 | SL1 | SL0 |
| IF1/XTAL | 19 | XTAL4 | XTAL3 | XTAL2 | XTAL1 | XTAL0 | IFG11 | IFG10 | IFG2 |
| TANK ADJ | 20 | IF1T3 | IF1T2 | IF1T1 | IF1T0 | IF2T3 | IF2T2 | IF2T1 | IF2T0 |
| I/Q ADJ | 21 | ODCUR | - | G1 | G0 | PH3 | PH2 | PH1 | PH0 |
| TESTCTRL1 | 22 | - | ISSIN | TOUT | TIN | CLKSEP | TEST3 | TEST2 | TEST1 |
| TESTCTRL2 | 23 | OUT7 | OUT6 | OUT5 | OUT4 | OUT3 | OUT2 | OUT1 | OUT0 |
| TESTCTRL3 | 24 | - | TINACM | TINMP | TINAC | OUT11 | OUT10 | OUT9 | OUT8 |
| TESTCTRL4 | 25 | - | - | - | OUT16 | OUT15 | OUT14 | OUT13 | OUT12 |

5.2 Control register function

Table 9. Control register function

| Register name | Function |
|---------------|---|
| A | Charge pump high current |
| ACF | Adjacent channel filter select |
| ACG | Adjacent channel filter gain |
| ACM | Threshold for startpoint adjacent channel mute |
| ACMD | Adjacent channel mute depth |
| ACNTH | Adjacent channel narrow band threshold |
| ACWTH | Adjacent channel wide band threshold |
| AMD | AM prescaler |
| AMIN | AM IF1 input select |
| AMON | AM-FM switch |
| AMSEEK | Set short time constant of AGC in AM seek mode |
| AMST | AM stereo select |
| APPM | Application mode quality detection |
| B | Charge pump low current |
| BWCTL | ISS filter fixed bandwidth (ISS80) in automatic control |
| CASF | Check alternative station frequency |
| CF | Center frequency IF counter |

Table 9. Control register function (continued)

| Register name | Function |
|---------------|---|
| CLKSEP | Clock separation (only for testing) |
| CTLOFF | Switch off automatic control of ISS filter |
| CURRH | Set current high charge pump |
| DAGC | AM narrow band AGC threshold |
| DEM | Demodulator offset |
| DNB | Demodulator noise spike blanking |
| DTH | Deviation detector threshold for ISS filter "OFF" |
| DWTH | Deviation detector threshold for ISS filter narrow/wide |
| EW | Frequency error window IF counter |
| F100K | Corner frequency of AC-mute high pass filter |
| G | I/Q mixer gain adjust |
| IF1T | FM/AM mixer1 tank adjust |
| IF2T | AM mixer2 tank adjust |
| IFAGC | FM IF AGC |
| IFCM | IF counter mode |
| IFENA | IF counter enable |
| IFG | IF1 amplifier gain (10.7 MHz) |
| IFS | IF counter sampling time |
| ISSIN | Test input for ISS filter |
| ISSON | ISS filter "ON" |
| ISS30 | ISS filter 30 kHz weather band |
| ISS60 | ISS filter narrow/mid switch |
| KAGC | FM keying AGC |
| LDENA | Lock detector enable |
| LM | Local mode FM seek stop |
| LPF | Loop filter input select |
| MENA | Softmute enable |
| MPAC | Adjacent channel control by multipath |
| MPF | Multipath filter frequency |
| MPG | Multipath filter gain |
| MPOFF | Multipath control "OFF" |
| MPTH | Multipath threshold |
| ODCUR | Current for overdeviation-correction |
| ODSW | Overdeviation-correction enable |
| OUT | Test output (only for testing) |

Table 9. Control register function (continued)

| Register name | Function |
|---------------|--|
| PC | Counter for PLL (VCO frequency) |
| PH | I/Q mixer phase adjust |
| RC | Reference counter PLL |
| RFAGC | FM RF AGC |
| SL | S meter slider |
| SMCTH | Softmute capacitor threshold for ISS "ON" |
| SMD | Softmute depth threshold |
| SMSL | S meter slope |
| SMTH | Softmute startpoint threshold |
| TDEV | Time constant for deviation detector |
| TEST | Testing PLL/IFC (only for testing) |
| TIN | Switch FSU PIN to TEST input (only for testing) |
| TINAC | Test input adjacent channel (only for testing) |
| TINACM | Test input adjacent channel mute (only for testing) |
| TINMP | Test input multipath (only for testing) |
| TISS | Time constant for ISS filter "ON"/"OFF" |
| TOUT | Switch FSU PIN to test output (only for testing) |
| TVO | Tuning voltage offset for prestage |
| TVWB | Tuning voltage offset for prestage (weather band mode) |
| VCOD | VCO divider |
| WAGC | AM wide band AGC |
| XTAL | Crystal frequency adjust |

Table 10. Subaddress

| MSB | | | | | | | | LSB | Function |
|-----|---|---|----|----|----|----|----|---------------------|----------|
| I | 0 | I | A4 | A3 | A2 | A1 | A0 | | |
| - | - | - | 0 | 0 | 0 | 0 | 0 | Charge pump control | |
| - | - | - | 0 | 0 | 0 | 0 | 1 | PLL lock detector | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | 1 | 0 | 1 | 0 | 1 | I/Q ADJ | |
| - | - | 0 | - | - | - | - | - | Page mode "OFF" | |
| - | - | 1 | - | - | - | - | - | Page mode enable | |

5.3 Data byte specification

Table 11. Addr 0 charge pump control

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|-----------------------|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| - | - | - | - | 0 | 0 | 0 | 0 | High current = 0 mA | |
| - | - | - | - | 0 | 0 | 0 | 1 | High current = 0.5 mA | |
| - | - | - | - | 0 | 0 | 1 | 0 | High current = 1 mA | |
| - | - | - | - | 0 | 0 | 1 | 1 | High current = 1.5 mA | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | 1 | 1 | 1 | 1 | High current = 7.5 mA | |
| - | - | 0 | 0 | - | - | - | - | Low current = 0 µA | |
| - | - | 0 | 1 | - | - | - | - | Low current = 50 µA | |
| - | - | 1 | 0 | - | - | - | - | Low current = 100 µA | |
| - | - | 1 | 1 | - | - | - | - | Low current = 150 µA | |
| - | 0 | - | - | - | - | - | - | Select low current | |
| - | 1 | - | - | - | - | - | - | Select high current | |
| 0 | - | - | - | - | - | - | - | Lock detector disable | |
| 1 | - | - | - | - | - | - | - | Lock detector enable | |

Table 12. Addr 1 PLL counter 1 (LSB)

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|-----------|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | LSB = 0 | |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | LSB = 1 | |
| 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | LSB = 2 | |
| - | - | - | - | - | - | - | - | - | |
| - | 1 | 1 | 1 | 1 | 1 | 0 | 0 | LSB = 252 | |
| 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | LSB = 253 | |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | LSB = 254 | |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | LSB = 255 | |

Table 13. Addr 2 PLL counter 2 (MSB)

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|-------------|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | MSB = 0 | |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | MSB = 256 | |
| 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | MSB = 512 | |
| - | - | - | - | - | - | - | - | - | |
| 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | MSB = 64768 | |
| 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | MSB = 65024 | |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | MSB = 65280 | |
| 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | MSB = 65536 | |

Note: Swallow mode: $f_{VCO}/f_{SYN} = LSB + MSB + 32$

Table 14. Addr 3,4 TV1,2 (offset referred to tuning voltage PIN28)

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|---------------------------|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| - | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Tuning Voltage Offset = 0 | |
| - | 0 | 0 | 0 | 0 | 0 | 0 | 1 | TVO = 25 mV | |
| - | 0 | 0 | 0 | 0 | 0 | 1 | 0 | TVO = 50 mV | |
| - | - | - | - | - | - | - | - | - | |
| - | 1 | 1 | 1 | 1 | 1 | 1 | 1 | TVO = 3175 mV | |
| 0 | - | - | - | - | - | - | - | -TVO | |
| 1 | - | - | - | - | - | - | - | +TVO | |

Table 15. Addr 5 IF counter control 1

| MSB | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|-----|---|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | |
| - | - | - | - | - | 0 | 0 | 0 | t _{Sample} = 20.48 ms (FM)128 ms (AM) |
| - | - | - | - | - | 0 | 0 | 1 | t _{Sample} = 10.24 ms (FM)64 ms (AM) |
| - | - | - | - | - | 0 | 1 | 0 | t _{Sample} = 5.12 ms (FM)32 ms (AM) |
| - | - | - | - | - | 0 | 1 | 1 | t _{Sample} = 2.56 ms (FM)16 ms (AM) |
| - | - | - | - | - | 1 | 0 | 0 | t _{Sample} = 1.28 ms (FM)8 ms (AM) |
| - | - | - | - | - | 1 | 0 | 1 | t _{Sample} = 640 μs (FM)4 ms (AM) |
| - | - | - | - | - | 1 | 1 | 0 | t _{Sample} = 320 μs (FM)2 ms (AM) |
| - | - | - | - | - | 1 | 1 | 1 | t _{Sample} = 160 μs (FM)1 ms (AM) |
| - | - | - | - | 0 | - | - | - | IF counter disable / stand by |
| - | - | - | - | 1 | - | - | - | IF counter enable |
| - | - | 0 | 0 | - | - | - | - | Not valid |
| - | - | 0 | 1 | - | - | - | - | IF counter FM mode |
| - | - | 1 | 0 | - | - | - | - | IF counter AM mode (450 kHz) |
| - | - | 1 | 1 | - | - | - | - | IF counter AM mode (10.7 MHz) |
| - | 0 | - | - | - | - | - | - | Disable mute & AGC on hold in FM mode |
| - | 1 | - | - | - | - | - | - | Enable mute & AGC on hold in FM mode |
| 0 | - | - | - | - | - | - | - | Disable local mode |
| 1 | - | - | - | - | - | - | - | Enable local mode (PIN diode current = 0.5 mA) "ON" |

Table 16. Addr 6 IF counter control 2

| MSB | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|-----|--|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | |
| - | - | - | 0 | 0 | 0 | 0 | 0 | f _{Center} = 10.60625 MHz (FM) / 10.689 MHz; 449 kHz (AM) |
| - | - | - | 0 | 0 | 0 | 0 | 1 | f _{Center} = 10.61250 MHz (FM) / 10.690 MHz; 450 kHz (AM) |
| - | - | - | - | - | - | - | - | - |
| - | - | - | 0 | 1 | 0 | 1 | 1 | f _{Center} = 10.67500 MHz (FM) / 10.700 MHz; 460 kHz (AM) |
| - | - | - | 0 | 1 | 1 | 0 | 0 | f _{Center} = 10.68125 MHz (FM) / 10.701 MHz; 461 kHz (AM) |
| - | - | - | 0 | 1 | 1 | 0 | 1 | f _{Center} = 10.68750 MHz (FM) / 10.702 MHz; 462 kHz (AM) |
| - | - | - | 0 | 1 | 1 | 1 | 0 | f _{Center} = 10.69375 MHz (FM) / 10.703 MHz; 463 kHz (AM) |
| - | - | - | 0 | 1 | 1 | 1 | 1 | f _{Center} = 10.70000 MHz (FM) / 10.704 MHz; 464 kHz(AM) |
| - | - | - | - | - | - | - | - | - |
| - | - | - | 1 | 1 | 1 | 1 | 1 | f _{Center} = 10.80000 MHz (FM) / 10.720 MHz;480 kHz (AM) |
| 0 | 0 | 0 | - | - | - | - | - | Not valid |
| 0 | 0 | 1 | - | - | - | - | - | Not valid |

Table 16. Addr 6 IF counter control 2 (continued)

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|---------------------------------------|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| 0 | 1 | 0 | - | - | - | - | - | Not valid | |
| 0 | 1 | 1 | - | - | - | - | - | $\Delta f = 6.25$ kHz (FM) 1 kHz (AM) | |
| 1 | 0 | 0 | - | - | - | - | - | $\Delta f = 12.5$ kHz (FM) 2 kHz (AM) | |
| 1 | 0 | 1 | - | - | - | - | - | $\Delta f = 25$ kHz (FM) 4 kHz (AM) | |
| 1 | 1 | 0 | - | - | - | - | - | $\Delta f = 50$ kHz (FM) 8 kHz (AM) | |
| 1 | 1 | 1 | - | - | - | - | - | $\Delta f = 100$ kHz (FM) 16 kHz (AM) | |

Table 17. Addr 7 AM control

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|---|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| - | - | - | - | - | - | - | 0 | Normal AGC time constant | |
| - | - | - | - | - | - | - | 1 | Short time constant for AM seek stop | |
| - | - | - | - | - | - | 0 | - | Multipath information available FM at PIN34 | |
| - | - | - | - | - | - | 1 | - | AM stereo output available at PIN34 | |
| - | - | - | - | 0 | 0 | - | - | Prescaler ratio 10 | |
| - | - | - | - | 0 | 1 | - | - | Prescaler ratio 8 | |
| - | - | - | - | 1 | 0 | - | - | Prescaler ratio 6 | |
| - | - | - | - | 1 | 1 | - | - | Prescaler ratio 4 | |

Table 18. Addr 8 quality (ISS) filter

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|---|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| - | - | - | - | - | - | - | 0 | ISS filter control "ON" | |
| - | - | - | - | - | - | - | 1 | ISS filter control "OFF" | |
| - | - | - | - | - | - | 0 | - | Switch ISS filter "OFF" | |
| - | - | - | - | - | - | 1 | - | Switch ISS filter "ON" | |
| - | - | - | - | - | 0 | - | - | Switch "OFF" ISS filter 120 kHz | |
| - | - | - | - | - | 1 | - | - | Switch "ON" ISS filter 80 kHz | |
| - | - | - | - | 0 | - | - | - | Switch "OFF" ISS filter 30 kHz for weatherband | |
| - | - | - | - | 1 | - | - | - | Switch "ON" ISS filter 30 kHz for weatherband | |
| - | - | - | 0 | - | - | - | - | Disable TV offset for weather band | |
| - | - | - | 1 | - | - | - | - | Enable TV offset for weather band (+4V) | |
| 0 | 0 | 0 | - | - | - | - | - | discharge current 1 μ A, charge current mid 74 μ A narrow 124 μ A | |
| 0 | 0 | 1 | - | - | - | - | - | discharge current 3 μ A, charge current mid 72 μ A narrow 122 μ A | |

Table 18. Addr 8 quality ISS filter (continued)

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|--|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| 0 | 1 | 0 | - | - | - | - | - | discharge current 5 μ A, charge current mid 70 μ A narrow 120 μ A | |
| 0 | 1 | 1 | - | - | - | - | - | discharge current 7 μ A, charge current mid 68 μ A narrow 118 μ A | |
| - | - | - | - | - | - | - | - | - | |
| 1 | 1 | 1 | - | - | - | - | - | discharge current 15 μ A, charge current mid 60 μ A narrow 110 μ A | |

Table 19. Addr 9 quality detection adjacent channel

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|-----|--------------------------------|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| - | - | - | - | - | - | - | 0/1 | Not valid | |
| - | - | - | - | - | - | 0 | - | AC highpass frequency 100 kHz | |
| - | - | - | - | - | - | 1 | - | AC bandpass frequency 100 kHz | |
| - | - | - | - | - | 0 | - | - | AC gain 32 dB | |
| - | - | - | - | - | 1 | - | - | AC gain 35 dB | |
| - | - | 0 | 0 | 0 | - | - | - | AC wide band threshold 0.25 V | |
| - | - | 0 | 0 | 1 | - | - | - | AC wide band threshold 0.35 V | |
| - | - | 0 | 1 | 0 | - | - | - | AC wide band threshold 0.45 V | |
| - | - | - | - | - | - | - | - | - | |
| - | - | 1 | 1 | 1 | - | - | - | AC wide band threshold 0.95 V | |
| 0 | 0 | - | - | - | - | - | - | AC narrow band threshold 0.0 V | |
| 0 | 1 | - | - | - | - | - | - | AC narrow band threshold 0.1 V | |
| 1 | 0 | - | - | - | - | - | - | AC narrow band threshold 0.2 V | |
| 1 | 1 | - | - | - | - | - | - | AC narrow band threshold 0.3 V | |

Table 20. Addr 10 quality detection multipath

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|------------------------------|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| - | - | - | - | - | - | - | 0 | Multipath control "ON" | |
| - | - | - | - | - | - | - | 1 | Multipath control "OFF" | |
| - | - | - | - | - | - | 0 | - | MP bandpass frequency 19 kHz | |
| - | - | - | - | - | - | 1 | - | MP bandpass frequency 31 kHz | |
| - | - | - | - | - | 0 | - | - | MP gain 12 dB | |
| - | - | - | - | - | 1 | - | - | MP gain 23 dB | |
| - | - | - | 0 | 0 | - | - | - | MP threshold 0.50 V | |

Table 20. Addr 10 quality detection multipath (continued)

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|---------------------------------|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| - | - | - | 0 | 1 | - | - | - | MP threshold 0.75 V | |
| - | - | - | 1 | 0 | - | - | - | MP threshold 1.00 V | |
| - | - | - | 1 | 1 | - | - | - | MP threshold 1.25 V | |
| - | 0 | 0 | - | - | - | - | - | Application mode 1 | |
| - | 0 | 1 | - | - | - | - | - | Application mode 2 | |
| 0 | - | - | - | - | - | - | - | Multipath eliminates ac | |
| 1 | - | - | - | - | - | - | - | Multipath eliminates ac and ac+ | |

Table 21. Addr 11 quality deviation detection

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|--|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| - | - | - | - | - | 0 | 0 | 0 | charge current 34 μ A, discharge current 6 μ A | |
| - | - | - | - | - | 0 | 0 | 1 | charge current 32 μ A, discharge current 8 μ A | |
| - | - | - | - | - | 0 | 1 | 0 | charge current 50 μ A, discharge current 10 μ A | |
| - | - | - | - | - | 0 | 1 | 1 | charge current 28 μ A, discharge current 12 μ A | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | 1 | 1 | - | charge current 20 μ A, discharge current 20 μ A | |
| - | - | - | 0 | 0 | - | - | - | DEV threshold for ISS narrow/wide 30 kHz | |
| - | - | - | 0 | 1 | - | - | - | DEV threshold for ISS narrow/wide 45 kHz | |
| - | - | - | 1 | 0 | - | - | - | DEV threshold for ISS narrow/wide 60 kHz | |
| - | - | - | 1 | 1 | - | - | - | DEV threshold for ISS narrow/wide 75 kHz | |
| - | 0 | 0 | - | - | - | - | - | DEV threshold for ISS filter "OFF" ratio 1.5 | |
| - | 0 | 1 | - | - | - | - | - | DEV threshold for ISS filter "OFF" ratio 1.4 | |
| - | 1 | 0 | - | - | - | - | - | DEV threshold for ISS filter "OFF" ratio 1.3 | |
| - | 1 | 1 | - | - | - | - | - | DEV threshold for ISS filter "OFF" ratio 1 | |
| 0 | - | - | - | - | - | - | - | Disable ISS filter to fixed bandwidth (ISS80) in automatic control | |
| 1 | - | - | - | - | - | - | - | Enable ISS filter to fixed bandwidth (ISS80) in automatic control | |

Table 22. Addr 12 softmute control 1

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|--|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| - | - | - | - | - | 0 | 0 | 0 | Startpoint mute 0 in application about 3 dB μ V antenna level | |
| - | - | - | - | - | 0 | 0 | 1 | Startpoint mute 1 in application about 4 dB μ V antenna level | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | - | 1 | 1 | 1 | Startpoint mute 7 in application about 10 dB μ V antenna level | |
| - | 0 | 0 | 0 | 0 | - | - | - | Mute depth 0 in application 18 dB | |
| - | 0 | 0 | 0 | 1 | - | - | - | Mute depth 1 in application 20 dB | |
| - | 0 | 0 | 1 | 0 | - | - | - | Mute depth 2 in application 22 dB | |
| - | 0 | 0 | 1 | 1 | - | - | - | Mute depth 3 in application 24 dB | |
| - | - | - | - | - | - | - | - | - (logarithmically behavior) | |
| - | 1 | 1 | 1 | 1 | - | - | - | Mute depth 15 in application 26 dB | |
| 0 | - | - | - | - | - | - | - | Mute disable | |
| 1 | - | - | - | - | - | - | - | Mute enable | |

Table 23. Addr 13 softmute control 2

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|--|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| - | - | - | - | - | - | - | 0 | Disable mute threshold for ISS filter "ON" | |
| - | - | - | - | - | - | - | 1 | Enable mute threshold for ISS filter "ON" | |
| - | - | - | - | - | 0 | 0 | - | AC mute depth 10 dB | |
| - | - | - | - | - | 0 | 1 | - | AC mute depth 8 dB | |
| - | - | - | - | - | 1 | 0 | - | AC mute depth 6 dB | |
| - | - | - | - | - | 1 | 1 | - | AC mute depth 4 dB | |
| - | 0 | 0 | 0 | 0 | - | - | - | AC mute threshold 60 mV | |
| - | 0 | 0 | 0 | 1 | - | - | - | AC mute threshold 80 mV | |
| - | 0 | 0 | 1 | 0 | - | - | - | AC mute threshold 100 mV | |
| - | - | - | - | - | - | - | - | - | |
| - | 0 | 1 | 1 | 1 | - | - | - | AC mute threshold 340 mV | |
| - | 1 | 1 | 1 | 1 | - | - | - | AC mute "OFF" | |
| 0 | - | - | - | - | - | - | - | AC mute filter 110 kHz | |
| 1 | - | - | - | - | - | - | - | AC mute filter 100 kHz | |

Table 24. Addr 14 VCODIV/PLLREF

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|--------------------------------|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| - | - | - | - | - | - | 0 | 0 | not valid (only for testing) | |
| - | - | - | - | - | - | 0 | 1 | VCO frequency divided by 2 | |
| - | - | - | - | - | - | 1 | 0 | VCO frequency divided by 3 | |
| - | - | - | - | - | - | 1 | 1 | original VCO frequency | |
| - | - | - | - | - | 0 | - | - | VCO "I" signal 0 degree | |
| - | - | - | - | - | 1 | - | - | VCO "I" signal 180 degree | |
| - | - | 1 | 0 | 0 | - | - | - | PLL reference frequency 50 kHz | |
| - | - | 1 | 0 | 1 | - | - | - | PLL reference frequency 25 kHz | |
| - | - | 1 | 1 | 0 | - | - | - | PLL reference frequency 10 kHz | |
| - | - | 1 | 1 | 1 | - | - | - | PLL reference frequency 9 kHz | |
| - | - | 0 | 0 | 0 | - | - | - | PLL reference frequency 2 kHz | |
| - | 0 | - | - | - | - | - | - | Select FM mode | |
| - | 1 | - | - | - | - | - | - | Select AM mode | |
| 0 | - | - | - | - | - | - | - | Select PLL low pass filter FM | |
| 1 | - | - | - | - | - | - | - | Select PLL low pass filter AM | |

Table 25. Addr 15 FM AGC

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|---|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| - | - | - | - | - | - | 0 | 0 | RFAGC threshold $V_{7-9TH} = 85$ (77 ANT) $\text{dB}_{\mu\text{V}}$ | |
| - | - | - | - | - | - | 0 | 1 | RFAGC threshold $V_{7-9TH} = 90$ (82 ANT) $\text{dB}_{\mu\text{V}}$ | |
| - | - | - | - | - | - | 1 | 0 | RFAGC threshold $V_{7-9TH} = 94$ (86 ANT) $\text{dB}_{\mu\text{V}}$ | |
| - | - | - | - | - | - | 1 | 1 | RFAGC threshold $V_{7-9TH} = 96$ (88 ANT) $\text{dB}_{\mu\text{V}}$ | |
| - | - | - | - | 0 | 0 | - | - | IFAGC threshold $V_{60TH} = 86$ (60 ANT) $\text{dB}_{\mu\text{V}}$ | |
| - | - | - | - | 0 | 1 | - | - | IFAGC threshold $V_{60TH} = 92$ (66 ANT) $\text{dB}_{\mu\text{V}}$ | |
| - | - | - | - | 1 | 0 | - | - | IFAGC threshold $V_{60TH} = 96$ (70 ANT) $\text{dB}_{\mu\text{V}}$ | |
| - | - | - | - | 1 | 1 | - | - | IFAGC threshold $V_{60TH} = 98$ (72 ANT) $\text{dB}_{\mu\text{V}}$ | |
| - | 0 | 0 | 0 | - | - | - | - | KAGC threshold 80 $\text{dB}_{\mu\text{V}}$ | |
| - | 0 | 0 | 1 | - | - | - | - | KAGC threshold 82 $\text{dB}_{\mu\text{V}}$ | |
| - | 0 | 1 | 0 | - | - | - | - | KAGC threshold 84 $\text{dB}_{\mu\text{V}}$ | |
| - | 0 | 1 | 1 | - | - | - | - | KAGC threshold 86 $\text{dB}_{\mu\text{V}}$ | |
| - | 1 | 0 | 0 | - | - | - | - | KAGC threshold 88 $\text{dB}_{\mu\text{V}}$ | |
| - | 1 | 0 | 1 | - | - | - | - | KAGC threshold 90 $\text{dB}_{\mu\text{V}}$ | |
| - | 1 | 1 | 0 | - | - | - | - | KAGC threshold 92 $\text{dB}_{\mu\text{V}}$ | |
| - | 1 | 1 | 1 | - | - | - | - | Keying AGC "OFF" | |
| 0 | - | - | - | - | - | - | - | has to be "0" | |

Table 26. Addr 16 AM AGC

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|---|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| - | - | - | - | 0 | 0 | 0 | 0 | WAGC V _{3TH} = 90(65 ANT) dB _μ V _{58TH} = 90(60 ANT) dB _μ | |
| - | - | - | - | 0 | 0 | 0 | 1 | WAGC V _{3TH} = 94(69 ANT) dB _μ V _{58TH} = 94(64 ANT) dB _μ | |
| - | - | - | - | 0 | 0 | 1 | 0 | WAGC V _{3TH} = 97(72 ANT) dB _μ V _{58TH} = 96.5(66.5 ANT) dB _μ | |
| - | - | - | - | 0 | 0 | 1 | 1 | WAGC V _{3TH} = 98.5(73.5 ANT) dB _μ V _{58TH} = 98.5(68.5 ANT) dB _μ | |
| - | - | - | - | 0 | 1 | 0 | 0 | WAGC V _{3TH} = 100(75 ANT) dB _μ V _{58TH} = 100(70 ANT) dB _μ | |
| - | - | - | - | 0 | 1 | 0 | 1 | WAGC V _{3TH} = 101.5(76.5 ANT) dB _μ V _{58TH} = 101(71 ANT) dB _μ | |
| - | - | - | - | 0 | 1 | 1 | 0 | WAGC V _{3TH} = 102.5(77.5 ANT) dB _μ V _{58TH} = 102.5(72.5 ANT) dB _μ | |
| - | - | - | - | 0 | 1 | 1 | 1 | WAGC V _{3TH} = 103.5(78.5 ANT) dB _μ V _{58TH} = 103.5(73.5 ANT) dB _μ | |
| - | - | - | - | 1 | 0 | 0 | 0 | WAGC V _{3TH} = 104.5(79.5 ANT) dB _μ V _{58TH} = 104(74 ANT) dB _μ | |
| - | - | - | - | 1 | 0 | 0 | 1 | WAGC V _{3TH} = 105(80 ANT) dB _μ V _{58TH} = 105(75 ANT) dB _μ | |
| - | - | - | - | 1 | 0 | 1 | 0 | WAGC V _{3TH} = 106(81 ANT) dB _μ V _{58TH} = 105.5(75.5 ANT) dB _μ | |
| - | - | - | - | 1 | 0 | 1 | 1 | WAGC V _{3TH} = 106.5(81.5 ANT) dB _μ V _{58TH} = 106.5(76.5 ANT) dB _μ | |
| - | - | - | - | 1 | 1 | 0 | 0 | WAGC V _{3TH} = 107(82 ANT) dB _μ V _{58TH} = 107(77 ANT) dB _μ | |
| - | - | - | - | 1 | 1 | 0 | 1 | WAGC V _{3TH} = 107.5(82.5 ANT) dB _μ V _{58TH} = 107.5(77.5 ANT) dB _μ | |
| - | - | - | - | 1 | 1 | 1 | 0 | WAGC V _{3TH} = 108.5(83.5 ANT) dB _μ V _{58TH} = 108(78 ANT) dB _μ | |
| - | - | - | - | 1 | 1 | 1 | 1 | WAGC V _{3TH} = 109(84 ANT) dB _μ V _{58TH} = 108.5(78.5 ANT) dB _μ | |
| 0 | 0 | 0 | 0 | - | - | - | - | DAGC V _{58TH} = 74(44 ANTENNA) dB _μ | |
| 0 | 0 | 0 | 1 | - | - | - | - | DAGC V _{58TH} = 77(47 ANTENNA) dB _μ | |
| 0 | 0 | 1 | 0 | - | - | - | - | DAGC V _{58TH} = 79(49 ANTENNA) dB _μ | |
| 0 | 0 | 1 | 1 | - | - | - | - | DAGC V _{58TH} = 80.5(50.5 ANTENNA) dB _μ | |
| 0 | 1 | 0 | 0 | - | - | - | - | DAGC V _{58TH} = 82(52 ANTENNA) dB _μ | |
| 0 | 1 | 0 | 1 | - | - | - | - | DAGC V _{58TH} = 83.5(53.5 ANTENNA) dB _μ | |
| 0 | 1 | 1 | 0 | - | - | - | - | DAGC V _{58TH} = 85(55 ANTENNA) dB _μ | |
| 0 | 1 | 1 | 1 | - | - | - | - | DAGC V _{58TH} = 86.5(56.5 ANTENNA) dB _μ | |
| 1 | 0 | 0 | 0 | - | - | - | - | DAGC V _{58TH} = 88(58 ANTENNA) dB _μ | |
| 1 | 0 | 0 | 1 | - | - | - | - | DAGC V _{58TH} = 89(59 ANTENNA) dB _μ | |
| 1 | 0 | 1 | 0 | - | - | - | - | DAGC V _{58TH} = 90(60 ANTENNA) dB _μ | |
| 1 | 0 | 1 | 1 | - | - | - | - | DAGC V _{58TH} = 91(61 ANTENNA) dB _μ | |
| 1 | 1 | 0 | 0 | - | - | - | - | DAGC V _{58TH} = 92(62 ANTENNA) dB _μ | |
| 1 | 1 | 0 | 1 | - | - | - | - | DAGC V _{58TH} = 93(63 ANTENNA) dB _μ | |
| 1 | 1 | 1 | 0 | - | - | - | - | DAGC V _{58TH} = 94(64 ANTENNA) dB _μ | |
| 1 | 1 | 1 | 1 | - | - | - | - | DAGC V _{58TH} = 96(66 ANTENNA) dB _μ | |

Table 27. Addr 17 FM demodulator fine adjust

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|---|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| - | - | 0 | 0 | 0 | 0 | 0 | 0 | 0 mV | |
| - | - | 0 | 0 | 0 | 0 | 0 | 1 | +8.5 mV | |
| - | - | 0 | 0 | 0 | 0 | 1 | 0 | +17 mV | |
| - | - | - | - | - | - | - | - | - | |
| - | - | 0 | 1 | 1 | 1 | 1 | 1 | +263.5 mV | |
| - | - | 1 | 0 | 0 | 0 | 0 | 0 | 0 mV | |
| - | - | 1 | 0 | 0 | 0 | 0 | 1 | -8.5 mV | |
| - | - | 1 | 0 | 0 | 0 | 1 | 0 | -17 mV | |
| - | - | - | - | - | - | - | - | - | |
| - | - | 1 | 1 | 1 | 1 | 1 | 1 | -263.5 mV | |
| 0 | 0 | - | - | - | - | - | - | Spike cancellation "OFF" | |
| 0 | 1 | - | - | - | - | - | - | Threshold for spike cancellation 270 mV | |
| 1 | 0 | - | - | - | - | - | - | Threshold for spike cancellation 520 mV | |
| 1 | 1 | - | - | - | - | - | - | Threshold for spike cancellation 750 mV | |

Table 28. Addr 18 S-meter slider

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|---------------------------------|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| - | - | - | - | 0 | 0 | 0 | 0 | S meter slider offset SL = 0 dB | |
| - | - | - | - | 0 | 0 | 0 | 1 | S meter offset SL = 1 dB | |
| - | - | - | - | 0 | 0 | 1 | 0 | S meter offset SL = 2 dB | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | 1 | 1 | 1 | 1 | S meter offset SL=15 dB | |
| - | - | - | 0 | - | - | - | - | S meter offset -SL | |
| - | - | - | 1 | - | - | - | - | S meter offset +SL | |
| - | - | 0 | - | - | - | - | - | S Meter slope 1V/decade | |
| - | - | 1 | - | - | - | - | - | S meter slope 1.5V/decade | |
| - | 0 | - | - | - | - | - | - | Select external AM-IF input | |
| - | 1 | - | - | - | - | - | - | Select internal AM-IF input | |
| 0 | - | - | - | - | - | - | - | Overdeviation correction "ON" | |
| 1 | - | - | - | - | - | - | - | Overdeviation correction "OFF" | |

Table 29. Addr 19 IF GAIN/Crystal adjust

| MSB | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|-----|----------------------------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | |
| - | - | - | - | - | - | - | 0 | IF1 gain2 9 dB |
| - | - | - | - | - | - | - | 1 | IF1 gain2 11 dB |
| - | - | - | - | - | 0 | 0 | - | IF1 gain1 9 dB |
| - | - | - | - | - | 0 | 1 | - | IF1 gain1 11 dB |
| - | - | - | - | - | 1 | 0 | - | IF1 gain1 12 dB |
| - | - | - | - | - | 1 | 1 | - | IF1 gain1 15 dB |
| 0 | 0 | 0 | 0 | 0 | - | - | - | C _{Load} 0 pF |
| 0 | 0 | 0 | 0 | 1 | - | - | - | C _{Load} 0.75 pF |
| 0 | 0 | 0 | 1 | 0 | - | - | - | C _{Load} 1.5 pF |
| 0 | 0 | 0 | 1 | 1 | - | - | - | C _{Load} 2.25 pF |
| 0 | 0 | 1 | 0 | 0 | - | - | - | C _{Load} 3 pF |
| - | - | - | - | - | - | - | - | - |
| 1 | 1 | 1 | 1 | 1 | - | - | - | C _{Load} 23.25 pF |

Table 30. Addr 20 tank adjust

| MSB | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|-----|------------------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | |
| - | - | - | - | 0 | 0 | 0 | 0 | 450 kHz 0 pF |
| - | - | - | - | 0 | 0 | 0 | 1 | 450 kHz 1.6 pF |
| - | - | - | - | 0 | 0 | 1 | 0 | 450 kHz 3.2 pF |
| - | - | - | - | 0 | 0 | 1 | 1 | 450 kHz 4.8 pF |
| - | - | - | - | - | - | - | - | - |
| - | - | - | - | 1 | 1 | 1 | 1 | 450 kHz 24 pF |
| 0 | 0 | 0 | 0 | - | - | - | - | 10.7 MHz 0 pF |
| 0 | 0 | 0 | 1 | - | - | - | - | 10.7 MHz 0.55 pF |
| 0 | 0 | 1 | 0 | - | - | - | - | 10.7 MHz 1.1 pF |
| 0 | 0 | 1 | 1 | - | - | - | - | 10.7 MHz 1.65 pF |
| - | - | - | - | - | - | - | - | - |
| 1 | 1 | 1 | 1 | - | - | - | - | 10.7 MHz 8.25 pF |

Table 31. Addr 21 I/Q FM mixer1 adjust

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|---|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| - | - | - | - | 0 | 0 | 0 | 0 | -7 degree | |
| - | - | - | - | 0 | 0 | 0 | 1 | -6 degree | |
| - | - | - | - | 0 | 0 | 1 | 0 | -5 degree | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | 0 | 1 | 1 | 1 | 0 degree | |
| - | - | - | - | 1 | 0 | 0 | 0 | +1 degree | |
| - | - | - | - | 1 | 0 | 0 | 1 | +2 degree | |
| - | - | - | - | - | - | - | - | - | |
| - | - | - | - | 1 | 1 | 1 | 1 | +8degree | |
| - | - | 0 | 0 | - | - | - | - | 0% | |
| - | - | 0 | 1 | - | - | - | - | -1% | |
| - | - | 1 | 0 | - | - | - | - | +1% | |
| - | - | 1 | 1 | - | - | - | - | 0% | |
| - | x | - | - | - | - | - | - | not used | |
| 0 | - | - | - | - | - | - | - | Overdeviation correction current max=45 μ A | |
| 1 | - | - | - | - | - | - | - | Overdeviation correction current max=90 μ A | |

Table 32. Addr 22 test control 1

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|--|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| x | x | x | x | x | x | x | x | Only for testing (have to be set to 0) | |

Table 33. Addr 23 test control 2

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|--|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| x | x | x | x | x | x | x | x | Only for testing (have to be set to 0) | |

Table 34. Addr 24 Test Control 3

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|--|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| x | x | x | x | x | x | x | x | Only for testing (have to be set to 0) | |

Table 35. Addr 25 test control 4


| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|--|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| x | x | x | x | x | x | x | x | Only for testing (have to be set to 0) | |

6 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com.

ECOPACK[®] is an ST trademark.

Figure 4. LQFP64 mechanical data and package dimensions

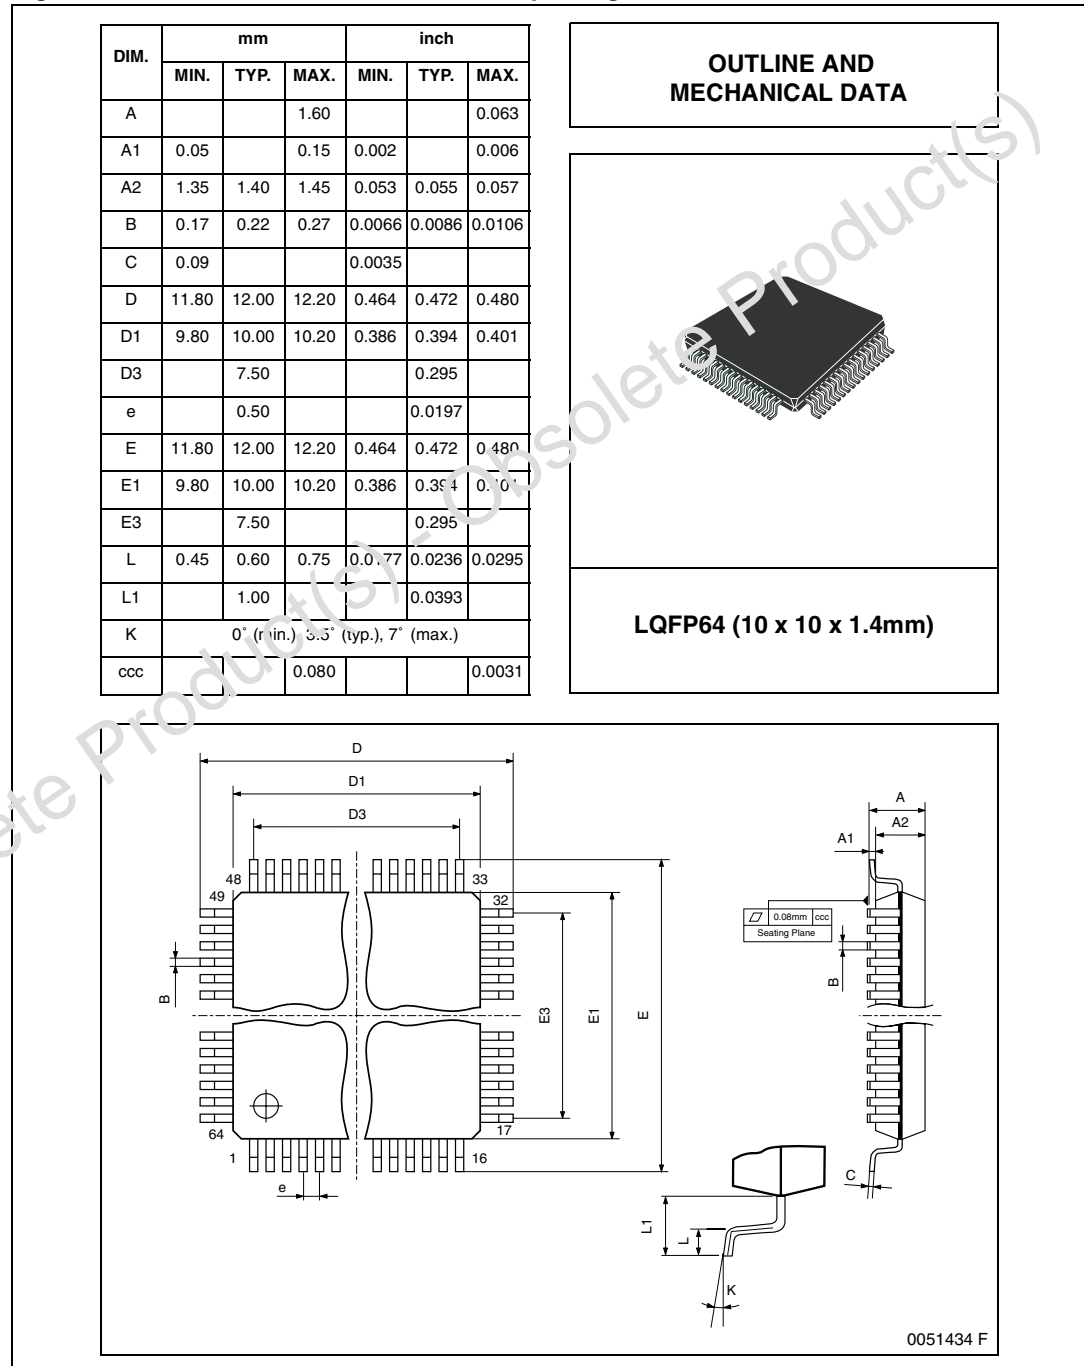

Appendix A Block diagrams

Figure 5. Block diagram I/Q mixer

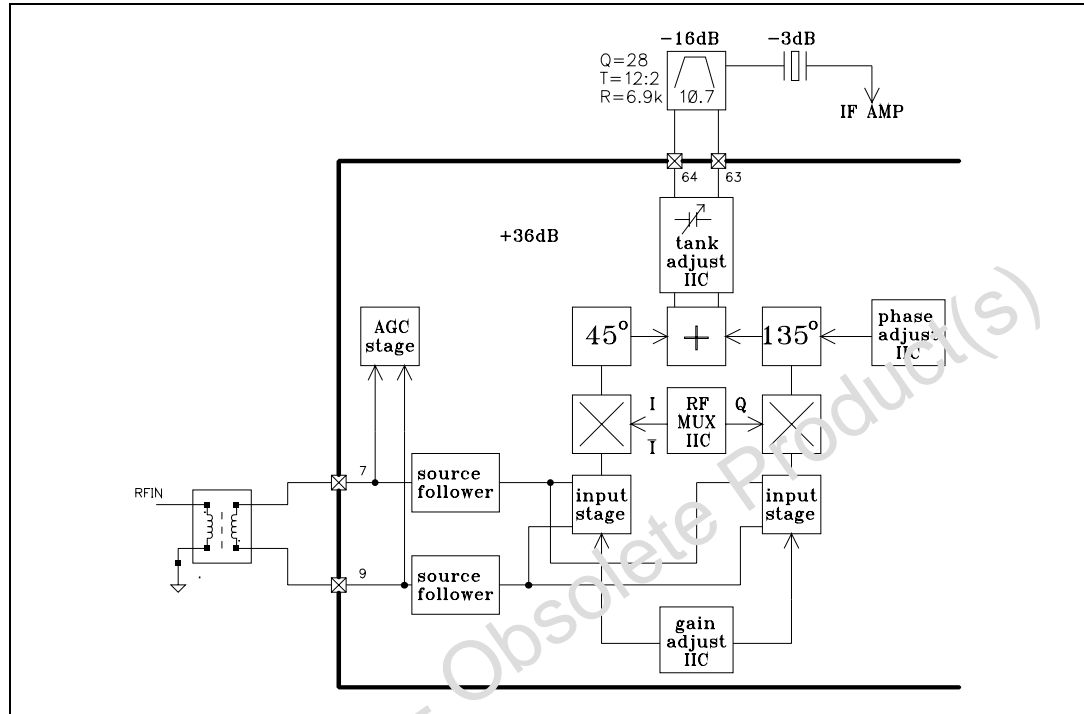


Figure 6. Block diagram VCO

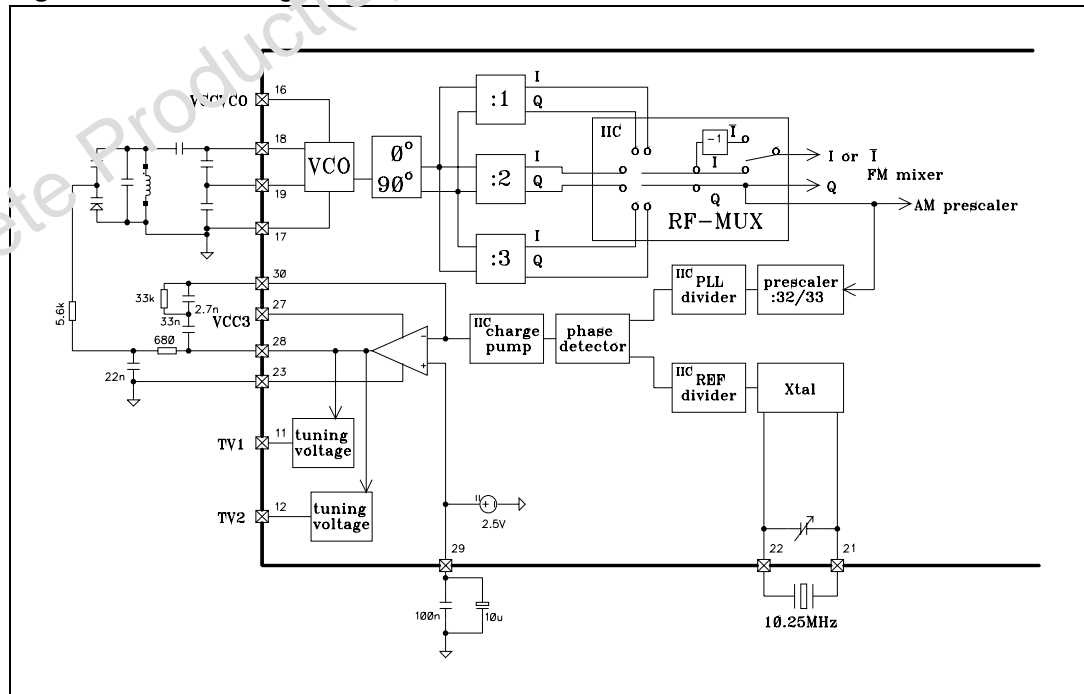


Table 36. Block diagram quality detection principle (without overdeviation correction)

| Signal | LOW | HIGH |
|--------|--|---|
| ac | No adjacent channel | Adjacent channel present |
| ac+ | No strong adjacent channel | Adjacent channel higher as ac |
| sm | Fieldstrength higher as softmute threshold | Fieldstrength lower as softmute threshold |
| dev | Deviation lower as threshold DWTH | Deviation higher as threshold DWTH |
| dev+ | Deviation lower as threshold DTH*DWTH | Deviation higher as threshold DTH*DWTH |
| inton | ISS filter off by logic (wide) | ISS filter on by logic |
| int80 | ISS filter 120 kHz (mid) | ISS filter 80 kHz (narrow) |

Table 37. Input signals modes

| Input Signals | | | | | Mode1 | | | Mode2 | | |
|---------------|-----|----|-----|------|-------|-------|----------|-------|-------|----------|
| ac | ac+ | sm | dev | dev+ | inton | int80 | Function | inton | int80 | Function |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | wide | 0 | 0 | wide |
| 0 | 0 | 0 | 1 | 0 | 0 | 0 | wide | 0 | 0 | wide |
| 0 | 0 | 0 | 1 | 1 | 0 | 0 | wide | 0 | 0 | wide |
| 0 | 0 | 1 | 0 | 0 | 1 | 1 | narrow | 1 | 1 | narrow |
| 0 | 0 | 1 | 1 | 0 | 0 | 0 | wide | 1 | 0 | mid |
| 0 | 0 | 1 | 1 | 1 | 0 | 0 | wide | 0 | 0 | wide |
| 1 | 0 | 0 | 0 | 0 | 1 | 1 | narrow | 1 | 0 | mid |
| 1 | 1 | 0 | 0 | 0 | 1 | 1 | narrow | 1 | 1 | narrow |
| 1 | 0 | 0 | 1 | 0 | 1 | 0 | mid | 1 | 0 | mid |
| 1 | 0 | 0 | 1 | 1 | 1 | 0 | mid | 1 | 1 | narrow |
| 1 | 0 | 1 | 0 | 0 | 1 | 1 | narrow | 1 | 1 | narrow |
| 1 | 1 | 1 | 0 | 0 | 1 | 1 | narrow | 1 | 1 | narrow |
| 1 | 0 | 1 | 1 | 0 | 1 | 0 | mid | 1 | 0 | mid |
| 1 | 1 | 1 | 1 | 0 | 1 | 0 | mid | 1 | 1 | narrow |
| 1 | 0 | 1 | 1 | 1 | 1 | 0 | mid | 1 | 0 | mid |
| 1 | 1 | 1 | 1 | 1 | 1 | 0 | mid | 1 | 1 | narrow |


Table 38. Part list (application and measurement circuit)

| Item | Description |
|------|---------------------------|
| F1 | TOKO 5KG 611SNS-A096GO |
| F2 | TOKO 5KM 396INS-A467AO |
| F3 | TOKO MC152 E558HNA-100092 |

Table 38. Part list (application and measurement circuit) (continued)

| Item | Description |
|---------|---|
| F4 | TOKO 7PSG 826AC-A0022EK=S |
| F5 | TOKO PGL 5PGLC-5103N |
| L1 | TOKO FSLM 2520-150 15 μ H |
| L2,L4 | TOKO FSLM 2520-680 68 μ H |
| L3,L8 | SIEMENS SIMID03 B82432 1 mH |
| L5 | TOKO LL 2012-220 |
| L6 | TOKO LL 2012-270 |
| L7 | TOKO LL 2012-22.0 |
| CF1,CF2 | muRata SFE10.7MS3A10-A 180 kHz or (TOKO CFSK107M3-4L-20X) |
| CF3 | muRata SFE10.7MJA10-A 150 kHz or (TOKO CFSK107M14-4L-20X) |
| CF4 | muRata SFPS 450H 6 kHz or (TOKO ARLFC450T) |
| D1 | TOSHIBA 1SV172 |
| D2,D3 | TOKO KP2311E |
| D4 | TOKO KV1370NT |
| D5 | PHILIPS BB156 |
| Q1 | TOSHIBA HN3G01J |

Figure 9. Application circuit

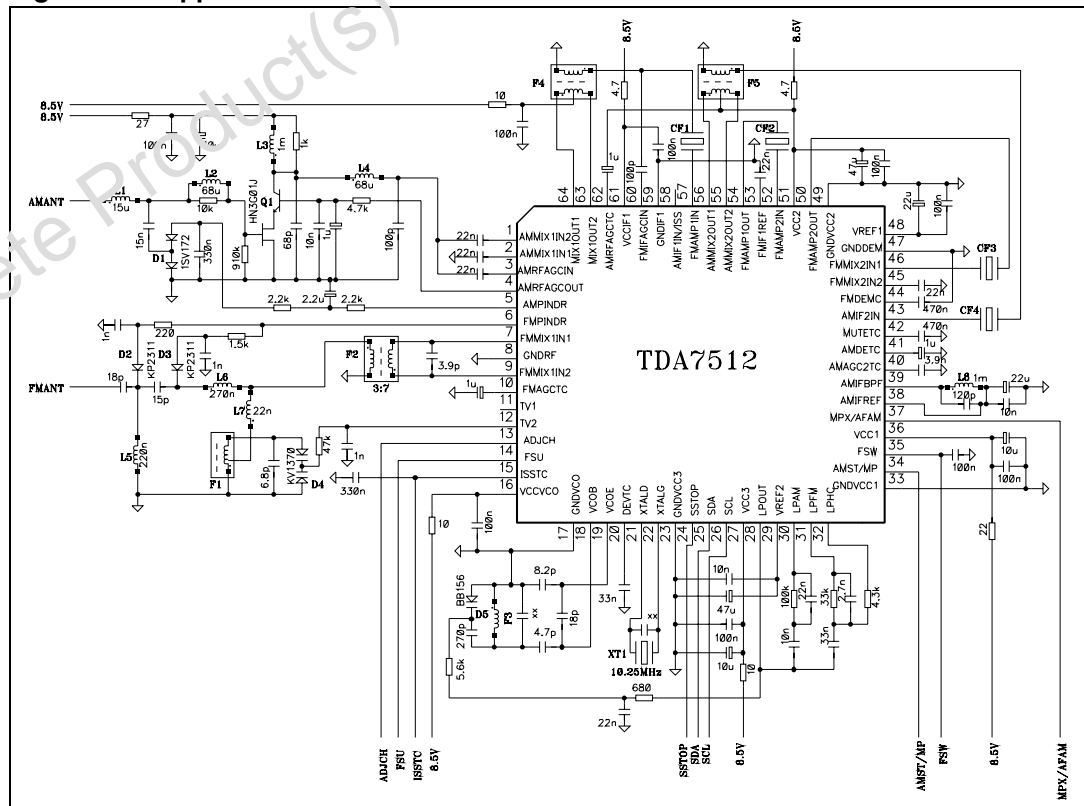

Appendix B Application notes

Following items are important to get highest performance of TDA7512 in application:

1. In order to avoid leakage current from PLL loop filter input to ground a guardring is recommended around loop filter PIN's with PLL reference voltage potential.
2. Distance between Crystal and VCO input PIN18 should be far as possible and Crystal package should get a shield versus ground.
3. Blocking of VCO supply should be near at PIN16 and PIN17.
4. Wire length to FM mixer1 input and output should be symmetrically and short.
5. FM demodulator capacitance at PIN44 should be sense connected as short as possible versus demodulator ground at PIN47.
6. With respect to THD capacitive coupling from PIN20 to VCO should be avoided. Capacitance at PIN20 has be connected versus VCC2 ground.
7. Wire length from AM mixer tank output to 9 kHz ceramic filter input has to be short as possible.

7 Revision history

Table 39. Document revision history

| Date | Revision | Changes |
|-------------|----------|--|
| 24-Sep-2003 | 2 | Initial release. |
| 11-Dec-2008 | 3 | Document reformatted. Document status promoted from preliminary data to datasheet. Updated Section 6: Package information on page 42 . |
| 22-Jun-2009 | 4 | Corrected typo (ref: "K" Dim.) on Figure 4: LQFP64 mechanical data and package dimensions on page 42 . |

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2009 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com