



TDA8296

Digital global standard low IF demodulator for analog TV and FM radio

Rev. 1 — 3 March 2011

Product data sheet

1. General description

The TDA8296 is an alignment-free digital multistandard vision and sound low IF signal PLL demodulator for positive and negative video modulation including AM and FM mono sound processing. It can be used in all countries worldwide for M/N, B/G/H, I, D/K, L and L-accent standard. CVBS and SSIF/mono audio are provided via two DACs. FM radio preprocessing is included for simple interfacing with demodulator/stereo decoder backends.

The IC is especially suited for the application with the NXP Silicon Tuner TDA1827x.

All the processing is done in the digital domain.

The chip has an 'easy programming' mode to make the I²C-bus protocol very simple. In principle, only one bit sets the proper standard with recommended content. However, if this is not suitable, free programming is always possible.

Note: Register 06h has to be reprogrammed to new value C4h (see [Section 9.2](#) and [Section 9.3.1](#)).

2. Features and benefits

- Digital IF demodulation for all analog TV standards worldwide (M/N, B/G/H, D/K, I, L and L-accent standard)
- Multistandard true synchronous demodulation with active carrier regeneration
- Alignment-free
- 16 MHz typical reference frequency input (from low IF tuner) or operating as crystal oscillator
- Internal PLL synthesizer which allows the use of a low-cost crystal (typically 16 MHz)
- Especially suited for the NXP Silicon Tuner TDA1827x
- No SAW filter needed
- Low application effort and external component count in combination with the TDA1827x
- Simple upgrade of TDA8295 possible
- 12-bit low power IF ADC on chip running with 54 MHz or 27 MHz
- Two 10-bit DACs on chip for CVBS and SSIF or audio
- Easy programming for I²C-bus
- High flexibility due to various I²C-bus programming registers
- I²C-bus interface and I²C-bus feed-through for tuner programming
- Four I²C-bus addresses selectable via two external pins



- Gated IF AGC acting on black level by using H/V PLL or peak IF AGC (I²C-bus selectable)
- Internal digital logarithmic IF AGC amplifier with up to 48 dB gain and 68 dB control range
- Peak search tuner IF AGC for optimal adaptive drive of the IF ADC
- Switchable IF PLL and IF AGC loop bandwidths
- Precise AFC and lock detector
- Accurate group delay equalization for all standards
- Very robust IF demodulator coping with adverse field conditions
- Wide PLL pull-in range up to $\pm 1\,660$ kHz (I²C-bus selectable)
- CVBS and SSIF or audio output with simple postfilter (capacitor only)
- CVBS gain levelling stage to provide nearly constant signal amplitude during over modulation
- Video equalizer with eight settings
- Nyquist filter in video baseband
- Excellent video S/N (typically 60 dB weighted)
- High selectivity video low-pass filter for all standards
- Low video into sound crosstalk
- SSIF AGC
- Sound performance comparable to QSS single reference concepts
- AM/FM mono sound demodulator
- Switchable de-emphasis
- Excellent FM sound
- Good AM sound
- High FM Deviation mode for China
- Preprocessing of FM radio (mono and stereo) with highly selective digital band-pass filter
- No ceramic filter or external components needed for FM radio
- FM radio available in mono
- Automatic or forced mute for mono sound
- Automatic or forced blank for video
- Mostly digital FIR filter implementation (NSC notches and video low-pass filters)
- Three GPIO pins
- Power-On Reset (POR) block for reliable power-up behavior
- Very low total power dissipation (typically 150 mW)
- No power sequence requirement
- Standby mode (typically 5 mW)
- 40-pin HVQFN package
- CMOS technology (0.090 μ m 1.2 V and 3.3 V)

3. Applications

- TV applications
- Recording
- PC TV applications

4. Quick reference data

Table 1. Quick reference data

Power supplies 3.3 V, 1.2 V; $T_{amb} = 25\text{ °C}$; PC/SC1 for L and M = 10 dB, all others 13 dB; nominal residual picture carrier of 3 % for L/L', 10 % for M, 10 % for B/G, 12.5 % for D/K, 20 % for I; FM/AM modulation = 54 %, 1 kHz modulation frequency; measured in application PCB (see [Figure 22](#) and [Figure 23](#)) with 16 MHz crystal frequency, terminated with 75 Ω (CVBS) and 1 k Ω (SSIF/audio). Operation mode set via easy programming ([Section 9.3.1](#)), otherwise stated. Low IF input signal at -3dB full scale, input frequencies as defined under row header IF input.

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|---|---------------------------------------|--|--------------------|-------------|-----|------|
| Power supply | | | | | | |
| $V_{DD(1V2)}$ | supply voltage (1.2 V) | digital and analog | 1.1 | 1.2 | 1.3 | V |
| $V_{DD(3V3)}$ | supply voltage (3.3 V) | digital and analog | 3.0 | 3.3 | 3.6 | V |
| $I_{DD(tot)(1V2)}$ | total supply current (1.2 V) | | - | 49 | - | mA |
| $I_{DD(tot)(3V3)}$ | total supply current (3.3 V) | | - | 65 | - | mA |
| P_{tot} | total power dissipation | default settings; $f_s = 54\text{ MHz}$ at ADC; DAC application in accordance to Figure 23 | - | 270 | - | mW |
| | | $f_s = 54\text{ MHz}$ at ADC; DAC application in accordance to Figure 24 | - | 150 | - | mW |
| | | Standby mode | - | 5 | 8 | mW |
| IF input | | | | | | |
| $V_{i(p-p)}$ | peak-to-peak input voltage | for full-scale ADC input (0 dBFS) | 0.7 | 0.8 | 0.9 | V |
| V_i | input voltage | operational input related to ADC full scale; all standards; sum of all signals | -3 | -3 | -3 | dBFS |
| f_i | input frequency | PC / SC1 | | | | |
| | | M/N standard | - | 5.40 / 0.90 | - | MHz |
| | | B standard | - | 6.40 / 0.90 | - | MHz |
| | | G/H standard | - | 6.75 / 1.25 | - | MHz |
| | | I standard | - | 7.25 / 1.25 | - | MHz |
| | | D/K standard | - | 6.85 / 0.35 | - | MHz |
| | | L standard | - | 6.75 / 0.25 | - | MHz |
| | | L-accent standard | - | 1.25 / 7.75 | - | MHz |
| | | FM radio | - | 1.25 | - | MHz |
| Carrier recovery FPLL | | | | | | |
| $B_{-3dB(cl)}$ | closed-loop -3 dB bandwidth | wide | - | 60 | - | kHz |
| Δf_{pullin} | pull-in frequency range | | 11 | ± 830 | - | kHz |
| $m_{over(PC)}$ | picture carrier over modulation index | black for L/L-accent standard; flat field white else | 115 | 117 | - | % |
| IF demodulation (video equalizer in Flat mode) | | | | | | |
| $\alpha_{sup(stpb)}$ | stop-band suppression | video low-pass filter (M/N, B/G/H, I, D/K, L/L-accent standard) | - | -60 | - | dB |
| $t_{ripple(GDE)}$ | group delay equalizer ripple time | peak value for B/G/H half, D/K half, I flat, M (FCC) full, L/L-accent full standard | - | 20 | 40 | ns |

Table 1. Quick reference data ...continued

Power supplies 3.3 V, 1.2 V; $T_{amb} = 25\text{ }^{\circ}\text{C}$; PC/SC1 for L and M = 10 dB, all others 13 dB; nominal residual picture carrier of 3 % for L/L', 10 % for M, 10 % for B/G, 12.5 % for D/K, 20 % for I; FM/AM modulation = 54 %, 1 kHz modulation frequency; measured in application PCB (see [Figure 22](#) and [Figure 23](#)) with 16 MHz crystal frequency, terminated with 75 Ω (CVBS) and 1 k Ω (SSIF/audio). Operation mode set via easy programming ([Section 9.3.1](#)), otherwise stated. Low IF input signal at -3dB full scale, input frequencies as defined under row header IF input.

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|----------------------------------|--------------------------------|--|-----|------|------|------|
| CVBS output | | | | | | |
| $V_{o(p-p)}$ | peak-to-peak output voltage | negative PC modulation (all standards except L/L-accent); 75 Ω DC load; sync-white modulation; 90 % (nominal) | 0.9 | 1.0 | 1.1 | V |
| | | positive PC modulation (L/L-accent standard); 75 Ω DC load; sync-white modulation; 97 % (nominal) | 0.9 | 1.0 | 1.1 | V |
| $B_{\text{video}(-3\text{dB})}$ | -3 dB video bandwidth | overall video response; CVBS equalizer flat | | | | |
| | | all standards except M/N | 4.7 | 4.85 | - | MHz |
| | | M/N standard | 3.8 | 3.9 | - | MHz |
| $\alpha_{\text{resp}(f)}$ | frequency response | video equalizer; 8 equally spaced settings; value at 3.9 MHz | -5 | - | +4.5 | dB |
| G_{dif} | differential gain | "ITU-T J.63 line 330" | - | 1.5 | 5 | % |
| φ_{dif} | differential phase | "ITU-T J.63 line 330" | - | 1.0 | 3 | deg |
| $(S/N)_w$ | weighted signal-to-noise ratio | all standards; unified weighting filter ("ITU-T J.61"); PC at -6 dBFS | 57 | 60 | - | dB |
| SSIF/mono sound output | | | | | | |
| $V_{o(\text{SSIF})(\text{RMS})}$ | RMS SSIF output voltage | 1 k Ω DC or AC load; no modulation; PC / SC1 = 13 dB | | | | |
| | | M standard | 105 | 115 | 127 | mV |
| | | B standard | 97 | 104 | 116 | mV |
| | | G/H standard | 97 | 104 | 116 | mV |
| | | D/K standard | 89 | 96 | 106 | mV |
| | | I standard | 93 | 100 | 111 | mV |
| | | L standard | 89 | 96 | 106 | mV |
| | | L-accent standard | 89 | 96 | 106 | mV |
| | | FM radio (single carrier) | 94 | 103 | 115 | mV |
| $V_{o(\text{AF})(\text{RMS})}$ | RMS AF output voltage | 1 k Ω DC or AC load | | | | |
| | | M standard; 54 % modulation degree (± 13.5 kHz FM deviation before pre-emphasis) | 98 | 116 | 135 | mV |
| | | B, G/H, I, D/K standard; 54 % modulation degree (± 27 kHz FM deviation before pre-emphasis) | 107 | 126 | 144 | mV |
| $\alpha_{\text{hr}(\text{AF})}$ | AF headroom | before clipping; 1 k Ω DC or AC load | | | | |
| | | M standard; related to ± 25 kHz peak deviation before pre-emphasis | - | 7 | - | dB |
| | | B, G/H, I, D/K standard; related to ± 50 kHz peak deviation before pre-emphasis | - | 7 | - | dB |

Table 1. Quick reference data ...continued

Power supplies 3.3 V, 1.2 V; $T_{amb} = 25\text{ }^{\circ}\text{C}$; PC/SC1 for L and M = 10 dB, all others 13 dB; nominal residual picture carrier of 3 % for L/L', 10 % for M, 10 % for B/G, 12.5 % for D/K, 20 % for I; FM/AM modulation = 54 %, 1 kHz modulation frequency; measured in application PCB (see [Figure 22](#) and [Figure 23](#)) with 16 MHz crystal frequency, terminated with $75\ \Omega$ (CVBS) and $1\ \text{k}\Omega$ (SSIF/audio). Operation mode set via easy programming ([Section 9.3.1](#)), otherwise stated. Low IF input signal at -3dB full scale, input frequencies as defined under row header IF input.

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|-----------------|-----------------------------------|--|-----|------|-----|------|
| THD | total harmonic distortion | FM; for 50 kHz deviation before pre-emphasis (25 kHz for M standard) | - | 0.15 | 0.3 | % |
| | | AM; m = 80 % | - | 0.5 | 1 | % |
| $B_{AF(-3dB)}$ | -3 dB AF bandwidth | AM | 20 | 27 | - | kHz |
| | | FM | 40 | 50 | - | kHz |
| $(S/N)_{w(AF)}$ | AF weighted signal-to-noise ratio | via internal mono sound demodulator; "ITU-R BS.468-4"; FM mode related to 27 kHz deviation before pre-emphasis; 10 % residual PC; SC1; color bar picture | 52 | 54 | - | dB |
| | | via internal mono sound demodulator; [2] (audio gain +6 dB) "ITU-R BS.468-4"; AM; m = 54 %; 3 % residual PC; SC1; color bar picture | 40 | 44 | - | dB |

[1] The pull-in range can be doubled to $\pm 1\ 660\ \text{kHz}$ by I²C-bus register like described in [Table 16](#). Then the AFC read-out has 256 steps.


[2] To set audio gain to +6 dB for internal sound demodulation, register 22h has to be programmed to 08h.

5. Ordering information

Table 2. Ordering information

| Type number | Package | | Version |
|-------------|---------|--|----------|
| | Name | Description | |
| TDA8296HN | HVQFN40 | plastic thermal enhanced very thin quad flat package; no leads; 40 terminals; body $6 \times 6 \times 0.85\ \text{mm}$ | SOT618-1 |

6. Functional diagram

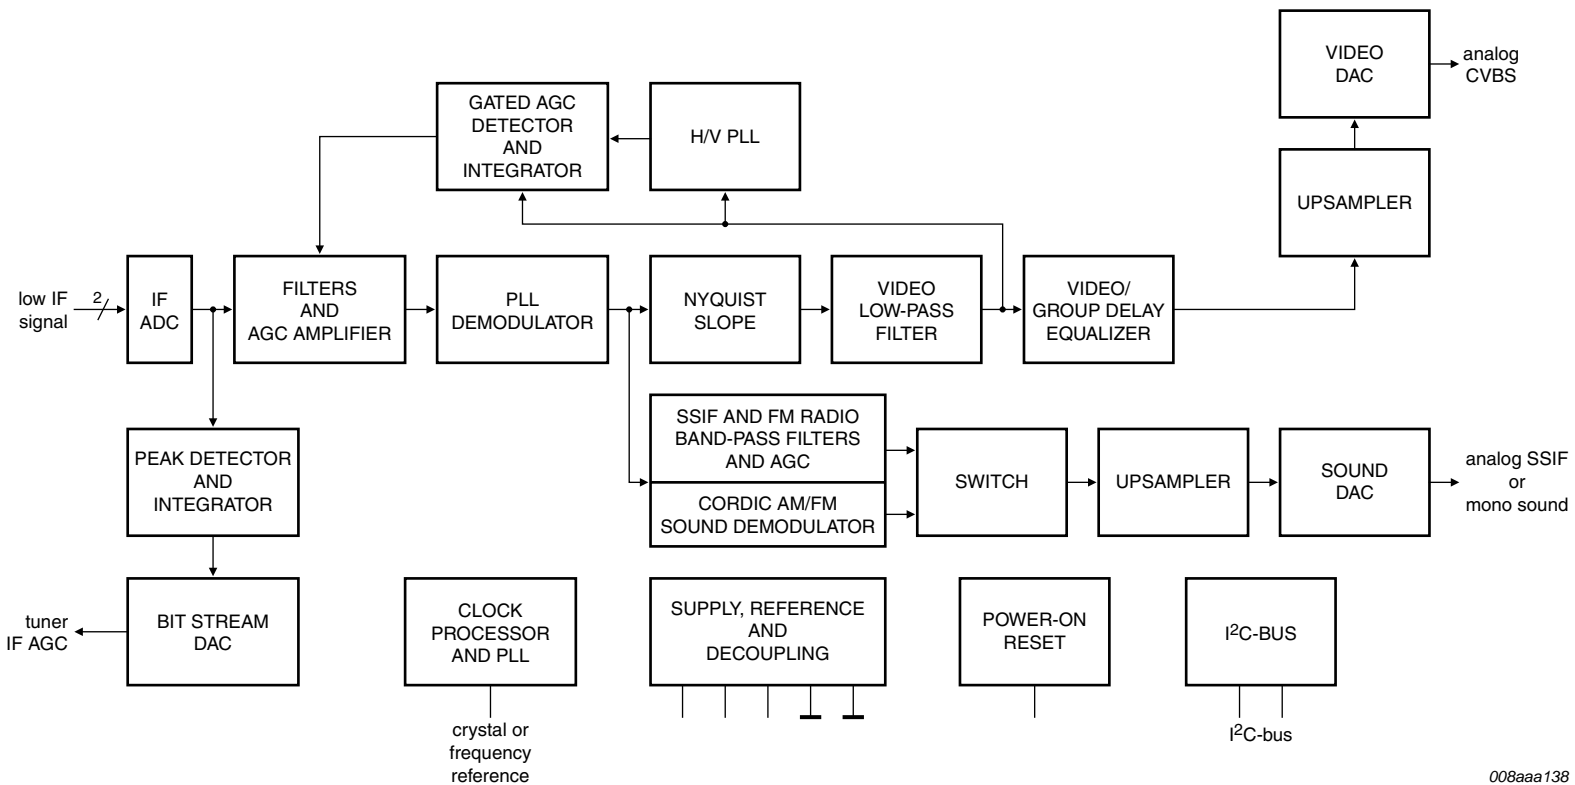

008aaa138

Fig 1. Functional diagram of TDA8296

7. Pinning information

7.1 Pinning

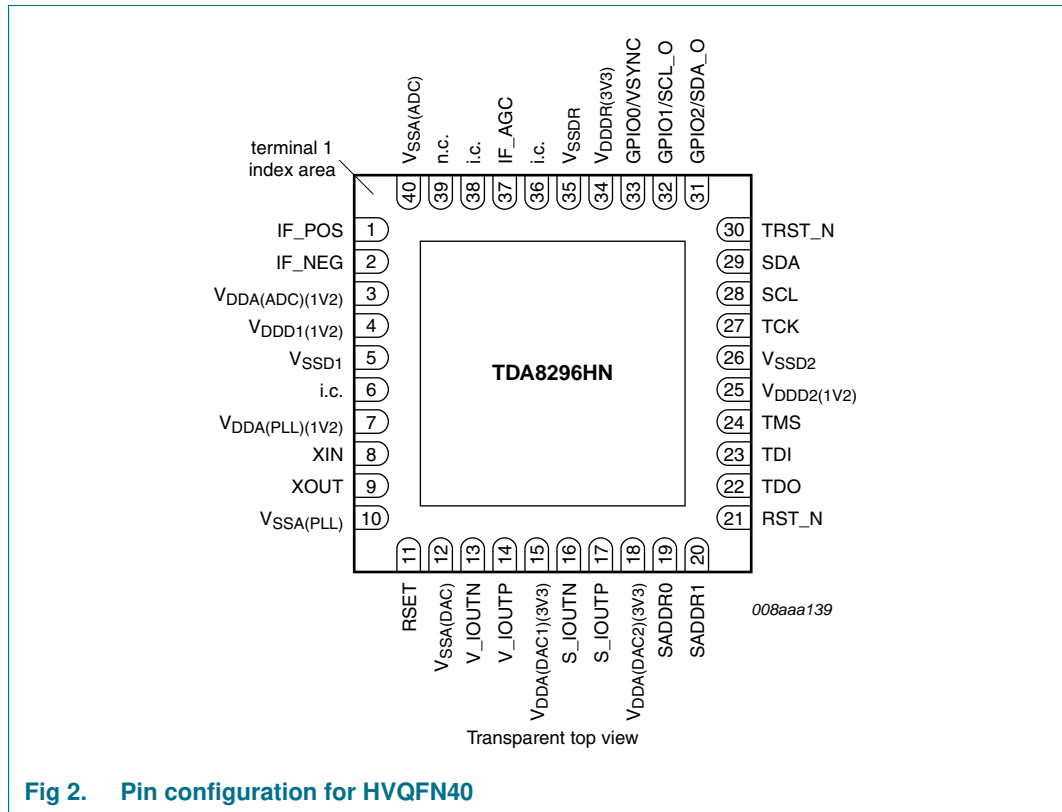


Fig 2. Pin configuration for HVQFN40

Table 3. Pin allocation table

| Pin | Symbol | Pin | Symbol |
|-----|-----------------|-----|-----------------|
| 1 | IF_POS | 2 | IF_NEG |
| 3 | VDDA(ADC)(1V2) | 4 | VDD1(1V2) |
| 5 | VSSD1 | 6 | i.c. |
| 7 | VDDA(PLL)(1V2) | 8 | XIN |
| 9 | XOUT | 10 | VSSA(PLL) |
| 11 | RSET | 12 | VSSA(DAC) |
| 13 | V_IOUTN | 14 | V_IOUTP |
| 15 | VDDA(DAC1)(3V3) | 16 | S_IOUTN |
| 17 | S_IOUTP | 18 | VDDA(DAC2)(3V3) |
| 19 | SADDR0 | 20 | SADDR1 |
| 21 | RST_N | 22 | TDO |
| 23 | TDI | 24 | TMS |
| 25 | VDD2(1V2) | 26 | VSSD2 |
| 27 | TCK | 28 | SCL |
| 29 | SDA | 30 | TRST_N |

Table 3. Pin allocation table ...continued

| Pin | Symbol | Pin | Symbol |
|---------|-----------------------------------|-----|------------------------|
| 31 | GPIO2/SDA_O | 32 | GPIO1/SCL_O |
| 33 | GPIO0/VSYNC | 34 | V _{DDDR(3V3)} |
| 35 | V _{SSDR} | 36 | i.c. |
| 37 | IF_AGC | 38 | i.c. |
| 39 | n.c. | 40 | V _{SSA(ADC)} |
| die pad | global ground at backside contact | | |

7.2 Pin description

Table 4. Pin description

| Symbol | Pin | Type ^[1] | Description |
|---|-----|---------------------|--|
| Reset | | | |
| RST_N | 21 | I | The RST_N input is asynchronous and active LOW, and clears the TDA8296. When RST_N goes LOW, the circuit immediately enters its Reset mode and normal operation will resume four XIN signal falling edges later after RST_N returns HIGH. Internal register contents are all initialized to their default values. The minimum width of RST_N at LOW level is four XIN clock periods. |
| Reference | | | |
| XIN | 8 | I | Crystal oscillator input pin. In Slave mode (typically), the XIN input simply receives a 16 MHz clock signal (f_{REF}) from an external device (typically from the TDA1827x). In Oscillator mode, a fundamental 16 MHz (typically) crystal is connected between pin XIN and pin XOUT. |
| XOUT | 9 | O | Crystal oscillator output pin. In Slave mode, the XOUT output is not connected. In Oscillator mode a fundamental 16 MHz (typically) crystal is connected between pin XIN and pin XOUT. |
| I²C-bus | | | |
| SDA | 29 | I/O, OD | I ² C-bus bidirectional serial data. SDA is an open-drain output and therefore requires an external pull-up resistor (typically 4.7 k Ω). |
| SCL | 28 | I | I ² C-bus clock input. SCL is nominally a square wave with a maximum frequency of 400 kHz. It is generated by the system I ² C-bus master. |
| SADDR0 | 19 | I | These two bits allow to select four possible I ² C-bus addresses, and therefore permits to use several TDA8296 in the same application and/or to avoid conflict with other ICs. The complete I ² C-bus address is: 1, 0, 0, SADDR1, 0, 1, SADDR0, R/W (see also Section 9.1). |
| SADDR1 | 20 | I | |
| I²C-bus feed-through switch or GPIO | | | |
| GPIO2/SDA_O | 31 | I/O, OD | SDA_O is equivalent to SDA but can be 3-stated by I ² C-bus programming. It is the output of a switch controlled by I2CSW_EN parameter. SDA_O is an open-drain output and therefore requires an external pull-up resistor (see Section 9.3.18). |
| GPIO1/SCL_O | 32 | I/O, OD | SCL_O is equivalent to SCL input but can be 3-stated by I ² C-bus programming. SCL_O is an open-drain output and therefore requires an external pull-up resistor (see Section 9.3.18). For proper functioning of the I ² C-bus feed-through, a capacitor C = 33 pF to GND must be added (see Section 13.6). |
| V-sync or GPIO | | | |
| GPIO0/VSYNC | 33 | I/O, OD | vertical synchronization pulse needed for the NXP Silicon Tuner (see Section 9.3.18) |
| Tuner IF AGC | | | |
| IF_AGC | 37 | I/O, OD, T | tuner IF AGC output |

Table 4. Pin description ...continued

| Symbol | Pin | Type ^[1] | Description |
|-----------------------------|-----------|---------------------|---|
| Boundary scan | | | |
| TMS | 24 | I | Test mode select provides the logic levels needed to change the TAP controller from state to state during the boundary scan test. |
| TRST_N | 30 | I | Test reset is used to reset the TAP controller (active LOW). Grounding is mandatory in Functional mode. |
| TCK | 27 | I | Test clock is used to drive the TAP controller. |
| TDI | 23 | I | Test data input is the serial data input for the test data instruction. |
| TDO | 22 | O | Test data output is the serial test data output pin. The data is provided on the falling edge of TCK. |
| ADC | | | |
| IF_POS | 1 | AI | IF positive analog input for internal ADC |
| IF_NEG | 2 | AI | IF negative analog input for internal ADC |
| DAC | | | |
| V_IOUTP | 14 | AO | positive analog current output of the video output |
| V_IOUTN | 13 | AO | negative analog current output of the video output |
| S_IOUTP | 17 | AO | positive analog current output of the SSIF/mono sound output |
| S_IOUTN | 16 | AO | negative analog current output of the SSIF/mono sound output |
| RSET | 11 | I | External bias setting of the DACs. An external resistor (1 kΩ typical) has to be connected between RSET and the analog ground of the board. This resistor generates the current into the DACs and also defines the full scale output current. The total parasitic capacitance seen externally from the RSET pin has to be lower than 20 pF. |
| Supplies and grounds | | | |
| V _{DDA(DAC1)(3V3)} | 15 | PS | DAC1 (video DAC) and DAC reference module analog supply voltage (3.3 V typical) |
| V _{DDA(DAC2)(3V3)} | 18 | PS | DAC2 (sound DAC) analog supply voltage (3.3 V typical) |
| V _{SSA(DAC)} | 12 | GND | DAC reference module analog ground supply voltage (0 V typical) |
| V _{DDA(ADC)(1V2)} | 3 | PS | IF ADC analog supply voltage (1.2 V typical) |
| V _{SSA(ADC)} | 40 | GND | ADC analog ground supply voltage (0 V typical) |
| V _{DDD1(1V2)} | 4 | PS | ADC, PLL and DACs digital supply voltage (1.2 V typical) |
| V _{SSD1} | 5 | GND | ADC, PLL and DACs digital ground supply voltage (0 V typical) |
| V _{DDA(PLL)(1V2)} | 7 | PS | crystal oscillator and clock PLL analog supply voltage (1.2 V typical) |
| V _{SSA(PLL)} | 10 | GND | crystal oscillator and clock PLL analog ground supply voltage (0 V typical) |
| V _{DDD2(1V2)} | 25 | PS | core digital supply voltage (1.2 V typical) |
| V _{SSD2} | 26 | GND | core digital ground supply voltage (0 V typical) |
| V _{DDDR(3V3)} | 34 | PS | ring digital supply voltage (3.3 V typical) |
| V _{SSDR} | 35 | GND | ring digital ground supply voltage (0 V typical) |
| V _{SS} | die pad | GND | |
| Other pins | | | |
| i.c. | 6, 36, 38 | I | internally connected; connect to ground |
| n.c. | 39 | I | not connected |

[1] The pin types are defined in [Table 5](#).

Table 5. Pin type description

| Type | Description |
|------|--------------------------|
| AI | analog input |
| AO | analog output |
| GND | ground |
| I | digital input |
| I/O | digital input and output |
| O | digital output |
| OD | open-drain output |
| PS | power supply |
| T | 3-state |

8. Functional description

8.1 IF ADC

The low IF spectrum (1 MHz to 10 MHz) from the Silicon Tuner TDA1827x is fed symmetrically to the 12-bit IF ADC of the TDA8296, where it is sampled with 54 MHz or 27 MHz. All the anti-aliasing filtering is already done in the Silicon Tuner.

8.2 Filters

The internal filters permit to reduce the sampling rate to 13.5 MHz, and to form a complex signal to ease the effort of further signal processing. Before this, the DC offset (coming from the ADC) is removed.

In addition, standard dependent notch filters for the adjacent sound carriers protect the picture carrier PLL from malfunctioning and avoid disturbances (i.e. moire) becoming visible in the video output.

8.3 PLL demodulator

The second-order PLL is the core block of the whole IC. It is very robust against adverse field conditions, like excessive over modulation, no residual carrier presence or unwanted phase or frequency modulation of the picture carrier. The PLL output is the synchronously demodulated channel.

The AFC data is available via the I²C-bus.

8.4 Nyquist filter, video low-pass filter, video and group delay equalizer, video leveling

The afore-mentioned down-mixed complex signal at the mixer CORDIC output, already consisting of the demodulated content of the picture carrier together with the sound carriers (the so-called intercarriers), is running through a Nyquist filter to get a flat video response and is made real.

Afterwards, a video low-pass filter suppresses the sound carriers and other disturbers.

Next comes the equalizer circuit to remove the transmitter group delay predistortion.

A video leveling stage follows, which brings the output within the SCART specification (± 3 dB overall), despite heavy over modulation. The response time is made very slow.

Finally, a video equalizer allows to compensate the perhaps non-flat frequency response from the tuner or to change the overall video response according to customer wish (i.e. peaking or early roll-off).

8.5 Upsampler and video DAC

The filtered and compensated CVBS signal is connected to the oversampled 10-bit video DAC ($f_s = 108$ MHz) via an interpolation stage. The strong oversampling replaces a former complicated LCR postfiltering by a simple first-order RC low-pass filter to remove the DAC image frequencies sufficiently. This holds also for the sound DAC, described in [Section 8.6](#).

8.6 SSIF/mono sound processing

The complex signal is routed via a band-pass, AGC and interpolation filter to the 10-bit sound DAC for the recovery of the second sound carriers (SSIF). A very sharp band-pass filter at 5.5 MHz is added in the FM Radio mode to remove neighbor channels. This also eases the dynamic burden on the following ADC in the demodulator/decoder chip. The afore-mentioned high-selectivity band-pass, which replaces the former ceramic filter, is located behind a frequency shifter. In there, the incoming wanted FM radio channel from the Silicon Tuner is changed from 1.25 MHz to 5.5 MHz.

Moreover, the complex signal is demodulated in a linear CORDIC detector and low-pass filtered to attenuate the video spectrum and the second sound carrier, respectively other disturbers above the intercarrier. The output of the linear CORDIC (phase information) is differentiated for getting the demodulated FM audio. The AM demodulation is executed in a synchronous fashion by using a narrow-band PLL demodulator.

A de-emphasis filter is implemented for FM standards, before the audio is interpolated to 108 MHz as in the CVBS case.

The mono audio is made available in the sound DAC via an I²C-bus controlled selector in case the intercarrier path is not used for driving an external stereo demodulator.

However, if the mono audio output has to meet the SCART specification, an external cheap operational amplifier with 12 dB gain becomes necessary, because the low supply voltage for the TDA8296 doesn't allow such high levels like 2 V (RMS) maximum.

8.7 Tuner IF AGC

This AGC controls the tuner IF AGC amplifier in the TDA1827x in such a way, that the IF ADC is always running with a permanent headroom of 3 dB for the sum of all signals present at the ADC input. This ensures an always optimal exploitation of the dynamic range in the IF ADC.

The detection is done in peak Search mode during a field period. The attack time is made much faster than the decay time in order to avoid transient clipping effects in the IF ADC. This can happen during channel change or airplane flutter conditions.

The above wideband, slowly acting AGC loop (uncorrelated) is of first-order integral action. It is closed via the continuous tuner IF AGC amplifier in the Silicon Tuner via a bit stream DAC (PWM signal at 13.5 MHz, 27 MHz or 54 MHz) and an external and uncritical first-order RC low-pass.

8.8 Digital IF AGC

Common to both IF AGC concepts is the peak search algorithm as long as the H/V PLL is not locked. This is of advantage for the acquisition by avoiding hang-ups due to excessive overloading, so being able to leave the saturated condition by reducing the gain.

Two Detection modes are made available in the IC via I²C-bus.

- Black level gated AGC:

The first mode uses an IF AGC detector which is gated with a very robust and well-proven H/V sync PLL block on board. Gating occurs on the black level (most of the time on the back porch) of the video signal and the control is delivered after an error integration and exponential weighting to the internal IF AGC amplifier. This IF AGC amplifier, in fact a multiplier, has a control range of -20 dB to +48 dB.

- Peak AGC:

A fast attack and slow decay action cares for a good and nearly clip-free transient behavior. This proved to be more robust for non-standard signals, like sync clipping along the transmitter/receiver chain.

With respect to the IF AGC speed generally, only the gated black level or peak sync digital IF AGC can be made fast. However the peak search tuner IF AGC, used for positive modulation standards (L and L-accent standard), is rather slow because the VITS is present only once in a field.

The correlated or narrow-band AGC loop, closed via the continuous IF AGC amplifier in the TDA8296, is of first-order integral action and settles at a constant IF input level with a permanent headroom of 12 dB (picture carrier). This headroom is needed for the own sound carriers and the leaking neighbor (N - 1) spectrum.

8.9 Clock generation

Finally, either an external reference frequency (i.e. from the Silicon Tuner) or an own on-chip crystal oscillator in the TDA8296 feeds the internal PLL synthesizer to generate the necessary clock signals.

9. I²C-bus control

9.1 Protocol of the I²C-bus serial interface

The TDA8296 internal registers are accessible by means of the I²C-bus serial interface. The SDA bidirectional pin is used as the data input/output pin and SCL as the clock input pin. The highest SCL speed is 400 kHz.

9.1.1 Write mode


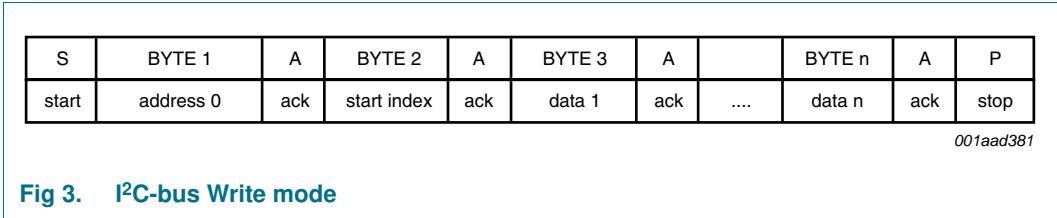


Table 6. Address format

| | | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|----------|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 1 | 0 | 0 | SADDR1 | 0 | 1 | SADDR0 | R/W |

Table 7. I²C-bus transfer description

| Field | Bit | Description |
|--------|---------|--------------------------|
| S | - | START condition |
| Byte 1 | 7 to 5 | device address |
| | 4 | SADDR1 |
| | 3 and 2 | device address |
| | 1 | SADDR0 |
| | 0 | R/W = 0 for write action |
| A | - | acknowledge |
| Byte 2 | 7 to 0 | start index |
| | | |
| A | - | acknowledge |
| Byte 3 | 7 to 0 | data 1 |
| | | |
| A | - | acknowledge |
| : | | |
| Byte n | 7 to 0 | data n |
| | | |
| A | - | acknowledge |
| P | - | STOP condition |

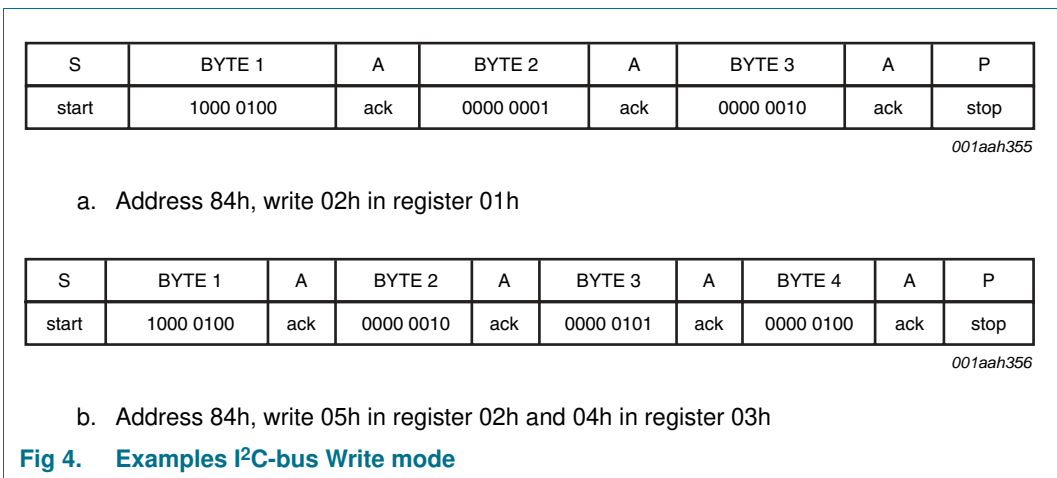

9.1.2 Read mode

| | | | | | | | | | | | | | |
|-------|-----------|-----|-------------|-----|-------|-----------|-----|---------|-----|------|---------|-----|------|
| S | BYTE 1 | A | BYTE 2 | A | S | BYTE 3 | A | BYTE 4 | A | | BYTE n | A | P |
| start | address 0 | ack | start index | ack | start | address 1 | ack | value 1 | ack | | value n | ack | stop |

001aad423

Fig 5. I²C-bus Read mode

Table 8. I²C-bus transfer description

| Field | Bit | Description |
|--------|---------|---------------------------------------|
| S | - | START condition |
| Byte 1 | 7 to 5 | device address |
| | 4 | SADDR1 |
| | 3 and 2 | device address |
| | 1 | SADDR0 |
| | 0 | R/W = 0 for write action |
| A | - | acknowledge |
| Byte 2 | 7 to 0 | start index |
| A | - | acknowledge |
| S | - | START condition (without stop before) |
| Byte 3 | 7 to 5 | device address |
| | 4 | SADDR1 |
| | 3 and 2 | device address |
| | 1 | SADDR0 |
| | 0 | R/W = 1 for read action |
| A | - | acknowledge |
| Byte 4 | 7 to 0 | value 1 |
| A | - | acknowledge |
| : | | |
| Byte n | 7 to 0 | value n |
| A | - | acknowledge |
| P | - | STOP condition |

| | | | | | | | | | | | | |
|-------|-----------|-----|-----------|-----|-------|-----------|-----|-----------|-----|-----------|-----|------|
| S | BYTE 1 | A | BYTE 2 | A | S | BYTE 3 | A | BYTE 4 | A | BYTE 5 | A | P |
| start | 1000 0100 | ack | 0000 0010 | ack | start | 1000 0101 | ack | 0000 0101 | ack | 0000 0100 | ack | stop |

001aah357

Address 84h, read register 02h with value 05h and read register 03h with value 04h

Fig 6. Example I²C-bus Read mode

9.2 Register overview

The TDA8296 internal registers are accessible by means of the I²C-bus serial interface as described in [Section 9.1](#). In [Table 10](#) and [Table 9](#) an overview of all the registers is given, the register description can be found in [Section 9.3](#).

Table 9. I²C-bus register reference

| Index | Name | I ² C-bus access | Default value | Reference |
|-------|----------------|-----------------------------|--------------------|--------------------------|
| 00h | STANDARD | R/W | 01h | Table 11 |
| 01h | EASY_PROG | R/W | 00h | Table 12 |
| 02h | DIV_FUNC | R/W | 04h | Table 14 |
| 03h | ADC_HEADR | R/W | 01h | Table 15 |
| 04h | PC_PLL_FUNC | R/W | 24h | Table 16 |
| 05h | SSIF_MUTE | R/W | 04h | Table 33 |
| 06h | reserved | R/W | 48h ^[1] | - |
| 07h | reserved | R/W | 84h ^[1] | - |
| 08h | reserved | R/W | 08h ^[1] | - |
| 09h | DTO_PC_LOW | R/W | 9Ah | Table 17 |
| 0Ah | DTO_PC_MID | R/W | 99h | Table 17 |
| 0Bh | DTO_PC_HIGH | R/W | 99h | Table 17 |
| 0Ch | DTO_SC_LOW | R/W | 3Dh | Table 19 |
| 0Dh | DTO_SC_MID | R/W | 20h | Table 19 |
| 0Eh | DTO_SC_HIGH | R/W | 59h | Table 19 |
| 0Fh | FILTERS_1 | R/W | 21h | Table 21 |
| 10h | FILTERS_2 | R/W | 31h | Table 22 |
| 11h | GRP_DELAY | R/W | 01h | Table 23 |
| 12h | D_IF_AGC_SET_1 | R/W | A0h | Table 24 |
| 13h | D_IF_AGC_SET_2 | R/W | 90h | Table 25 |
| 14h | reserved | R/W | 67h ^[1] | - |
| 15h | T_IF_AGC_SET | R/W | 88h | Table 26 |
| 16h | T_IF_AGC_LIM | R/W | F0h | Table 27 |
| 17h | T_IF_AGC_FORCE | R/W | 3Fh | Table 28 |
| 18h | reserved | R/W | 02h ^[1] | - |
| 19h | reserved | R/W | 88h ^[1] | - |
| 1Ah | reserved | R/W | 80h ^[1] | - |
| 1Bh | reserved | R/W | 00h ^[1] | - |
| 1Ch | V_SYNC_DEL | R/W | 6Fh | Table 29 |
| 1Dh | CVBS_SET | R/W | 31h | Table 30 |
| 1Eh | CVBS_LEVEL | R/W | 73h | Table 31 |
| 1Fh | CVBS_EQ | R/W | 10h | Table 32 |
| 20h | SOUNDSET_1 | R/W | 21h | Table 34 |
| 21h | SOUNDSET_2 | R/W | 22h | Table 35 |
| 22h | SOUND_LEVEL | R/W | 08h | Table 36 |
| 23h | SSIF_LEVEL | R/W | AFh | Table 37 |

Table 9. I²C-bus register reference ...continued

| Index | Name | I ² C-bus access | Default value | Reference |
|------------|-------------------|-----------------------------|--------------------|--------------------------|
| 24h | ADC_SAT | R | - | Table 38 |
| 25h | AFC | R | - | Table 39 |
| 26h | HVPLL_STAT | R | - | Table 41 |
| 27h | D_IF_AGC_STAT | R | - | Table 42 |
| 28h | T_IF_AGC_STAT | R | - | Table 43 |
| 29h | reserved | R | - | - |
| 2Ah | reserved | R/W | 00h ^[1] | - |
| 2Bh | ALT_FILT_COEF | R/W | 00h ^[1] | Table 44 |
| 2Ch | reserved | R | - | - |
| 2Dh | SSIF_AGC_STAT_REG | R | - | Table 45 |
| 2Eh | not used | R/W | 00h | - |
| 2Fh | IDENTITY | R | - | Table 46 |
| 30h | CLB_STDBY | R/W | 01h | Table 47 |
| 31h | reserved | R/W | 00h ^[1] | - |
| 32h | reserved | R | - | - |
| 33h | ADC_CTL | R/W | 24h | Table 48 |
| 34h | ADC_CTL_2 | R/W | 05h | Table 49 |
| 35h | VIDEODAC_CTL | R/W | 7Eh | Table 50 |
| 36h | AUDIODAC_CTL | R/W | 00h | Table 51 |
| 37h | DAC_REF_CLK_CTL | R/W | 40h | Table 52 |
| 38h | reserved | R/W | 20h ^[1] | - |
| 39h to 3Bh | not used | R/W | 00h | - |
| 3Ch | reserved | R/W | 00h ^[1] | - |
| 3Dh | not used | R/W | 00h | - |
| 3Eh | reserved | R/W | 61h ^[1] | - |
| 3Fh | PLL_REG07 | R/W | 00h | Table 53 |
| 40h | PLL_REG08 | R/W | 1Ah | Table 53 |
| 41h | PLL_REG09 | R/W | 02h | Table 53 |
| 42h | PLL_REG10 | R/W | 01h | Table 53 |
| 43h | reserved | R/W | 00h ^[1] | - |
| 44h | GPIOREG_0 | R/W | 1Bh | Table 54 |
| 45h | GPIOREG_1 | R/W | C1h | Table 55 |
| 46h | GPIOREG_2 | R/W | 07h | Table 57 |
| 47h to 4Ah | reserved | R | - | - |
| 4Bh | GD_EQ_SECT1_C1 | R/W | 00h | Table 58 |
| 4Ch | GD_EQ_SECT1_C2 | R/W | 00h | Table 58 |
| 4Dh | GD_EQ_SECT2_C1 | R/W | 00h | Table 58 |
| 4Eh | GD_EQ_SECT2_C2 | R/W | 00h | Table 58 |
| 4Fh | GD_EQ_SECT3_C1 | R/W | 00h | Table 58 |
| 50h | GD_EQ_SECT3_C2 | R/W | 00h | Table 58 |
| 51h | GD_EQ_SECT4_C1 | R/W | 00h | Table 58 |

Table 9. I²C-bus register reference ...continued

| Index | Name | I ² C-bus access | Default value | Reference |
|-------------|--------------------|-----------------------------|--------------------|--------------------------|
| 52h | GD_EQ_SECT4_C2 | R/W | 00h | Table 58 |
| 53h to 56h | not used | R/W | 00h | - |
| 57h | CVBS_EQ_COEF0_LOW | R/W | 00h | Table 60 |
| 58h | CVBS_EQ_COEF0_HIGH | R/W | 00h | Table 60 |
| 59h | CVBS_EQ_COEF1_LOW | R/W | 00h | Table 60 |
| 5Ah | CVBS_EQ_COEF1_HIGH | R/W | 00h | Table 60 |
| 5Bh | CVBS_EQ_COEF2_LOW | R/W | 00h | Table 60 |
| 5Ch | CVBS_EQ_COEF2_HIGH | R/W | 00h | Table 60 |
| 5Dh | CVBS_EQ_COEF3_LOW | R/W | 00h | Table 60 |
| 5Eh | CVBS_EQ_COEF3_HIGH | R/W | 00h | Table 60 |
| 5Fh | CVBS_EQ_COEF4_LOW | R/W | 00h | Table 60 |
| 60h | CVBS_EQ_COEF4_HIGH | R/W | 00h | Table 60 |
| 61h | CVBS_EQ_COEF5_LOW | R/W | 00h | Table 60 |
| 62h | CVBS_EQ_COEF5_HIGH | R/W | 04h | Table 60 |
| 63h to 66h | not used | R/W | 00h | - |
| 67h | reserved | R/W | Fh ^[1] | - |
| 68h | reserved | R/W | 0Fh ^[1] | - |
| 69h | reserved | R/W | FAh ^[1] | - |
| 6Ah | reserved | R/W | 0Fh ^[1] | - |
| 6Bh | reserved | R/W | EFh ^[1] | - |
| 6Ch | reserved | R/W | 0Fh ^[1] | - |
| 6Dh | reserved | R/W | DDh ^[1] | - |
| 6Eh | reserved | R/W | 0Fh ^[1] | - |
| 6Fh | reserved | R/W | BEh ^[1] | - |
| 70h | reserved | R/W | 0Fh ^[1] | - |
| 71h | reserved | R/W | 8Ah ^[1] | - |
| 72h | reserved | R/W | 0Fh ^[1] | - |
| 73h | reserved | R/W | 32h ^[1] | - |
| 74h | reserved | R/W | 0Fh ^[1] | - |
| 75h | reserved | R/W | 6Fh ^[1] | - |
| 76h | reserved | R/W | 0Eh ^[1] | - |
| 77h | reserved | R/W | F4h ^[1] | - |
| 78h | reserved | R/W | 0Ah ^[1] | - |
| 79h to 7Bh | not used | R/W | 00h | - |
| 7Ch to 9Ch | reserved | R/W | 00h ^[1] | - |
| 9Dh to A0h | not used | R/W | 00h | - |
| A1h and A2h | reserved | R/W | 00h ^[1] | - |

[1] This register must not be written with values other than default.

Table 10. I²C-bus registers

| Index | Name | 7 (MSB) | 6 | 5 | 4 | 3 | 2 | 1 | 0 (LSB) | |
|--------------------|----------------|----------------|---------------------|-------------------|-----------------|----------------|---------|-----------------|-----------------|--|
| 00h | STANDARD | STANDARD[7:0] | | | | | | | | |
| 01h | EASY_PROG | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ACTIVE | |
| 02h | DIV_FUNC | T_IF_SEL[1:0] | | 0 | 0 | 0 | POL_DET | VID_MOD | IF_SWAP | |
| 03h | ADC_HEADR | 0 | 0 | 0 | 0 | ADC_HEADR[3:0] | | | | |
| 04h | PC_PLL_FUNC | PC_PLL_BW[4:0] | | | | | PLL_ON | PULL_IN | 0 | |
| 05h | SSIF_MUTE | 0 | 0 | SSIF_AFC_WIN[3:0] | | | | SSIF_MUTE_ TYPE | SSIF_MUTE_ CTRL | |
| 06h ^[1] | reserved | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | |
| 07h | reserved | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | |
| 08h | reserved | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | |
| 09h | DTO_PC_LOW | DTO_PC[7:0] | | | | | | | | |
| 0Ah | DTO_PC_MID | DTO_PC[15:8] | | | | | | | | |
| 0Bh | DTO_PC_HIGH | DTO_PC[23:16] | | | | | | | | |
| 0Ch ^[2] | DTO_SC_LOW | DTO_SC[7:0] | | | | | | | | |
| 0Dh ^[3] | DTO_SC_MID | DTO_SC[15:8] | | | | | | | | |
| 0Eh ^[3] | DTO_SC_HIGH | DTO_SC[23:16] | | | | | | | | |
| 0Fh | FILTERS_1 | VID_FILT[2:0] | | | NOTCH_FILT[4:0] | | | | | |
| 10h ^[4] | FILTERS_2 | 0 | 0 | VID_FILT_ LOW_RIP | 1 | SBP[3:0] | | | | |
| 11h | GRP_DELAY | GD_EQ_CTRL | 0 | 0 | GRP_DEL[4:0] | | | | | |
| 12h | D_IF_AGC_SET_1 | 1 | D_IF_AGC_ MODE | 1 | 0 | 0 | 0 | 0 | 0 | |
| 13h | D_IF_AGC_SET_2 | 1 | D_IF_AGC_BW[6:0] | | | | | | | |
| 14h | reserved | 0 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | |
| 15h | T_IF_AGC_SET | POL_TIF | T_IF_AGC_SPEED[6:0] | | | | | | | |
| 16h | T_IF_AGC_LIM | UP_LIM[3:0] | | | LOW_LIM[3:0] | | | | | |
| 17h | T_IF_AGC_FORCE | T_FORCE | T_FORCE_VAL[6:0] | | | | | | | |
| 18h | reserved | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | |
| 19h | reserved | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | |
| 1Ah | reserved | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| 1Bh | reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |

Table 10. I²C-bus registers ...continued

| Index | Name | 7 (MSB) | 6 | 5 | 4 | 3 | 2 | 1 | 0 (LSB) |
|-------|------------------------------|--------------------|----------------|------------------|--------------|--------------|-----------|--------------------|-----------|
| 1Ch | V_SYNC_DEL | VS_WIDTH[1:0] | | VS_POL | VS_DEL[4:0] | | | | |
| 1Dh | CVBS_SET | 0 | 0 | 1 ^[5] | 1 | CVBS_EQ_CTRL | FOR_BLK | AUTO_BLK | 1 |
| 1Eh | CVBS_LEVEL | CVBS_LVL[7:0] | | | | | | | |
| 1Fh | CVBS_EQ | CVBS_EQ[7:0] | | | | | | | |
| 20h | SOUNDSET_1 | 0 | AM_FM_SND[1:0] | | DEEMPH[4:0] | | | | |
| 21h | SOUNDSET_2 | 0 | SSIF_AGC_TC | SSIF_AGC_CTRL | HD_DK | FOR_MUTE | AUTO_MUTE | SSIF_SND[1:0] | |
| 22h | SOUND_LEVEL | 0 | 0 | 0 | SND_LVL[4:0] | | | | |
| 23h | SSIF_LEVEL | SSIF_LVL[7:0] | | | | | | | |
| 24h | ADC_SAT | ADC_SAT[7:0] | | | | | | | |
| 25h | AFC | AFC[7:0] | | | | | | | |
| 26h | HVPLL_STAT | - | - | NOISE_DET | MAC_DET | FIDT | V_LOCK | F_H_LOCK | N_H_LOCK |
| 27h | D_IF_AGC_STAT | D_IF_AGC_STAT[7:0] | | | | | | | |
| 28h | T_IF_AGC_STAT | T_IF_AGC_STAT[7:0] | | | | | | | |
| 29h | reserved | - | - | - | - | - | - | - | - |
| 2Ah | reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 2Bh | ALT_FILT_COEF ^[6] | 0 | 0 | 0 | 0 | 0 | 0 | ALT_FILT_COEF[1:0] | |
| 2Ch | reserved | - | - | - | - | - | - | - | - |
| 2Dh | SSIF_AGC_STAT | SSIF_AGC_STAT[7:0] | | | | | | | |
| 2Eh | not used | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 2Fh | IDENTITY | IDENTITY[7:0] | | | | | | | |
| 30h | CLB_STDBY | 0 | 0 | 0 | 0 | 0 | 0 | STDBY | CLB |
| 31h | reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 32h | reserved | - | - | - | - | - | - | - | - |
| 33h | ADC_CTL | 0 | 0 | 1 | 0 | DCIN | 1 | SLEEP | PD_ADC |
| 34h | ADC_CTL_2 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | AD_SR54M |
| 35h | VIDEODAC_CTL | 0 | B_DA_V[5:0] | | | | | | PD_DA_V |
| 36h | AUDIODAC_CTL | 0 | B_DA_S[5:0] | | | | | | PD_DA_S |
| 37h | DAC_REF_CLK_CTL | 0 | 1 | 0 | 0 | 0 | 0 | 0 | PD_DA_REF |

Table 10. I²C-bus registers ...continued

| Index | Name | 7 (MSB) | 6 | 5 | 4 | 3 | 2 | 1 | 0 (LSB) |
|------------|--------------------------|---------------------|----------|---|-------------|---------------------|---------|---------|---------|
| 38h | reserved ^[6] | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 |
| 39h to 3Bh | not used | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 3Ch | reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 3Dh | not used | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 3Eh | reserved ^[6] | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1 |
| 3Fh | PLL_REG07 ^[6] | 0 | NSEL7 | 0 | 0 | 0 | 0 | 0 | 0 |
| 40h | PLL_REG08 ^[6] | MSEL[7:0] | | | | | | | |
| 41h | PLL_REG09 ^[6] | NSEL[6:0] | | | | | | | |
| 42h | PLL_REG10 ^[6] | 0 | 0 | 0 | PSEL[4:0] | | | | |
| 43h | reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 44h | GPIOREG_0 | GP1_CF[3:0] | | | GP0_CF[3:0] | | | | |
| 45h | GPIOREG_1 | I2CSW_EN | I2CSW_ON | 0 | 0 | GP2_CF[3:0] | | | |
| 46h | GPIOREG_2 | 0 | 0 | 0 | 0 | 0 | GP2_VAL | GP1_VAL | GP0_VAL |
| 47h to 4Ah | reserved | - | - | - | - | - | - | - | - |
| 4Bh | GD_EQ_SECT1_C1 | GD_EQ_SECT1_C1[7:0] | | | | | | | |
| 4Ch | GD_EQ_SECT1_C2 | GD_EQ_SECT1_C2[7:0] | | | | | | | |
| 4Dh | GD_EQ_SECT2_C1 | GD_EQ_SECT2_C1[7:0] | | | | | | | |
| 4Eh | GD_EQ_SECT2_C2 | GD_EQ_SECT2_C2[7:0] | | | | | | | |
| 4Fh | GD_EQ_SECT3_C1 | GD_EQ_SECT3_C1[7:0] | | | | | | | |
| 50h | GD_EQ_SECT3_C2 | GD_EQ_SECT3_C2[7:0] | | | | | | | |
| 51h | GD_EQ_SECT4_C1 | GD_EQ_SECT4_C1[7:0] | | | | | | | |
| 52h | GD_EQ_SECT4_C2 | GD_EQ_SECT4_C2[7:0] | | | | | | | |
| 53h to 56h | not used | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 57h | CVBS_EQ_COEF0_LOW | CVBS_EQ_COEF0[7:0] | | | | | | | |
| 58h | CVBS_EQ_COEF0_HIGH | 0 | 0 | 0 | 0 | CVBS_EQ_COEF0[11:8] | | | |
| 59h | CVBS_EQ_COEF1_LOW | CVBS_EQ_COEF1[7:0] | | | | | | | |

Table 10. I²C-bus registers ...continued

| Index | Name | 7 (MSB) | 6 | 5 | 4 | 3 | 2 | 1 | 0 (LSB) |
|---------------|------------------------|--------------------|---|---|---|---------------------|---|---|---------|
| 5Ah | CVBS_EQ_COEF1_ HIGH | 0 | 0 | 0 | 0 | CVBS_EQ_COEF1[11:8] | | | |
| 5Bh | CVBS_EQ_COEF2_ LOW | CVBS_EQ_COEF2[7:0] | | | | | | | |
| 5Ch | CVBS_EQ_COEF2_ HIGH | 0 | 0 | 0 | 0 | CVBS_EQ_COEF2[11:8] | | | |
| 5Dh | CVBS_EQ_COEF3_ LOW | CVBS_EQ_COEF3[7:0] | | | | | | | |
| 5Eh | CVBS_EQ_COEF3_ HIGH | 0 | 0 | 0 | 0 | CVBS_EQ_COEF3[11:8] | | | |
| 5Fh | CVBS_EQ_COEF4_ LOW | CVBS_EQ_COEF4[7:0] | | | | | | | |
| 60h | CVBS_EQ_COEF4_ HIGH | 0 | 0 | 0 | 0 | CVBS_EQ_COEF4[11:8] | | | |
| 61h | CVBS_EQ_COEF5_ LOW | CVBS_EQ_COEF5[7:0] | | | | | | | |
| 62h | CVBS_EQ_COEF5_ HIGH | 0 | 0 | 0 | 0 | CVBS_EQ_COEF5[11:8] | | | |
| 63h to 66h | not used | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 67h | reserved | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 |
| 68h | reserved | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |
| 69h | reserved | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 0 |
| 6Ah | reserved | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |
| 6Bh | reserved | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 1 |
| 6Ch | reserved | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |
| 6Dh | reserved | 1 | 1 | 0 | 1 | 1 | 1 | 0 | 1 |
| 6Eh | reserved | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |
| 6Fh | reserved | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 0 |
| 70h | reserved | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |
| 71h | reserved | 1 | 0 | 0 | 0 | 1 | 0 | 1 | 0 |
| 72h | reserved | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |
| 73h | reserved | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 0 |

Table 10. I²C-bus registers ...continued

| Index | Name | 7 (MSB) | 6 | 5 | 4 | 3 | 2 | 1 | 0 (LSB) |
|-------------------|----------|---------|---|---|---|---|---|---|---------|
| 74h | reserved | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |
| 75h | reserved | 0 | 1 | 1 | 0 | 1 | 1 | 1 | 1 |
| 76h | reserved | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 0 |
| 77h | reserved | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 0 |
| 78h | reserved | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 0 |
| 79h to 7Bh | not used | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 7Ch to 9Ch | reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 9Dh to A0h | not used | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| A1h and A2h | reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

[1] Register 06h has to be reprogrammed to new value C4h.

[2] Register 0Ch has to be reprogrammed to new value 00h.

[3] For M/N standard (ADC clock at 54 MHz) register 0Dh and 0Eh have to be reprogrammed to new value 55h.

[4] For M/N standard use narrow SSIF band-pass filter (SBP[3:0] = 0100).

[5] For L/L-accent standard the bit has to be programmed to 0.

[6] These registers have to be programmed to the alternative value in [Table 66](#), if an other frequency is required than 54 MHz for ADC sample frequency.

9.3 Register description

If registers (or bit groups contained in registers) are programmed with invalid values, i.e. values different from those described in the tables below, the default behavior is chosen for the related block. Other settings than described in the tables are not allowed.

9.3.1 Standard setting with easy programming

With the implemented ‘easy programming’, only one bit sets the TV or FM radio standard with recommended register content. If not suitable however, any of these registers can be written with other settings. With the rising edge of the bit ACTIVE, some of the registers 02h to 23h are programmed internally with the standard dependent settings according to [Table 13](#). The content of registers with address 24h and higher is untouched.

Table 11. STANDARD register (address 00h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|---------------|--------|------------|--|
| 7 to 0 | STANDARD[7:0] | R/W | | TV or FM radio standard selection (easy programming) |
| | | | 0000 0001* | M/N standard |
| | | | 0000 0010 | B standard |
| | | | 0000 0100 | G/H standard |
| | | | 0000 1000 | I standard |
| | | | 0001 0000 | D/K standard |
| | | | 0010 0000 | L standard |
| | | | 0100 0000 | L-accent standard |
| | | | 1000 0000 | FM radio |

In addition to application specific software settings following general recommendation should be used (deviating from easy programming values):

- Register 06h: new value C4h
- Register 0Ch: new value 00h
- M/N standard:
 - Register 10h: use narrow SSIF band-pass filter (SBP[3:0] = 0100)
 - Register 0Dh and 0Eh: new value 55h

Remark: When using alternative ADC sampling frequencies the DTO settings have to be adapted accordingly.

Table 12. EASY_PROG register (address 01h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|--------|--------|-----------|---|
| 7 to 1 | - | R/W | 000 0000* | not used |
| 0 | ACTIVE | R/W | | With the rising edge of this bit, the registers 02h to 23h are programmed with the standard dependent settings (see Table 13). |
| | | | 0* | no action |
| | | | 1 | no action |
| | | | 0 to 1 | activate easy programming |

Example: To set the device to B standard e.g., please do the following steps.

1. Write 02h to register STANDARD, address 00h (set B standard)
2. Write 00h to register EASY_PROG, address 01h
3. Write 01h to register EASY_PROG, address 01h (due to 0 to 1 transition of ACTIVE the device is set to B standard, i.e. registers 02h to 23h are programmed automatically according to [Table 13](#))
4. Write 00h to register EASY_PROG, address 01h (reset ACTIVE to logic 0)

Table 13. Easy programming values

| Register | | Standard | | | | | | | |
|----------|----------------|--------------------|-----|-----|-----|-----|-----|----------|----------|
| Index | Name | M/N ^[1] | B | G/H | I | D/K | L | L-accent | FM radio |
| 02h | DIV_FUNC | 04h | 04h | 04h | 04h | 04h | 06h | 07h | 00h |
| 04h | PC_PLL_FUNC | 24h | 24h | 24h | 24h | 24h | 24h | 24h | 20h |
| 05h | SSIF_MUTE | 04h | 04h | 04h | 04h | 04h | 04h | 04h | 04h |
| 06h | reserved | 48h | 48h | 48h | 48h | 48h | 48h | 48h | 48h |
| 07h | reserved | 84h | 84h | 84h | 84h | 84h | 84h | 84h | 04h |
| 08h | reserved | 08h | 08h | 08h | 08h | 08h | 08h | 08h | 08h |
| 09h | DTO_PC_LOW | 9Ah | 15h | 00h | BEh | 8Ch | 00h | 26h | 00h |
| 0Ah | DTO_PC_MID | 99h | A3h | 00h | 84h | 1Ah | 00h | B4h | 00h |
| 0Bh | DTO_PC_HIGH | 99h | 86h | 80h | 76h | 7Eh | 80h | 17h | 80h |
| 0Ch | DTO_SC_LOW | 3Dh | 7Bh | 7Bh | BEh | BEh | D6h | D6h | DAh |
| 0Dh | DTO_SC_MID | 20h | 09h | 09h | 84h | 84h | B9h | B9h | 4Bh |
| 0Eh | DTO_SC_HIGH | 59h | 6Dh | 6Dh | 76h | 79h | 72h | 72h | 68h |
| 0Fh | FILTERS_1 | 21h | 42h | 48h | 48h | 44h | 44h | 48h | 90h |
| 10h | FILTERS_2 | 31h | 32h | 32h | 32h | 32h | 32h | 32h | 34h |
| 11h | GRP_DELAY | 01h | 02h | 02h | 10h | 04h | 08h | 08h | 10h |
| 12h | D_IF_AGC_SET_1 | A0h | A0h | A0h | A0h | A0h | A0h | A0h | A0h |
| 13h | D_IF_AGC_SET_2 | 90h | 90h | 90h | 90h | 90h | 90h | 90h | 08h |
| 14h | reserved | 67h | 67h | 67h | 67h | 67h | 67h | 67h | E7h |
| 1Dh | CVBS_SET | 31h | 31h | 31h | 31h | 31h | 31h | 31h | 04h |
| 1Eh | CVBS_LEVEL | 73h | 73h | 73h | 81h | 75h | 6Ch | 6Ch | 73h |
| 1Fh | CVBS_EQ | 10h | 10h | 10h | 10h | 10h | 10h | 10h | 10h |
| 20h | SOUNDSET_1 | 21h | 22h | 22h | 22h | 22h | 44h | 44h | 22h |
| 21h | SOUNDSET_2 | 22h | 22h | 22h | 22h | 22h | 22h | 22h | 22h |
| 22h | SOUND_LEVEL | 08h | 04h | 04h | 04h | 04h | 04h | 04h | 02h |
| 23h | SSIF_LEVEL | AFh | AFh | AFh | AFh | AFh | AFh | AFh | AFh |

[1] M/N standard settings are equal to the power-on reset (default) values.

9.3.2 Diverse functions (includes tuner IF AGC Pin mode)

Table 14. DIV_FUNC register (address 02h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|---------|---------------|--------|-------|--|
| 7 and 6 | T_IF_SEL[1:0] | R/W | | It determines the tuner IF AGC output Pin mode. The open-drain output can be used in special applications in need of a higher control voltage. |
| | | | 00* | Normal mode |
| | | | 01 | Open-drain mode |
| | | | 10 | 3-state mode |
| | | | 11 | not allowed |
| 5 and 4 | - | R/W | 00* | not used |
| 3 | - | R/W | 0* | reserved, must be set to logic 0 |
| 2 | POL_DET | R/W | | The polarity detector ensures the proper polarity of the video signal. So, the sync impulses of the video output are near ground level. |
| | | | 0 | polarity detector off |
| | | | 1* | polarity detector on |
| 1 | VID_MOD | R/W | | Selects video modulation. The only standards with positive video modulation are L and L-accent. |
| | | | 0* | negative video modulation |
| | | | 1 | positive video modulation |
| 0 | IF_SWAP | R/W | | When HIGH, the demodulator expects a swapped IF spectrum. This is the case in L-accent standard. This option is also built in for flexibility reasons. |
| | | | 0* | normal IF spectrum expected |
| | | | 1 | swapped IF spectrum expected |

9.3.3 ADC headroom

Table 15. ADC_HEADR register (address 03h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|----------------|--------|-------|---|
| 7 to 4 | - | R/W | 0000* | not used |
| 3 to 0 | ADC_HEADR[3:0] | R/W | | ADC_HEADR adjusts the needed headroom for the wanted channel's own sound carriers and the N – 1 adjacent sound carriers (PC in L-accent standard). The ADC headroom is related to the sum of all signals. This function is built in for debugging purposes. |
| | | | 0001* | ADC headroom 3 dB |
| | | | 0010 | ADC headroom 6 dB |
| | | | 0100 | ADC headroom 9 dB |
| | | | 1000 | ADC headroom 12 dB |

9.3.4 Picture carrier PLL functions

Table 16. PC_PLL_FUNC register (address 04h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|--|--------|---------|---|
| 7 to 3 | PC_PLL_BW[4:0] | R/W | | picture carrier PLL loop bandwidth selection |
| | | | 0 0001 | loop bandwidth 15 kHz (not recommended) |
| | | | 0 0010 | loop bandwidth 30 kHz |
| | | | 0 0100* | loop bandwidth 60 kHz |
| | | | 0 1000 | loop bandwidth 130 kHz |
| 1 0000 | loop bandwidth 280 kHz (not recommended) | | | |
| 2 | PLL_ON | R/W | | the picture carrier PLL can be disengaged (e.g. in FM radio standard) |
| | | | 0 | PLL off (FM radio) ^[1] |
| 1* | PLL on ^[2] | | | |
| 1 | PULL_IN | R/W | | PULL_IN selects the pull-in range of the picture carrier PLL/FPLL |
| | | | 0* | pull-in range ±1.66 MHz |
| | | | 1 | pull-in range ±830 kHz |
| 0 | - | R/W | 0* | reserved, must be set to logic 0 |

[1] The DTO_PC frequency is set via register 09h to 0Bh

[2] The DTO_PC frequency is controlled by VIF_PLL function

9.3.5 Picture and sound carrier DTO

Table 17. DTO_PC_LOW, DTO_PC_MID and DTO_PC_HIGH register (address 09h to 0Bh) bit description

Legend: * = default value.

| Address | Register | Bit | Symbol | Access | Value | Description |
|---------|-------------|--------|---------------|--------|-------|---|
| 09h | DTO_PC_LOW | 7 to 0 | DTO_PC[7:0] | R/W | 9Ah* | For picture processing the digital tuned oscillator (DTO_PC) provides its oscillation signal to the demodulator part. For demodulation the oscillation frequency of the DTO_PC is controlled by the VIF_PLL. Optional the DTO_PC can operate at fixed programmed frequency. This will be the case if PLL_ON register is set to “off” mode. In case of VIF_PLL mode of the DTO_PC the register value defines the nominal frequency of AFC register (see Table 39). If PLL_ON register is set to “off” mode the DTO_PC register defines the fixed oscillation frequency value of the DTO_PC. The frequency of the DTO_PC is in relation to the register value by following formula: |
| 0Ah | DTO_PC_MID | 7 to 0 | DTO_PC[15:8] | R/W | 99h* | |
| 0Bh | DTO_PC_HIGH | 7 to 0 | DTO_PC[23:16] | R/W | 99h* | |

$$DTO_PC = \frac{f_{ADC}/4 - f_{PC}}{f_{ADC}/4} \times 2^{24} .$$

In case of standard L' please use the following

formula: $DTO_PC = f_{PC} \times \frac{4}{f_{ADC}} \times 2^{24}$

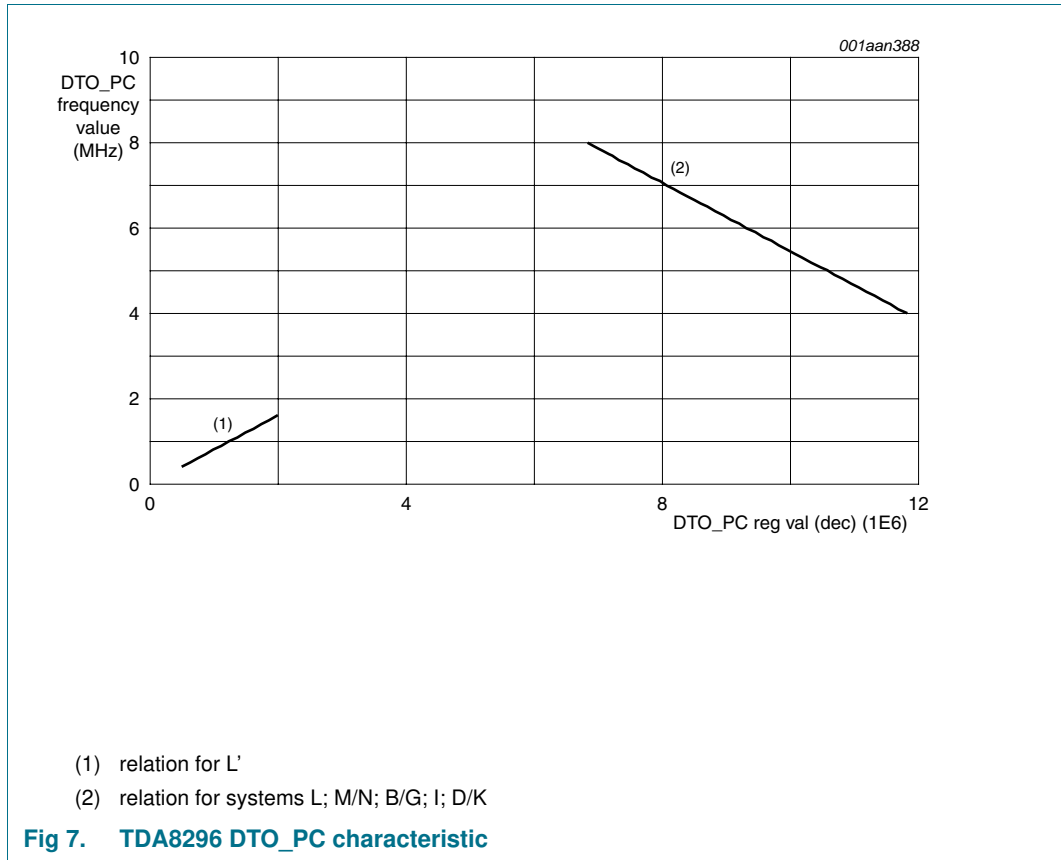


Table 18. Values of DTO_PC per TV standard at 54 MHz sampling frequency

| Standard | DTO_SC[23:16] | DTO_SC[15:8] | DTO_SC[7:0] | DTO_PC frequency value |
|----------|---------------|--------------|-------------|------------------------|
| M/N | 99h | 99h | 9Ah | 5.40 MHz |
| B | 86h | A3h | 15h | 6.40 MHz |
| G | 80h | 00h | 00h | 6.75 MHz |
| I | 76h | 84h | BEh | 7.25 MHz |
| D/K | 7Eh | 1Ah | 8Ch | 6.85 MHz |
| L | 80h | 00h | 00h | 6.75 MHz |
| L-accent | 17h | B4h | 26h | 1.25 MHz |

Table 19. DTO_SC_LOW, DTO_SC_MID and DTO_SC_HIGH register (address 0Ch to 0Eh) bit description

Legend: * = default value.^[1]

| Address | Register | Bit | Symbol | Access | Value | Description |
|---------|-------------|--------|---------------|--------|-------|--|
| 0Ch | DTO_SC_LOW | 7 to 0 | DTO_SC[7:0] | R/W | 00h* | The DTO_SC is suited for SSIF band-pass filter tuning. DTO_SC is calculated according to the following formula, whereas f_{SC} is the SSIF band-pass center frequency: |
| 0Dh | DTO_SC_MID | 7 to 0 | DTO_SC[15:8] | R/W | 20h* | |
| 0Eh | DTO_SC_HIGH | 7 to 0 | DTO_SC[23:16] | R/W | 59h* | |

$$DTO_SC = \frac{f_{SC}}{f_{ADC}/4} \times 2^{24}$$

[1] Deviating from easy programming values for DTO_SC[23:0] the values from [Table 20](#) should be used.

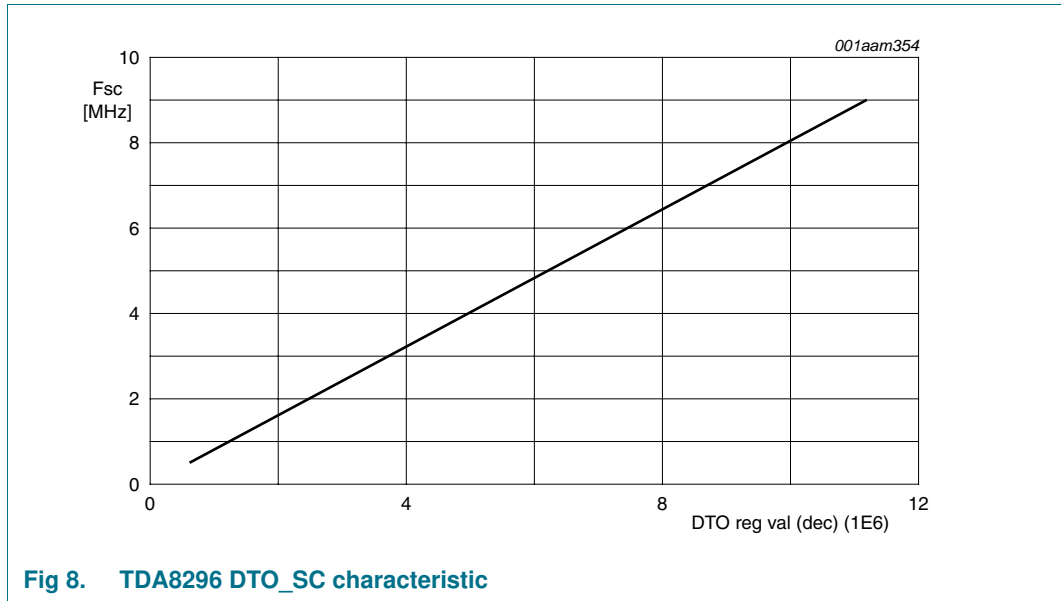


Fig 8. TDA8296 DTO_SC characteristic

Table 20. Values for SSIF mode at 54 MHz sampling frequency

| Standard | DTO_SC[23:16] | DTO_SC[15:8] | DTO_SC[7:0] | Band-pass center frequency |
|------------|---------------|--------------|-------------|----------------------------|
| M/N | 55h | 55h | 00h | 4.5 MHz |
| B | 6Dh | 09h | 00h | 5.75 MHz |
| G/H | 6Dh | 09h | 00h | 5.75 MHz |
| I | 76h | 84h | 00h | 6.25 MHz |
| D/K | 76h | 84h | 00h | 6.25 MHz |
| L/L-accent | 72h | B9h | 00h | 6.05 MHz |
| FM radio | 68h | 4Bh | 00h | 5.5 MHz |

9.3.6 Filter settings

Table 21. FILTERS_1 register (address 0Fh) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|---------------------|--------|---------|---|
| 7 to 5 | VID_FILT[2:0] | R/W | | video low-pass filter to remove all unwanted frequencies (own sound carriers) above video content (see Figure 9) |
| | | | 001* | video low-pass filter 4 MHz |
| | | | 010 | video low-pass filter 5 MHz |
| | | | 100 | video low-pass filter off |
| 4 to 0 | NOTCH_FILT[4:0] | R/W | | The notch filter attenuates the adjacent sound carrier N – 1, which is located differently dependent on standard (see Figure 10). |
| | | | 0 0001* | notch filter at 6.9 MHz for M/N standard |
| | | | 0 0010 | notch filter at 7.9 MHz for B standard |
| | | | 0 0100 | notch filter at 8.3 MHz for D/K and L standard |
| | | | 0 1000 | notch filter at 9.25 MHz for G/H, I and L-accent standard |
| 1 0000 | notch filter bypass | | | |

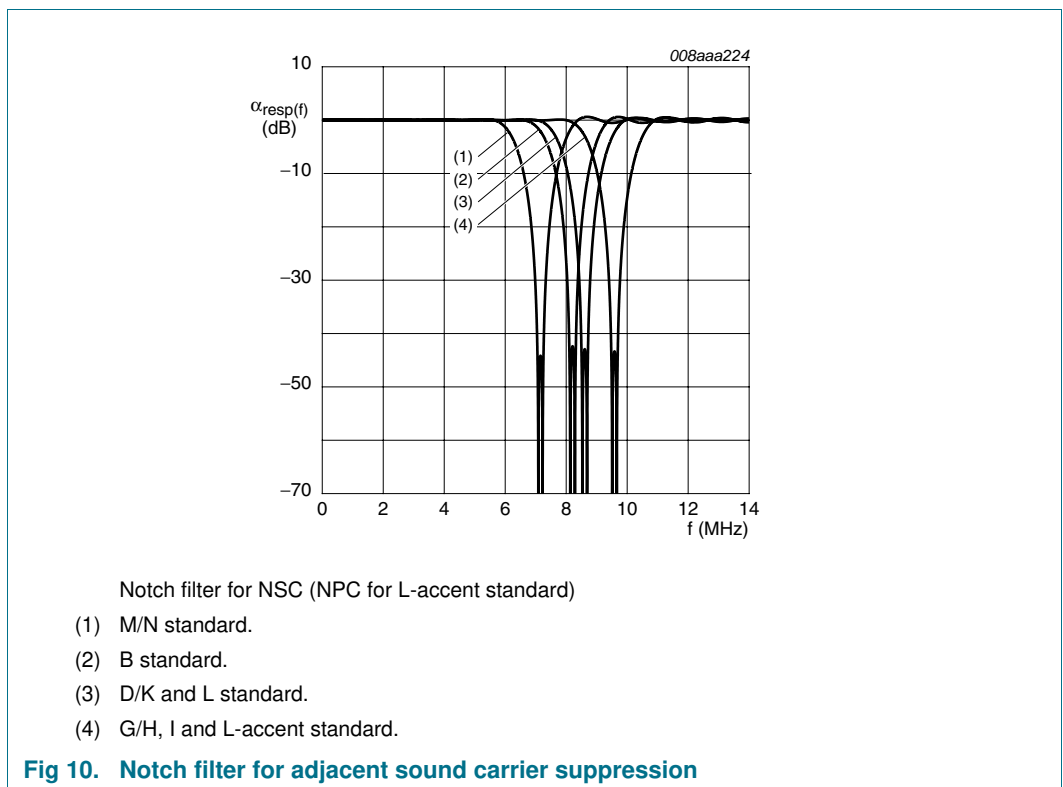
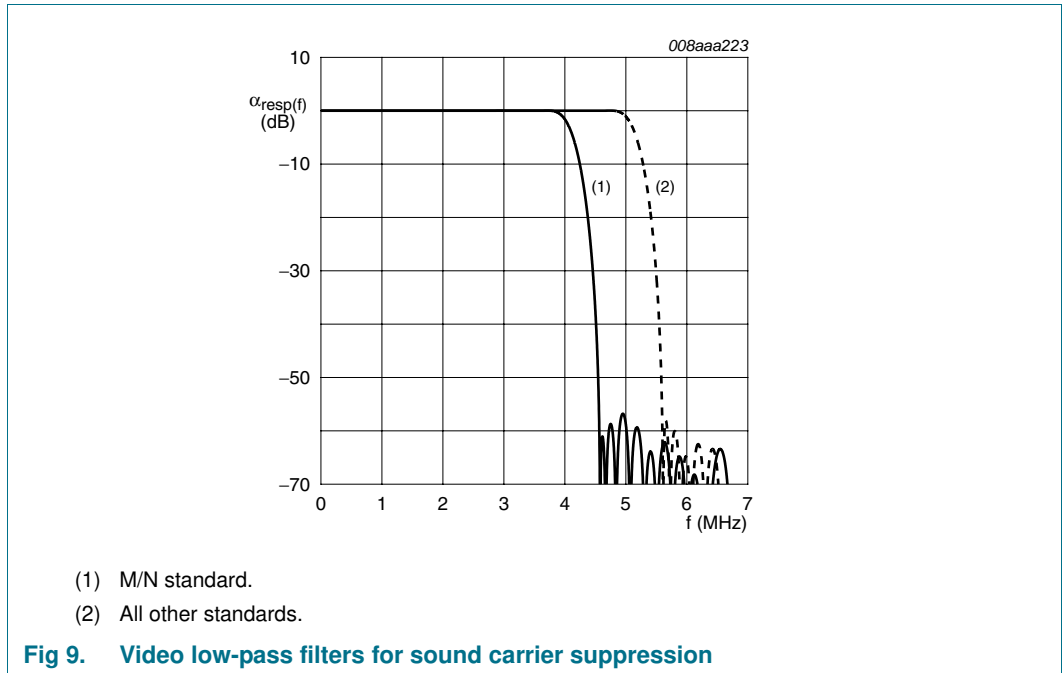



Table 22. FILTERS_2 register (address 10h) bit description


Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|---------|----------------------|--------|-------|---|
| 7 and 6 | - | R/W | 00* | not used |
| 5 | VID_FILT_ LOW_RIP | R/W | 0 | video filter characteristic adjust |
| | | | 1* | smooth roll-off |
| 4 | - | R/W | 1* | reserved, must be set to logic 1 |
| 3 to 0 | SBP[3:0] | R/W | | The SSIF band-pass attenuates unwanted video frequencies ^{[1][2]} , e.g. color carrier. For FM radio standard it provides almost channel selectivity (see Figure 12). |
| | | | 0001* | SSIF band-pass, wide bandwidth |
| | | | 0010 | SSIF band-pass, normal bandwidth (1.1 MHz, all TV standards) |
| | | | 0100 | SSIF band-pass, narrow bandwidth (200 kHz, FM radio) |

[1] SSIF band-pass center frequency is controlled by DTO_SC[23:0]. See [Table 20](#) for recommended DTO values.

[2] Deviating from easy programming values for FILTERS_2, the narrow SSIF band-pass filter (SPB[3:0] = 0100) should be used for M/N standard.

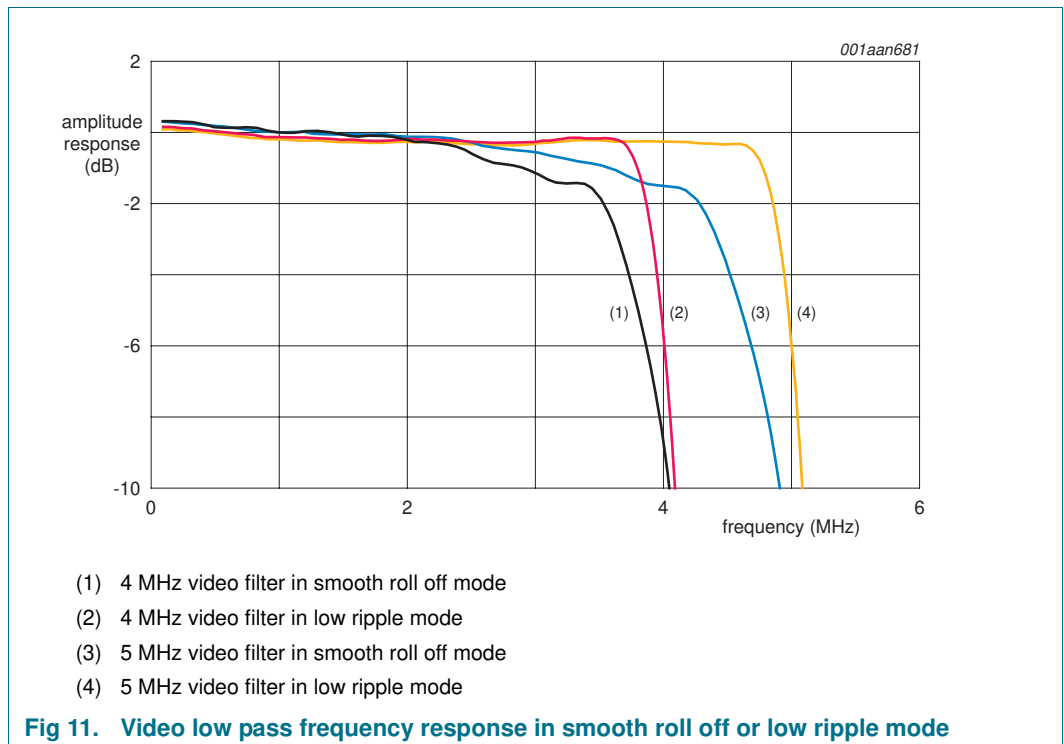

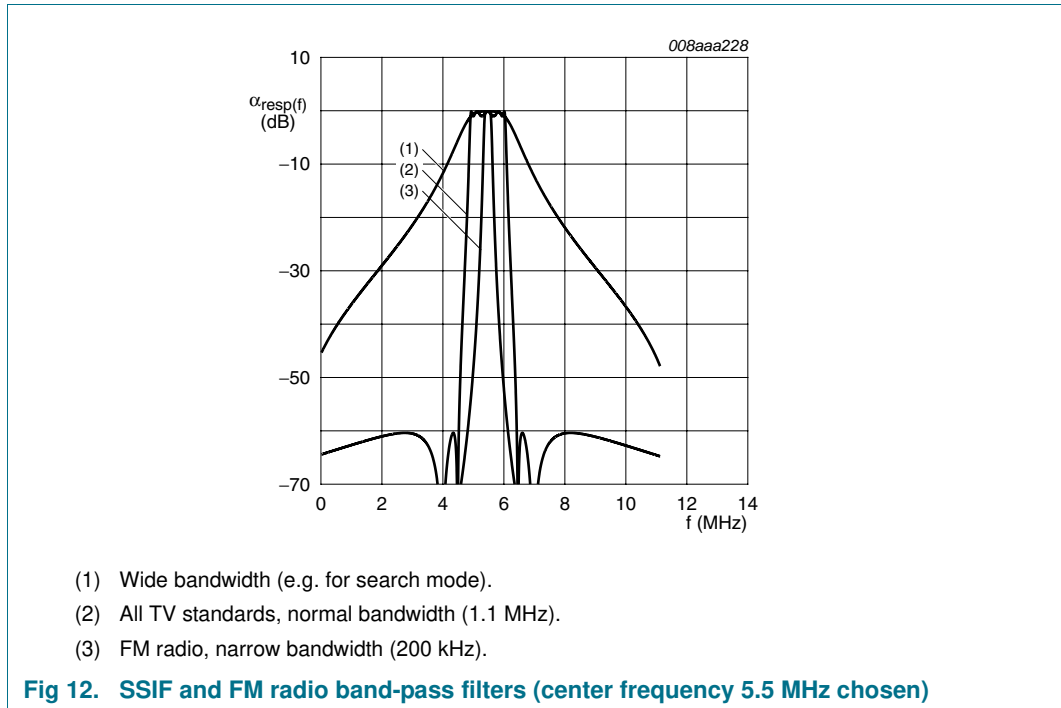

9.3.7 Group delay equalization

Table 23. GRP_DELAY register (address 11h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|---------|--------------|--------|---------|--|
| 7 | GD_EQ_CTRL | R/W | | group delay equalizer control; this is the control for the freely programmable group delay equalizer; for details see Section 9.3.19 |
| | | | 0* | off (equalizer bypassed) |
| | | | 1 | on (equalizer active) |
| 6 and 5 | - | R/W | 00* | reserved, must be set to logic 00 |
| 4 to 0 | GRP_DEL[4:0] | R/W | | group delay equalization to correct the transmitter predistortion |
| | | | 0 0001* | group delay M/N standard |
| | | | 0 0010 | group delay B/G/H standard |
| | | | 0 0100 | group delay D/K standard |
| | | | 0 1000 | group delay L/L-accent standard |
| | | | 1 0000 | group delay I (flat) standard |

9.3.8 Digital IF AGC functions

Table 24. D_IF_AGC_SET_1 register (address 12h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|---------------|--------|----------|---|
| 7 | - | R/W | 1* | reserved, must be set to logic 1 |
| 6 | D_IF_AGC_MODE | R/W | | If HIGH, the digital IF AGC detection and gating is done during the back porch of the video signal. This Detection mode can be used for all standards (also L/L-accent standard) without impact on the IF AGC loop speed. |
| | | | 0* | peak sync AGC (slow peak white L/L-accent standard) |
| | | | 1 | black level AGC detection |
| 5 to 0 | - | R/W | 10 0000* | reserved, must be set to logic 10 0000 |

Table 25. D_IF_AGC_SET_2 register (address 13h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|------------------|--------|-----------|--|
| 7 | - | R/W | 1* | reserved, must be set to logic 1 |
| 6 to 0 | D_IF_AGC_BW[6:0] | R/W | | digital IF AGC 3 dB-loop bandwidth setting |
| | | | 000 0001 | 25 Hz |
| | | | 000 0010 | 50 Hz |
| | | | 000 0100 | 100 Hz |
| | | | 000 1000 | 200 Hz |
| | | | 001 0000* | 400 Hz |
| | | | 010 0000 | 800 Hz |
| | | | 100 0000 | 1.6 kHz (not recommended) |

9.3.9 Tuner IF AGC functions

Table 26. T_IF_AGC_SET register (address 15h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|-----|---------|--------|-------|--|
| 7 | POL_TIF | R/W | | tuner IF AGC polarity |
| | | | 0 | inverted tuner IF AGC polarity |
| | | | 1* | normal tuner IF AGC polarity: the higher the necessary gain, the higher the IF AGC voltage |

Table 26. T_IF_AGC_SET register (address 15h) bit description ...continued

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|---------------------|--------|-----------|--|
| 6 to 0 | T_IF_AGC_SPEED[6:0] | R/W | | T_IF_AGC_SPEED determines the tuner IF AGC loop speed |
| | | | 000 0001 | -18 dB nominal |
| | | | 000 0010 | -12 dB nominal |
| | | | 000 0100 | -6 dB nominal |
| | | | 000 1000* | nominal speed (determined by the tuner IF control slope) |
| | | | 001 0000 | +6 dB nominal |
| | | | 010 0000 | +12 dB nominal |
| | | | 100 0000 | +18 dB nominal |

Table 27. T_IF_AGC_LIM register (address 16h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|--------------|--------|-------|--|
| 7 to 4 | UP_LIM[3:0] | R/W | | The tuner IF AGC output voltage can be limited to interface with concepts having power supply < 3.3 V. UP_LIM determines the upper limit from $1\sqrt{2}$ FS (= 0h) to FS (= Fh). The format is straight binary. |
| | | | 1111* | set upper limit to maximum |
| 3 to 0 | LOW_LIM[3:0] | R/W | | LOW_LIM determines the lower tuner IF AGC output limit from 0 (= 0h) to $1\sqrt{2}$ FS (= Fh). The format is straight binary. |
| | | | 0000* | set lower limit to minimum |

Table 28. T_IF_AGC_FORCE register (address 17h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|------------------|--------|-------|--|
| 7 | T_FORCE | R/W | | the tuner IF AGC output voltage can be forced externally to a fixed voltage, determined by T_FORCE_VAL |
| | | | 0* | tuner IF AGC normal operation |
| | | | 1 | tuner IF AGC output voltage determined by T_FORCE_VAL |
| 6 to 0 | T_FORCE_VAL[6:0] | R/W | | T_FORCE_VAL determines the tuner IF AGC forced value. So the tuner IF AGC can be fixed to a certain value for debugging purposes. Format is straight binary. |
| | | | 3Fh* | $0.5 \times V_{DD(3V3)}$, i.e. 1.65 V nominally |
| | | | XXh | don't care if T_FORCE = 0 |

9.3.10 V-sync adjustment

Table 29. V_SYNC_DEL register (address 1Ch) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|---------|---------------|--------|-------|---|
| 7 and 6 | VS_WIDTH[1:0] | R/W | | VS_WIDTH determines the width (in horizontal lines) of the V-sync gating pulse (needed for gating of tuner RF AGC2) |
| | | | 00 | width 1 line (64 μ s) |
| | | | 01* | width 2 lines |
| | | | 10 | width 4 lines |
| | | | 11 | width 16 lines |
| 5 | VS_POL | R/W | | VS_POL determines the polarity of the V-sync pulse: if VS_POL = 1, the first edge of the pulse is positive, else negative. |
| | | | 0 | first edge negative |
| | | | 1* | first edge positive |
| 4 to 0 | VS_DEL[4:0] | R/W | | VS_DEL determines the first edge position of the output V-sync pulse compared to the beginning of the vertical blanking interval: $pulse_position = (VS_DEL - 12) \text{ lines}$ |
| | | | 0Fh* | first edge 3 lines after beginning of vertical interval |

9.3.11 CVBS settings

Table 30. CVBS_SET register (address 1Dh) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|---------|--------------|--------|-------|--|
| 7 and 6 | - | R/W | 00* | not used |
| 5 and 4 | - | R/W | 11* | must be set to logic 11 or in case of L/L-accent to 01 |
| 3 | CVBS_EQ_CTRL | R/W | | video equalizer mode control |
| | | | 0* | mode using predefined settings like described in Table 32 |
| | | | 1 | free programmable mode; for details see Section 9.3.19 |
| 2 | FOR_BLK | R/W | | when active, the video output is always blanked, e.g. for channel change (forced blank) |
| | | | 0* | no action |
| | | | 1 | video blanked |
| 1 | AUTO_BLK | R/W | | when active, the video output is blanked if the horizontal line lock flag (N_H_LOCK, see Table 41) is not present |
| | | | 0* | auto-blanking off |
| | | | 1 | auto-blanking on |
| 0 | - | R/W | 1* | reserved, must be set to logic 1 |

Table 31. CVBS_LEVEL register (address 1Eh) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|---------------|--------|-------|--|
| 7 to 0 | CVBS_LVL[7:0] | R/W | | With this byte, the nominal video output level is freely programmable. The format is unsigned integer (offset binary). Settings below 40h and above C0h, which correspond to -5 dB (40h) and +4.5 dB (C0h) related to the default value, are forbidden. In the following some possible settings in 1 dB steps are shown. |
| | | | 51h | -3 dB nominal |
| | | | 5Bh | -2 dB nominal |
| | | | 66h | -1 dB nominal |
| | | | 73h* | nominal: 1 V (p-p) video output level (sync-peak) |
| | | | 81h | +1 dB nominal |
| | | | 91h | +2 dB nominal |
| | | | A2h | +3 dB nominal |

Table 32. CVBS_EQ register (address 1Fh) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|--------------|--------|------------|--|
| 7 to 0 | CVBS_EQ[7:0] | R/W | | The video equalizer can be used for the compensation of a principal tuner tilt or to change the video frequency according to customer taste. The figures given are at 5 MHz CVBS with respect to low frequencies (see Figure 13). |
| | | | 0000 0001 | The video frequency response is -8 dB for 5 MHz. |
| | | | 0000 0010 | The video frequency response is -6 dB for 5 MHz. |
| | | | 0000 0100 | The video frequency response is -4 dB for 5 MHz. |
| | | | 0000 1000 | The video frequency response is -2 dB for 5 MHz. |
| | | | 0001 0000* | The video frequency response is made flat in this mode. |
| | | | 0010 0000 | The video frequency response is +2 dB (peaking) for 5 MHz. |
| | | | 0100 0000 | The video frequency response is +4 dB (peaking) for 5 MHz. |
| | | | 1000 0000 | The video frequency response is +6 dB (peaking) for 5 MHz. |

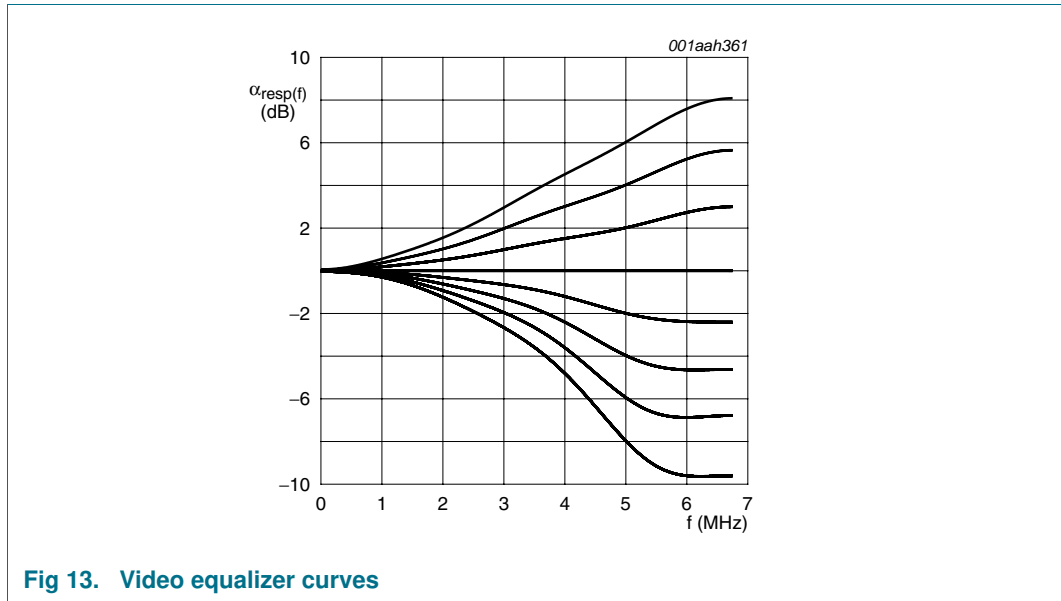


Fig 13. Video equalizer curves

9.3.12 SSIF and mono sound settings

Table 33. SSIF_MUTE register (address 05h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|---------|-------------------|--------|-------|------------------------------------|
| 7 and 6 | - | R/W | 00* | not used |
| 5 to 2 | SSIF_AFC_WIN[3:0] | R/W | | SSIF AFC mute window configuration |
| | | | 0001* | ±100 kHz |
| | | | 0010 | ±200 kHz |
| | | | 0100 | ±400 kHz |
| | | | 1000 | ±800 kHz |
| 1 | SSIF_MUTE_TYPE | R/W | | SSIF auto-mute behavior |
| | | | 0* | reduced gain |
| | | | 1 | mute |
| 0 | SSIF_MUTE_CTRL | R/W | | auto-mute of SSIF output |
| | | | 0* | off |
| | | | 1 | on |

Table 34. SOUNDSET_1 register (address 20h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|---------|----------------|--------|-------|--|
| 7 | - | R/W | 0* | reserved, must be set to logic 0 |
| 6 and 5 | AM_FM_SND[1:0] | R/W | | Output mode for inbuilt FM/AM mono sound demodulator |
| | | | 01* | FM sound |
| | | | 10 | AM sound (only L/L-accent standard) |
| | | | XX | don't care if SSIF output is chosen (SSIF_SND[1:0] = 10) |

Table 34. SOUNDSET_1 register (address 20h) bit description ...continued

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|-------------|--------|---------|--|
| 4 to 0 | DEEMPH[4:0] | R/W | | mono sound de-emphasis adjustment to compensate transmitter pre-emphasis; or low-pass filter to remove out of audio band interferers |
| | | | 0 0001* | de-emphasis of 75 μ s for M/N standard or non-European FM radio to compensate the transmitter pre-emphasis |
| | | | 0 0010 | de-emphasis of 50 μ s for B/G/H, D/K and I standard or European FM radio to compensate the transmitter pre-emphasis |
| | | | 0 0100 | low-pass filter with 30 kHz -3 dB cut-off frequency to remove out of audio band interferers |
| | | | 0 1000 | low-pass filter with 140 kHz -3 dB cut-off frequency to drive an external BTSC stereo decoder |
| | | | 1 0000 | The de-emphasis filter is bypassed. This can be used for debugging or other purposes. |

Table 35. SOUNDSET_2 register (address 21h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|-----|---------------|--------|-------|--|
| 7 | - | R/W | 0* | reserved, must be set to logic 0 |
| 6 | SSIF_AGC_TC | R/W | | SSIF AGC time constant for L/L-accent standard |
| | | | 0* | slow (normal) |
| | | | 1 | fast |
| 5 | SSIF_AGC_CTRL | R/W | | SSIF AGC control |
| | | | 0 | SSIF AGC off |
| | | | 1* | SSIF AGC on |
| 4 | HD_DK | R/W | | When active, the internal FM mono sound demodulator can handle excessive FM deviations up to 400 kHz. This might happen in D/K standard China. To activate this mode, it is mandatory to set D/K standard first. The sound output level has to be adapted accordingly by the microprocessor to avoid sound DAC clipping. E.g. for 400 kHz FM deviation, the -12 dB setting of the sound level register (see Table 36) is recommended. |
| | | | 0* | high Deviation mode off |
| | | | 1 | high Deviation mode on |
| | | | X | don't care if SSIF output is chosen (SSIF_SND[1:0] = 10) |
| 3 | FOR_MUTE | R/W | | When active, the mono sound signal is always muted. This setting only makes sense in case the sound DAC output is also set to mono sound (SSIF_SND[1:0] = 01). FOR_MUTE has no function if SSIF_SND[1:0] = 10. |
| | | | 0* | off |
| | | | 1 | on |
| | | | X | don't care if SSIF output is chosen (SSIF_SND[1:0] = 10) |

Table 35. SOUNDSET_2 register (address 21h) bit description ...continued

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|---------|---------------|--------|-------|---|
| 2 | AUTO_MUTE | R/W | | When active, the mono sound signal is muted if the horizontal lock flag (N_H_LOCK) disappears. This setting only makes sense in case the sound DAC output is also set to mono sound (SSIF_SND[1:0] = 01). FOR_MUTE has no function if SSIF_SND[1:0] = 10. |
| | | | 0* | off |
| | | | 1 | on |
| | | | X | don't care if SSIF output is chosen (SSIF_SND[1:0] = 10) |
| 1 and 0 | SSIF_SND[1:0] | R/W | | either mono sound or SSIF can be chosen for the sound DAC output |
| | | | 01 | mono sound ^[1] |
| | | | 10* | SSIF |

[1] Before activating mono sound, the TV standard needs to be set via easy programming

Table 36. SOUND_LEVEL register (address 22h) bit description

Legend: * = default value.


| Bit | Symbol | Access | Value | Description |
|--------|--------------|--|---------|---|
| 7 to 5 | - | R/W | 000* | not used |
| 4 to 0 | SND_LVL[4:0] | R/W | | mono sound output level |
| | | | 0 0001 | -12 dB nominal; implemented for flexibility reasons. With this setting, the adaptation to different standard requirements can be done. |
| | | | 0 0010 | -6 dB nominal; implemented for flexibility reasons. With this setting, the adaptation to different standard requirements can be done. It is chosen for FM radio because of the large FM deviation involved. |
| | | | 0 0100 | Nominal setting; FM deviations up to 100 kHz can be processed without sound DAC clipping. The clipping level is 535 mV (RMS) typically. |
| | | | 0 1000* | +6 dB nominal; chosen for M/N standard due to less nominal frequency deviation |
| | | | 1 0000 | +12 dB nominal; implemented for flexibility reasons. With this setting, the adaptation to different standard requirements can be done. |
| X | XXXXX | don't care if SSIF output is chosen (SSIF_SND[1:0] = 10) | | |

Table 37. SSIF_LEVEL register (address 23h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|---------------|--------|------------------------------|--|
| 7 to 0 | SSIF_LVL[7:0] | R/W | | SSIF output level adjustment; SSIF AGC on (21h[5] = 1) |
| | | | 1111 1111 | +3 dB |
| | | | : | : |
| | | | 1010 1111* | 0 dB |
| | | | : | : |
| | | | 0100 0000 to 0000 0000 | -8.7 dB |
| | | | | SSIF output level adjustment; SSIF AGC off (21h[5] = 0) |
| | | | XXX0 0001 | -12 dB nominal; implemented for flexibility reasons. With this setting, the adaptation to different standard requirements can be done. |
| | | | XXX0 0010 | -6 dB nominal; implemented for flexibility reasons. With this setting, the adaptation to different standard requirements can be done. |
| | | | XXX0 0100 | Nominal setting; typical output level is 55 mV (RMS) for PC / SC ratio of 13 dB (see Section 12 , SSIF/mono sound output). |
| | | | XXX0 1000 | +6 dB nominal; implemented for flexibility reasons. With this setting, the adaptation to different standard requirements can be done. |
| | | | XXX1 0000 | +12 dB nominal; implemented for flexibility reasons. With this setting, the adaptation to different standard requirements can be done. |
| | | | XXXX XXXX | don't care if mono sound output is chosen (SSIF_SND[1:0] = 01) |

Remark: The SSIF level depends also on the used capacitor C_S . Please refer to [Figure 14](#)

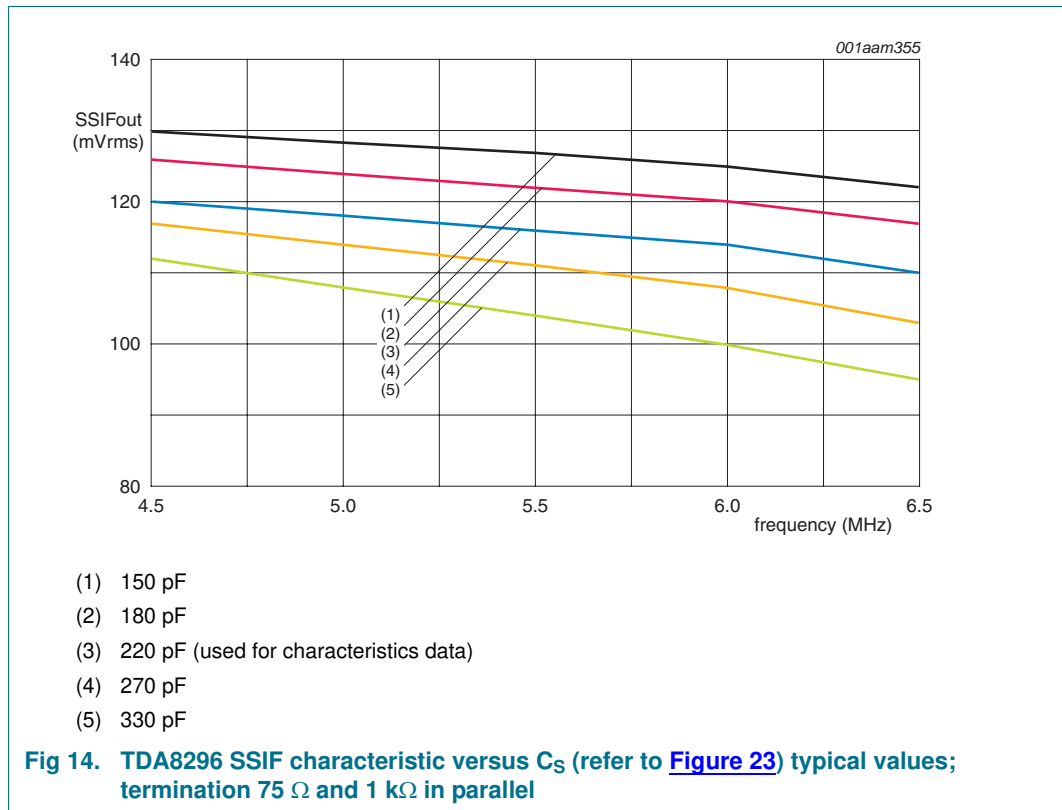

9.3.13 Status registers: ADC saturation, AFC, H/V PLL and AGC

Table 38. ADC_SAT register (address 24h) bit description

| Bit | Symbol | Access | Value | Description |
|--------|--------------|--------|-------|---|
| 7 to 0 | ADC_SAT[7:0] | R | - | With ADC_SAT, the ADC saturation percentage in a period of 40 ms can be calculated by the following formula: $saturation = \frac{ADC_SAT}{256} (\%)$. |

Table 39. AFC register (address 25h) bit description

| Bit | Symbol | Access | Value | Description |
|--------|----------|--------|-------|--|
| 7 to 0 | AFC[7:0] | R | - | <p>This is the readout for AFC. AFC contains the frequency deviation from nominal IF picture carrier. The format is twos complement, 13.2 kHz steps are done per LSB. See Table 40 for details. The frequency deviation could also be given by the following formula:</p> $f_{IF} - f_{nom} = \frac{-AFC \times 6750}{512} \text{ (kHz)}$ <p>For a frequency deviation from the nominal IF picture carrier greater than the FPLL pull-in capability (–830.6 kHz to +843.8 kHz or –1674.3 kHz to +1687.5 kHz), the output reading is undefined. The AFC lock indication can be taken from the N_H_LOCK information from the H-sync PLL. The lock occurs inside a frequency window, which is determined by the pull-in capability of the FPLL.</p> |

Table 40. Calculation of frequency deviation from AFC value

| Deviation from nominal IF frequency ^[1] | AFC[7] | AFC[6] | AFC[5] | AFC[4] | AFC[3] | AFC[2] | AFC[1] | AFC[0] |
|--|--------|--------|--------|--------|--------|--------|--------|--------|
| $f_{IF} = f_{nom} - 1674.3 \text{ kHz}$ | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| $f_{IF} = f_{nom} - 1661.1 \text{ kHz}$ | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 |
| : | : | : | : | : | : | : | : | : |
| $f_{IF} = f_{nom} - 830.6 \text{ kHz}$ | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| $f_{IF} = f_{nom} - 817.4 \text{ kHz}$ | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 |
| : | : | : | : | : | : | : | : | : |
| $f_{IF} = f_{nom} - 13.2 \text{ kHz}$ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| $f_{IF} = f_{nom}$ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| $f_{IF} = f_{nom} + 13.2 \text{ kHz}$ | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| : | : | : | : | : | : | : | : | : |
| $f_{IF} = f_{nom} + 830.6 \text{ kHz}$ | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 1 |
| $f_{IF} = f_{nom} + 843.8 \text{ kHz}$ | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| : | : | : | : | : | : | : | : | : |
| $f_{IF} = f_{nom} + 1674.3 \text{ kHz}$ | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| $f_{IF} = f_{nom} + 1687.5 \text{ kHz}$ | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

[1] See [Section 12](#) for nominal IF frequencies.

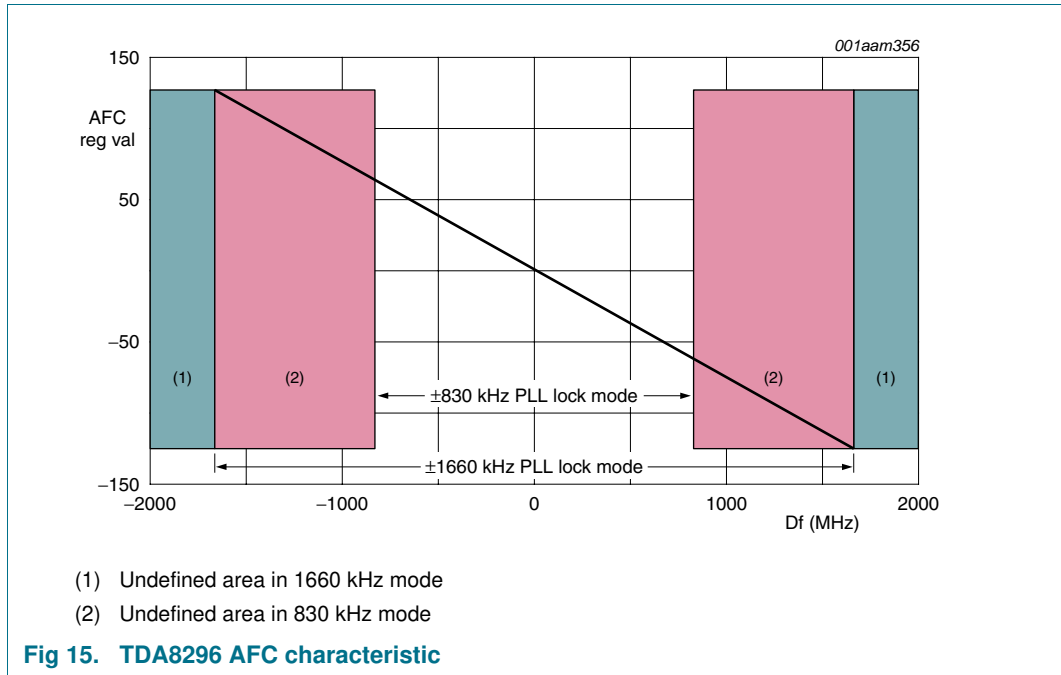


Table 41. HVPLL_STAT register (address 26h) bit description

| Bit | Symbol | Access | Value | Description |
|---------|-----------|--------|-------|--|
| 7 and 6 | - | R | - | not used |
| 5 | NOISE_DET | R | - | This flag gets HIGH in case the video S/N (weighted) drops below 30 dB. For proper and noise free video signals it stays LOW. It can be used for debugging and other purposes. |
| 4 | MAC_DET | R | - | This flag indicates the presence of copy-guarded video content from STBs or VCRs. It can be used for debugging and other purposes. |
| 3 | FIDT | R | - | This flag indicates the frame rate (50 Hz or 60 Hz). When active, 60 Hz is detected. It can be used for debugging and other purposes. |
| 2 | V_LOCK | R | - | This flag is active, if a proper frame (50 Hz or 60 Hz) is detected. It can be used for debugging and other purposes. |
| 1 | F_H_LOCK | R | - | This flag is active, if a proper H-sync (15.625 kHz or 15.734 kHz) is detected (Fast mode). It can be used for debugging and other purposes. |
| 0 | N_H_LOCK | R | - | This flag is active, if a proper H-sync (15.625 kHz or 15.734 kHz) is detected (Normal mode). It can be used for debugging and other purposes. |

Table 42. D_IF_AGC_STAT register (address 27h) bit description

| Bit | Symbol | Access | Value | Description |
|--------|--------------------|--------|-------|---|
| 7 to 0 | D_IF_AGC_STAT[7:0] | R | - | D_IF_AGC_STAT is the digital IF AGC status readout byte. Contains the digital IF AGC loop DC information. The format is twos complement. To get the internal gain in dB, the following formula can be used: $gain = \frac{D_IF_AGC_STAT + 50}{3.675} (dB).$ |

Table 43. T_IF_AGC_STAT register (address 28h) bit description

| Bit | Symbol | Access | Value | Description |
|--------|--------------------|--------|-------|--|
| 7 to 0 | T_IF_AGC_STAT[7:0] | R | - | T_IF_AGC_STAT is the IF AGC status readout byte. Contains the tuner IF AGC loop DC information. The format is offset binary. |

Table 44. ALT_FILT_COEF register (address 2Bh) bit description

| Bit | Symbol | Access | Value | Description | Frequency |
|--------|---------------|--------|-------|---|-----------|
| 7 to 2 | not used | R/W | 0 | not used. | |
| 1 to 0 | ALT_FILT_COEF | R/W | 00 | internal selection of fixed coefficients for video low pass filter using an ADC sampling frequency of | 54.00 MHz |
| | | | 01 | | 50.75 MHz |
| | | | 10 | | 57.25 MHz |

Table 45. SSIF_AGC_STAT register (address 2Dh) bit description

| Bit | Symbol | Access | Value | Description |
|--------|--------------------|--------|-------|---|
| 7 to 0 | SSIF_AGC_STAT[7:0] | R | - | SSIF_AGC_STAT contains the SSIF AGC gain information. To get the internal gain in dB, the following formula can be used: $gain = 20 \log_{10} \frac{SSIF_AGC_STAT}{8}$. The value is approximately the PC / SC ratio. |

9.3.14 Chip identification and Standby mode

Table 46. IDENTITY register (address 2Fh) bit description

| Bit | Symbol | Access | Value | Description |
|--------|---------------|--------|------------|---|
| 7 to 0 | IDENTITY[7:0] | R | 1000 1100* | chip identification, value corresponds to TDA8296 |

Table 47. CLB_STDBY register (address 30h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|--------|--------|---------|----------------------------------|
| 7 to 3 | - | R/W | 0000 0* | not used |
| 2 | - | R/W | 0* | reserved, must be set to logic 0 |

Table 47. CLB_STDBY register (address 30h) bit description ...continued

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|-----|--------|--------|-------|--|
| 1 | STDBY | R/W | | When STDBY is set to logic 1, the chip enters in Standby mode, and its power consumption is reduced. The IF AGC pin is set to high-ohmic. The default value is logic 0, which means that the chip is active. |
| | | | 0* | Normal mode |
| | | | 1 | Standby mode |
| 0 | CLB | R/W | | This signal clears the TDA8296 through the I ² C-bus interface (software reset). To activate the reset, just write CLB = 0. This software reset will not affect the content of the registers. |
| | | | 0 | activate soft reset |
| | | | 1* | normal operation |

9.3.15 ADC control

In the TDA8296 a 12-bit ADC is implemented sampling with a 54 MHz clock (27 MHz optional).

Table 48. ADC_CTL register (address 33h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|--------|--------|-------|---|
| 7 to 4 | - | R/W | 0010* | reserved, must be set to logic 0010 |
| 3 | DCIN | R/W | | The input signal of the ADC can be either AC coupled by means of two capacitors or connected directly to the inputs (DC coupled). |
| | | | 0* | AC coupling |
| | | | 1 | DC coupling |
| 2 | - | R/W | 1* | reserved, must be set to logic 1 |
| 1 | SLEEP | R/W | | When HIGH, SLEEP sets the ADC into its Sleep mode. Both bias current and clock are switched off. In this mode, the current consumption is reduced by a factor of 6. The reference circuit will remain active in order to guarantee a fast recovery from Sleep mode. |
| | | | 0* | Normal mode |
| | | | 1 | ADC Sleep mode |
| 0 | PD_ADC | R/W | | When HIGH, PD_ADC sets the ADC into its Power-down mode. All internal currents are switched off. In this mode, the current consumption is near zero (leakage current only). |
| | | | 0* | Normal mode |
| | | | 1 | ADC Power-down mode |

Table 49. ADC_CTL_2 register (address 34h) bit description


Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|---------|--------|--------|---------|-----------------------------------|
| 7 to 3 | - | R/W | 0000 0* | not used |
| 2 and 1 | - | R/W | 10* | reserved, must be set to logic 10 |

Table 49. ADC_CTL_2 register (address 34h) bit description ...continued

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|-----|----------|--------|-------|---|
| 0 | AD_SR54M | R/W | | AD_SR54M sets the ADC sampling rate |
| | | | 0 | ADC sampling rate 27 MHz; first decimation filter is bypassed |
| | | | 1* | ADC sampling rate 54 MHz |

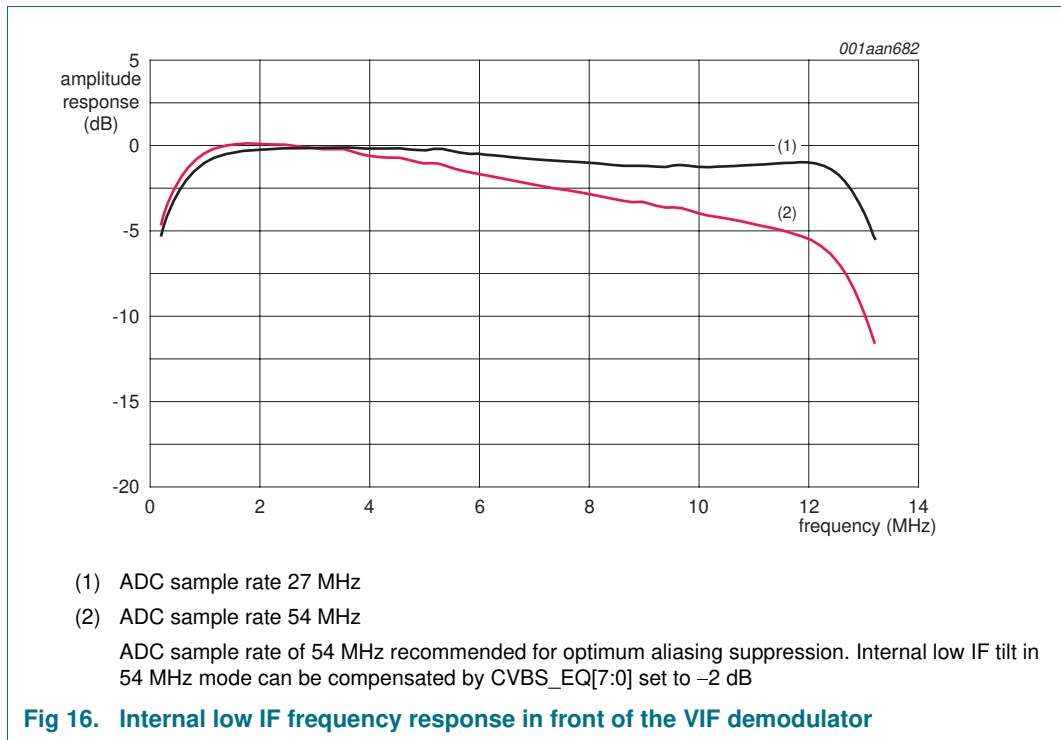

9.3.16 Video and sound DAC control

The TDA8296 implements two 10-bit DAC modules (CVBS and sound outputs) which are sampled by a 108 MHz clock. A reference module derives biasing currents for the two DACs.

Table 50. VIDEODAC_CTL register (address 35h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|-------------|--------|----------|---|
| 7 | - | R/W | 0* | reserved, must be set to logic 0 |
| 6 to 1 | B_DA_V[5:0] | R/W | | B_DA_V modifies between 50% to 100% the full scale DAC output current. See Section 13.3 . |
| | | | 00 0000 | minimum current setting |
| | | | 11 1111* | maximum current setting |
| 0 | PD_DA_V | R/W | | When HIGH, PD_DA_V sets the video DAC into its Power-down mode. |
| | | | 0* | Normal mode |
| | | | 1 | video DAC Power-down mode |

Table 51. AUDIODAC_CTL register (address 36h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|-------------|--------|----------|---|
| 7 | - | R/W | 0* | reserved, must be set to logic 0 |
| 6 to 1 | B_DA_S[5:0] | R/W | | B_DA_S modifies between 50% to 100% the full scale DAC output current. See Section 13.3 . |
| | | | 00 0000* | minimum current setting |
| | | | 11 1111 | maximum current setting |
| 0 | PD_DA_S | R/W | | When HIGH, PD_DA_S sets the sound DAC into its Power-down mode. |
| | | | 0* | Normal mode |
| | | | 1 | sound DAC Power-down mode |

Table 52. DAC_REF_CLK_CTL register (address 37h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|-----------|--------|----------|--|
| 7 | - | R/W | 0* | not used |
| 6 to 1 | - | R/W | 10 0000* | reserved, must be set to logic 10 0000 |
| 0 | PD_DA_REF | R/W | | When HIGH, PD_DA_REF sets the reference module into its Power-down mode. |
| | | | 0* | Normal mode |
| | | | 1 | Power-down mode |

9.3.17 Clock generation (PLL and crystal oscillator)

The TDA8296 implements a crystal oscillator which can be used either in Slave mode or in Oscillator mode (see [Section 13.7](#)), and a multipurpose PLL which receives XIN as input clock, and delivers the system clock of the IC (108 MHz).

Table 53. PLL_REG07, PLL_REG08, PLL_REG09 and PLL_REG10 register (address 3Fh to 42h) bit description

Legend: * = default value.

| Address | Register | Bit | Symbol | Access | Value | Description |
|---------|-----------|--------|-----------|--------|-------|--|
| 3Fh | PLL_REG07 | 7 | - | R/W | 0* | not used |
| | | 6 | NSEL7 | R/W | 0* | It programs bit 7 of the N parameter (N = NSEL + 1). N is the PLL pre-divider. See below for bits NSEL[6:0]. |
| | | 5 to 0 | - | R/W | 00h* | reserved, must be set to 00h |
| 40h | PLL_REG08 | 7 to 0 | MSEL[7:0] | R/W | 1Ah* | It programs the M parameter (M = MSEL + 1). M is the PLL feedback-divider. |
| 41h | PLL_REG09 | 7 to 1 | NSEL[6:0] | R/W | 01h* | It programs bits 6 to 0 of the N parameter (N = NSEL + 1). N is the PLL pre-divider. |
| | | 0 | - | R/W | 0* | reserved, must be set to logic 0 |
| 42h | PLL_REG10 | 7 to 5 | - | R/W | 000* | reserved, must be set to logic 000 |
| | | 4 to 0 | PSEL[4:0] | R/W | 01h* | It programs the P parameter (P = PSEL + 1). P is the PLL post-divider. |

The PLL output frequency (108 MHz) can be calculated with the following formula:

$$f_{clk(o)(PLL)} = \frac{f_{VCO}}{2 \times P} = \frac{f_i \times M}{N \times P} \tag{1}$$

For optimum performances, the following relations must be respected:

- $275 \text{ MHz} \leq f_{VCO} \leq 550 \text{ MHz}$
- $4 \text{ kHz} \leq f_i / N \leq 150 \text{ MHz}$

9.3.18 GPIOs

In the TDA8296, three general purpose input/outputs are implemented.

Table 54. GPIOREG_0 register (address 44h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|-------------|--------|---------------|--|
| 7 to 4 | GP1_CF[3:0] | R/W | | It determines how the general purpose pin GPIO1 is configured. |
| | | | 0000 | The GPIO1 pin is in Input mode. The input value is stored in GP1_VAL. |
| | | | 0001* | The GPIO1 pin is in Open-drain mode. The output value is determined by GP1_VAL. |
| | | | 0011 | The GPIO1 pin is in Output mode. The PLL output clock divided by two is delivered. |
| | | | 0100 to 1011 | The GPIO1 pin is in Output mode. HVPLL signals are delivered. The HVPLL signal is chosen according to Table 56 . |
| | | | XXXX | Don't care if I2CSW_EN = 1. Then the pad is configured as I ² C-bus feed-through like described in Table 55 . |
| 3 to 0 | GP0_CF[3:0] | R/W | | It determines how the general purpose pin GPIO0 is configured. |
| | | | 0000 | The GPIO0 pin is in Input mode. The input value is stored in GP0_VAL. |
| | | | 0001 | The GPIO0 pin is in Open-drain mode. The output value is determined by GP0_VAL. |
| | | | 0011 | The GPIO0 pin is in Output mode. The PLL output clock divided by two is delivered. |
| | | | 0100 to 1011* | The GPIO0 pin is in Output mode. HVPLL signals are delivered. The HVPLL signal is chosen according to Table 56 . |

Table 55. GPIOREG_1 register (address 45h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|---------|----------|--------|-------|--|
| 7 | I2CSW_EN | R/W | 1* | When I2CSW_EN = 1, GPIO1 and GPIO2 are configured as an I ² C-bus feed-through independently of the GP1_CF and GP2_CF value. When I2CSW_ON = 0, the feed-through switch is open, and GPIO1 and GPIO2 are in 3-state. When the switch is closed (I2CSW_ON = 1), the I ² C-bus clock and data signals (SCL and SDA) are available on the GPIO1 and GPIO2 pins. |
| 6 | I2CSW_ON | R/W | 0* | |
| 5 and 4 | - | R/W | 00* | not used |

Table 55. GPIOREG_1 register (address 45h) bit description ...continued

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|--------|-------------|--------|--------------|--|
| 3 to 0 | GP2_CF[3:0] | R/W | | It determines how the general purpose pin GPIO2 is configured. |
| | | | 0000 | The GPIO2 pin is in Input mode. The input value is stored in GP2_VAL. |
| | | | 0001* | The GPIO2 pin is in Open-drain mode. The output value is determined by GP2_VAL. |
| | | | 0011 | The GPIO2 pin is in Output mode. The PLL output clock divided by two is delivered. |
| | | | 0100 to 1011 | The GPIO2 pin is in Output mode. HVPLL signals are delivered. The HVPLL signal is chosen according to Table 56 . |
| | | | XXXX | Don't care if I2CSW_EN = 1. Then the pad is configured as I ² C-bus feed-through. |

Table 56. HVPLL signal configuration

| HVPLL_BUS bit | Signal |
|--------------------|-----------|
| GPx_CF[3:0] = 1011 | V_SYNC |
| GPx_CF[3:0] = 1010 | H_SYNC |
| GPx_CF[3:0] = 1001 | NOISE_DET |
| GPx_CF[3:0] = 1000 | MAC_DET |
| GPx_CF[3:0] = 0111 | FIDT |
| GPx_CF[3:0] = 0110 | V_LOCK |
| GPx_CF[3:0] = 0101 | F_H_LOCK |
| GPx_CF[3:0] = 0100 | N_H_LOCK |

Table 57. GPIOREG_2 register (address 46h) bit description

Legend: * = default value.

| Bit | Symbol | Access | Value | Description |
|---------|---------|--------|-------|---|
| 7 to 5 | - | R/W | 000* | reserved, must be set to logic 000 |
| 4 and 3 | - | R/W | 00* | not used |
| 2 | GP2_VAL | R/W | 1* | GP2_VAL controls the value of the pin GPIO2 when GP2_CF[3:0] = 0001. When GP2_CF[3:0] = 0000, GPIO2 is an input pin which value can be read through the I ² C-bus stored in GP2_VAL. |
| 1 | GP1_VAL | R/W | 1* | GP1_VAL controls the value of the pin GPIO1 when GP1_CF[3:0] = 0001. When GP1_CF[3:0] = 0000, GPIO1 is an input pin which value can be read through the I ² C-bus stored in GP1_VAL. |
| 0 | GP0_VAL | R/W | 1* | GP0_VAL controls the value of the pin GPIO0 when GP0_CF[3:0] = 0001. When GP0_CF[3:0] = 0000, GPIO0 is an input pin which value can be read through the I ² C-bus stored in GP0_VAL. |

9.3.19 Special equalizer functions for group delay and video (CVBS)

To realize special customer demands or accurate compensation of the tuner influence, the TDA8296 has got freely programmable equalizers for the group delay and video (CVBS) response.

In [Table 58](#) the programming of the group delay equalizer is explained, in [Table 60](#) the programming of the video equalizer. For each equalizer type an example is given.

Table 58. GD_EQ_SECTx_C1 and GD_EQ_SECTx_C2 (x = 1 to 4) register (address 4Bh to 52h) bit description

Legend: * = default value[1].

| Address | Register | Bit | Symbol | Access | Value |
|---------|----------------|--------|---------------------|--------|-------|
| 4Bh | GD_EQ_SECT1_C1 | 7 to 0 | GD_EQ_SECT1_C1[7:0] | R/W | 00h* |
| 4Ch | GD_EQ_SECT1_C2 | 7 to 0 | GD_EQ_SECT1_C2[7:0] | R/W | 00h* |
| 4Dh | GD_EQ_SECT2_C1 | 7 to 0 | GD_EQ_SECT2_C1[7:0] | R/W | 00h* |
| 4Eh | GD_EQ_SECT2_C2 | 7 to 0 | GD_EQ_SECT2_C2[7:0] | R/W | 00h* |
| 4Fh | GD_EQ_SECT3_C1 | 7 to 0 | GD_EQ_SECT3_C1[7:0] | R/W | 00h* |
| 50h | GD_EQ_SECT3_C2 | 7 to 0 | GD_EQ_SECT3_C2[7:0] | R/W | 00h* |
| 51h | GD_EQ_SECT4_C1 | 7 to 0 | GD_EQ_SECT4_C1[7:0] | R/W | 00h* |
| 52h | GD_EQ_SECT4_C2 | 7 to 0 | GD_EQ_SECT4_C2[7:0] | R/W | 00h* |

[1] Don't care if GD_EQ_CTRL = 0; see [Table 23](#).

Remark: The group delay equalizer consists of four cascaded all-pass Infinite Impulse Response (IIR) sections of second order (8th order in sum). The transfer function H(z) of one section is as follows, while the sampling rate is 13.5 MHz:

$$H(z) = \frac{b_2 + b_1 \times z^{-1} + z^{-2}}{1 + b_1 \times z^{-1} + b_2 \times z^{-2}}$$

GD_EQ_SECTx_C1 and GD_EQ_SECTx_C2 (x = 1 to 4) are defining the linear and square coefficient of each section, i.e. GD_EQ_SECTx_C1 = b₁ and GD_EQ_SECTx_C2 = b₂. The coefficients are in signed fixed-point format, the representation is in two's complement. There is one sign bit, one magnitude bit and 6 fractional bits. Each fractional bit represents an inverse power of two, so that the highest value for a coefficient is 2⁰ + 2⁻¹ + ... + 2⁻⁶ = 2¹ - 2⁻⁶ = 1.984375. The binary representation for this value is 01.11 1111 (= 7Fh) and all bits except the sign bit are logic 1. As two's complement is chosen, the lowest value for a coefficient is -2, which is 10.00 0000 (= 80h) in the binary representation. So, for the lowest possible value, only the sign bit is logic 1. The shown default values for GD_EQ_SECTx_C1 and GD_EQ_SECTx_C2 (x = 1 to 4) implement a flat equalizer response.

Example of [Table 58](#): If e.g. a flat group delay response up to 4 MHz and -70 ns from 4.43 MHz to 5 MHz on the CVBS signal is wanted, one might realize a characteristic like shown in [Figure 17](#).

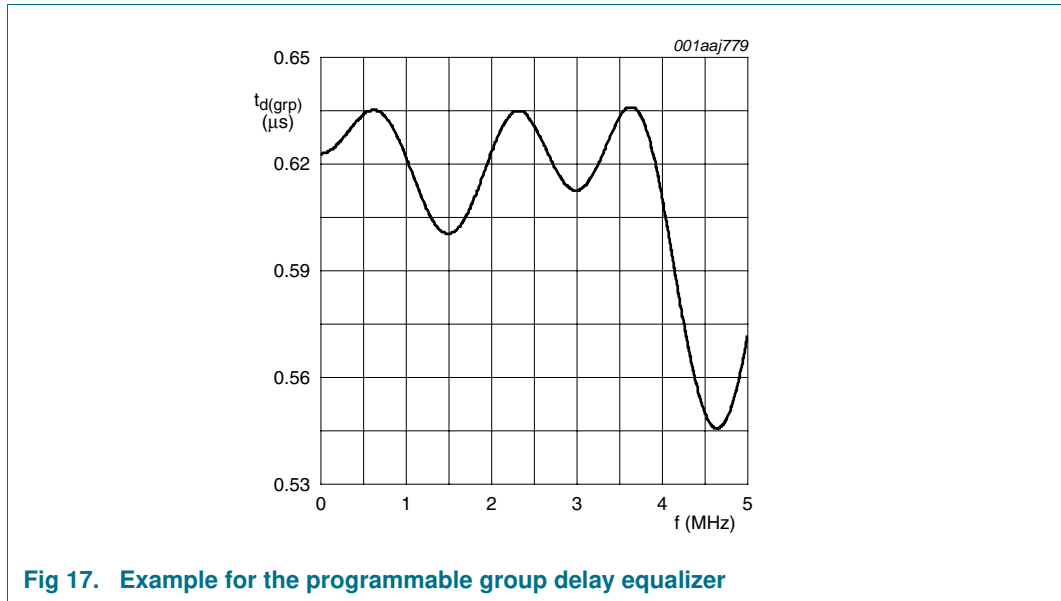


Fig 17. Example for the programmable group delay equalizer

The coefficients used in the above filter are according to [Table 59](#). To get any other filter characteristic use a professional filter tool to determine the coefficients.

Table 59. Coefficients used in group delay equalizer example

| Symbol | Value |
|---------------------|-------|
| GD_EQ_SECT1_C1[7:0] | B9h |
| GD_EQ_SECT1_C2[7:0] | 16h |
| GD_EQ_SECT2_C1[7:0] | DBh |
| GD_EQ_SECT2_C2[7:0] | 17h |
| GD_EQ_SECT3_C1[7:0] | 0Eh |
| GD_EQ_SECT3_C2[7:0] | 19h |
| GD_EQ_SECT4_C1[7:0] | 47h |
| GD_EQ_SECT4_C2[7:0] | 1Ch |

Table 60. CVBS_EQ_COEFx_LOW and CVBS_EQ_COEFx_HIGH (x = 0 to 5) register (address 57h to 62h) bit description

Legend: * = default value^[1].

| Address | Register | Bit | Symbol | Access | Value |
|---------|--------------------|--------|---------------------|--------|-------|
| 57h | CVBS_EQ_COEF0_LOW | 7 to 0 | CVBS_EQ_COEF0[7:0] | R/W | 00h* |
| 58h | CVBS_EQ_COEF0_HIGH | 7 to 4 | - | R/W | 0000* |
| | | 3 to 0 | CVBS_EQ_COEF0[11:8] | R/W | 0h* |
| 59h | CVBS_EQ_COEF1_LOW | 7 to 0 | CVBS_EQ_COEF1[7:0] | R/W | 00h* |
| 5Ah | CVBS_EQ_COEF1_HIGH | 7 to 4 | - | R/W | 0000* |
| | | 3 to 0 | CVBS_EQ_COEF1[11:8] | R/W | 0h* |
| 5Bh | CVBS_EQ_COEF2_LOW | 7 to 0 | CVBS_EQ_COEF2[7:0] | R/W | 00h* |
| 5Ch | CVBS_EQ_COEF2_HIGH | 7 to 4 | - | R/W | 0000* |
| | | 3 to 0 | CVBS_EQ_COEF2[11:8] | R/W | 0h* |
| 5Dh | CVBS_EQ_COEF3_LOW | 7 to 0 | CVBS_EQ_COEF3[7:0] | R/W | 00h* |

Table 60. CVBS_EQ_COEFx_LOW and CVBS_EQ_COEFx_HIGH (x = 0 to 5) register (address 57h to 62h) bit description ...continued

Legend: * = default value[1].

| Address | Register | Bit | Symbol | Access | Value |
|---------|--------------------|--------|---------------------|--------|-------|
| 5Eh | CVBS_EQ_COEF3_HIGH | 7 to 4 | - | R/W | 0000* |
| | | 3 to 0 | CVBS_EQ_COEF3[11:8] | R/W | 0h* |
| 5Fh | CVBS_EQ_COEF4_LOW | 7 to 0 | CVBS_EQ_COEF4[7:0] | R/W | 00h* |
| 60h | CVBS_EQ_COEF4_HIGH | 7 to 4 | - | R/W | 0000* |
| | | 3 to 0 | CVBS_EQ_COEF4[11:8] | R/W | 0h* |
| 61h | CVBS_EQ_COEF5_LOW | 7 to 0 | CVBS_EQ_COEF5[7:0] | R/W | 00h* |
| 62h | CVBS_EQ_COEF5_HIGH | 7 to 4 | - | R/W | 0000* |
| | | 3 to 0 | CVBS_EQ_COEF5[11:8] | R/W | 4h* |

[1] Don't care if CVBS_EQ_CTRL = 0; see [Table 32](#).

Remark: The overall video (CVBS) equalizer is a symmetric FIR filter with 11 taps. Due to the symmetry the group delay is constant (linear phase). The transfer function is as follows, while the sampling rate is 13.5 MHz:

$$H(z) = h_0 + h_1 \times z^{-1} + h_2 \times z^{-2} + h_3 \times z^{-3} + h_4 \times z^{-4} + \dots + h_{10} \times z^{-10}$$

Please note that because of the symmetry $h_0 = h_{10}$, $h_1 = h_9$, $h_2 = h_8$, $h_3 = h_7$ and $h_4 = h_6$. The mid coefficient h_5 is only present once. CVBS_EQ_COEFx (x = 0 to 5) are defining the coefficients, i.e. CVBS_EQ_COEF0 = $h_0 = h_{10}$, CVBS_EQ_COEF1 = $h_1 = h_9$, CVBS_EQ_COEF2 = $h_2 = h_8$, CVBS_EQ_COEF3 = $h_3 = h_7$, CVBS_EQ_COEF4 = $h_4 = h_6$ and CVBS_EQ_COEF5 = h_5 . Each of the coefficients h_0 to h_5 has got 12-bit quantization. The coefficients are in signed fixed-point format, the representation is in two's complement. There is one sign bit, one magnitude bit and 10 fractional bits. Each fractional bit represents an inverse power of two, so that the highest value for a coefficient is $2^0 + 2^{-1} + \dots + 2^{-10} = 2^1 - 2^{-10} = 1.9990234375$. The binary representation for this value is 01.11 1111 1111 (= 7FFh) and all bits except the sign bit are logic 1. As two's complement is chosen, the lowest value for a coefficient is -2, which is 10.00 0000 0000 (= 800h) in the binary representation. So, for the lowest possible value, only the sign bit is logic 1. The shown default values for CVBS_EQ_COEFx (x = 0 to 5) implement a flat equalizer response.

Example of [Table 60](#): If an attenuation of around 1 dB for video frequencies greater than 2 MHz is wanted, the following figure (see [Figure 18](#)) can be implemented.

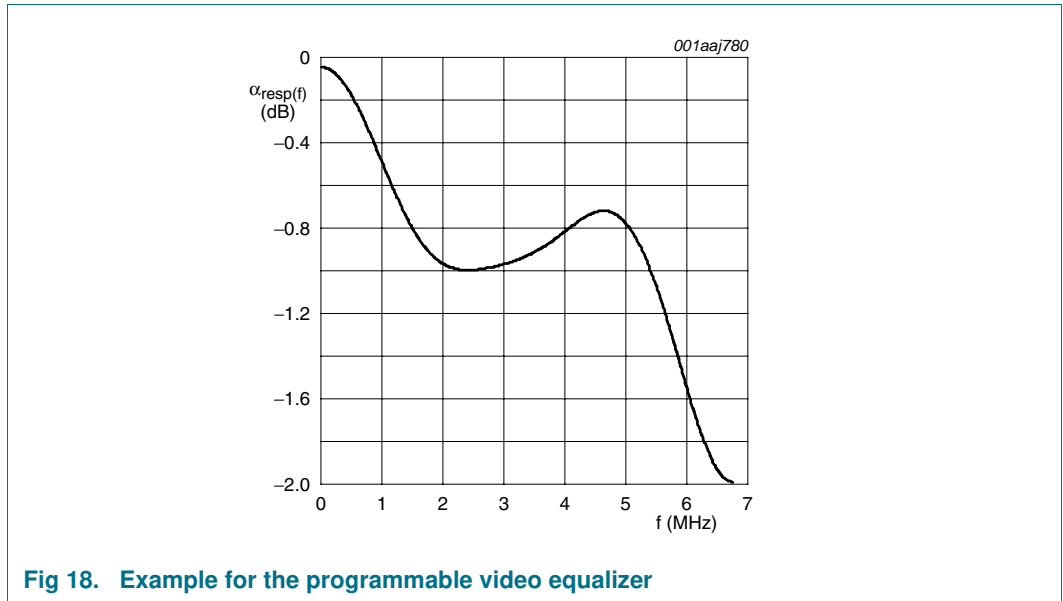


Fig 18. Example for the programmable video equalizer

Table 61. Coefficients used in video equalizer example

| Symbol | Value |
|---------------------|-------|
| CVBS_EQ_COEF0[11:0] | 005h |
| CVBS_EQ_COEF1[11:0] | FFDh |
| CVBS_EQ_COEF2[11:0] | 016h |
| CVBS_EQ_COEF3[11:0] | FFFh |
| CVBS_EQ_COEF4[11:0] | 018h |
| CVBS_EQ_COEF5[11:0] | 39Ch |

10. Limiting values

Table 62. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).^{[1][2][3]}

| Symbol | Parameter | Conditions | Min | Max | Unit |
|----------------------------|-------------------------------------|---------------------------------------|------------------|-------|------|
| V _{DD(1V2)} | digital supply voltage (1.2 V) | | -0.5 | +1.5 | V |
| V _{DDDR(3V3)} | ring digital supply voltage (3.3 V) | | -0.5 | +4.6 | V |
| V _{DDA(ADC)(1V2)} | ADC analog supply voltage (1.2 V) | | -0.5 | +1.5 | V |
| V _{DDA(PLL)(1V2)} | PLL analog supply voltage (1.2 V) | | -0.5 | +1.5 | V |
| V _{DDA(DAC)(3V3)} | DAC analog supply voltage (3.3 V) | | -0.5 | +4.6 | V |
| V _i | input voltage | pins XIN, IF_POS and IF_NEG | -0.5 | +1.3 | V |
| | | digital input pins | -0.5 | +4.6 | V |
| T _{lead} | lead temperature | | - | 300 | °C |
| P _{tot} | total power dissipation | T _{amb} = 85 °C | - | 0.5 | W |
| T _{stg} | storage temperature | | -40 | +125 | °C |
| T _j | junction temperature | | - | +125 | °C |
| T _{amb} | ambient temperature | | -20 | +85 | °C |
| V _{ESD} | electrostatic discharge voltage | all pins: | | | |
| | | Field ind. Charge Device Model (FCDM) | ^[4] - | ±1000 | V |
| | | Human Body Model (HBM) | - | ±4000 | V |

- [1] Stresses above the absolute maximum ratings may cause permanent damage to the device. Exposure to absolute maximum ratings conditions for extended periods may affect device reliability.
- [2] T_j depends on the assembly condition of the package and especially on the design of the PCB. The application mounting must be done in such a way that the maximum junction temperature T_{j(max)} is never exceeded.
- [3] No power sequence requirement
- [4] Class IV according to EIA/JESD22-C101.

11. Thermal characteristics

Table 63. Thermal characteristics

| Symbol | Parameter | Conditions | Typ | Unit |
|----------------------|---|--------------|------|------|
| R _{th(j-a)} | thermal resistance from junction to ambient | in still air | 36.8 | K/W |

The thermal resistance depends strongly on the nature of the PCB used in the application and on its design. The thermal resistance given in [Table 63](#) corresponds to the value that can be measured on a multilayer PCB (4 layers) as defined by EIA/JESD51-2. This value is given for information only.

The junction temperature influences strongly the reliability of an IC. The PCB used in the application contributes on a large part to the overall thermal characteristic. It must therefore be designed to insure that the junction temperature of the IC never exceeds T_{j(max)} = 125 °C at the maximum ambient temperature.

The IC has to be soldered to ground with its die-attached paddle. Plenty of vias are recommended to remove the heat.

12. Characteristics

Table 64. Characteristics

Power supplies 3.3 V, 1.2 V; $T_{amb} = 25\text{ °C}$; PC/SC1 for L and M = 10 dB, all others 13 dB; nominal residual picture carrier of 3 % for L/L', 10 % for M, 10 % for B/G, 12.5 % for D/K, 20 % for I; FM/AM modulation = 54 %, 1 kHz modulation frequency; measured in application PCB (see [Figure 22](#) and [Figure 23](#)) with 16 MHz crystal frequency, terminated with $75\ \Omega$ (CVBS) and $1\ k\Omega$ (SSIF/audio). Operation mode set via easy programming ([Section 9.3.1](#)), otherwise stated. Low IF input signal at -3dB full scale, input frequencies as defined under row header IF input.

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--|---|--|--------------------------|------|-----------|-----------|
| Power supply | | | | | | |
| $V_{DD(1V2)}$ | supply voltage (1.2 V) | digital and analog | 1.1 | 1.2 | 1.3 | V |
| $V_{DD(3V3)}$ | supply voltage (3.3 V) | digital and analog | 3.0 | 3.3 | 3.6 | V |
| $I_{DD(tot)(1V2)}$ | total supply current (1.2 V) | | - | 49 | - | mA |
| $I_{DD(tot)(3V3)}$ | total supply current (3.3 V) | | - | 65 | - | mA |
| P_{tot} | total power dissipation | default settings; $f_s = 54\text{ MHz}$ at ADC; DAC application in accordance to Figure 23 | - | 270 | - | mW |
| | | $f_s = 54\text{ MHz}$ at ADC; DAC application in accordance to Figure 24 | - | 150 | - | mW |
| | | Standby mode | - | 5 | 8 | mW |
| Digital I/Os | | | | | | |
| V_{IH} | HIGH-level input voltage | all inputs (except pin XIN); including voltage on outputs in 3-state mode | $0.7 \times V_{DD(3V3)}$ | - | 6.0 | V |
| V_{IL} | LOW-level input voltage | all inputs (except pin XIN); including voltage on outputs in 3-state mode | - | - | 0.8 | V |
| V_{OH} | HIGH-level output voltage | source current 4 mA | $V_{DD(3V3)} - 0.4$ | - | - | V |
| V_{OL} | LOW-level output voltage | sink current 4 mA | - | - | 0.4 | V |
| C_i | input capacitance | | - | - | 5 | pF |
| Master clock | | | | | | |
| $f_{clk(o)(PLL)}$ | PLL output clock frequency | | 1 | 108 | - | MHz |
| $\Delta f/f_{clk}$ | relative frequency deviation from clock frequency | | - | - | ± 200 | 10^{-6} |
| Reference frequency in Slave mode | | | | | | |
| $f_{clk(ext)}$ | external clock frequency | | - | 16 | - | MHz |
| $V_{i(RMS)}$ | RMS input voltage | AC coupled | 200 | 250 | - | mV |
| SR_r | rising slew rate | external clock | 30 | - | - | mV/ns |
| $t_{jit(cc)}$ | cycle-to-cycle jitter time | RMS value | - | 12.5 | - | ps |
| C_i | input capacitance | on pin XIN | - | 3 | - | pF |

Table 64. Characteristics ...continued

Power supplies 3.3 V, 1.2 V; $T_{amb} = 25\text{ }^{\circ}\text{C}$; PC/SC1 for L and M = 10 dB, all others 13 dB; nominal residual picture carrier of 3 % for L/L', 10 % for M, 10 % for B/G, 12.5 % for D/K, 20 % for I; FM/AM modulation = 54 %, 1 kHz modulation frequency; measured in application PCB (see [Figure 22](#) and [Figure 23](#)) with 16 MHz crystal frequency, terminated with $75\ \Omega$ (CVBS) and $1\ \text{k}\Omega$ (SSIF/audio). Operation mode set via easy programming ([Section 9.3.1](#)), otherwise stated. Low IF input signal at -3dB full scale, input frequencies as defined under row header IF input.

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--|---------------------------------------|--|-------------------------|-------------|-----------|------------------|
| Reference frequency in Oscillator mode (with a crystal) | | | | | | |
| f_{xtal} | crystal frequency | | - | 16 | - | MHz |
| $\Delta f_{\text{xtal}}/f_{\text{xtal}}$ | relative crystal frequency variation | temperature, ageing and spreading | - | - | ± 200 | 10^{-6} |
| IF input | | | | | | |
| $V_{i(\text{p-p})}$ | peak-to-peak input voltage | for full-scale ADC input (0 dBFS) | 0.7 | 0.8 | 0.9 | V |
| $R_{i(\text{dif})}$ | differential input resistance | | 10 | 15 | - | $\text{k}\Omega$ |
| $C_{i(\text{dif})}$ | differential input capacitance | | - | 2 | 3 | pF |
| V_i | input voltage | operational input related to ADC full scale; all standards; sum of all signals | -3 | -3 | -3 | dBFS |
| f_i | input frequency | PC / SC1 | | | | |
| | | M/N standard | - | 5.40 / 0.90 | - | MHz |
| | | B standard | - | 6.40 / 0.90 | - | MHz |
| | | G/H standard | - | 6.75 / 1.25 | - | MHz |
| | | I standard | - | 7.25 / 1.25 | - | MHz |
| | | D/K standard | - | 6.85 / 0.35 | - | MHz |
| | | L standard | - | 6.75 / 0.25 | - | MHz |
| | | L-accent standard | - | 1.25 / 7.75 | - | MHz |
| | | FM radio | - | 1.25 | - | MHz |
| IF selectivity | | | | | | |
| $\alpha_{\text{sup(stpb)}}$ | stop-band suppression | Hilbert filter stop-band | -60 | - | - | dB |
| | | decimation filter stop-band | -40 | - | - | dB |
| | | notch for NSC (NPC for L-accent standard) | [2] -40 | - | - | dB |
| Carrier recovery FPLL | | | | | | |
| $B_{-3\text{dB}(\text{cl})}$ | closed-loop -3 dB bandwidth | ultrawide | - | 280 | - | kHz |
| | | superwide | - | 130 | - | kHz |
| | | wide | - | 60 | - | kHz |
| | | medium | - | 30 | - | kHz |
| | | narrow | - | 15 | - | kHz |
| Δf_{pullin} | pull-in frequency range | | [3] - | ± 830 | - | kHz |
| $m_{\text{over(PC)}}$ | picture carrier over modulation index | black for L/L-accent standard; flat field white else | 115 | 117 | - | % |
| $f_{\text{step(AFC)}}$ | AFC step frequency | 128 steps | [3] 13 | - | - | kHz |

Table 64. Characteristics ...continued

Power supplies 3.3 V, 1.2 V; $T_{amb} = 25\text{ }^{\circ}\text{C}$; PC/SC1 for L and M = 10 dB, all others 13 dB; nominal residual picture carrier of 3 % for L/L', 10 % for M, 10 % for B/G, 12.5 % for D/K, 20 % for I; FM/AM modulation = 54 %, 1 kHz modulation frequency; measured in application PCB (see [Figure 22](#) and [Figure 23](#)) with 16 MHz crystal frequency, terminated with 75 Ω (CVBS) and 1 k Ω (SSIF/audio). Operation mode set via easy programming ([Section 9.3.1](#)), otherwise stated. Low IF input signal at -3dB full scale, input frequencies as defined under row header IF input.

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|---|-----------------------------------|--|-------------------------|------|-----|------|
| IF demodulation (video equalizer in Flat mode) | | | | | | |
| $B_{T(tot)}$ | total transition bandwidth | Nyquist filter; all standards | - | 1 | - | MHz |
| $\alpha_{sup(stpb)}$ | stop-band suppression | Nyquist filter; all standards | -60 | - | - | dB |
| | | video low-pass filter (M/N, B/G/H, I, D/K, L/L-accent standard) | - | -60 | - | dB |
| $B_{video(-1dB)}$ | -1 dB video bandwidth | M/N standard | - | 3.8 | - | MHz |
| | | B/G/H, I, D/K, L/L-accent standard | - | 4.8 | - | MHz |
| $t_{ripple(GDE)}$ | group delay equalizer ripple time | peak value for B/G/H half, D/K half, I flat, M (FCC) full, L/L-accent full standard | - | 20 | 40 | ns |
| Digital IF AGC (internal loop) | | | | | | |
| $B_{-3dB(cl)}$ | closed-loop -3 dB bandwidth | negative modulation (all standards except L/L-accent) | [4] 400 | - | - | Hz |
| | | positive modulation (L/L-accent standard) | 0.2 | - | - | Hz |
| t_{resp} | response time | ± 20 dB level change; video settled within ± 3 dB | | | | |
| | | negative modulation (all standards except L/L-accent) | - | 3 | - | ms |
| | | positive modulation (L/L-accent standard) | - | 100 | - | ms |
| ΔG_{AGC} | AGC gain range | | -20 | - | +48 | dB |
| Tuner IF AGC (external loop) | | | | | | |
| t_{resp} | response time | at 60 dB μ V (RMS) PC input; ± 20 dB level change; video settled within ± 3 dB | [5] | | | |
| | | with TDA1827x; positive modulation | - | 3000 | - | ms |
| | | with TDA1827x; negative modulation | - | 600 | - | ms |
| $f_{-3dB(lpf)}$ | low-pass filter -3 dB frequency | IF AGC postfilter | 0.9 | 1.0 | 1.1 | kHz |

Table 64. Characteristics ...continued

Power supplies 3.3 V, 1.2 V; $T_{amb} = 25\text{ }^{\circ}\text{C}$; PC/SC1 for L and M = 10 dB, all others 13 dB; nominal residual picture carrier of 3 % for L/L', 10 % for M, 10 % for B/G, 12.5 % for D/K, 20 % for I; FM/AM modulation = 54 %, 1 kHz modulation frequency; measured in application PCB (see [Figure 22](#) and [Figure 23](#)) with 16 MHz crystal frequency, terminated with 75 Ω (CVBS) and 1 k Ω (SSIF/audio). Operation mode set via easy programming ([Section 9.3.1](#)), otherwise stated. Low IF input signal at -3dB full scale, input frequencies as defined under row header IF input.

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit | |
|---|---|--|-------|------|------|------|--|
| CVBS output | | | | | | | |
| $V_{o(p-p)}$ | peak-to-peak output voltage | negative PC modulation (all standards except L/L-accent); 75 Ω DC load; sync-white modulation | | | | | |
| | | 65 % | - | 0.7 | - | V | |
| | | nominal | 0.9 | 1.0 | 1.1 | V | |
| | | 115 % | - | 1.0 | - | V | |
| | | positive PC modulation (L/L-accent standard); 75 Ω DC load; sync-white modulation | | | | | |
| | | 65 % | - | 0.7 | - | V | |
| $B_{\text{video}(-3\text{dB})}$ | -3 dB video bandwidth | overall video response; CVBS equalizer flat | | | | | |
| | | all standards except M/N | 4.7 | 4.85 | - | MHz | |
| | | M/N standard | 3.8 | 3.9 | - | MHz | |
| $\alpha_{\text{resp}(f)}$ | frequency response | video equalizer; 8 equally spaced settings; value at 3.9 MHz | -5 | - | +4.5 | dB | |
| G_{dif} | differential gain | "ITU-T J.63 line 330" | [6] - | 1.5 | 5 | % | |
| φ_{dif} | differential phase | "ITU-T J.63 line 330" | - | 1.0 | 3 | deg | |
| $V_{\text{video}}/V_{\text{sync}}$ | video voltage to sync voltage ratio | video DAC application according to Figure 23 | 1.9 | 2.33 | 3.0 | | |
| V_{sync} | synchronization voltage | video DAC application according to Figure 23 | 160 | 200 | 240 | mV | |
| $V_{\text{stilt}}/V_{\text{CVBS}(p-p)}$ | synchronization tilt voltage to peak-to-peak CVBS voltage ratio | | - | 1 | 2 | % | |
| $V_{\text{fitt}}/V_{\text{CVBS}(p-p)}$ | frame tilt voltage to peak-to-peak CVBS voltage ratio | all standards except L/L-accent | - | 1 | 3 | % | |
| | | L/L-accent standard in peak white AGC detection | - | 1 | 5 | % | |
| $\Delta V_{\text{tro}}/V_{\text{tro}}$ | relative transient response overshoot voltage variation | 2T pulse | [7] - | 2 | 5 | % | |

Table 64. Characteristics ...continued

Power supplies 3.3 V, 1.2 V; $T_{amb} = 25\text{ }^{\circ}\text{C}$; PC/SC1 for L and M = 10 dB, all others 13 dB; nominal residual picture carrier of 3 % for L/L', 10 % for M, 10 % for B/G, 12.5 % for D/K, 20 % for I; FM/AM modulation = 54 %, 1 kHz modulation frequency; measured in application PCB (see [Figure 22](#) and [Figure 23](#)) with 16 MHz crystal frequency, terminated with 75 Ω (CVBS) and 1 k Ω (SSIF/audio). Operation mode set via easy programming ([Section 9.3.1](#)), otherwise stated. Low IF input signal at -3dB full scale, input frequencies as defined under row header IF input.

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|---------------------------------------|--|---|-----------------------|-----|-----|------|
| $\alpha_{IM(\text{blue})}$ | intermodulation suppression (blue) | carrier levels related to PC sync; PC = -3.2 dB; CC = -19.2 dB; SC = -13 dB | | | | |
| | | 1.1 MHz (related to black-to-white in RMS, equals CC + 3.6 dB) | - | 67 | - | dB |
| | | 3.3 MHz (related to CC) | - | 77 | - | dB |
| $\alpha_{IM(\text{yellow})}$ | intermodulation suppression (yellow) | carrier levels related to PC sync; PC = -10 dB; CC = -19.2 dB; SC = -13 dB | | | | |
| | | 1.1 MHz (related to black-to-white in RMS, equals CC + 3.6 dB) | - | 70 | - | dB |
| | | 3.3 MHz (related to CC) | - | 78 | - | dB |
| $(S/N)_w$ | weighted signal-to-noise ratio | all standards; unified weighting filter ("ITU-T J.61"); PC at -6 dBFS | 57 | 60 | - | dB |
| PSRR | power supply rejection ratio | $f_{\text{ripple}} = 70\text{ Hz}$; 100 mV (p-p); video signal: gray; level: 50 %; TDA8296 stand alone; input | | | | |
| | | positive video modulation; L standard; 1.2 V | - | 39 | - | dB |
| | | positive video modulation; L standard; 3.3 V | [8] - | 47 | - | dB |
| | | negative video modulation; B standard; 1.2 V | - | 65 | - | dB |
| | | negative video modulation; B standard; 3.3 V | [8] - | 37 | - | dB |
| $\alpha_{\text{sup}(f)L(\text{unw})}$ | unwanted leakage frequency suppression | 4.8 MHz video modulation; related to black-to-white in 10 MHz to 200 MHz band, wanted signal (peak-to-peak) and unwanted signal (RMS) | - | 56 | - | dB |

Table 64. Characteristics ...continued

Power supplies 3.3 V, 1.2 V; $T_{amb} = 25\text{ }^{\circ}\text{C}$; PC/SC1 for L and M = 10 dB, all others 13 dB; nominal residual picture carrier of 3 % for L/L', 10 % for M, 10 % for B/G, 12.5 % for D/K, 20 % for I; FM/AM modulation = 54 %, 1 kHz modulation frequency; measured in application PCB (see [Figure 22](#) and [Figure 23](#)) with 16 MHz crystal frequency, terminated with 75 Ω (CVBS) and 1 k Ω (SSIF/audio). Operation mode set via easy programming ([Section 9.3.1](#)), otherwise stated. Low IF input signal at -3dB full scale, input frequencies as defined under row header IF input.

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|-------------------------------|-------------------------|---|------------------------|-----|-----|------|
| SSIF/mono sound output | | | | | | |
| $f_{o(SSIF)}$ | SSIF output frequency | SC1 or FM radio carrier | [9] | | | |
| | | M standard | - | 4.5 | - | MHz |
| | | B/G/H standard | - | 5.5 | - | MHz |
| | | I standard | - | 6.0 | - | MHz |
| | | D/K/L/L-accent standard | - | 6.5 | - | MHz |
| $V_{o(SSIF)(RMS)}$ | RMS SSIF output voltage | 1 k Ω DC or AC load; no modulation; PC / SC1 = 13 dB; Cs = 220 pF | | | | |
| | | M standard | 105 | 120 | 135 | mV |
| | | B standard | 100 | 115 | 130 | mV |
| | | G/H standard | 100 | 115 | 130 | mV |
| | | D/K standard | 95 | 110 | 125 | mV |
| | | I standard | 100 | 115 | 130 | mV |
| | | L standard | 95 | 110 | 125 | mV |
| | | L-accent standard | 95 | 110 | 125 | mV |
| | | FM radio (single carrier) | 100 | 115 | 130 | mV |
| $V_{o(AF)(RMS)}$ | RMS AF output voltage | 1 k Ω DC or AC load; FM; gain 0 dB | | | | |
| | | M standard; 54 % modulation degree (± 13.5 kHz FM deviation before pre-emphasis) | 98 | 126 | 135 | mV |
| | | B, G/H, I, D/K standard; 54 % modulation degree (± 27 kHz FM deviation before pre-emphasis) | 107 | 133 | 144 | mV |
| | | L/L-accent standard; AM; m = 54 %; gain +6 dB | 158 | 176 | 196 | mV |
| | | FM radio; 30 % modulation degree (± 22.5 kHz FM deviation before pre-emphasis) | 51 | 54 | 60 | mV |
| | | high Deviation mode (D/K standard China); FM deviation before pre-emphasis ± 400 kHz; sound level setting: -12 dB | [10] - | 425 | - | mV |

Table 64. Characteristics ...continued

Power supplies 3.3 V, 1.2 V; $T_{amb} = 25\text{ }^{\circ}\text{C}$; PC/SC1 for L and M = 10 dB, all others 13 dB; nominal residual picture carrier of 3 % for L/L', 10 % for M, 10 % for B/G, 12.5 % for D/K, 20 % for I; FM/AM modulation = 54 %, 1 kHz modulation frequency; measured in application PCB (see [Figure 22](#) and [Figure 23](#)) with 16 MHz crystal frequency, terminated with 75 Ω (CVBS) and 1 k Ω (SSIF/audio). Operation mode set via easy programming ([Section 9.3.1](#)), otherwise stated. Low IF input signal at -3dB full scale, input frequencies as defined under row header IF input.

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|-------------------|---------------------------|--|-----|------|-----|---------------|
| $\alpha_{hr(AF)}$ | AF headroom | before clipping; 1 k Ω DC or AC load | | | | |
| | | M standard; related to ± 25 kHz peak deviation before pre-emphasis | - | 7 | - | dB |
| | | B, G/H, I, D/K standard; related to ± 50 kHz peak deviation before pre-emphasis | - | 7 | - | dB |
| | | L/L-accent standard; PC / SC1 ratio for start of audio output clipping; AM; m = 100 %; related to mean SC1 | - | 9 | - | dB |
| | | FM radio; 30 % modulation degree related to ± 22.5 kHz peak deviation before pre-emphasis | - | 9 | - | dB |
| τ_{deemp} | de-emphasis time constant | M/N standard (mono); FM radio USA | - | 75 | - | μs |
| | | B/G/H, I, D/K standard; FM radio Europe | - | 50 | - | μs |
| B_{-3dB} | -3 dB bandwidth | audio low-pass filter | | | | |
| | | L/L-accent standard | - | 30 | - | kHz |
| | | M-BTSC standard | - | 140 | - | kHz |
| THD | total harmonic distortion | FM; for 50 kHz deviation before pre-emphasis (25 kHz for M standard) | - | 0.15 | 0.3 | % |
| | | AM; m = 80 % | - | 0.5 | 1 | % |
| $B_{AF(-3dB)}$ | -3 dB AF bandwidth | AM | 20 | 27 | - | kHz |
| | | FM | 40 | 50 | - | kHz |
| α_{AM} | AM suppression | of FM demodulator; AM: f = 1 kHz; m = 54 % referenced to 27 kHz FM deviation | 40 | 51 | - | dB |

Table 64. Characteristics ...continued

Power supplies 3.3 V, 1.2 V; $T_{amb} = 25\text{ }^{\circ}\text{C}$; PC/SC1 for L and M = 10 dB, all others 13 dB; nominal residual picture carrier of 3 % for L/L', 10 % for M, 10 % for B/G, 12.5 % for D/K, 20 % for I; FM/AM modulation = 54 %, 1 kHz modulation frequency; measured in application PCB (see [Figure 22](#) and [Figure 23](#)) with 16 MHz crystal frequency, terminated with 75 Ω (CVBS) and 1 k Ω (SSIF/audio). Operation mode set via easy programming ([Section 9.3.1](#)), otherwise stated. Low IF input signal at -3dB full scale, input frequencies as defined under row header IF input.

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit | |
|-----------------|-----------------------------------|---|-----|-----|-----|------|--|
| $(S/N)_{w(AF)}$ | AF weighted signal-to-noise ratio | via internal mono sound demodulator; "ITU-R BS.468-4"; FM mode related to 27 kHz deviation before pre-emphasis; 10 % residual PC; SC1 | | | | | |
| | | black picture | 52 | 54 | - | dB | |
| | | flat field white picture | 52 | 54 | - | dB | |
| | | 6 kHz sine wave picture | 52 | 54 | - | dB | |
| | | 250 kHz square wave picture | 52 | 54 | - | dB | |
| | | crosshatch picture | 52 | 54 | - | dB | |
| | | color bar picture | 52 | 54 | - | dB | |
| | | via internal mono sound demodulator; (audio gain +6 dB) "ITU-R BS.468-4"; AM; m = 54 %; 3 % residual PC; SC1 | | | | | |
| | | black picture | 40 | 44 | - | dB | |
| | | flat field white picture | 41 | 44 | - | dB | |
| | | color bar picture | 40 | 44 | - | dB | |
| | | via internal mono sound demodulator; "ITU-R BS.468-4"; FM Radio mode; 22.5 kHz deviation | | | | | |
| | | | - | 45 | - | dB | |

Table 64. Characteristics ...continued

Power supplies 3.3 V, 1.2 V; $T_{amb} = 25\text{ }^{\circ}\text{C}$; PC/SC1 for L and M = 10 dB, all others 13 dB; nominal residual picture carrier of 3 % for L/L', 10 % for M, 10 % for B/G, 12.5 % for D/K, 20 % for I; FM/AM modulation = 54 %, 1 kHz modulation frequency; measured in application PCB (see [Figure 22](#) and [Figure 23](#)) with 16 MHz crystal frequency, terminated with 75 Ω (CVBS) and 1 k Ω (SSIF/audio). Operation mode set via easy programming ([Section 9.3.1](#)), otherwise stated. Low IF input signal at -3dB full scale, input frequencies as defined under row header IF input.

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit | | |
|-----------------------------|--|---|---|---|-----|------|---|----|
| $(S/N)_{w(SC1)}$ | first sound carrier weighted signal-to-noise ratio | via external SSIF sound demodulator in Dual mode; "ITU-R BS.468-4"; FM mode related to 27 kHz deviation before pre-emphasis; 10 % residual PC | | | | | | |
| | | black picture | - | 58 | - | dB | | |
| | | flat field white picture | - | 57 | - | dB | | |
| | | 6 kHz sine wave picture | - | 57 | - | dB | | |
| | | 250 kHz square wave picture | - | 58 | - | dB | | |
| | | crosshatch picture | - | 52 | - | dB | | |
| | | color bar picture | - | 58 | - | dB | | |
| | | via SSIF sound demodulator; "ITU-R BS.468-4"; AM; m = 54 %; 3 % residual PC | | | | | | |
| | | black picture | - | 44 | - | dB | | |
| | | flat field white picture | - | 44 | - | dB | | |
| | | color bar picture | - | 44 | - | dB | | |
| | | $(S/N)_{w(SC2)}$ | second sound carrier weighted signal-to-noise ratio | via external SSIF sound demodulator in Dual mode; "ITU-R BS.468-4"; FM mode related to 27 kHz deviation before pre-emphasis; 10 % residual PC | | | | |
| | | | | black picture | - | 56 | - | dB |
| | | | | flat field white picture | - | 55 | - | dB |
| 6 kHz sine wave picture | - | | | 55 | - | dB | | |
| 250 kHz square wave picture | - | | | 51 | - | dB | | |
| crosshatch picture | - | | | 51 | - | dB | | |
| color bar picture | - | | | 56 | - | dB | | |
| $(S/N)_w$ | weighted signal-to-noise ratio | FM radio; via SSIF sound demodulator in Mono mode; "ITU-R BS.468-4"; 22.5 kHz deviation | - | 55 | - | dB | | |

Table 64. Characteristics ...continued


Power supplies 3.3 V, 1.2 V; $T_{amb} = 25\text{ }^{\circ}\text{C}$; PC/SC1 for L and M = 10 dB, all others 13 dB; nominal residual picture carrier of 3 % for L/L', 10 % for M, 10 % for B/G, 12.5 % for D/K, 20 % for I; FM/AM modulation = 54 %, 1 kHz modulation frequency; measured in application PCB (see [Figure 22](#) and [Figure 23](#)) with 16 MHz crystal frequency, terminated with 75 Ω (CVBS) and 1 k Ω (SSIF/audio). Operation mode set via easy programming ([Section 9.3.1](#)), otherwise stated. Low IF input signal at -3dB full scale, input frequencies as defined under row header IF input.

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit | |
|--------------------------------|---|---|-----|-----|-----|------|----|
| PSRR | power supply rejection ratio | $f_{\text{ripple}} = 70\text{ Hz}$; 100 mV (p-p); video signal: gray; level: 50 %; TDA8296 stand alone | | | | | |
| | | FM sound; 1.2 V | - | 80 | - | dB | |
| | | FM sound; 3.3 V | [8] | - | 39 | - | dB |
| | | AM sound; 1.2 V | - | 40 | - | dB | |
| | | AM sound; 3.3 V | [8] | - | 38 | - | dB |
| $\alpha_{\text{sup(f)L(unw)}}$ | unwanted leakage frequency suppression | related to SSIF (SC1) in 10 MHz to 200 MHz band wanted signal (peak-to-peak) and unwanted signal (RMS) | - | 51 | - | dB | |



- [1] See [Section 9.3.17](#) for PLL setting.
- [2] Standard dependent located at 6.9 MHz, 7.9 MHz, 8.3 MHz and 9.25 MHz.
- [3] The pull-in range can be doubled to $\pm 1\,660\text{ kHz}$ by I²C-bus register like described in [Table 16](#). Then the AFC read-out has 256 steps.
- [4] To counteract a fast IF level reduction, the digital IF AGC loop has a speed-up circuit for positive video modulation.
- [5] In the ordinary system application, this slow response is counteracted by the fast digital IF AGC loop. ADC clipping is practically avoided by fast-attack AGC characteristic.
- [6] Graph differential gain versus temperature.
- [7] HAD: 250 ns for M standard, 200 ns for others.
- [8] The values given are measured with an IF AGC time constant of 5 Hz. For that, capacitor C7 in [Figure 19](#) must be chosen 220 nF instead of 2.2 nF. Doing so, the PSRR on 3.3 V together with the tuner can be improved.
- [9] SC2 is not listed, but supported for all world standards.
- [10] At high deviation mode at D/K standard, IF frequency has to be programmed, that SIF frequency is higher than 500 kHz (default: 350 kHz).
- [11] To set audio gain to +6 dB for internal sound demodulation, register 22h has to be programmed to 08h.

13. Application information

13.1 Typical application

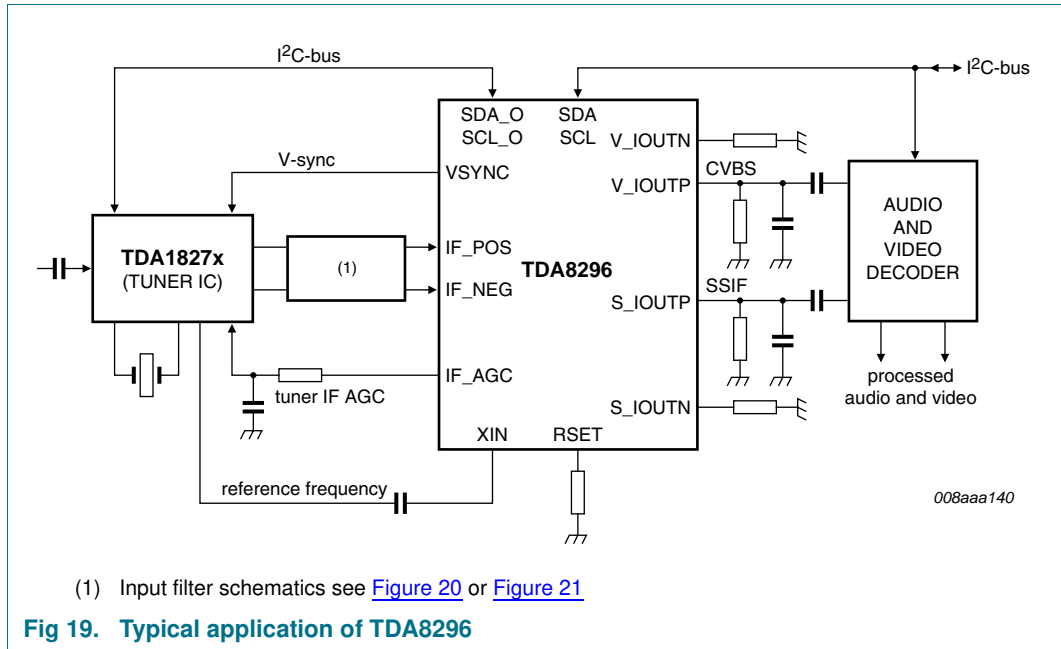

13.1.1 IF input application

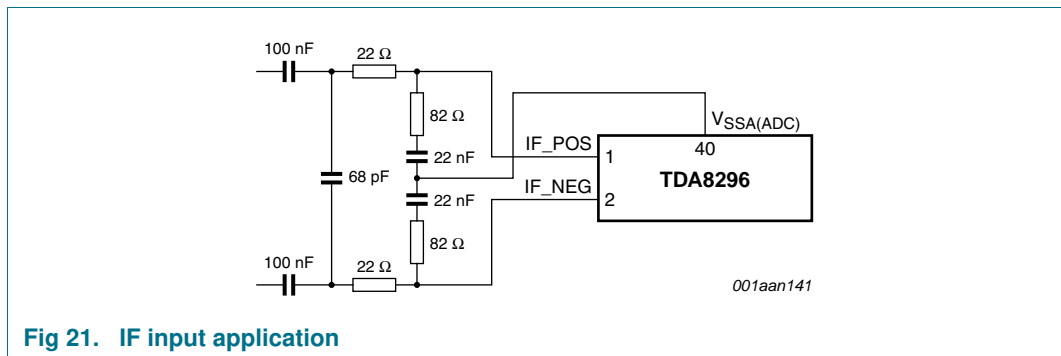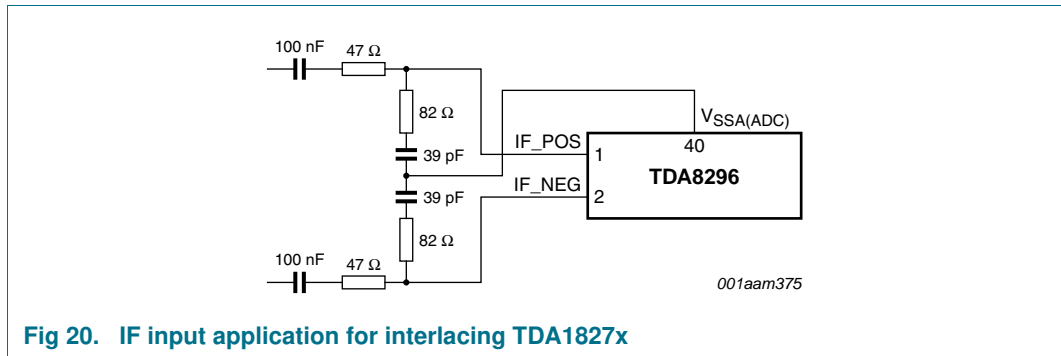

13.2 Detailed application diagrams

13.2.1 Main application diagram


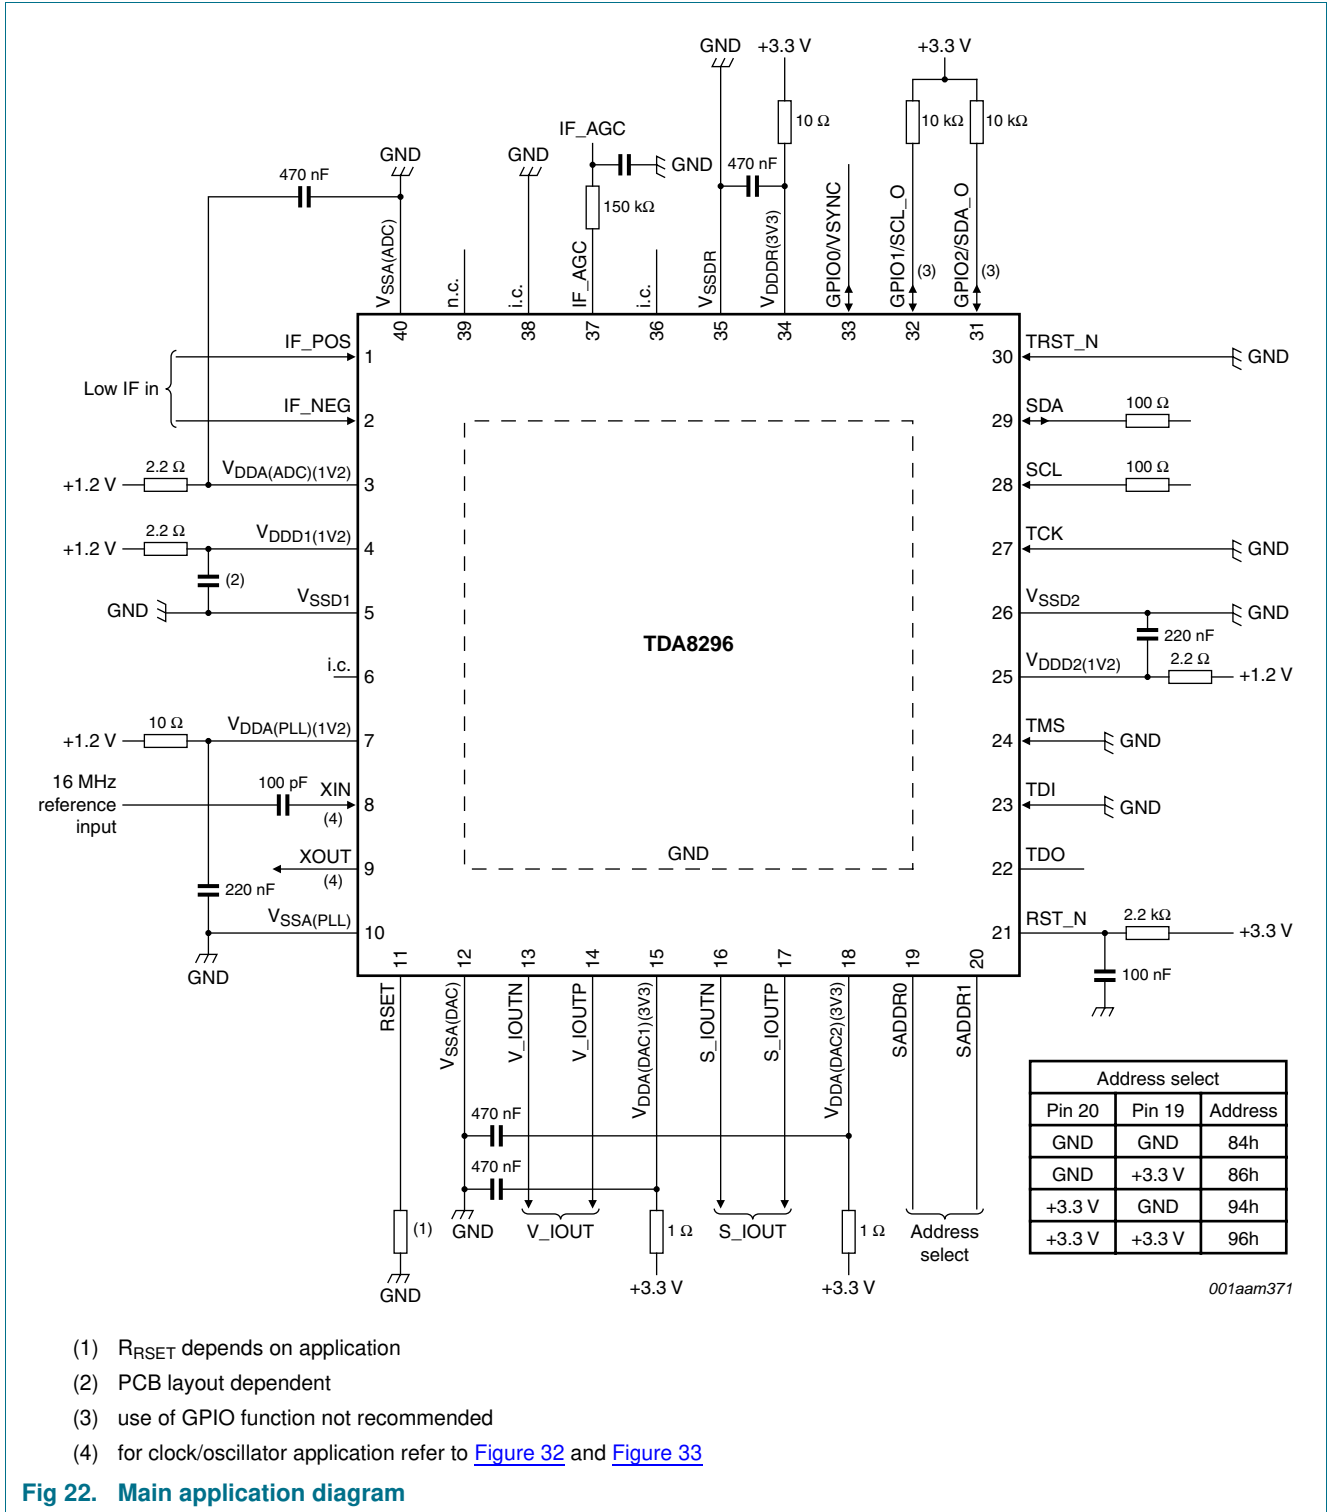



Fig 22. Main application diagram

13.2.2 75 Ω application

This is the reference application for the data sheet characteristic.

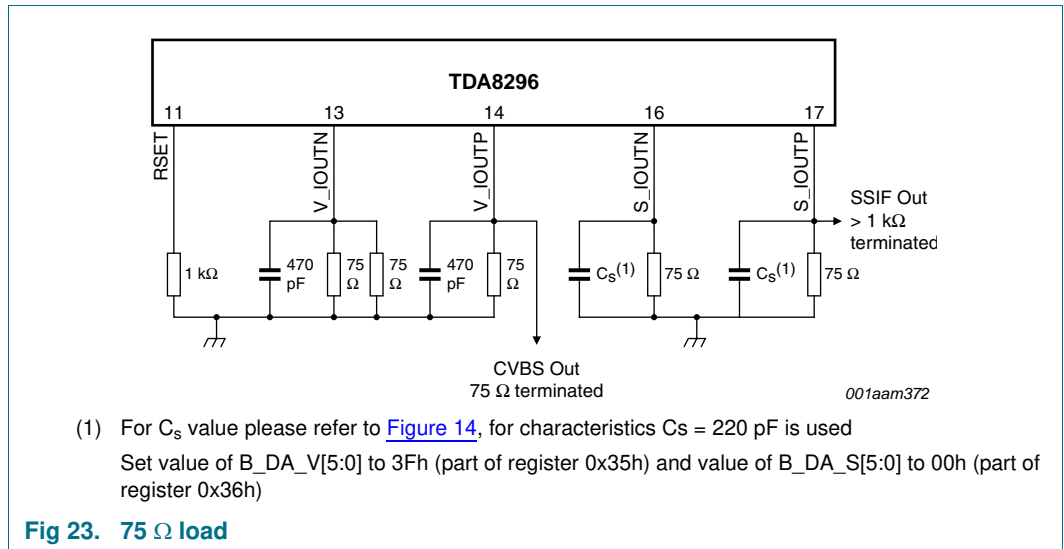

13.2.3 100 Ω application

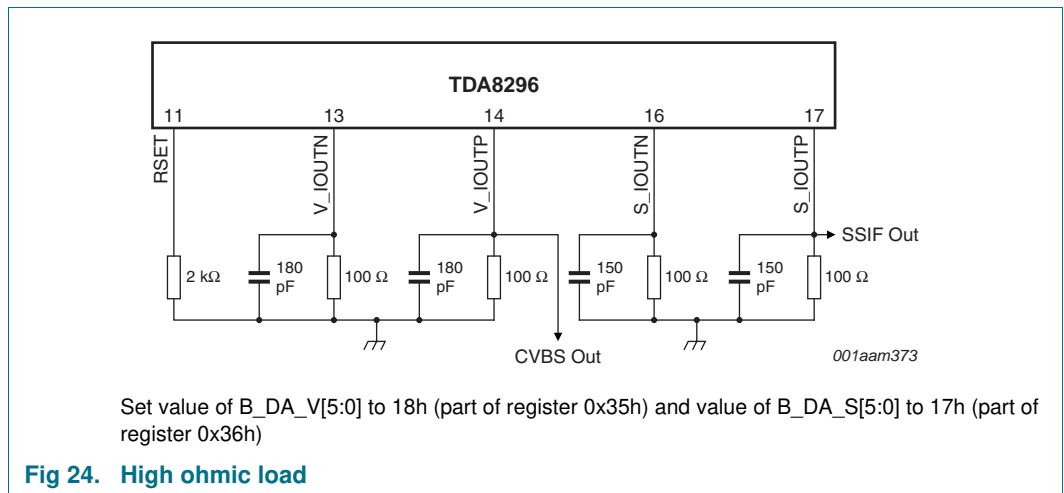


The following relation gives the value of the full-scale current I_{FS} in function of the bias resistance value and value of B_DA_V[5:0] (part of register 0x35h) and value of B_DA_S[5:0] (part of register 0x36h) (B_DA_V or B_DA_S):



$$I_{FS} = \frac{1.216 V_{RSET}}{R_{RSET}} \times \frac{1}{5} \times \frac{64 + B_DA_V/S}{48} \times 64 \tag{2}$$

$$0 \leq B_DA_V/S \leq 63$$

For programming of B_DA_V see [Table 50](#), for B_DA_S see [Table 51](#).

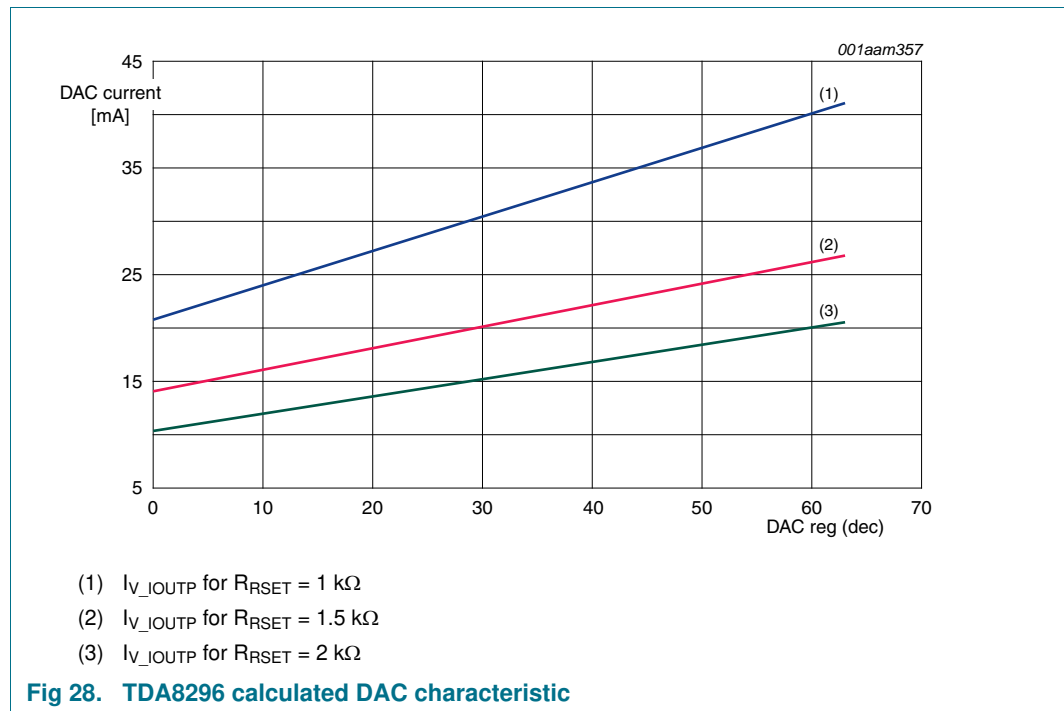

The DAC signal range used for CVBS and sound signal is reduced to provide headroom. The signal headroom is shown in [Figure 29](#) and [Figure 30](#). The full scale DAC current corresponds to digital input value of 1034. For the pins VIOUT_P and SIOUT_P the corresponding signal shapes of CVBS and sound signal can be mapped linear to the full scale DAC current. For the CVBS signal the sync level is fixed, the white level depends also on register value CVBS_LVL[7:0]. For the sound signal the DC level is fixed.

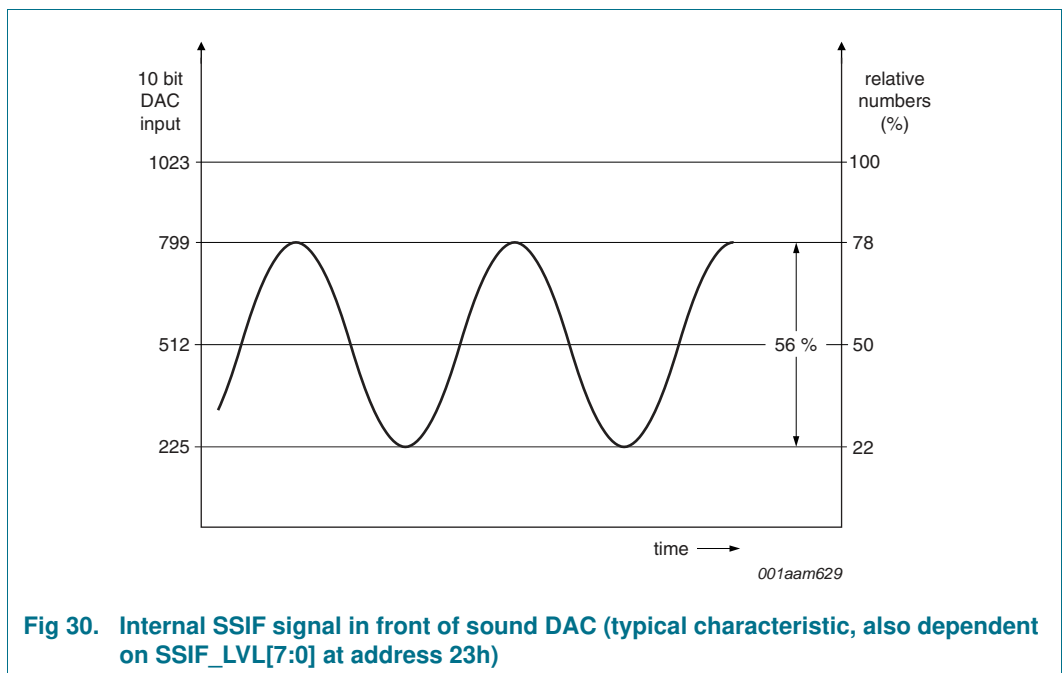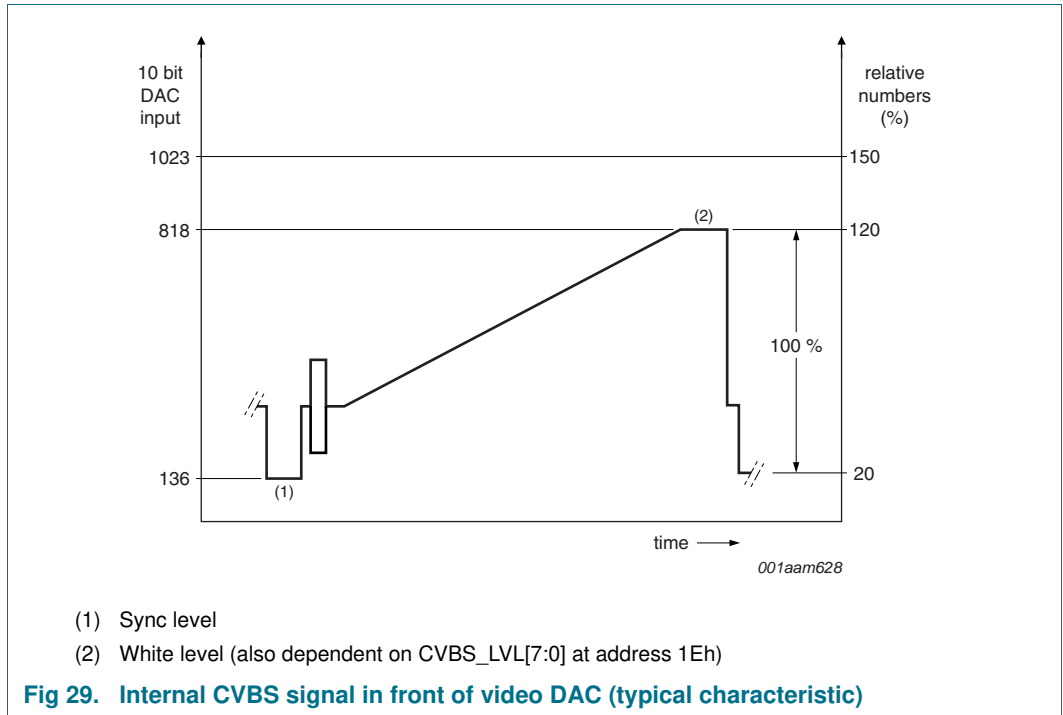

Application hints for DAC supply: it is required to use de-coupling capacitors at $V_{DDA(DAC1)(3V3)}$ and $V_{DDA(DAC2)(3V3)}$ supplies of $> 100nF$. A decoupling capacitor at pin RSET is not allowed. The component R_{RSET} should be placed close to the chip.

13.4 ADC connection

The input signals of the ADC (IF_POS and IF_NEG) can be either AC coupled by means of two capacitors or connected directly to the inputs (DC coupled). In case of AC coupling, the DCIN bit (see [Table 48](#)) should be set to logic 0, which enables the internal resistive dividers between $V_{DDA(ADC)(1V2)}$ and V_{SSD1} to take care of the correct DC biasing of the input signals.

In case the input signal is DC coupled, the input resistor network can be switched off by setting the DCIN bit to logic 1. When using the ADC in this mode, the Common mode level of the input signal should be at $(0.5 / 1.2) \times V_{DDA(ADC)(1V2)} \pm 200$ mV.

Please note that during power-down the DC biasing network at the input will be switched off in order to reduce current consumption. During Sleep mode however the resistor network will remain active.

13.5 Reset operation

13.5.1 Hardware reset

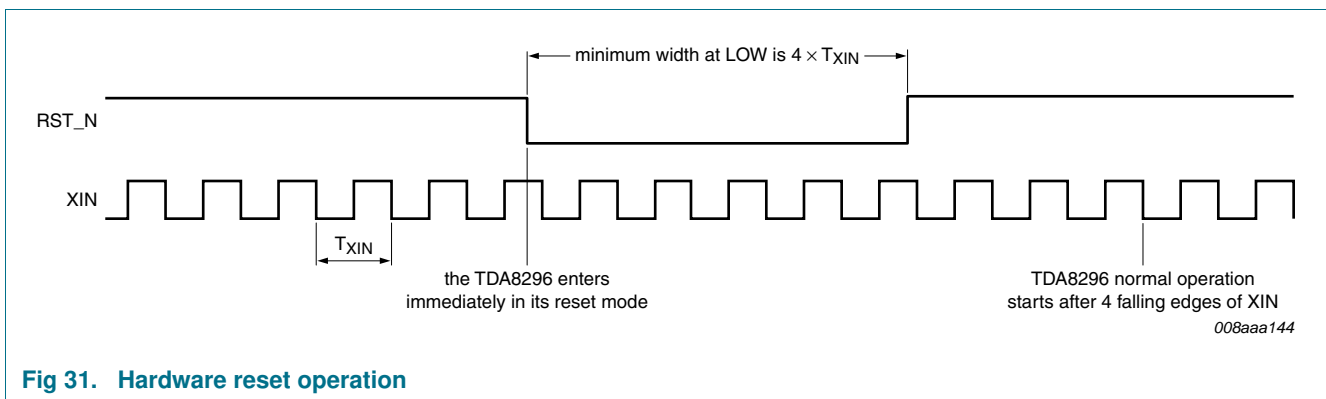


Fig 31. Hardware reset operation

After a hardware reset, the registers are set to default (power-on reset values) according to [Table 9](#). M/N standard is the default standard.

13.5.2 Software reset

A software reset can be done each time something has been programmed. The software reset does not affect the content of the registers but clears the flip-flops in the design. For the activation of the software reset see [Table 47](#) bit CLB.

13.6 Application hints

The DAC application can be adapted to a wide range of application needs. The data sheet describes 3 different use cases as shown in [Figure 23](#) to [Figure 25](#).

The default application (also used for specification) is shown in [Figure 23](#). This application supports 75 Ω DC termination for the video CVBS and > 1 kΩ AC/DC termination for the SSIF or mono audio sound signal. This application is e.g. preferred for device evaluation.

In applications, where the impedance of the CVBS termination is high (e.g. >1 kΩ), which is normally the case with audio/video processor, the video and sound DAC can operate with significant lower current. An application proposal (which leads to reduced power consumption) is shown in [Figure 24](#).

For application requirements, where both, connections to audio/video processor (with input impedance >1 kΩ) and 75 Ω termination (e.g. to SCART output), are needed in parallel, a buffer application can be used as shown in [Figure 25](#).

13.7 Crystal connection

The typical crystal frequency value is 16 MHz. The values of the passive components depend on crystal manufacturer. The oscillator can be set in two configurations depending on the origin of the crystal. [Figure 32](#) describes the case of a crystal shared with the tuner and the TDA8296 (Slave mode), [Figure 33](#) the case of a crystal dedicated to the TDA8296 (Oscillator mode).

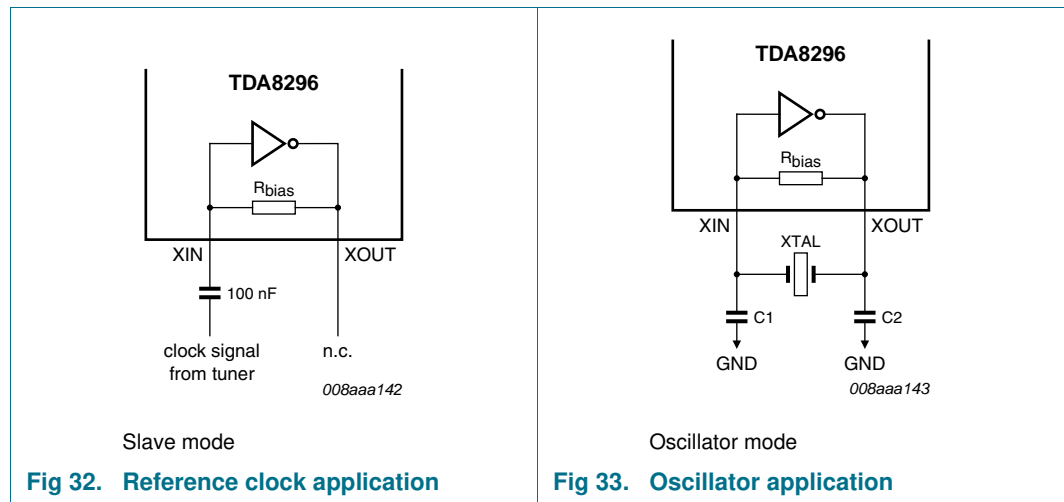


Fig 32. Reference clock application

Fig 33. Oscillator application

In Oscillator mode, only a crystal and the load capacitances C1 and C2 need to be connected externally since the feedback resistance is integrated on chip. For an accurate time reference it is advised to use the load capacitors as specified in [Table 65](#). C_L is the typical load capacitance of the crystal and is usually specified by the crystal manufacturer.

Table 65. Crystal parameters together with external components

| Fundamental oscillation frequency | Crystal load capacitance C _{L(xtal)} (pF) | Crystal series resistance R _{S(xtal)} (Ω) | External load capacitors | |
|-----------------------------------|--|--|--------------------------|---------|
| | | | C1 (pF) | C2 (pF) |
| 1 MHz to 5 MHz | 10 | < 300 | 18 | 18 |
| | 20 | < 300 | 39 | 39 |
| | 30 | < 300 | 56 | 56 |
| 5 MHz to 10 MHz | 10 | < 300 | 18 | 18 |
| | 20 | < 200 | 39 | 39 |
| | 30 | < 100 | 56 | 56 |

Table 65. Crystal parameters together with external components ...continued

| Fundamental oscillation frequency | Crystal load capacitance $C_{L(xtal)}$ (pF) | Crystal series resistance $R_{S(xtal)}$ (Ω) | External load capacitors | |
|-----------------------------------|---|--|--------------------------|---------|
| | | | C1 (pF) | C2 (pF) |
| 10 MHz to 15 MHz | 10 | < 160 | 18 | 18 |
| | 20 | < 60 | 39 | 39 |
| 15 MHz to 20 MHz | 10 | < 80 | 18 | 18 |

13.8 Alternative ADC sampling rates

In combination with a tuner front-end an alternative ADC sampling rates could be necessary. Please refer to [Table 66](#)

The default register setting is adapted to 16 MHz reference frequency (either from crystal or external source) and a nominal $f_{ADC} = 54$ MHz. In case of crosstalk of clock related signals (e.g. $n \times 54$ MHz) into the RF input of connected tuner circuit, the potential disturbance of the wanted TV channel can be avoided by switching to the alternative ADC clock frequencies of 50.75 MHz or 57.25 MHz.

Table 66. Alternative ADC clocks

| Frequencies | | | |
|----------------|------------|------------|------------|
| ADC SR | 50.75 MHz | 54.00 MHz | 57.25 MHz |
| Clock PLL | 101.50 MHz | 108.00 MHz | 114.50 MHz |
| Xtal frequency | 16.00 MHz | 16.00 MHz | 16.00 MHz |
| Divider | | | |
| M | 203 | 27 | 229 |
| N | 16 | 2 | 16 |
| P | 2 | 2 | 2 |
| Registers | | | |
| Register 2Bh | 01h | 01h | 02h |
| Register 38h | 23h | 23h | 23h |
| Register 3Eh | 63h | 63h | 63h |
| Register 3Fh | 01h | 01h | 01h |
| Register 40h | CAh | 1Ah | E4h |
| Register 41h | 1Eh | 02h | 1Eh |
| Register 41h | 61h | 61h | 61h |

14. Test information

14.1 Boundary scan interface (“IEEE Std. 1149.1”)

The TDA8296 implements a boundary scan architecture to allow access to, and control of, board test support features within integrated circuits through a TAP. The TAP controller is a synchronous state machine that controls the sequence of operations on the TAP circuitry when the TMS signal changes. All state transitions occur on the basis of the TMS value on the rising edge of TCK. The instruction register is a shift register based design. It decodes the test to be performed and/or the test data register to be accessed. The instructions are shifted into the register through the TDI and are latched as the current instruction at the completion of the shifting process. The TDA8296 boundary scan architecture includes: a TAP controller, a scannable instruction register and three scannable test data registers: a boundary scan register, a device ID register, and a bypass register.

The supported instructions are: EXTEST, IDCODE, SAMPLE, INTEST, CLAMP, HIGHZ and BYPASS.

The boundary scan register is composed of 16 cells (see [Table 67](#)). Each cell is associated either to an input pad, an output pad, a bidirectional pad or to the bidirectional or 3-state command itself. All cells are of ‘observe and control’ type.

The device ID register is a 32-bit identification register that is included in the scan register itself and contains the ID number. It is a fixed value that identifies the chip.

ID number structure is:

ID version [3:0] = 1h
ID part number [15:0] = 224Ch
ID manufacturer [11:1] = 015h
ID mandatory [0] = 1h
IDCODE [31:0] = 1224 C02Bh

When the boundary scan function is not used, please connect the four dedicated input pins (TRST_N, TCK, TDI and TMS) to GND.

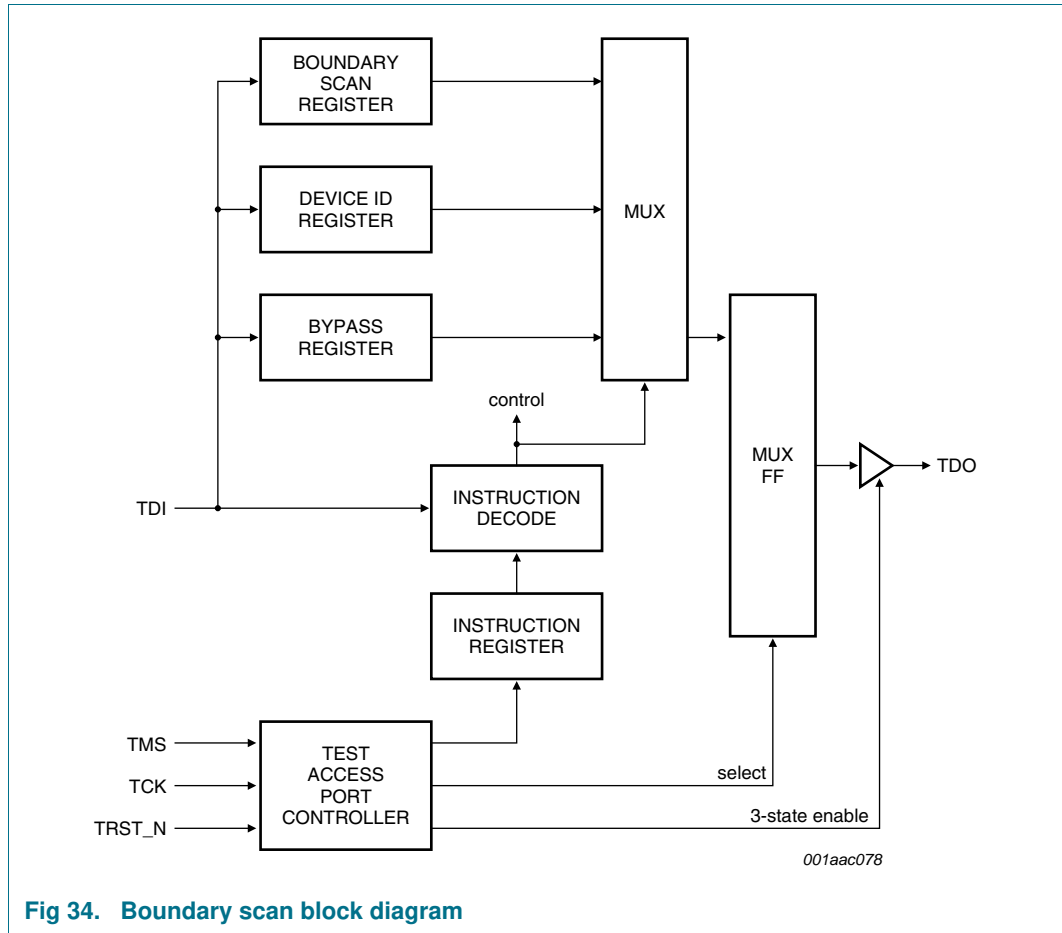


Fig 34. Boundary scan block diagram

Table 67. Boundary scan register list

| Pad signal | Chain position | Pad type | Scan type | Control signal |
|------------|----------------|----------|-----------------|----------------|
| IF_AGC | [1] | Bidir | control/observe | U1.vagc_cmd |
| | [2] | Ctrl | control/observe | U1.vagc_cmd |
| GPIO0 | [3] | Bidir | control/observe | U1.gpio0_cmd |
| | [4] | Ctrl | control/observe | U1.gpio0_cmd |
| GPIO1 | [5] | Bidir | control/observe | U1.gpio1_cmd |
| | [6] | Ctrl | control/observe | U1.gpio1_cmd |
| GPIO2 | [7] | Bidir | control/observe | U1.gpio2_cmd |
| | [8] | Ctrl | control/observe | U1.gpio2_cmd |
| SDA | [9] | Bidir | control/observe | U1.sda_cmd |
| | [10] | Ctrl | control/observe | U1.sda_cmd |
| SCL | [11] | input | control/observe | - |
| RST_N | [12] | input | control/observe | - |
| SADDR1 | [13] | Ctrl | control/observe | U1.saddr1_cmd |
| | [14] | Bidir | control/observe | U1.saddr1_cmd |
| SADDR0 | [15] | Ctrl | control/observe | U0.saddr1_cmd |
| | [16] | Bidir | control/observe | U0.saddr1_cmd |

Table 68. Boundary scan electrical characteristics

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------------|-----------------------|-------------|-----|-----|-----|------|
| T_{cy} | cycle time | TCK | 25 | - | - | ns |
| t_{su} | set-up time | TDI and TMS | 0 | - | - | ns |
| t_h | hold time | TDI and TMS | 4 | - | - | ns |
| $t_{d(TDO)}$ | delay time on pin TDO | on 50 pF | - | - | 12 | ns |

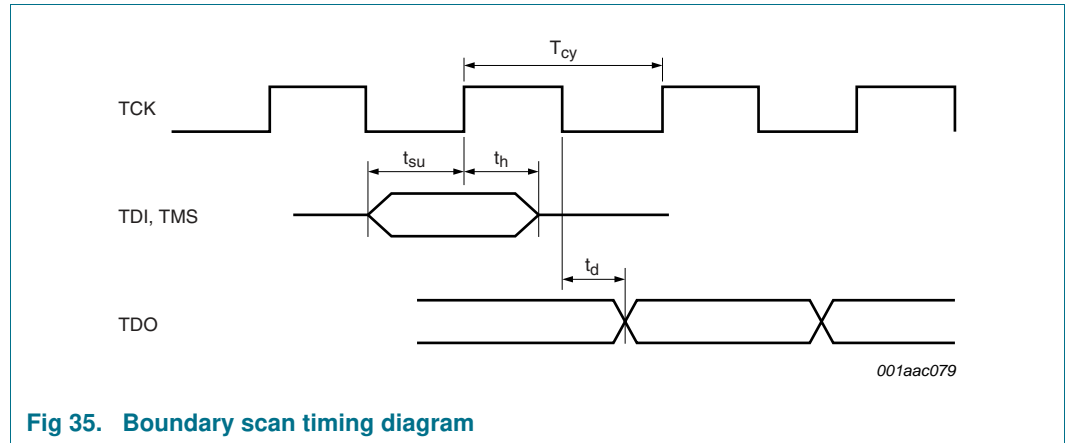


Fig 35. Boundary scan timing diagram

15. Package outline

HVQFN40: plastic thermal enhanced very thin quad flat package; no leads; 40 terminals; body 6 x 6 x 0.85 mm

SOT618-1

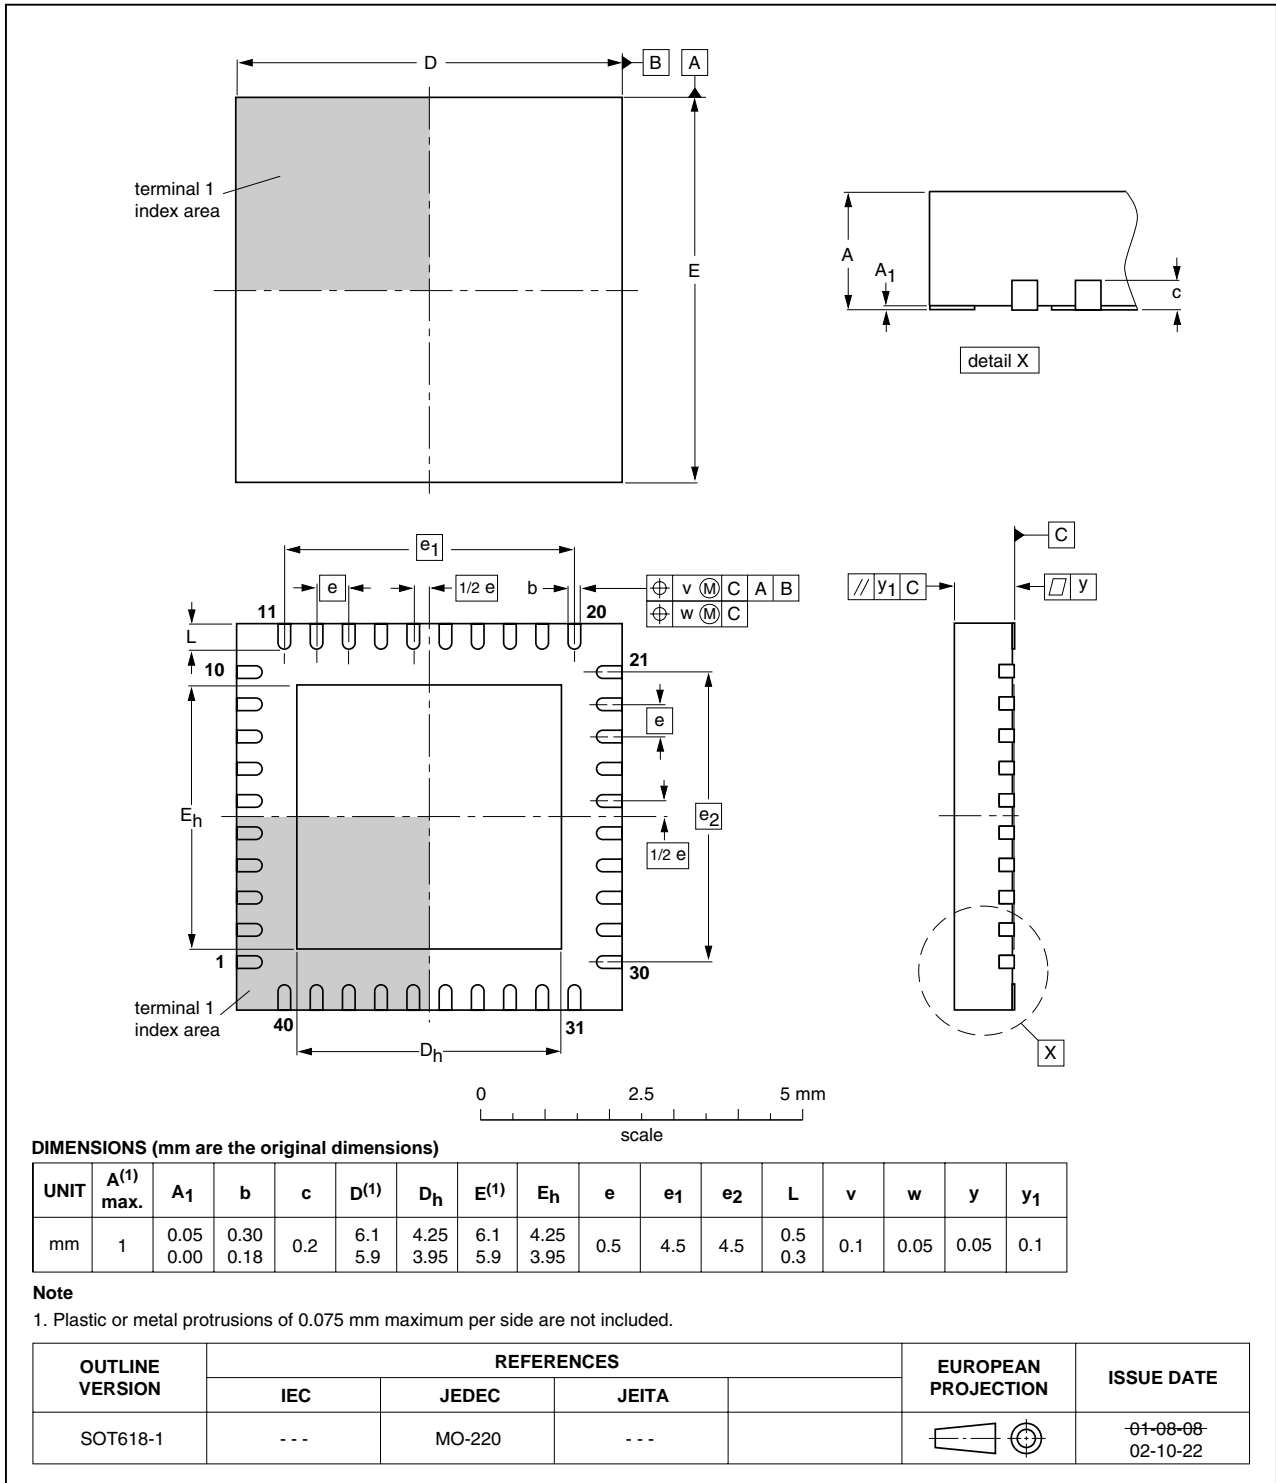


Fig 36. Package outline SOT618-1 (HVQFN40)

16. Soldering of SMD packages

This text provides a very brief insight into a complex technology. A more in-depth account of soldering ICs can be found in Application Note *AN10365 "Surface mount reflow soldering description"*.

16.1 Introduction to soldering

Soldering is one of the most common methods through which packages are attached to Printed Circuit Boards (PCBs), to form electrical circuits. The soldered joint provides both the mechanical and the electrical connection. There is no single soldering method that is ideal for all IC packages. Wave soldering is often preferred when through-hole and Surface Mount Devices (SMDs) are mixed on one printed wiring board; however, it is not suitable for fine pitch SMDs. Reflow soldering is ideal for the small pitches and high densities that come with increased miniaturization.

16.2 Wave and reflow soldering

Wave soldering is a joining technology in which the joints are made by solder coming from a standing wave of liquid solder. The wave soldering process is suitable for the following:

- Through-hole components
- Leaded or leadless SMDs, which are glued to the surface of the printed circuit board

Not all SMDs can be wave soldered. Packages with solder balls, and some leadless packages which have solder lands underneath the body, cannot be wave soldered. Also, leaded SMDs with leads having a pitch smaller than ~0.6 mm cannot be wave soldered, due to an increased probability of bridging.

The reflow soldering process involves applying solder paste to a board, followed by component placement and exposure to a temperature profile. Leaded packages, packages with solder balls, and leadless packages are all reflow solderable.

Key characteristics in both wave and reflow soldering are:

- Board specifications, including the board finish, solder masks and vias
- Package footprints, including solder thieves and orientation
- The moisture sensitivity level of the packages
- Package placement
- Inspection and repair
- Lead-free soldering versus SnPb soldering

16.3 Wave soldering

Key characteristics in wave soldering are:

- Process issues, such as application of adhesive and flux, clinching of leads, board transport, the solder wave parameters, and the time during which components are exposed to the wave
- Solder bath specifications, including temperature and impurities

16.4 Reflow soldering

Key characteristics in reflow soldering are:

- Lead-free versus SnPb soldering; note that a lead-free reflow process usually leads to higher minimum peak temperatures (see [Figure 37](#)) than a SnPb process, thus reducing the process window
- Solder paste printing issues including smearing, release, and adjusting the process window for a mix of large and small components on one board
- Reflow temperature profile; this profile includes preheat, reflow (in which the board is heated to the peak temperature) and cooling down. It is imperative that the peak temperature is high enough for the solder to make reliable solder joints (a solder paste characteristic). In addition, the peak temperature must be low enough that the packages and/or boards are not damaged. The peak temperature of the package depends on package thickness and volume and is classified in accordance with [Table 69](#) and [70](#)

Table 69. SnPb eutectic process (from J-STD-020C)


| Package thickness (mm) | Package reflow temperature (°C) | |
|------------------------|---------------------------------|-------|
| | Volume (mm ³) | |
| | < 350 | ≥ 350 |
| < 2.5 | 235 | 220 |
| ≥ 2.5 | 220 | 220 |

Table 70. Lead-free process (from J-STD-020C)

| Package thickness (mm) | Package reflow temperature (°C) | | |
|------------------------|---------------------------------|-------------|--------|
| | Volume (mm ³) | | |
| | < 350 | 350 to 2000 | > 2000 |
| < 1.6 | 260 | 260 | 260 |
| 1.6 to 2.5 | 260 | 250 | 245 |
| > 2.5 | 250 | 245 | 245 |

Moisture sensitivity precautions, as indicated on the packing, must be respected at all times.

Studies have shown that small packages reach higher temperatures during reflow soldering, see [Figure 37](#).

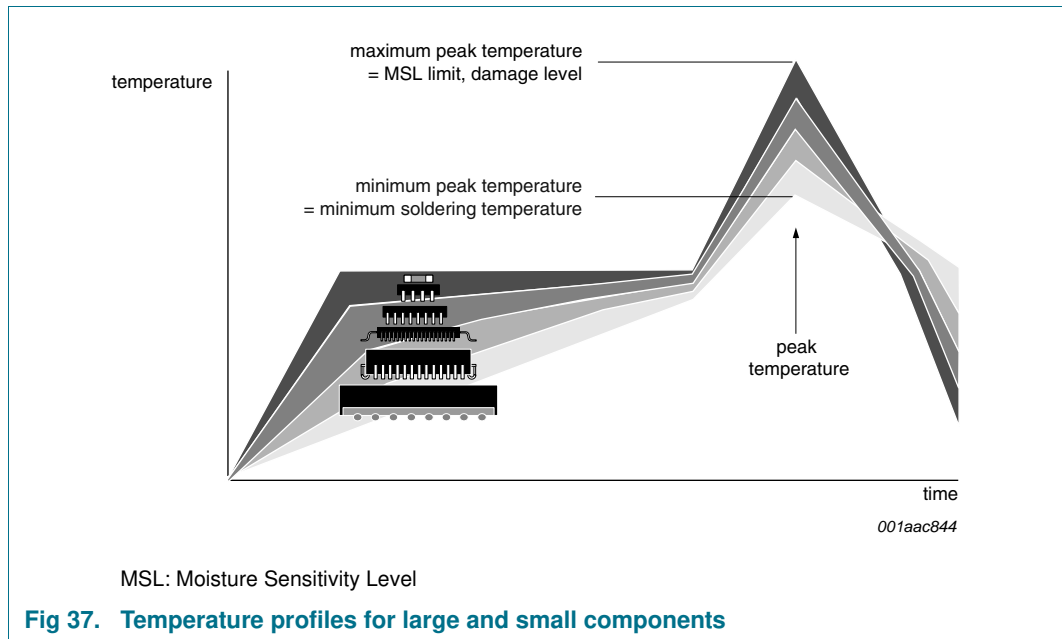

For further information on temperature profiles, refer to Application Note AN10365 “Surface mount reflow soldering description”.

17. Abbreviations

Table 71. Abbreviations

| Acronym | Description |
|---------|---|
| ADC | Analog-to-Digital Converter |
| AFC | Automatic Frequency Control |
| AGC | Automatic Gain Control |
| CC | Color Carrier |
| CMOS | Complementary Metal-Oxide Semiconductor |
| CORDIC | COordinate Rotation Digital Computer |
| CVBS | Color Video Blanking Signal |
| DAC | Digital-to-Analog Converter |
| DTO | Digitally Tuned Oscillator |
| DVD | Digital Versatile Disc |
| FIR | Finite Impulse Response |
| FPLL | Frequency Phase-Locked Loop |
| FS | Full Scale |
| GPIO | General Purpose Input Output |
| H/V | Horizontal and Vertical |
| HAD | Half Amplitude Duration |
| IC | Integrated Circuit |
| ID | IDentification |
| IF | Intermediate Frequency |

Table 71. Abbreviations ...continued

| Acronym | Description |
|---------|---|
| NPC | Neighbor Picture Carrier |
| NSC | Neighbor Sound Carrier |
| PC | Picture Carrier |
| PCB | Printed-Circuit Board |
| PLL | Phase-Locked Loop |
| POR | Power-On Reset |
| PWM | Pulse Width Modulation |
| QSS | Quasi Split Sound |
| SAW | Surface Acoustic Wave |
| SC | Sound Carrier |
| SCART | Syndicat des Constructeurs d'Appareils Radiorécepteurs et Téléviseurs Radio and Television Receiver Manufacturers' Association |
| SMD | Surface Mounted Device |
| SSIF | Second Sound Intermediate Frequency |
| TAP | Test Access Port |
| VITS | Vertical Interval Test Signal |

18. Revision history

Table 72. Revision history

| Document ID | Release date | Data sheet status | Change notice | Supersedes |
|-------------|--------------|--------------------|---------------|------------|
| TDA8296 v.1 | 20110303 | Product data sheet | - | - |

19. Legal information

19.1 Data sheet status

| Document status ^{[1][2]} | Product status ^[3] | Definition |
|-----------------------------------|-------------------------------|---|
| Objective [short] data sheet | Development | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet | Qualification | This document contains data from the preliminary specification. |
| Product [short] data sheet | Production | This document contains the product specification. |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

19.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

19.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or

malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Non-automotive qualified products — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond

NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

19.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

I²C-bus — logo is a trademark of NXP B.V.

Silicon Tuner — is a trademark of NXP B.V.

20. Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: salesaddresses@nxp.com

21. Tables

| | | | |
|--|----|--|----|
| Table 1. Quick reference data | 3 | bit description | 34 |
| Table 2. Ordering information | 5 | Table 30. CVBS_SET register (address 1Dh) | |
| Table 3. Pin allocation table | 7 | bit description | 34 |
| Table 4. Pin description | 8 | Table 31. CVBS_LEVEL register (address 1Eh) | |
| Table 5. Pin type description | 10 | bit description | 35 |
| Table 6. Address format | 13 | Table 32. CVBS_EQ register (address 1Fh) | |
| Table 7. I ² C-bus transfer description | 13 | bit description | 35 |
| Table 8. I ² C-bus transfer description | 14 | Table 33. SSIF_MUTE register (address 05h) | |
| Table 9. I ² C-bus register reference | 15 | bit description | 36 |
| Table 10. I ² C-bus registers | 18 | Table 34. SOUNDSET_1 register (address 20h) | |
| Table 11. STANDARD register (address 00h) | | bit description | 36 |
| bit description | 23 | Table 35. SOUNDSET_2 register (address 21h) | |
| Table 12. EASY_PROG register (address 01h) | | bit description | 37 |
| bit description | 23 | Table 36. SOUND_LEVEL register (address 22h) | |
| Table 13. Easy programming values | 24 | bit description | 38 |
| Table 14. DIV_FUNC register (address 02h) | | Table 37. SSIF_LEVEL register (address 23h) | |
| bit description | 25 | bit description | 39 |
| Table 15. ADC_HEADR register (address 03h) | | Table 38. ADC_SAT register (address 24h) | |
| bit description | 25 | bit description | 40 |
| Table 16. PC_PLL_FUNC register (address 04h) | | Table 39. AFC register (address 25h) bit description . . . | 41 |
| bit description | 26 | Table 40. Calculation of frequency deviation from AFC | |
| Table 17. DTO_PC_LOW, DTO_PC_MID and | | value | 41 |
| DTO_PC_HIGH register | | Table 41. HVPLL_STAT register (address 26h) | |
| (address 09h to 0Bh) bit description | 26 | bit description | 42 |
| Table 18. Values of DTO_PC per TV standard | | Table 42. D_IF_AGC_STAT register (address 27h) | |
| at 54 MHz sampling frequency | 27 | bit description | 43 |
| Table 19. DTO_SC_LOW, DTO_SC_MID and | | Table 43. T_IF_AGC_STAT register (address 28h) | |
| DTO_SC_HIGH register (address 0Ch to 0Eh) | | bit description | 43 |
| bit description | 27 | Table 44. ALT_FILT_COEF register (address 2Bh) | |
| Table 20. Values for SSIF mode at 54 MHz sampling | | bit description | 43 |
| frequency | 28 | Table 45. SSIF_AGC_STAT register (address 2Dh) | |
| Table 21. FILTERS_1 register (address 0Fh) | | bit description | 43 |
| bit description | 28 | Table 46. IDENTITY register (address 2Fh) | |
| Table 22. FILTERS_2 register (address 10h) | | bit description | 43 |
| bit description | 30 | Table 47. CLB_STDBY register (address 30h) | |
| Table 23. GRP_DELAY register (address 11h) | | bit description | 43 |
| bit description | 31 | Table 48. ADC_CTL register (address 33h) | |
| Table 24. D_IF_AGC_SET_1 register (address 12h) | | bit description | 44 |
| bit description | 32 | Table 49. ADC_CTL_2 register (address 34h) | |
| Table 25. D_IF_AGC_SET_2 register (address 13h) | | bit description | 44 |
| bit description | 32 | Table 50. VIDEODAC_CTL register (address 35h) | |
| Table 26. T_IF_AGC_SET register (address 15h) | | bit description | 45 |
| bit description | 32 | Table 51. AUDIODAC_CTL register (address 36h) | |
| Table 27. T_IF_AGC_LIM register (address 16h) | | bit description | 46 |
| bit description | 33 | Table 52. DAC_REF_CLK_CTL register | |
| Table 28. T_IF_AGC_FORCE register (address 17h) | | (address 37h) bit description | 46 |
| bit description | 33 | Table 53. PLL_REG07, PLL_REG08, PLL_REG09 | |
| Table 29. V_SYNC_DEL register (address 1Ch) | | and PLL_REG10 register (address 3Fh to 42h) | |

continued >>

bit description46

Table 54. GPIOREG_0 register (address 44h)
bit description47

Table 55. GPIOREG_1 register (address 45h)
bit description47

Table 56. HVPLL signal configuration48

Table 57. GPIOREG_2 register (address 46h)
bit description48

Table 58. GD_EQ_SECTx_C1 and GD_EQ_SECTx_C2
(x = 1 to 4) register (address 4Bh to 52h)
bit description49

Table 59. Coefficients used in group delay equalizer
example50

Table 60. CVBS_EQ_COEFx_LOW and
CVBS_EQ_COEFx_HIGH (x = 0 to 5) register
(address 57h to 62h) bit description50

Table 61. Coefficients used in video equalizer
example52

Table 62. Limiting values53

Table 63. Thermal characteristics53

Table 64. Characteristics54

Table 65. Crystal parameters together with external
components72

Table 66. Alternative ADC clocks73

Table 67. Boundary scan register list75

Table 68. Boundary scan electrical characteristics76

Table 69. SnPb eutectic process (from J-STD-020C) ...79

Table 70. Lead-free process (from J-STD-020C)79

Table 71. Abbreviations80

Table 72. Revision history81

22. Figures

| | | |
|---------|--|----|
| Fig 1. | Functional diagram of TDA8296 | 6 |
| Fig 2. | Pin configuration for HVQFN40 | 7 |
| Fig 3. | I ² C-bus Write mode | 13 |
| Fig 4. | Examples I ² C-bus Write mode | 13 |
| Fig 5. | I ² C-bus Read mode | 14 |
| Fig 6. | Example I ² C-bus Read mode | 14 |
| Fig 7. | TDA8296 DTO_PC characteristic | 27 |
| Fig 8. | TDA8296 DTO_SC characteristic | 28 |
| Fig 9. | Video low-pass filters for sound carrier suppression | 29 |
| Fig 10. | Notch filter for adjacent sound carrier suppression | 29 |
| Fig 11. | Video low pass frequency response in smooth roll off or low ripple mode | 30 |
| Fig 12. | SSIF and FM radio band-pass filters (center frequency 5.5 MHz chosen) | 31 |
| Fig 13. | Video equalizer curves | 36 |
| Fig 14. | TDA8296 SSIF characteristic versus C _S (refer to Figure 23) typical values; termination 75 Ω and 1 kΩ in parallel | 40 |
| Fig 15. | TDA8296 AFC characteristic | 42 |
| Fig 16. | Internal low IF frequency response in front of the VIF demodulator | 45 |
| Fig 17. | Example for the programmable group delay equalizer | 50 |
| Fig 18. | Example for the programmable video equalizer | 52 |
| Fig 19. | Typical application of TDA8296 | 64 |
| Fig 20. | IF input application for interlacing TDA1827x | 64 |
| Fig 21. | IF input application | 64 |
| Fig 22. | Main application diagram | 65 |
| Fig 23. | 75 Ω load | 66 |
| Fig 24. | High ohmic load | 66 |
| Fig 25. | Buffer application with 75 Ω load | 67 |
| Fig 26. | PCB pattern using circuit diagrams of Figure 20 , Figure 22 , Figure 23 and 16 MHz reference from XTAL | 67 |
| Fig 27. | PCB pattern using circuit diagrams of Figure 20 , Figure 22 , Figure 23 and 16 MHz reference from master | 68 |
| Fig 28. | TDA8296 calculated DAC characteristic | 69 |
| Fig 29. | Internal CVBS signal in front of video DAC (typical characteristic) | 70 |
| Fig 30. | Internal SSIF signal in front of sound DAC (typical characteristic, also dependent on SSIF_LVL[7:0] at address 23h) | 70 |
| Fig 31. | Hardware reset operation | 71 |
| Fig 32. | Reference clock application | 72 |
| Fig 33. | Oscillator application | 72 |
| Fig 34. | Boundary scan block diagram | 75 |
| Fig 35. | Boundary scan timing diagram | 76 |
| Fig 36. | Package outline SOT618-1 (HVQFN40) | 77 |
| Fig 37. | Temperature profiles for large and small components | 80 |

23. Contents

| | | | | | |
|----------|--|-----------|-----------|--|-----------|
| 1 | General description | 1 | 9.3.19 | Special equalizer functions for group delay and video (CVBS) | 49 |
| 2 | Features and benefits | 1 | 10 | Limiting values | 53 |
| 3 | Applications | 2 | 11 | Thermal characteristics | 53 |
| 4 | Quick reference data | 3 | 12 | Characteristics | 54 |
| 5 | Ordering information | 5 | 13 | Application information | 64 |
| 6 | Functional diagram | 6 | 13.1 | Typical application | 64 |
| 7 | Pinning information | 7 | 13.1.1 | IF input application | 64 |
| 7.1 | Pinning | 7 | 13.2 | Detailed application diagrams | 65 |
| 7.2 | Pin description | 8 | 13.2.1 | Main application diagram | 65 |
| 8 | Functional description | 10 | 13.2.2 | 75 W application | 66 |
| 8.1 | IF ADC | 10 | 13.2.3 | 100 W application | 66 |
| 8.2 | Filters | 10 | 13.2.4 | Buffer application | 67 |
| 8.3 | PLL demodulator | 10 | 13.2.5 | Layout recommendations | 67 |
| 8.4 | Nyquist filter, video low-pass filter, video and group delay equalizer, video leveling | 10 | 13.3 | DAC connection | 68 |
| 8.5 | Upsampler and video DAC | 11 | 13.4 | ADC connection | 71 |
| 8.6 | SSIF/mono sound processing | 11 | 13.5 | Reset operation | 71 |
| 8.7 | Tuner IF AGC | 11 | 13.5.1 | Hardware reset | 71 |
| 8.8 | Digital IF AGC | 12 | 13.5.2 | Software reset | 71 |
| 8.9 | Clock generation | 12 | 13.6 | Application hints | 71 |
| 9 | I²C-bus control | 12 | 13.7 | Crystal connection | 72 |
| 9.1 | Protocol of the I ² C-bus serial interface | 12 | 13.8 | Alternative ADC sampling rates | 73 |
| 9.1.1 | Write mode | 13 | 14 | Test information | 74 |
| 9.1.2 | Read mode | 14 | 14.1 | Boundary scan interface (“IEEE Std. 1149.1”) | 74 |
| 9.2 | Register overview | 15 | 15 | Package outline | 77 |
| 9.3 | Register description | 23 | 16 | Soldering of SMD packages | 78 |
| 9.3.1 | Standard setting with easy programming | 23 | 16.1 | Introduction to soldering | 78 |
| 9.3.2 | Diverse functions (includes tuner IF AGC Pin mode) | 25 | 16.2 | Wave and reflow soldering | 78 |
| 9.3.3 | ADC headroom | 25 | 16.3 | Wave soldering | 78 |
| 9.3.4 | Picture carrier PLL functions | 26 | 16.4 | Reflow soldering | 79 |
| 9.3.5 | Picture and sound carrier DTO | 26 | 17 | Abbreviations | 80 |
| 9.3.6 | Filter settings | 28 | 18 | Revision history | 81 |
| 9.3.7 | Group delay equalization | 31 | 19 | Legal information | 82 |
| 9.3.8 | Digital IF AGC functions | 32 | 19.1 | Data sheet status | 82 |
| 9.3.9 | Tuner IF AGC functions | 32 | 19.2 | Definitions | 82 |
| 9.3.10 | V-sync adjustment | 34 | 19.3 | Disclaimers | 82 |
| 9.3.11 | CVBS settings | 34 | 19.4 | Trademarks | 83 |
| 9.3.12 | SSIF and mono sound settings | 36 | 20 | Contact information | 83 |
| 9.3.13 | Status registers: ADC saturation, AFC, H/V PLL and AGC | 40 | 21 | Tables | 84 |
| 9.3.14 | Chip identification and Standby mode | 43 | 22 | Figures | 86 |
| 9.3.15 | ADC control | 44 | 23 | Contents | 87 |
| 9.3.16 | Video and sound DAC control | 45 | | | |
| 9.3.17 | Clock generation (PLL and crystal oscillator) | 46 | | | |
| 9.3.18 | GPIOs | 47 | | | |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section ‘Legal information’.

© NXP B.V. 2011.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 3 March 2011

Document identifier: TDA8296