

Evaluating of Optical Sensors with the EVAL-ADPDM3Z Evaluation Board

FEATURES

ADPD1080 full configuration

- Register level

- Parameter level

Graph views

- Time series view

- Gesture recognition view

- Triangulation view

UDP transfer capability

EVALUATION KIT CONTENTS

- EVAL-ADPDM3Z standard evaluation board

- USB-C cable

ADDITIONAL EQUIPMENT NEEDED

- PC running Windows® 7 operating system

ONLINE RESOURCES

- [ADPD1080 data sheet](#)

- [ADPD2140 data sheet](#)

- [Applications Wavetool](#)

GENERAL DESCRIPTION

The EVAL-ADPDM3Z evaluation kit provides users with a simplified means of interfacing with optical sensor products from Analog Devices, Inc. Supported sensor daughter boards include the [EVAL-ADPD2140Z](#) and the [EVAL-ADPD1080Z-PRX](#).

The evaluation kit includes the EVAL-ADPDM3Z evaluation board (requires the [Applications Wavetool](#), which can be downloaded from the EVAL-ADPDM3Z product page). The evaluation board features a graphical user interface (GUI) that provides users with low level and high level configurability, real-time data analysis, and user datagram protocol (UDP) transfer capability so that the evaluation board can easily interface to a PC.

The USB port of the PC powers the EVAL-ADPDM3Z evaluation board and provides power to any connected daughter boards.

The evaluation board schematics indicate signal names for simplified identification (see Figure 8).

EVAL-ADPDM3Z EVALUATION BOARD PHOTOGRAPH



Figure 1.

TABLE OF CONTENTS

Features	1	Evaluation Board Software Quick Start Procedures	3
Evaluation Kit Contents.....	1	Installing the Applications Wavetool.....	3
Additional Equipment Needed	1	Evaluation Board USB Connection	3
Online Resources	1	Updating the EVAL-ADPDM3Z Firmware	4
General Description	1	Configuring the EVAL-ADPD2140Z OR EVAL-ADPD1080Z-PRX Evaluation BOARDS.....	4
EVAL-ADPDM3Z Evaluation Board Photograph	1	Evaluation Board Schematics and Artwork.....	5
Revision History	2		

REVISION HISTORY

8/2018—Revision 0: Initial Version

EVALUATION BOARD SOFTWARE QUICK START PROCEDURES

INSTALLING THE APPLICATIONS WAVETOOL

Download the [Applications Wavetool](#) software package from the EVAL-ADPDM3Z product page. Unzip the downloaded software folder, run the enclosed **Applications_Wavetool.exe** file, and follow the prompts for installing the [Applications Wavetool](#) software (see Figure 2). For further information, follow the full installation guide included with the [Applications Wavetool](#) software in the downloaded folder.



Figure 2. Applications Wavetool Setup

To start the [Applications Wavetool](#) application, navigate to **Applications_Wavetool** from the **Start** menu and click the **Applications_Wavetool** icon (see Figure 3).

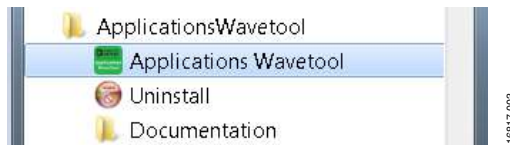


Figure 3. Navigate to **Applications_Wavetool** from **Start** Menu

At startup, the [Applications Wavetool](#) application automatically checks if the installed [Applications Wavetool](#) software version is up to date. If a newer software version is available, the user is prompted to download the newest version of the software.

EVALUATION BOARD USB CONNECTION

Prior to starting the [Applications Wavetool](#) application, connect either the [EVAL-ADPD2140Z](#) or [EVAL-ADPD1080Z-PRX](#) daughter board to the EVAL-ADPDM3Z evaluation board via the board-to-board connectors (see Figure 4). Connect the EVAL-ADPDM3Z evaluation board to a PC via the USB-C cable included with the evaluation kit. The PC tries to find the device drivers and install these drivers, if they have not been previously installed. This search is done automatically. When the EVAL-ADPDM3Z evaluation board is connected, open the [Applications Wavetool](#) application (see Figure 5).

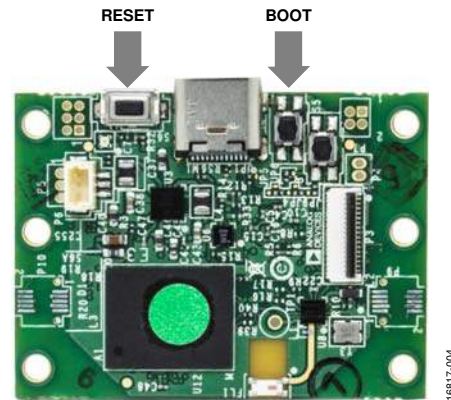


Figure 4. EVAL-ADPDM3Z Evaluation Board



Figure 5. Applications Wavetool Window

After the [Applications Wavetool](#) application opens, click **Connection > Connect** to open the **COM Port Selection** window. Select the appropriate communication (COM) port from the **Connect** dropdown menu and click **Connect** (see Figure 6). The [Applications Wavetool](#) then acknowledges that the EVAL-ADPDM3Z evaluation board is connected by displaying **M3 Motherboard Found** on the screen.

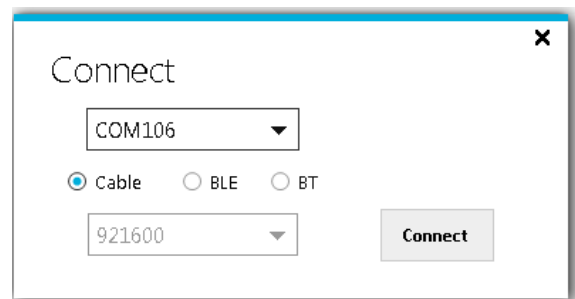


Figure 6. COM Port Selection Window

UPDATING THE EVAL-ADPDM3Z FIRMWARE

If the EVAL-ADPDM3Z firmware is out of date, the software displays a warning, as shown in Figure 7. If this occurs, click **Tools > Firmware Update** from the main window, and click **Ok** in the following pop-up window. Follow the instructions shown in Figure 7 to update the EVAL-ADPDM3Z firmware.



Figure 7. Updating the EVAL-ADPDM3Z Firmware

CONFIGURING THE EVAL-ADPD2140Z OR EVAL-ADPD1080Z-PRX EVALUATION BOARDS

To operate the EVAL-ADPD2140Z or EVAL-ADPD1080Z-PRX daughter boards, see the EVAL-ADPD2140Z or EVAL-ADPD1080Z-PRX user guides.

For more detailed information on the [Applications Wavetool](#) and additional features of the software, see the [Applications Wavetool User Manual](#), which can be found in the **Help > Help Topics** menu.

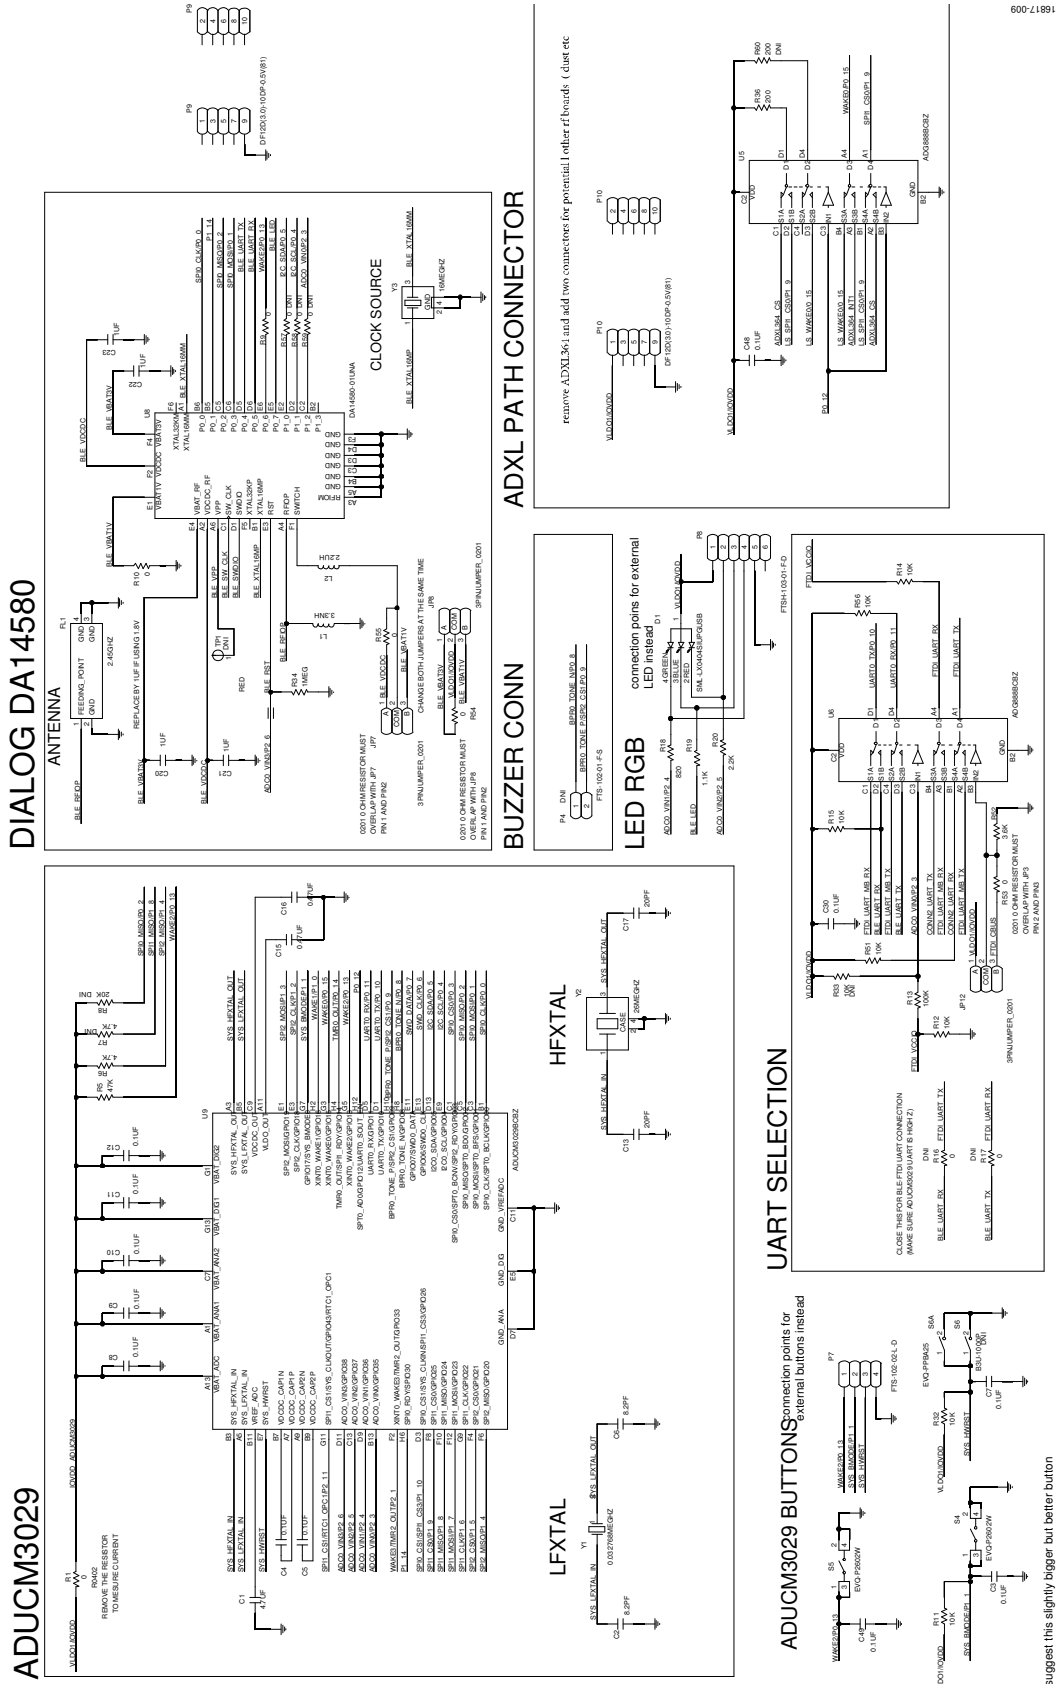


Figure 9. EVAL-ADPDM3Z Evaluation Board Schematic

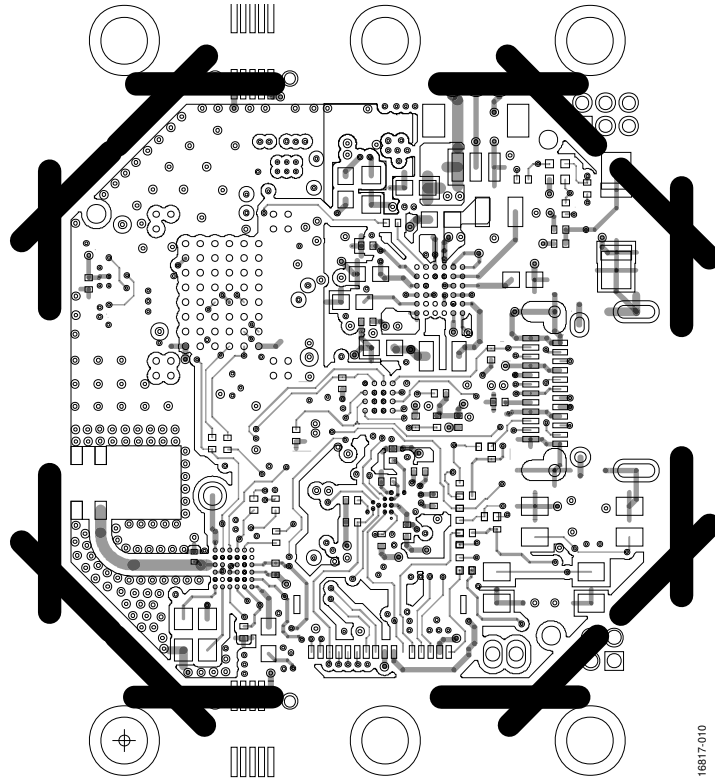


Figure 10. EVAL-ADPDM3Z Evaluation Board Layout



ESD Caution

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.

©2018 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners. UG16817-0-8/18(0)



www.analog.com