



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

4050 MHz Ceramic Band Pass Filter

Part Number: AM4050B1710



Electrical Specifications

Center Frequency: 4050 MHz
Bandwidth: 200 MHz
Insertion Loss in BW: 3.0 dB Max
Ripple in BW: 1.0 dB Max
Return Loss in BW: 15 dB Min
Rejection: >20 dB @ 3300 MHz
 >60 dB @ 2500 MHz
 >60 dB @ 5550 MHz
 >5 dB @ 4750 MHz


Mechanical

Mounting Method: SMT
Dimensions: 26.42 x 14.0 x 5.5 mm

Environmental

Operating Temperature: -40 to +85° C
Storage Temperature: -50 to +95° C
Shock: 20 G. 11 ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

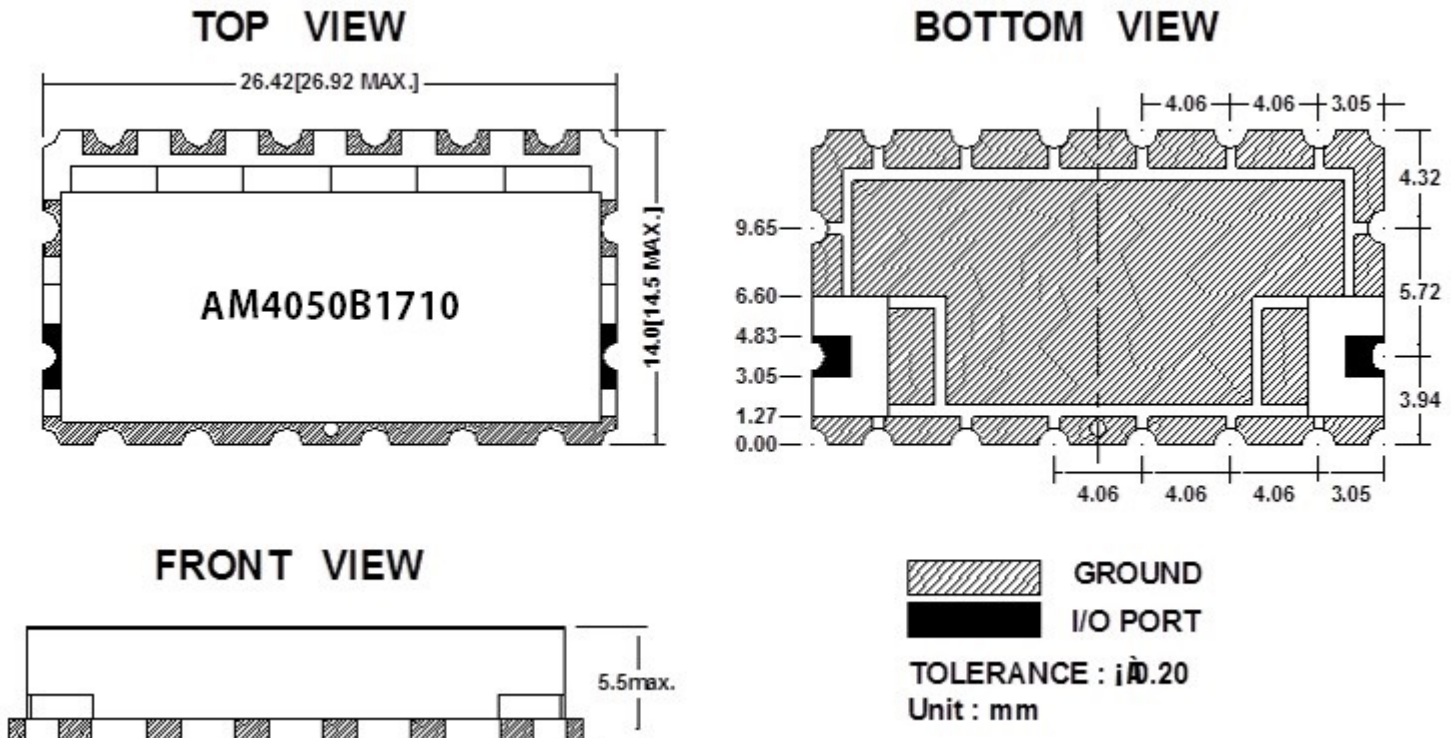



Response Plot:

