番号 No.	部品 PART NAME	材質 MATERIAL	仕上げ FINISH
①	リセプタクル　ハウジング RECEPTACLE HOUSING	液晶ポリマー、ガラス充填、自然色（白）、UL94V-0 LIQUID CRYSTAL POLYMER, GLASS FILLED , NATURAL(WHITE), UL94V-0	—//—
②	リセプタクル　ターミナル RECEPTACLE TERMINAL	リン青銅 PHOSPHOR BRONZE	△1.

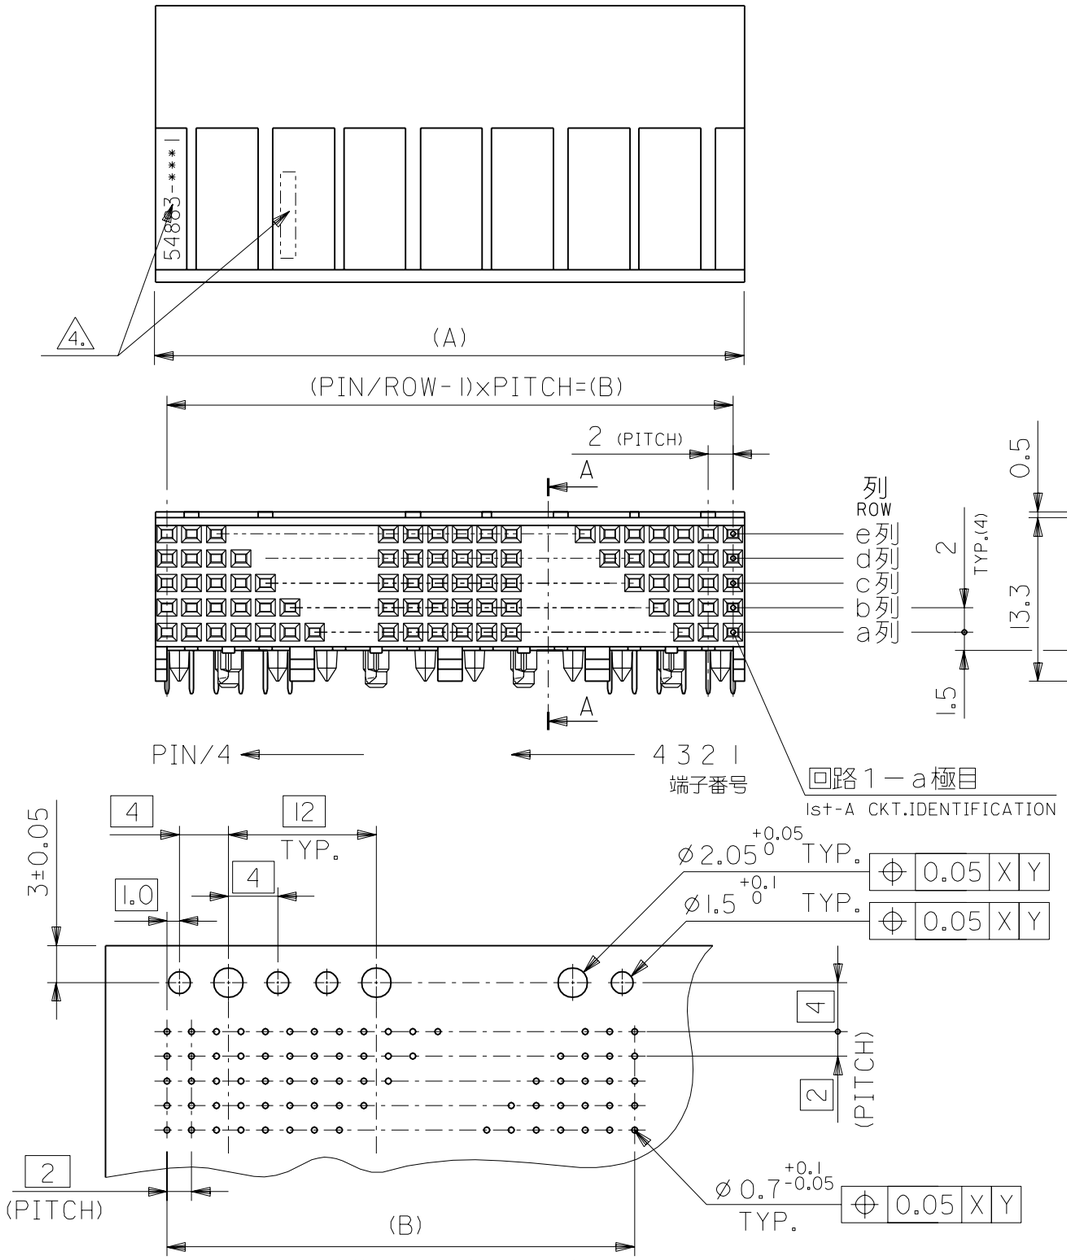

A-A
(NON-SCALE)

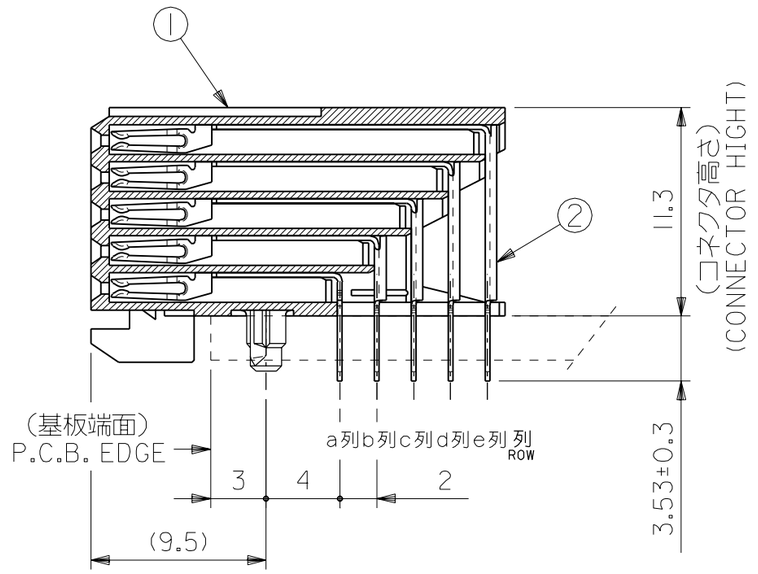

基板穴推奨寸法（部品実装）

RECOMMENDED P.C.B.LAYOUT (COMPONENT SIDE)

注記
NOTE :

△1. ターミナル　めっき仕様
TERMINAL PLATING
金めっき：0.76 μm MIN.（接点部）
GOLD : 0.76 μm MIN. (CONTACT AREA)
半田めっき：1.0μm MIN.（半田付け部）
TIN-LEAD : 1.0 μm MIN. (SOLDER AREA)
ニッケルメッキ：2.0 μm MIN.（下地めっき）
NICKEL : 2.0 μm MIN. (UNDER PLATING)

2. 推奨基板厚 : t=2.4mm
RECOMMENDED P.C.B. THICKNESS :

3. 適合プラグ：55060, 55332, 55333
APPLICABLE PLUG :

△4. 製品番号及びロットナンバー
MATERIAL NO. & LOT NO.

B	A	MATERIAL NO.	PIN
94	95.98	54883-2401	240
46	47.98	54883-1201	120
22	23.98	54883-0601	60
10	11.98	54883-0301	30

MODEL NO. : 54883-***1

DIMENSIONS: ☐ mm/INCH ☐ INCH/mm ☒ mm ONLY

SHT 227 REV 227

REVISE ON CAD ONLY

REV	DESCRIPTION	
B	REVISED	2B1NO. JD2001-1438 DRWN: S.HOSHIKAWA '01/04/24 CH'K: A.NODA APPR: H.IKESUGI
A	RELEASED	2B0NO. JD2001-0317 DRWN: S.HOSHIKAWA '00/08/25 CH'K: A.NODA APPR: H.IKESUGI

MATERIAL 材料	—//—
FINISH 仕上げ	—//—
WIRE RANGE 適用電線範囲	—//—
INS. RANGE 被覆外径	—//—

GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差

10 UNDER 未満	±0.2
10 OVER 以上 30 UNDER 未満	±0.25
30 OVER 以上	±0.3
ANGLE 角度	±3°

SCALE 2-1

DESIGN UNITS ☒mm ☐INCH

THIRD ANGLE PROJECTION

DRAWN BY & DATE S.Hoshikawa

CHECKED BY & DATE A.Noda

APPROVED BY & DATE H.Ikesugi

TITLE: "MFB" B/B CONN. (FB+) REC. ASS'Y 5ROW DIP

molex MOLEX INCORPORATED

CAD FILENAME SD-54883-002.S01

MATERIAL NO. SEE TABLE

DRAWING NO. SD-54883-002

SHEET NO. 1 OF 1

SIZE B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

DWG. NO. SD-54883-002

DO NOT SCALE DRAWING

SD-54883-002.S01

EN-02J(097) MXJ-54