

## LOW-POWER CAN TRANSCEIVER WITH BUS WAKE-UP

Check for Samples: [SN65HVD1040-HT](#)

### FEATURES

- Improved Drop-in Replacement for the TJA1040
- $\pm 12$  kV ESD Protection
- Low-Current Standby Mode with Bus Wake-up: 5  $\mu$ A Typical
- Bus-Fault Protection of  $-27$  V to 40 V
- Rugged Split-Pin Bus Stability
- Dominant Time-Out Function
- Thermal Shutdown Removed
- Power-Up/Down Glitch-Free Bus Inputs and Outputs
  - High Input Impedance with Low  $V_{CC}$
  - Monotonic Outputs During Power Cycling
- DeviceNet Vendor ID # 806

### APPLICATIONS

- Down-Hole Drilling
- High Temperature Environments
- Vibration/Modal Analysis
- Multi-Channel Data Acquisition
- Acoustics/Dynamic Strain Gauges
- Pressure Sensors

### SUPPORTS EXTREME TEMPERATURE APPLICATIONS

- Controlled Baseline
- One Assembly/Test Site
- One Fabrication Site
- Available in Extreme ( $-55^{\circ}\text{C}/210^{\circ}\text{C}$ ) Temperature Range <sup>(1)</sup>
- Extended Product Life Cycle
- Extended Product-Change Notification
- Product Traceability
- Texas Instruments high temperature products utilize highly optimized silicon (die) solutions with design and process enhancements to maximize performance over extended temperatures. All devices are characterized and qualified for 1000 hours continuous operating life at maximum rated temperature.

(1) Custom temperature ranges available

### DESCRIPTION

The SN65HVD1040 meets or exceeds the specifications of the ISO 11898 standard for use in applications employing a Controller Area Network (CAN). As CAN transceivers, these devices provide differential transmit and receive capability for a CAN controller at signaling rates of up to 1 megabit per second (Mbps). <sup>(2)</sup>

Designed for operation in especially harsh environments, the device features  $\pm 12$  kV ESD protection on the bus and split pins, cross-wire, overvoltage and loss of ground protection from  $-27$  to 40 V, a  $-12$  V to 12 V common-mode range, and will withstand voltage transients from  $-200$  V to 200 V according to ISO 7637.

The STB input (pin 8) selects between two different modes of operation; high-speed or low-power mode. The high-speed mode of operation is selected by connecting STB to ground.

If a high logic level is applied to the STB pin of the SN65HVD1040, the device enters a low-power bus-monitor standby mode. While the SN65HVD1040 is in the low-power bus-monitor standby mode, a dominant bit greater than 5  $\mu$ s on the bus is passed by the bus-monitor circuit to the receiver output. The local protocol controller may then reactivate the device when it needs to transmit to the bus.

A dominant-time-out circuit in the SN65HVD1040 prevents the driver from blocking network communication during a hardware or software failure. The time-out circuit is triggered by a falling edge on TXD (pin 1). If no rising edge is seen before the time-out constant of the circuit expires, the driver is disabled. The circuit is then reset by the next rising edge on TXD.


(2) The signaling rate of a line is the number of voltage transitions that are made per second expressed in the units bps (bits per second).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

The SPLIT output (pin 5) is available on the SN65HVD1040 as a  $V_{CC}/2$  common-mode bus voltage bias for a split-termination network.

The SN65HVD1040 is characterized for operation from  $-55^{\circ}\text{C}$  to  $210^{\circ}\text{C}$ .

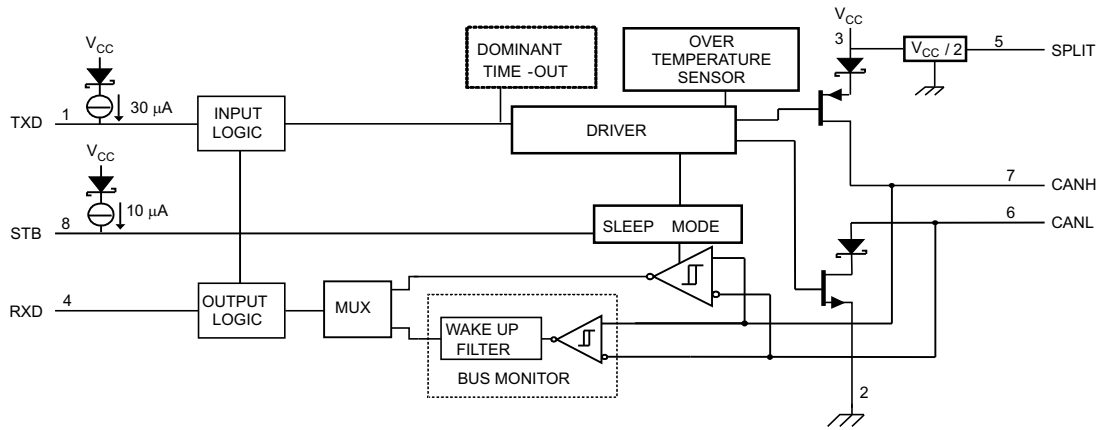



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.


**Table 1. ORDERING INFORMATION<sup>(1)</sup>**

| T <sub>J</sub> | PACKAGE        | ORDERABLE PART NUMBER | TOP-SIDE MARKING |
|----------------|----------------|-----------------------|------------------|
| -55°C to 210°C | KGD (bare die) | SN65HVD1040SKGD3      | NA               |
|                | HKQ            | SN65HVD1040SHKQ       | HVD1040SHKQ      |
| -55°C to 175°C | D              | SN65HVD1040HD         | H1040            |

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI Web site at [www.ti.com](http://www.ti.com).

**BARE DIE INFORMATION**

| DIE THICKNESS | BACKSIDE FINISH        | BACKSIDE POTENTIAL | BOND PAD METALLIZATION COMPOSITION | BOND PAD THICKNESS |
|---------------|------------------------|--------------------|------------------------------------|--------------------|
| 15 mils.      | Silicon with backgrind | Floating           | CuNiPd                             | 15 microns         |

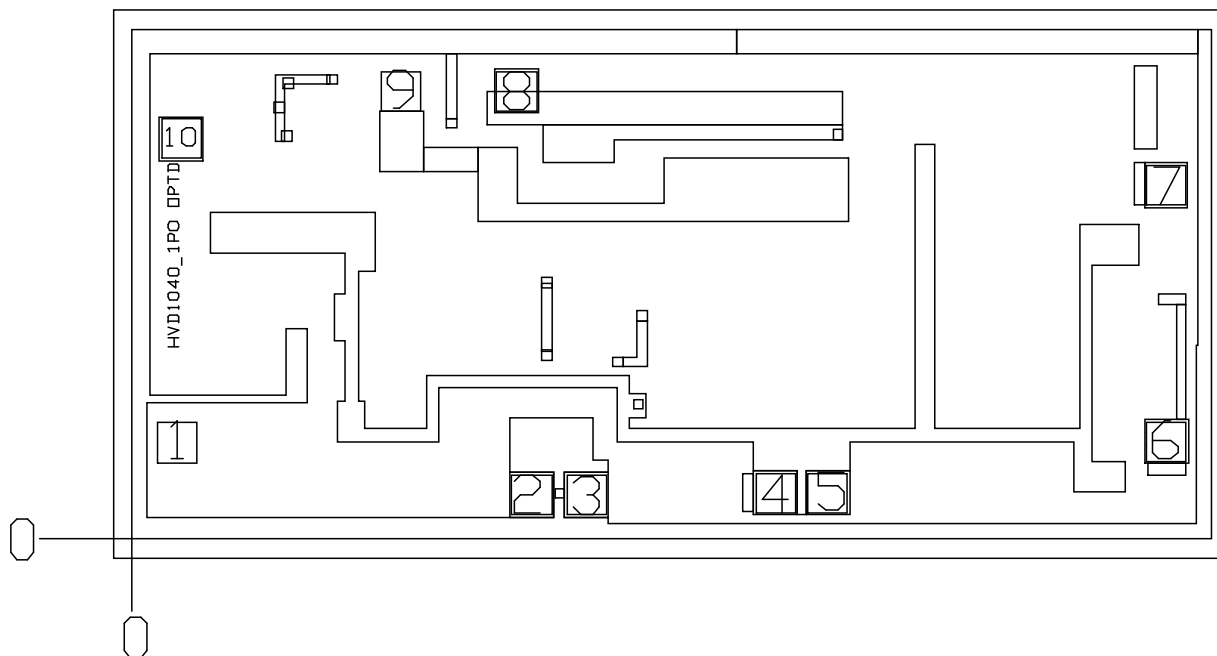
**Table 2. BOND PAD COORDINATES (μm)**

| DESCRIPTION | PAD NUMBER | X MIN   | Y MIN  | X MAX   | Y MAX  | PAD SIZE X | PAD SIZE Y |
|-------------|------------|---------|--------|---------|--------|------------|------------|
| TXD         | 1          | 53.64   | 162    | 137.7   | 246.06 | 84.06      | 84.06      |
| GND         | 2          | 804.06  | 50.85  | 888.12  | 134.91 | 84.06      | 84.06      |
| GND         | 3          | 920.07  | 50.85  | 1004.13 | 134.91 | 84.06      | 84.06      |
| Vcc         | 4          | 1320.21 | 54.18  | 1404.27 | 138.24 | 84.06      | 84.06      |
| Vcc         | 5          | 1431.09 | 54.18  | 1515.15 | 138.24 | 84.06      | 84.06      |
| RXD         | 6          | 2148.75 | 164.34 | 2232.81 | 248.4  | 84.06      | 84.06      |
| SPLIT       | 7          | 2147.4  | 707.49 | 2231.46 | 791.55 | 84.06      | 84.06      |
| CANL        | 8          | 771.93  | 907.38 | 855.99  | 991.44 | 84.06      | 84.06      |
| CANH        | 9          | 527.31  | 907.38 | 611.37  | 991.44 | 84.06      | 84.06      |
| STB         | 10         | 62.28   | 806.13 | 146.34  | 890.19 | 84.06      | 84.06      |

**ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>**

|   |   | VALUE                                       |   |
|---|---|---|---|
| V <sub>CC</sub>   | Supply voltage <sup>(2)</sup>                         | –0.3 V to 7 V                               |   |
| V <sub>I(bus)</sub>   | Voltage range at any bus terminal (CANH, CANL, SPLIT) | –27 V to 40 V                               |   |
| I <sub>O(OUT)</sub>   | Receiver output current                               | –20 mA to 20 mA                             |   |
| Voltage input, transient pulse <sup>(3)</sup> , (CANH, CANL, SPLIT) |   | –200 V to 200 V                             |   |
| ESD   | IEC Contact Discharge (IEC 61000-4-2)                 | Bus terminals vs GND<br>±6 kV               |   |
|   | Human body model                                      | JEDEC Standard 22,<br>Test Method A114-C.01 | Bus terminals vs GND<br>±12 kV<br>All pins<br>±4 kV |
|   | Field-Induced-Charged Device Model                    | JEDEC Standard 22,<br>Test Method C101      | All pins<br>±1 kV                                   |
|   | Machine model   | ANSI/ESDS5.2-1996                           | ±200 V  |
| IEC   |   | Bus terminals vs GND<br>±6 kV               |   |
| V <sub>I</sub>  | Voltage input range (TXD, STB)                        | –0.5 V to 6 V                               |   |
| T <sub>J</sub>  | Junction temperature                                  | –55°C to 210°C                              |   |

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values, except differential I/O bus voltages, are with respect to network ground terminal.
- (3) Tested in accordance with ISO 7637, test pulses 1, 2, 3a, 3b, 5, 6 & 7.

**THERMAL CHARACTERISTICS FOR HKQ PACKAGE**

over operating free-air temperature range (unless otherwise noted)

| PARAMETER       |                                     | MIN                                     | TYP | MAX  | UNIT |
|-----------------|-------------------------------------|---|-----|------|------|
| θ <sub>JC</sub> | Junction-to-case thermal resistance | to ceramic side of case                 |     | 5.7  | °C/W |
|                 |                                     | to top of case lid (metal side of case) |     | 13.7 |      |

**THERMAL INFORMATION FOR D PACKAGE**

| THERMAL METRIC <sup>(1)</sup> |   | SN65HVD1040 | UNITS |
|-------------------------------|---|-------------|-------|
|                               |   | D<br>8 PINS |       |
| θ <sub>JA</sub>               | Junction-to-ambient thermal resistance <sup>(2)</sup>       | 91.9        | °C/W  |
| θ <sub>JCtop</sub>            | Junction-to-case (top) thermal resistance <sup>(3)</sup>    | 39.9        |       |
| θ <sub>JB</sub>               | Junction-to-board thermal resistance <sup>(4)</sup>         | 40.6        |       |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter <sup>(5)</sup>   | 3.9         |       |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter <sup>(6)</sup> | 39.6        |       |
| θ <sub>JCbot</sub>            | Junction-to-case (bottom) thermal resistance <sup>(7)</sup> | N/A         |       |

- (1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).
- (2) The junction-to-ambient thermal resistance under natural convection is obtained in a simulation on a JEDEC-standard, high-K board, as specified in JESD51-7, in an environment described in JESD51-2a.
- (3) The junction-to-case (top) thermal resistance is obtained by simulating a cold plate test on the package top. No specific JEDEC-standard test exists, but a close description can be found in the ANSI SEMI standard G30-88.
- (4) The junction-to-board thermal resistance is obtained by simulating in an environment with a ring cold plate fixture to control the PCB temperature, as described in JESD51-8.
- (5) The junction-to-top characterization parameter, ψ<sub>JT</sub>, estimates the junction temperature of a device in a real system and is extracted from the simulation data for obtaining θ<sub>JA</sub>, using a procedure described in JESD51-2a (sections 6 and 7).
- (6) The junction-to-board characterization parameter, ψ<sub>JB</sub>, estimates the junction temperature of a device in a real system and is extracted from the simulation data for obtaining θ<sub>JA</sub>, using a procedure described in JESD51-2a (sections 6 and 7).
- (7) The junction-to-case (bottom) thermal resistance is obtained by simulating a cold plate test on the exposed (power) pad. No specific JEDEC standard test exists, but a close description can be found in the ANSI SEMI standard G30-88.

## RECOMMENDED OPERATING CONDITIONS

|                                   |   | T <sub>J</sub> = -55°C to 125°C |     |      | T <sub>J</sub> = -55°C to 175°C |     |      | T <sub>J</sub> = -55°C to 210°C |     |      | UNIT |
|-----------------------------------|---|---------------------------------|-----|------|---------------------------------|-----|------|---------------------------------|-----|------|------|
|                                   |   | MIN                             | NOM | MAX  | MIN                             | NOM | MAX  | MIN                             | NOM | MAX  |      |
| V <sub>CC</sub>                   | Supply voltage  | 4.75                            |     | 5.25 | 4.75                            |     | 5.25 | 4.75                            |     | 5.25 | V    |
| V <sub>I</sub> or V <sub>IC</sub> | Voltage at any bus terminal (separately or common mode) | -12 <sup>(1)</sup>              |     | 12   | -12 <sup>(1)</sup>              |     | 12   | -12 <sup>(1)</sup>              |     | 12   | V    |
| V <sub>IH</sub>                   | High-level input voltage                                | 2                               |     | 5.25 | 2                               |     | 5.25 | 2                               |     | 5.25 | V    |
| V <sub>IL</sub>                   | Low-level input voltage                                 | 0                               |     | 0.8  | 0                               |     | 0.8  | 0                               |     | 0.8  | V    |
| V <sub>ID</sub>                   | Differential input voltage                              | -6                              |     | 6    | -6                              |     | 6    | -6                              |     | 6    | V    |
| I <sub>OH</sub>                   | High-level output current                               | Driver                          |     | -70  |                                 |     | -70  |                                 |     |      | mA   |
|                                   |   | Receiver                        |     | -2   |                                 |     | -2   |                                 |     |      |      |
| I <sub>OL</sub>                   | Low-level output current                                | Driver                          |     | 70   |                                 |     | 70   |                                 |     | 70   | mA   |
|                                   |   | Receiver                        |     | 2    |                                 |     | 2    |                                 |     | 2    |      |
| t <sub>SS</sub>                   | Maximum pulse width to remain in standby                |                                 |     | 0.7  |                                 |     | 0.7  |                                 |     | 0.7  | μs   |
| T <sub>J</sub>                    | Junction temperature                                    | -55                             |     | 125  | -55                             |     | 175  | -55                             |     | 210  | °C   |

(1) The algebraic convention, in which the least positive (most negative) limit is designated as minimum is used in this data sheet.

## SUPPLY CURRENT

over operating free-air temperature range (unless otherwise noted)

| PARAMETER       |                                 | TEST CONDITIONS  | T <sub>J</sub> = -55°C to 125°C |     |     | T <sub>J</sub> = -55°C to 175°C |     |     | T <sub>J</sub> = -55°C to 210°C |     |     | UNIT |
|-----------------|---------------------------------|--|---------------------------------|-----|-----|---------------------------------|-----|-----|---------------------------------|-----|-----|------|
|                 |                                 |  | MIN                             | TYP | MAX | MIN                             | TYP | MAX | MIN                             | TYP | MAX |      |
| I <sub>CC</sub> | Supply current, V <sub>CC</sub> | Dominant<br>V <sub>I</sub> = 0 V, 60 Ω Load,<br>STB at 0 V           |                                 | 50  | 70  |                                 | 50  | 70  |                                 | 50  | 70  | mA   |
|                 |                                 | Recessive<br>V <sub>I</sub> = V <sub>CC</sub> , STB at 0 V           |                                 | 6   | 10  |                                 | 6   | 10  |                                 | 6   | 10  |      |
|                 |                                 | Standby<br>STB at V <sub>CC</sub> , V <sub>I</sub> = V <sub>CC</sub> |                                 | 5   | 12  |                                 | 5   | 20  |                                 | 5   | 50  | μA   |

## DEVICE SWITCHING CHARACTERISTICS

over recommended operating conditions (unless otherwise noted)

| PARAMETER          |  | TEST CONDITIONS                              | T <sub>J</sub> = -55°C to 125°C |     |     | T <sub>J</sub> = -55°C to 175°C |     |     | T <sub>J</sub> = -55°C to 210°C |     |     | UNIT |
|--------------------|--|--|---------------------------------|-----|-----|---------------------------------|-----|-----|---------------------------------|-----|-----|------|
|                    |  |  | MIN                             | TYP | MAX | MIN                             | TYP | MAX | MIN                             | TYP | MAX |      |
| t <sub>loop1</sub> | Total loop delay, driver input to receiver output, Recessive to Dominant | STB at 0 V,<br>See <a href="#">Figure 10</a> | 90                              |     | 230 | 90                              |     | 325 | 90                              |     | 450 | ns   |
| t <sub>loop2</sub> | Total loop delay, driver input to receiver output, Dominant to Recessive |  | 90                              |     | 230 | 90                              |     | 325 | 90                              |     | 450 |      |

## DRIVER ELECTRICAL CHARACTERISTICS

over recommended operating conditions (unless otherwise noted)

| PARAMETER           |   | TEST CONDITIONS  | T <sub>J</sub> = -55°C to 125°C  |                    |                    | T <sub>J</sub> = -55°C to 175°C |                    |                    | T <sub>J</sub> = -55°C to 210°C |                    |                     | UNIT |   |
|---------------------|---|--|--|--------------------|--------------------|---------------------------------|--------------------|--------------------|---------------------------------|--------------------|---------------------|------|---|
|                     |   |  | MIN  | TYP <sup>(1)</sup> | MAX                | MIN                             | TYP <sup>(1)</sup> | MAX                | MIN                             | TYP <sup>(1)</sup> | MAX                 |      |   |
| V <sub>O(D)</sub>   | Bus output voltage (Dominant)   | CAN H  | V <sub>I</sub> = 0 V, STB at 0 V, R <sub>L</sub> = 60 Ω, See Figure 2 and Figure 3 | 2.9                | 3.4                | 4.5                             | 2.9                | 3.4                | 4.6                             | 2.9                | 3.4                 | 4.6  | V |
|                     |   | CANL   |  | 0.8                |                    | 1.75                            | 0.8                |                    | 1.75                            | 0.8                |                     | 1.75 |   |
| V <sub>O(R)</sub>   | Bus output voltage (Recessive)  | V <sub>I</sub> = 3 V, STB at 0 V, See Figure 2 and Figure 3                                      | 2  | 2.5                | 3                  | 2                               | 2.5                | 3                  | 2                               | 2.5                | 3                   | V    |   |
| V <sub>O</sub>      | Bus output voltage (Standby)  | R <sub>L</sub> = 60 Ω, STB at V <sub>CC</sub> , See Figure 2 and Figure 3                        | -0.1   |                    | 0.1                | -0.125                          |                    | 0.125              | -0.15                           |                    | 0.15                | V    |   |
| V <sub>OD(D)</sub>  | Differential output voltage (Dominant)  | V <sub>I</sub> = 0 V, R <sub>L</sub> = 60 Ω, STB at 0 V, See Figure 2 and Figure 3, and Figure 4 | 1.5  |                    | 3                  | 1.5                             |                    | 3                  | 1.5                             |                    | 3                   | V    |   |
|                     |   | V <sub>I</sub> = 0 V, R <sub>L</sub> = 45 Ω, STB at 0 V, See Figure 2 and Figure 3               | 1.4  |                    | 3                  | 1.4                             |                    | 3                  | 1.4                             |                    | 3                   |      |   |
| V <sub>SYM</sub>    | Output symmetry (Dominant or Recessive) [ V <sub>O(CANH)</sub> + V <sub>O(CANL)</sub> ] | STB at 0 V, See Figure 3 and Figure 14   | 0.9xV <sub>CC</sub>  | V <sub>CC</sub>    | 1.1xV <sub>C</sub> | 0.9xV <sub>CC</sub>             | V <sub>CC</sub>    | 1.1xV <sub>C</sub> | 0.9xV <sub>C</sub>              | V <sub>CC</sub>    | 1.2xV <sub>CC</sub> | V    |   |
| V <sub>OD(R)</sub>  | Differential output voltage (Recessive)   | V <sub>I</sub> = 3 V, R <sub>L</sub> = 60 Ω, STB at 0 V, See Figure 2 and Figure 3               | -0.012   |                    | 0.012              | -0.014                          |                    | 0.017              | -0.015                          |                    | 0.02                | V    |   |
|                     |   | V <sub>I</sub> = 3 V, STB at 0 V, No Load  | -0.5   |                    | 0.05               | -0.5                            |                    | 0.225              | -0.75                           |                    | 0.8                 |      |   |
| V <sub>OC(D)</sub>  | Common-mode output voltage (Dominant)   | STB at 0 V, See Figure 9   | 2  | 2.3                | 3                  | 2                               | 2.3                | 3                  | 2                               | 2.3                | 3.1                 | V    |   |
| V <sub>OC(pp)</sub> | Peak-to-peak common-mode output voltage   |  |  | 0.3                |                    | 0.3                             |                    | 0.3                |                                 | 0.3                |                     |      |   |
| I <sub>IH</sub>     | High-level input current, TXD input   | V <sub>I</sub> at V <sub>CC</sub>  | -2   |                    | 2                  | -3                              |                    | 3                  | -3                              |                    | 3                   | μA   |   |
| I <sub>IL</sub>     | Low-level input current, TXD input  | V <sub>I</sub> at 0 V  | -50  |                    | -10                | -50                             |                    | -10                | -50                             |                    | -10                 | μA   |   |
| I <sub>O(off)</sub> | Power-off TXD Leakage current   | V <sub>CC</sub> at 0 V, TXD at 5 V   |  |                    | 1                  |                                 |                    | 180                |                                 |                    | 600                 | μA   |   |
| I <sub>OS(ss)</sub> | Short-circuit steady-state output current   | V <sub>CANH</sub> = -12 V, CANL Open, See Figure 13  | -120   | -72                |                    | -120                            | -72                |                    | -130                            | -72                |                     | mA   |   |
|                     |   | V <sub>CANH</sub> = 12 V, CANL Open, See Figure 13   |  | 0.36               | 1                  |                                 | 0.36               | 1                  |                                 | 0.36               | 1.1                 |      |   |
|                     |   | V <sub>CANL</sub> = -12 V, CANH Open, See Figure 13  | -1   | -0.5               |                    | -1                              | -0.5               |                    | -1.1                            | -0.5               |                     |      |   |
|                     |   | V <sub>CANL</sub> = 12 V, CANH Open, See Figure 13   |  | 71                 | 120                |                                 | 71                 | 120                |                                 | 71                 | 130                 |      |   |
| C <sub>O</sub>      | Output capacitance  | See Input capacitance to ground in RECEIVER ELECTRICAL CHARACTERISTICS.                          |  |                    |                    |                                 |                    |                    |                                 |                    |                     |      |   |

(1) All typical values are at 25°C with a 5-V supply.

## DRIVER SWITCHING CHARACTERISTICS

over recommended operating conditions (unless otherwise noted)

| PARAMETER          | TEST CONDITIONS                                     | T <sub>J</sub> = -55°C to 125°C |     |     | T <sub>J</sub> = -55°C to 175°C |     |     | T <sub>J</sub> = -55°C to 210°C |     |     | UNIT |     |     |    |
|--------------------|---|---------------------------------|-----|-----|---------------------------------|-----|-----|---------------------------------|-----|-----|------|-----|-----|----|
|                    |   | MIN                             | TYP | MAX | MIN                             | TYP | MAX | MIN                             | TYP | MAX |      |     |     |    |
| t <sub>PLH</sub>   | Propagation delay time, low-to-high-level output    | 25                              | 65  | 120 | 25                              | 65  | 175 | 25                              | 65  | 250 | ns   |     |     |    |
| t <sub>PHL</sub>   | Propagation delay time, high-to-low-level output    | 25                              | 45  | 120 | 25                              | 45  | 175 | 25                              | 45  | 250 |      |     |     |    |
| t <sub>sk(p)</sub> | Pulse skew ( t <sub>PHL</sub> – t <sub>PLH</sub>  ) | 25                              |     |     | 25                              |     |     | 25                              |     |     |      |     |     |    |
| t <sub>r</sub>     | Differential output signal rise time                | 25                              |     |     | 25                              |     |     | 25                              |     |     |      |     |     |    |
| t <sub>f</sub>     | Differential output signal fall time                | 50                              |     |     | 50                              |     |     | 50                              |     |     |      |     |     |    |
| t <sub>en</sub>    | Enable time from silent mode to dominant            | See <a href="#">Figure 8</a>    |     |     | 11                              |     |     | 14.5                            |     |     | 18   | μs  |     |    |
| t <sub>dom</sub>   | Dominant time-out                                   | See <a href="#">Figure 11</a>   |     |     | 300                             | 450 | 700 | 300                             | 450 | 700 | 300  | 450 | 700 | μs |

## RECEIVER ELECTRICAL CHARACTERISTICS

over recommended operating conditions (unless otherwise noted)

| PARAMETER           |   | TEST CONDITIONS  | T <sub>J</sub> = -55°C to 125°C |     |      | T <sub>J</sub> = -55°C to 175°C |     |      | T <sub>J</sub> = -55°C to 210°C |     |      | UNIT |
|---------------------|---|--|---------------------------------|-----|------|---------------------------------|-----|------|---------------------------------|-----|------|------|
|                     |   |  | MIN                             | TYP | MAX  | MIN                             | TYP | MAX  | MIN                             | TYP | MAX  |      |
| V <sub>IT+</sub>    | Positive-going input threshold voltage  | STB at 0 V, See <a href="#">Table 3</a>                |                                 | 800 | 900  |                                 | 800 | 900  |                                 | 800 | 900  | mV   |
| V <sub>IT-</sub>    | Negative-going input threshold voltage  |  | 500                             | 650 |      | 500                             | 650 |      | 500                             | 650 |      |      |
| V <sub>hys</sub>    | Hysteresis voltage (V <sub>IT+</sub> - V <sub>IT-</sub> )                               |  | 100                             | 125 |      | 70                              | 125 |      | 70                              | 125 |      |      |
| V <sub>IT</sub>     | Input threshold voltage   | Standby mode   | STB at V <sub>CC</sub>          | 500 | 1150 |                                 | 500 | 1300 |                                 | 400 | 1350 |      |
| V <sub>OH</sub>     | High-level output voltage   | I <sub>O</sub> = -2 mA, See <a href="#">Figure 7</a>   | 4                               | 4.6 |      | 4                               | 4.6 |      | 4                               | 4.6 | V    |      |
| V <sub>OL</sub>     | Low-level output voltage  | I <sub>O</sub> = 2 mA, See <a href="#">Figure 7</a>    |                                 | 0.2 | 0.4  |                                 | 0.2 | 0.5  |                                 | 0.2 | 0.55 | V    |
| I <sub>I(off)</sub> | Power-off bus input current   | CANH or CANL = 5 V, V <sub>CC</sub> at 0 V, TXD at 0 V |                                 |     | 5    |                                 |     | 15   |                                 |     | 30   | μA   |
| I <sub>O(off)</sub> | Power-off RXD leakage current   | V <sub>CC</sub> at 0 V, RXD at 5 V                     |                                 |     | 20   |                                 |     | 30   |                                 |     | 30   | μA   |
| C <sub>I</sub>      | Input capacitance to ground, (CANH or CANL)   | TXD at 3 V, V <sub>I</sub> = 0.4 sin(4E6πt) + 2.5 V    |                                 | 20  |      |                                 | 20  |      |                                 | 20  |      | pF   |
| C <sub>ID</sub>     | Differential input capacitance  | TXD at 3 V, V <sub>I</sub> = 0.4 sin(4E6πt)            |                                 | 10  |      |                                 | 10  |      |                                 | 10  |      | pF   |
| R <sub>ID</sub>     | Differential input resistance   | TXD at 3 V, STD at 0 V                                 | 30                              |     | 80   | 30                              |     | 80   | 30                              |     | 80   | kΩ   |
| R <sub>IN</sub>     | Input resistance, (CANH or CANL)  | TXD at 3 V, STD at 0 V                                 | 15                              | 30  | 40   | 15                              | 30  | 40   | 15                              | 30  | 40   |      |
| R <sub>I(m)</sub>   | Input resistance matching [1 - (R <sub>IN(CANH)</sub> / R <sub>IN(CANL)</sub> )] x 100% | V <sub>CANH</sub> = V <sub>CANL</sub>                  | -3%                             | 0%  | 3%   | -5%                             | 0%  | 5%   | -12%                            | 0%  | 12%  |      |

## RECEIVER SWITCHING CHARACTERISTICS

over recommended operating conditions (unless otherwise noted)

| PARAMETER        |   | TEST CONDITIONS                                      | T <sub>J</sub> = -55°C to 125°C |     |     | T <sub>J</sub> = -55°C to 175°C |     |     | T <sub>J</sub> = -55°C to 210°C |     |      | UNIT |
|------------------|---|--|---------------------------------|-----|-----|---------------------------------|-----|-----|---------------------------------|-----|------|------|
|                  |   |  | MIN                             | TYP | MAX | MIN                             | TYP | MAX | MIN                             | TYP | MAX  |      |
| t <sub>pLH</sub> | Propagation delay time, low-to-high-level output                      | STB at 0 V, TXD at 3 V, See <a href="#">Figure 7</a> | 60                              | 100 | 130 | 60                              | 100 | 200 | 60                              | 100 | 200  | ns   |
| t <sub>pHL</sub> | Propagation delay time, high-to-low-level output                      |  | 45                              | 70  | 130 | 45                              | 70  | 200 | 45                              | 70  | 200  |      |
| t <sub>r</sub>   | Output signal rise time   |  |                                 | 8   |     |                                 | 8   |     |                                 | 8   |      |      |
| t <sub>f</sub>   | Output signal fall time   |  |                                 | 8   |     |                                 | 8   |     |                                 | 8   |      |      |
| t <sub>BUS</sub> | Dominant time required on bus for wake-up from standby <sup>(1)</sup> | STB at V <sub>CC</sub> <a href="#">Figure 12</a>     | 0.7                             |     | 5   | 1.0                             |     | 5.1 | 1.45                            |     | 5.25 | μs   |

(1) The device under test shall not signal a wake-up condition with dominant pulses shorter than t<sub>BUS</sub> (min) and shall signal a wake-up condition with dominant pulses longer than t<sub>BUS</sub> (max). Dominant pulses with a length between t<sub>BUS</sub> (min) and t<sub>BUS</sub> (max) may lead to a wake-up.

## SPLIT-PIN CHARACTERISTICS

over recommended operating conditions (unless otherwise noted)


| PARAMETER            |                              | TEST CONDITIONS                           | T <sub>J</sub> = -55°C to 125°C |                     |                     | T <sub>J</sub> = -55°C to 175°C |                     |                     | T <sub>J</sub> = -55°C to 210°C |                    |                     | UNIT |
|----------------------|------------------------------|---|---------------------------------|---------------------|---------------------|---------------------------------|---------------------|---------------------|---------------------------------|--------------------|---------------------|------|
|                      |                              |   | MIN                             | TYP                 | MAX                 | MIN                             | TYP                 | MAX                 | MIN                             | TYP                | MAX                 |      |
| V <sub>O</sub>       | Output voltage               | -500 μA < I <sub>O</sub> < 500 μA         | 0.3xV <sub>CC</sub>             | 0.5xV <sub>CC</sub> | 0.7xV <sub>CC</sub> | 0.28xV <sub>CC</sub>            | 0.5xV <sub>CC</sub> | 0.7xV <sub>CC</sub> | 0.28xV <sub>C</sub>             | 0.5xV <sub>C</sub> | 0.7xV <sub>CC</sub> | V    |
| I <sub>O(st b)</sub> | Standby mode leakage current | STB at 2 V, -12 V ≤ V <sub>O</sub> ≤ 12 V | -5                              |                     | 5                   | -7                              |                     | 7                   | -15                             |                    | 15                  | μA   |



### STB-PIN CHARACTERISTICS

over recommended operating conditions (unless otherwise noted)

| PARAMETER       | TEST CONDITIONS          | T <sub>J</sub> = -55°C to 125°C |     |     | T <sub>J</sub> = -55°C to 175°C |     |     | T <sub>J</sub> = -55°C to 210°C |     |     | UNIT |    |
|-----------------|--------------------------|---------------------------------|-----|-----|---------------------------------|-----|-----|---------------------------------|-----|-----|------|----|
|                 |                          | MIN                             | TYP | MAX | MIN                             | TYP | MAX | MIN                             | TYP | MAX |      |    |
| I <sub>IH</sub> | High level input current | STB at 2 V                      | -10 |     | 0                               | -10 |     | 0                               | -10 |     | 0    | μA |
| I <sub>IL</sub> | Low level input current  | STB at 0 V                      | -10 |     | 0                               | -10 |     | 0                               | -10 |     | 0    | μA |

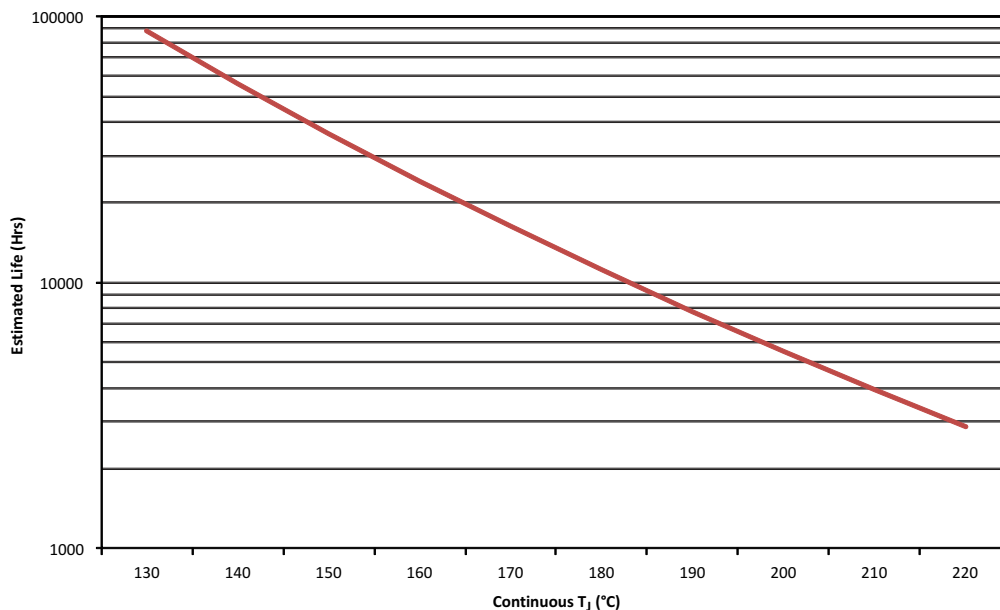

- A. See datasheet for absolute maximum and minimum recommended operating conditions.
- B. Silicon operating life design goal is 10 years at 105°C junction temperature (does not include package interconnect life).
- C. The predicted operating lifetime vs. junction temperature is based on reliability modeling using electromigration as the dominant failure mechanism affecting device wear out for the specific device process and design characteristics.

**Figure 1. SN65HVD1040-HT Operating Life Derating Chart**

PARAMETER MEASUREMENT INFORMATION

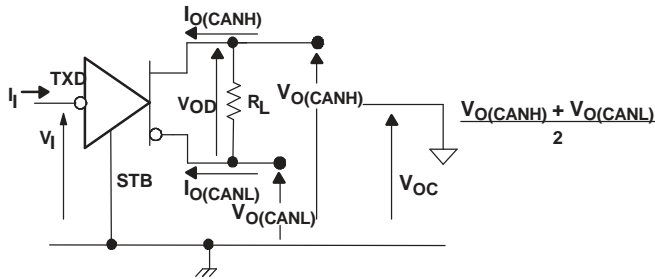


Figure 2. Driver Voltage, Current, and Test Definition

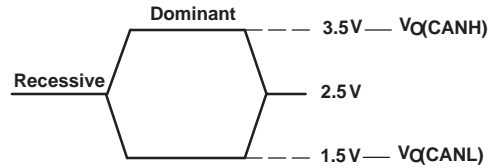


Figure 3. Bus Logic State Voltage Definitions

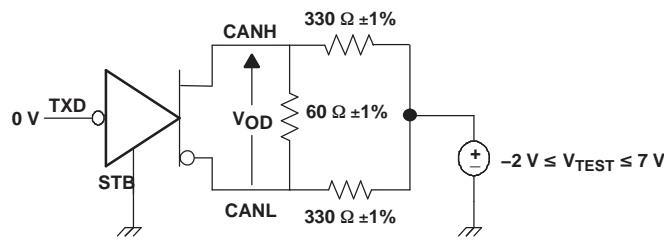


Figure 4. Driver VOD Test Circuit

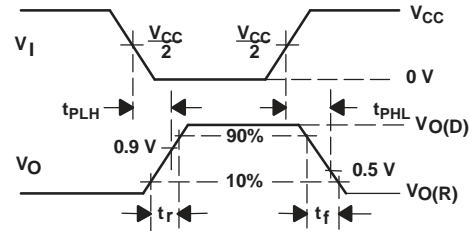
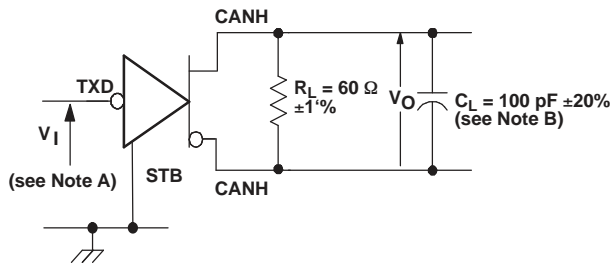


Figure 5. Driver Test Circuit and Voltage Waveforms


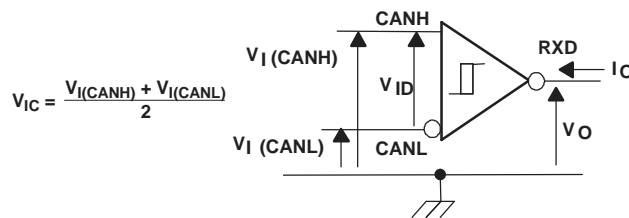


Figure 6. Receiver Voltage and Current Definitions

PARAMETER MEASUREMENT INFORMATION (continued)

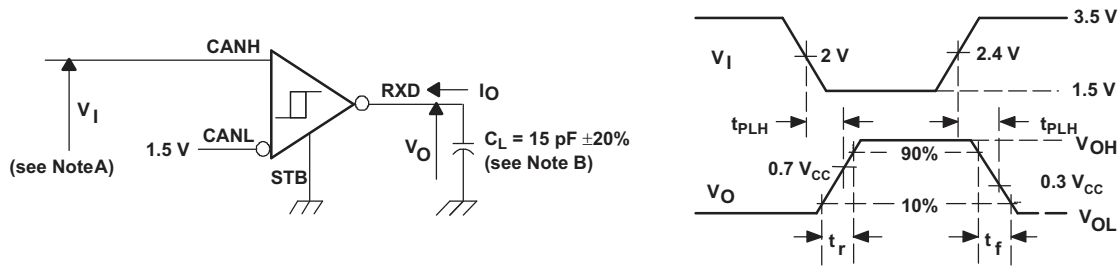

- A. The input pulse is supplied by a generator having the following characteristics: PRR ≤ 125 kHz, 50% duty cycle,  $t_r \leq 6$  ns,  $t_f \leq 6$  ns,  $Z_O = 50 \Omega$ .
- B.  $C_L$  includes instrumentation and fixture capacitance within ±20%.

Figure 7. Receiver Test Circuit and Voltage Waveforms

Table 3. Differential Input Voltage Threshold Test

| INPUT      |            |            | OUTPUT |          |
|------------|------------|------------|--------|----------|
| $V_{CANH}$ | $V_{CANL}$ | $ V_{ID} $ | R      |          |
| -11.1 V    | -12 V      | 900 mV     | L      | $V_{OL}$ |
| 12 V       | 11.1 V     | 900 mV     | L      |          |
| -6 V       | -12 V      | 6 V        | L      |          |
| 12 V       | 6 V        | 6 V        | L      |          |
| -11.5 V    | -12 V      | 500 mV     | H      | $V_{OH}$ |
| 12 V       | 11.5 V     | 500 mV     | H      |          |
| -12 V      | -6 V       | 6 V        | H      |          |
| 6 V        | 12 V       | 6 V        | H      |          |
| Open       | Open       | X          | H      |          |



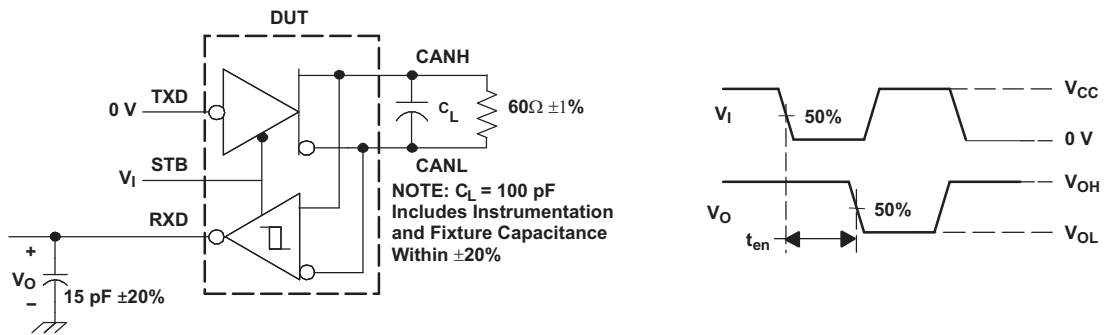


Figure 8.  $t_{en}$  Test Circuit and Voltage Waveforms

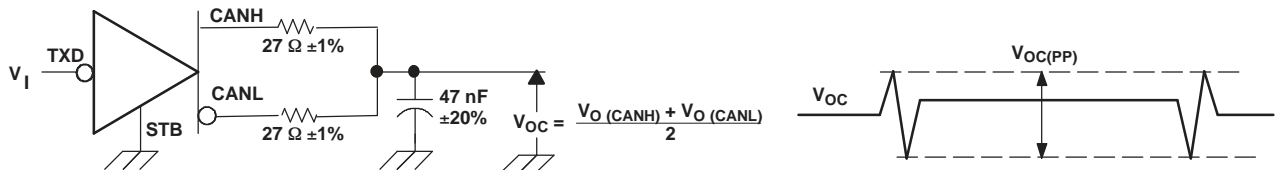


- A. All  $V_I$  input pulses are from 0 V to  $V_{CC}$  and supplied by a generator having the following characteristics:  $t_r$  or  $t_f \leq 6$  ns. Pulse Repetition Rate (PRR) = 125 kHz, 50% duty cycle.

Figure 9. Peak-to-Peak Common Mode Output Voltage Test and Waveform

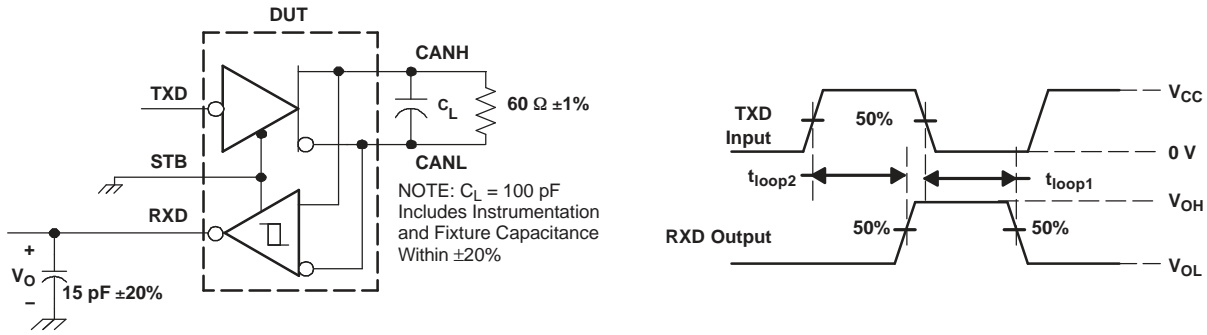


- A. All  $V_I$  input pulses are from 0 V to  $V_{CC}$  and supplied by a generator with the following characteristics:  $t_r$  or  $t_f \leq 6$  ns. Pulse Repetition Rate (PRR) = 125 kHz, 50% duty cycle.

Figure 10.  $t_{loop}$  Test Circuit and Voltage Waveforms

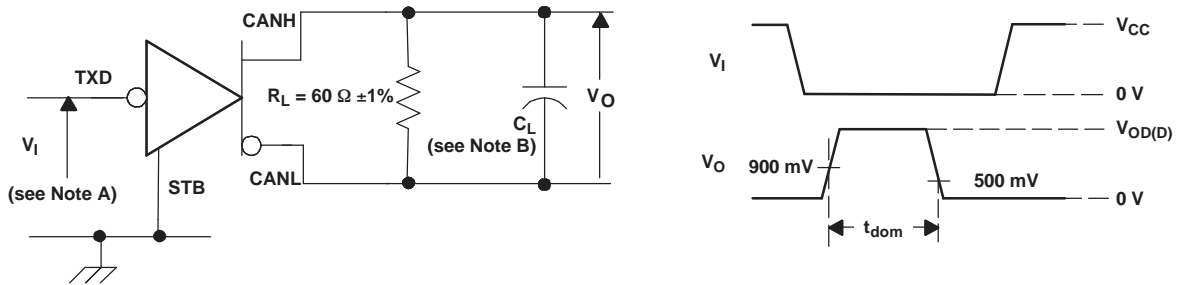

- A. All  $V_I$  input pulses are from 0 V to  $V_{CC}$  and supplied by a generator with the following characteristics:  $t_r$  or  $t_f \leq 6$  ns. Pulse Repetition Rate (PRR) = 500 Hz, 50% duty cycle.
- B.  $C_L = 100$  pF includes instrumentation and fixture capacitance within  $\pm 20\%$ .

Figure 11. Dominant Time-Out Test Circuit and Waveform

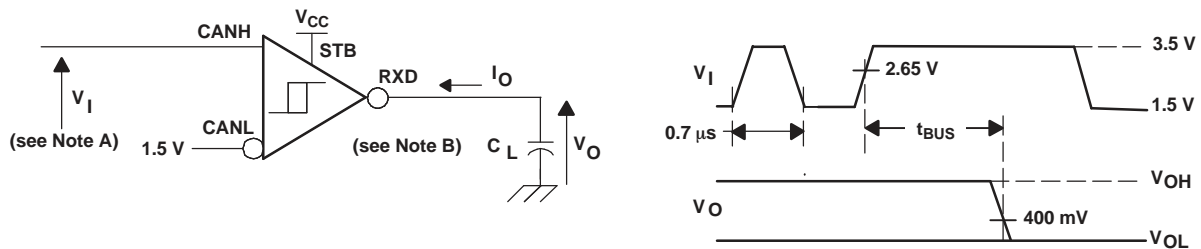

- A. For  $V_I$  bit width  $\leq 0.7 \mu\text{s}$ ,  $V_O = V_{OH}$ . For  $V_I$  bit width  $\geq 5 \mu\text{s}$ ,  $V_O = V_{OL}$ .  $V_I$  input pulses are supplied from a generator with the following characteristics;  $t_r$  or  $t_f \leq 6$  ns. Pulse Repetition Rate (PRR) = 50 Hz, 30% duty cycle.
- B.  $C_L = 15$  pF includes instrumentation and fixture capacitance within  $\pm 20\%$ .

Figure 12.  $t_{BUS}$  Test Circuit and Waveform

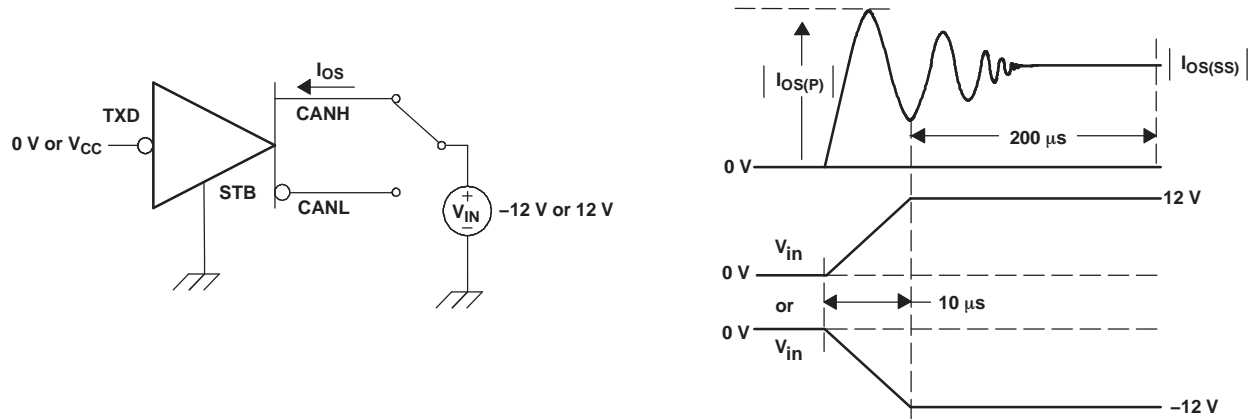


Figure 13. Driver Short-Circuit Current Test and Waveform

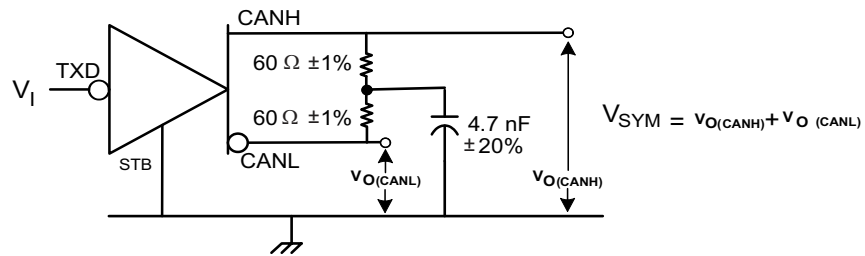


Figure 14. Driver Output Symmetry Test Circuit

## DEVICE INFORMATION

**Table 4. DRIVER FUNCTION TABLE<sup>(1)</sup>**

| INPUTS |           | OUTPUTS |      | BUS STATE |
|--------|-----------|---------|------|-----------|
| TXD    | STB       | CANH    | CANL |           |
| L      | L         | H       | L    | DOMINANT  |
| H      | L         | Z       | Z    | RECESSIVE |
| Open   | X         | Z       | Z    | RECESSIVE |
| X      | H or Open | Z       | Z    | RECESSIVE |

(1) H = high level; L = low level; X = irrelevant; Z = high impedance

**Table 5. RECEIVER FUNCTION TABLE<sup>(1)</sup>**

| DIFFERENTIAL INPUTS<br>$V_{ID} = \text{CANH} - \text{CANL}$ | STB       | OUTPUT<br>RXD | BUS STATE |
|---|-----------|---------------|-----------|
| $V_{ID} \geq 0.9 \text{ V}$                                 | L         | L             | DOMINANT  |
| $V_{ID} \geq 1.15 \text{ V}$                                | H or Open | L             | DOMINANT  |
| $0.5 \text{ V} < V_{ID} < 0.9 \text{ V}$                    | X         | ?             | ?         |
| $V_{ID} \leq 0.5 \text{ V}$                                 | X         | H             | RECESSIVE |
| Open  | X         | H             | RECESSIVE |


(1) H = high level; L = low level; X = irrelevant; ? = indeterminate; Z = high impedance

**DEVICE INFORMATION**
**Table 6. Parametric Cross Reference With the TJA1040**

| TJA1040 <sup>(1)</sup>           | PARAMETER                            | HVD10xx  |
|----------------------------------|--------------------------------------|--|
| <b>TJA1040 DRIVER SECTION</b>    |                                      |  |
| V <sub>IH</sub>                  | High-level input voltage             | Recommended V <sub>IH</sub>                              |
| V <sub>IL</sub>                  | Low-level input voltage              | Recommended V <sub>IL</sub>                              |
| I <sub>IH</sub>                  | High-level input current             | Driver I <sub>IH</sub>                                   |
| I <sub>IL</sub>                  | Low-level input current              | Driver I <sub>IL</sub>                                   |
| <b>TJA1040 BUS SECTION</b>       |                                      |  |
| V <sub>th(dif)</sub>             | Differential input voltage           | Receiver V <sub>IT</sub> and recommended V <sub>ID</sub> |
| V <sub>hys(dif)</sub>            | Differential input hysteresis        | Receiver V <sub>hys</sub>                                |
| V <sub>O(dom)</sub>              | Dominant output voltage              | Driver V <sub>O(D)</sub>                                 |
| V <sub>O(reces)</sub>            | Recessive output voltage             | Driver V <sub>O(R)</sub>                                 |
| V <sub>i(dif)(th)</sub>          | Differential input voltage           | Receiver V <sub>IT</sub> and recommended V <sub>ID</sub> |
| V <sub>O(dif0)(bus)</sub>        | Differential bus voltage             | Driver V <sub>OD(D)</sub> and V <sub>OD(R)</sub>         |
| I <sub>LI</sub>                  | Power-off bus input current          | Receiver I <sub>I(off)</sub>                             |
| I <sub>O(SC)</sub>               | Short-circuit output current         | Driver I <sub>OS(SS)</sub>                               |
| R <sub>i(cm)</sub>               | CANH, CANL input resistance          | Receiver R <sub>IN</sub>                                 |
| R <sub>i(def)</sub>              | Differential input resistance        | Receiver R <sub>ID</sub>                                 |
| R <sub>i(cm) (m)</sub>           | Input resistance matching            | Receiver R <sub>I (m)</sub>                              |
| C <sub>i(cm)</sub>               | Input capacitance to ground          | Receiver C <sub>I</sub>                                  |
| C <sub>i(dif)</sub>              | Differential input capacitance       | Receiver C <sub>ID</sub>                                 |
| <b>TJA1040 RECEIVER SECTION</b>  |                                      |  |
| I <sub>OH</sub>                  | High-level output current            | Recommended I <sub>OH</sub>                              |
| I <sub>OL</sub>                  | Low-level output current             | Recommended I <sub>OL</sub>                              |
| <b>TJA1040 SPLIT PIN SECTION</b> |                                      |  |
| V <sub>O</sub>                   | Reference output voltage             | V <sub>O</sub>   |
| <b>TJA1040 TIMING SECTION</b>    |                                      |  |
| t <sub>d(TXD-BUSon)</sub>        | Delay TXD to bus active              | Driver t <sub>PLH</sub>                                  |
| t <sub>d(TXD-BUSoff)</sub>       | Delay TXD to bus inactive            | Driver t <sub>PHL</sub>                                  |
| t <sub>d(BUSon-RXD)</sub>        | Delay bus active to RXD              | Receiver t <sub>PHL</sub>                                |
| t <sub>d(BUSoff-RXD)</sub>       | Delay bus inactive to RXD            | Receiver t <sub>PLH</sub>                                |
| t <sub>PD(TXD-RXD)</sub>         | Prop delay TXD to RXD                | Device t <sub>LOOP1</sub> and t <sub>LOOP2</sub>         |
| t <sub>d(stb-norm)</sub>         | Enable time from standby to dominant | Driver t <sub>en</sub>                                   |
| <b>TJA1040 STB PIN SECTION</b>   |                                      |  |
| V <sub>IH</sub>                  | High-level input voltage             | Recommended V <sub>IH</sub>                              |
| V <sub>IL</sub>                  | Low-level input voltage              | Recommended V <sub>IL</sub>                              |
| I <sub>IH</sub>                  | High-level input current             | I <sub>IH</sub>  |
| I <sub>IL</sub>                  | Low-level input current              | I <sub>IL</sub>  |

(1) From TJA1040 Product Specification, Philips Semiconductors, 2003 February 19.

Equivalent Input and Output Schematic Diagrams

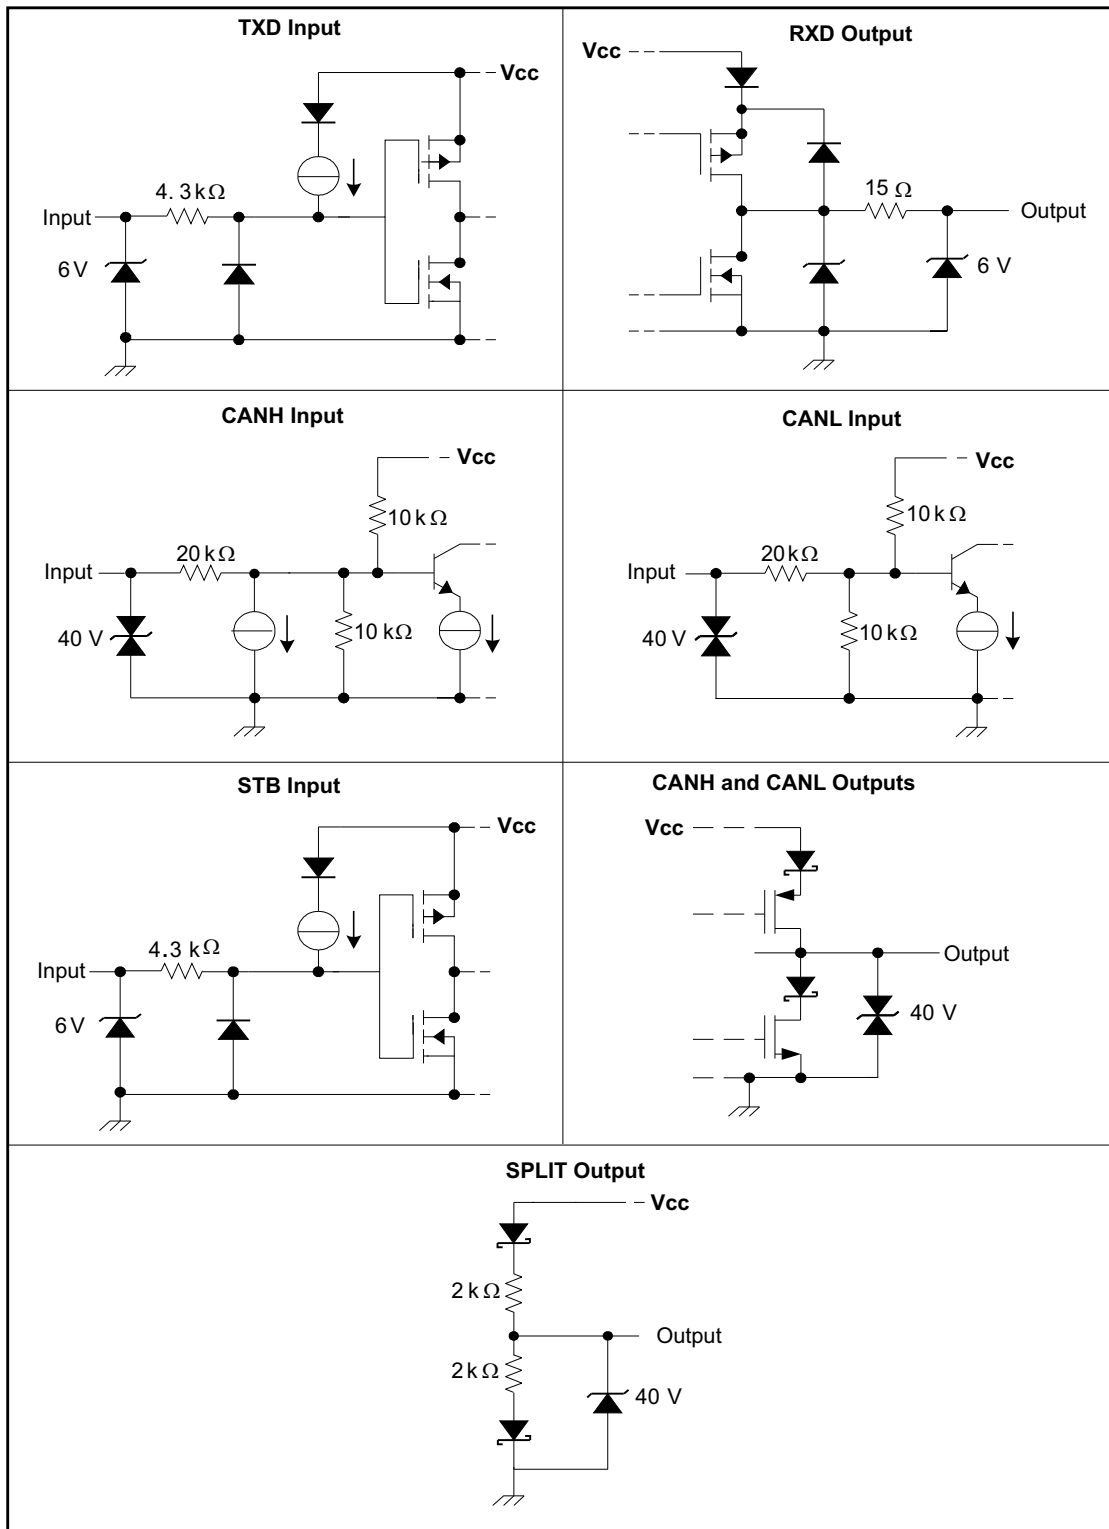



TYPICAL CHARACTERISTICS

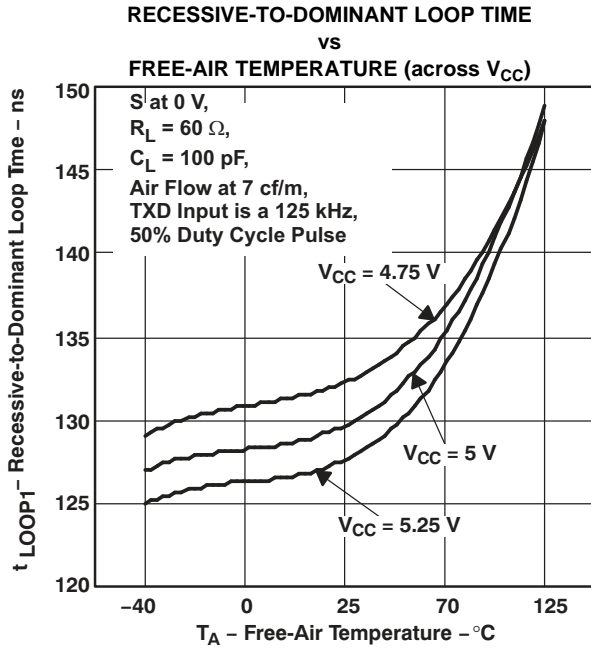


Figure 15.

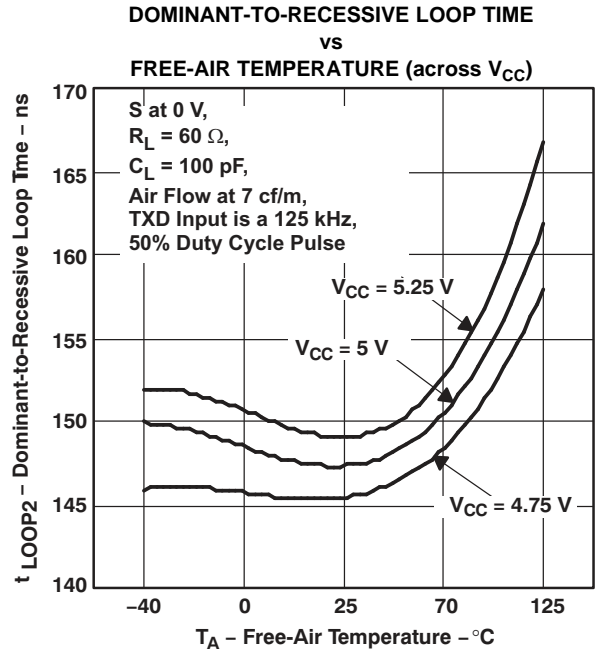


Figure 16.

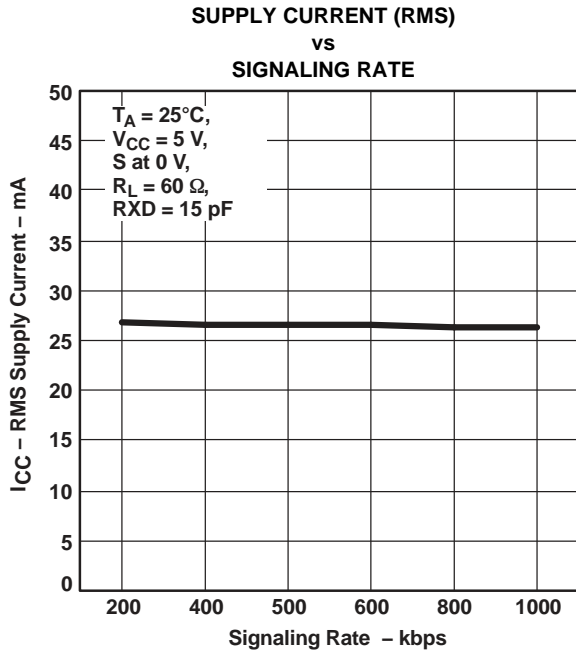


Figure 17.

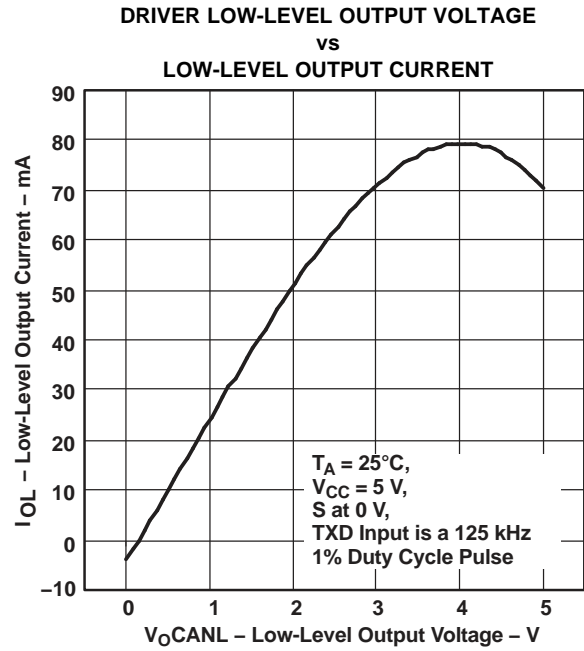


Figure 18.

**TYPICAL CHARACTERISTICS (continued)**

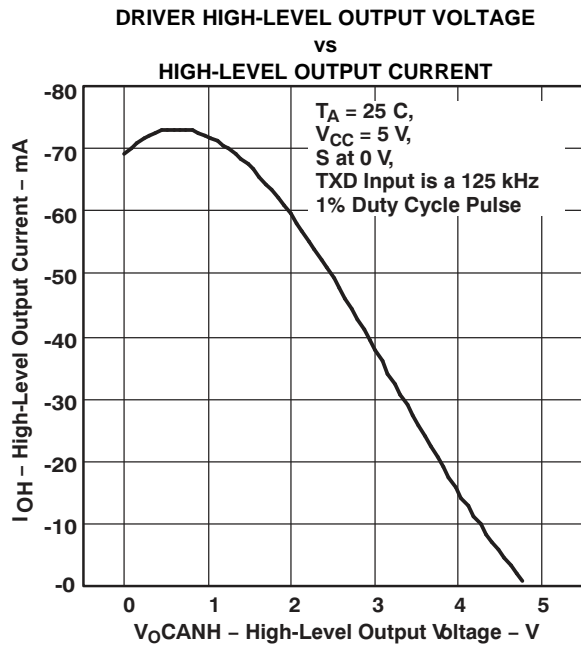


Figure 19.

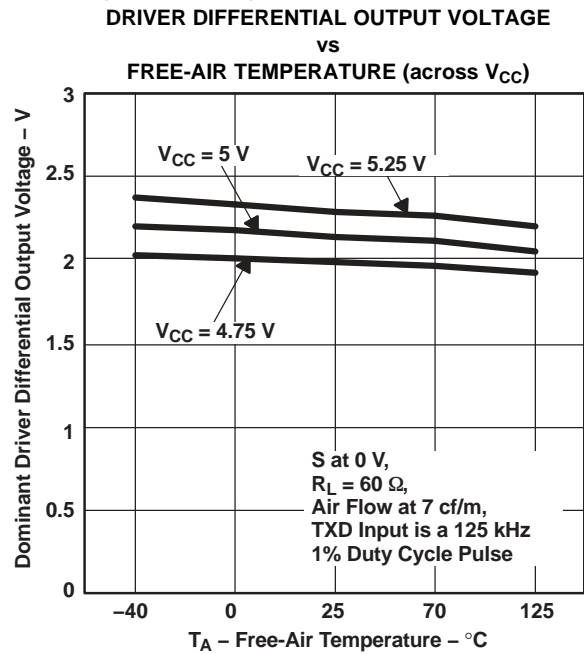


Figure 20.

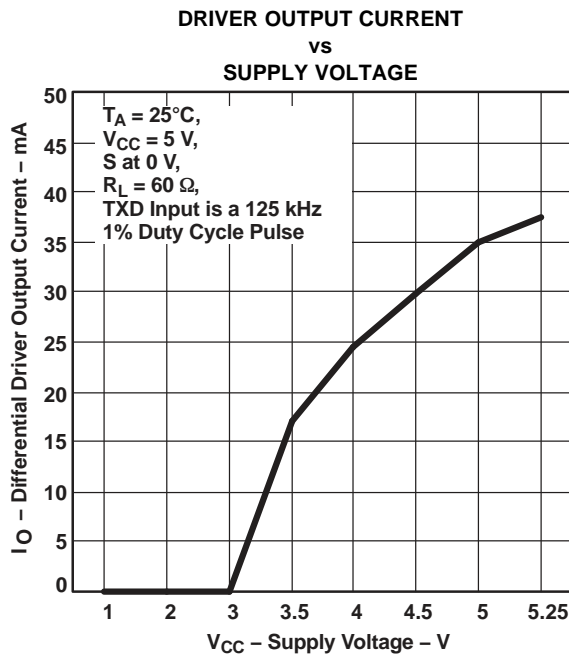


Figure 21.

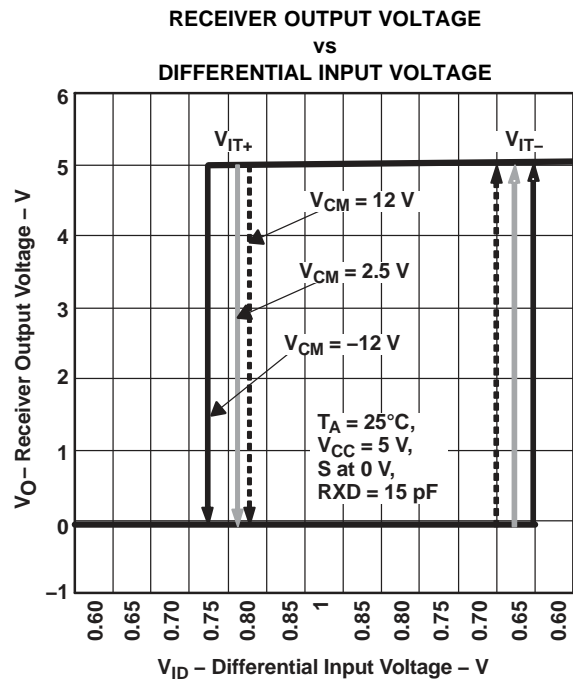


Figure 22.

TYPICAL CHARACTERISTICS (continued)

TYPICAL ELECTROMAGNETIC EMISSIONS  
UP TO 50 MHz (Peak Amplitude)

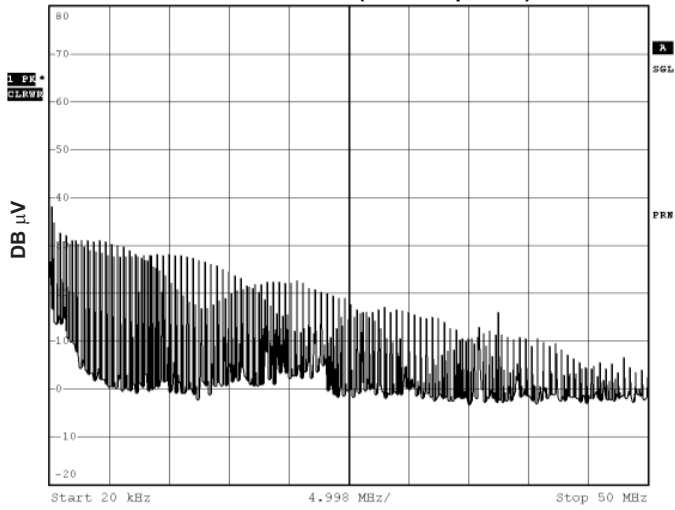


Figure 23. Frequency Spectrum of Common-Mode Emissions

TYPICAL ELECTROMAGNETIC IMMUNITY PERFORMANCE

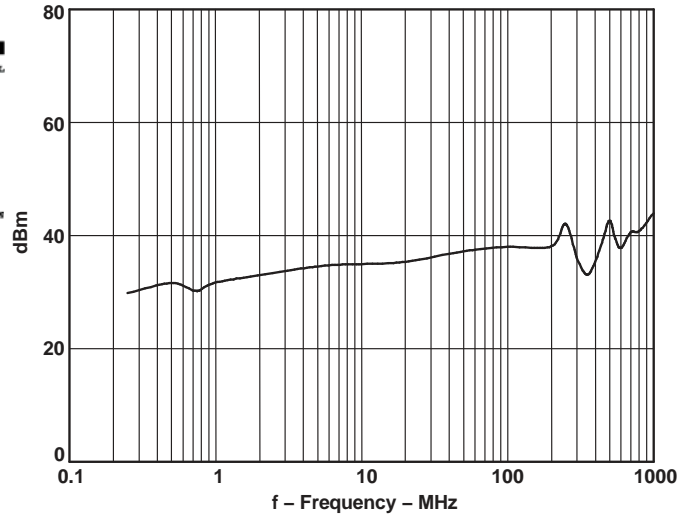


Figure 24. Direct Power Injection (DPI) Response vs Frequency

## APPLICATION INFORMATION

### CAN Basics

The basics of arbitration require that the receiver at the sending node designate the first bit as dominant or recessive after the initial wave of the first bit of a message travels to the most remote node on a network and back again. Typically, this “sample” is made at 75% of the bit width, and within this limitation, the maximum allowable signal distortion in a CAN network is determined by network electrical parameters.

Factors to be considered in network design include the approximately 5 ns/m propagation delay of typical twisted-pair bus cable; signal amplitude loss due to the loss mechanisms of the cable; and the number, length, and spacing of drop-lines (stubs) on a network. Under strict analysis, variations among the different oscillators in a system also need to be accounted for with adjustments in signaling rate and stub and bus length. [Table 7](#) lists the maximum signaling rates achieved with the SN65HVD1040 with several bus lengths of category 5, shielded twisted pair (CAT 5 STP) cable.

**Table 7. Maximum Signaling Rates for Various Cable Lengths**

| Bus Length (m) | Signaling Rate (kbps) |
|----------------|-----------------------|
| 30             | 1000                  |
| 100            | 500                   |
| 250            | 250                   |
| 500            | 125                   |
| 1000           | 62.5                  |

The ISO 11898 Standard specifies a maximum bus length of 40 m and maximum stub length of 0.3 m with a maximum of 30 nodes. However, with careful design, users can have longer cables, longer stub lengths, and many more nodes to a bus. (Note: Non-standard application may come with a trade-off in signaling rate.) A large number of nodes requires a transceiver with high input impedance such as the HVD1040.

The Standard specifies the interconnect to be a single twisted-pair cable (shielded or unshielded) with 120  $\Omega$  characteristic impedance ( $Z_0$ ). Resistors equal to the characteristic impedance of the line terminate both ends of the cable to prevent signal reflections. Unterminated drop-lines connect nodes to the bus and should be kept as short as possible to minimize signal reflections.

Connectors, while not specified by the standard should have as little effect as possible on standard operating parameters such as capacitive loading. Although unshielded cable is used in many applications, data transmission circuits employing CAN transceivers are usually used in applications requiring a rugged interconnection with a wide common-mode voltage range. Therefore, shielded cable is recommended in these electronically harsh environments, and when coupled with the Standard's  $-2$ -V to 7-V common-mode range of tolerable ground noise, helps to ensure data integrity. The HVD1040 enhances the Standard's insurance of data integrity with an extended  $-12$  V to 12 V range of common-mode operation.

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|-----------------|------|-------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| SN65HVD1040HD    | ACTIVE        | SOIC         | D               | 8    | 75          | RoHS & Green    | NIPDAU                               | Level-4-260C-72 HR   | -55 to 175   | H1040                   | <a href="#">Samples</a> |
| SN65HVD1040SHKQ  | ACTIVE        | CFP          | HKQ             | 8    | 25          | RoHS & Green    | AU                                   | N / A for Pkg Type   | -55 to 210   | HVD1040S<br>HKQ         | <a href="#">Samples</a> |
| SN65HVD1040SKGD3 | ACTIVE        | XCEPT        | KGD             | 0    | 210         | RoHS & Green    | Call TI                              | N / A for Pkg Type   | -55 to 210   |                         | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF SN65HVD1040-HT :**

- Catalog: [SN65HVD1040](#)
- Automotive: [SN65HVD1040-Q1](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

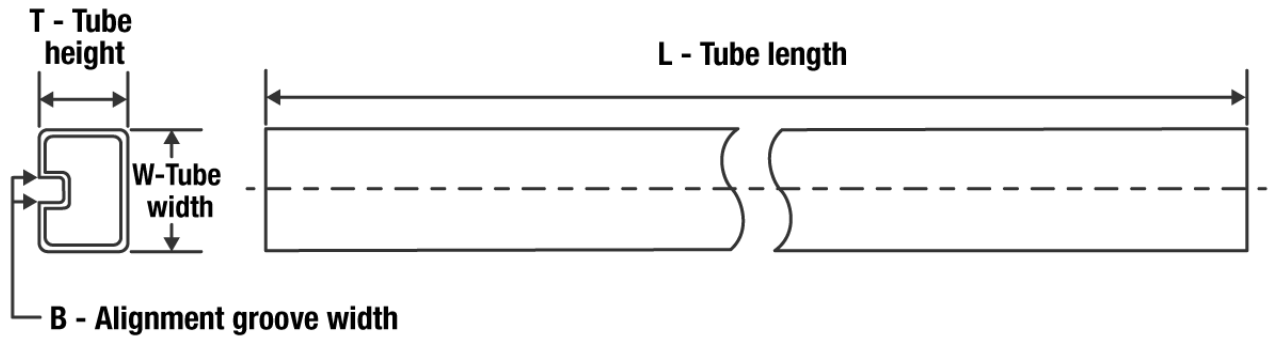**TUBE**


\*All dimensions are nominal

| Device          | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|-----------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| SN65HVD1040HD   | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| SN65HVD1040SHKQ | HKQ          | CFP          | 8    | 25  | 506.98 | 26.16  | 6220   | NA     |

# D0008A



## PACKAGE OUTLINE

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



4214825/C 02/2019

### NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.



# EXAMPLE BOARD LAYOUT

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:8X



SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X

4214825/C 02/2019


NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

# MECHANICAL DATA

HKQ (R-CDFP-G8)

CERAMIC GULL WING

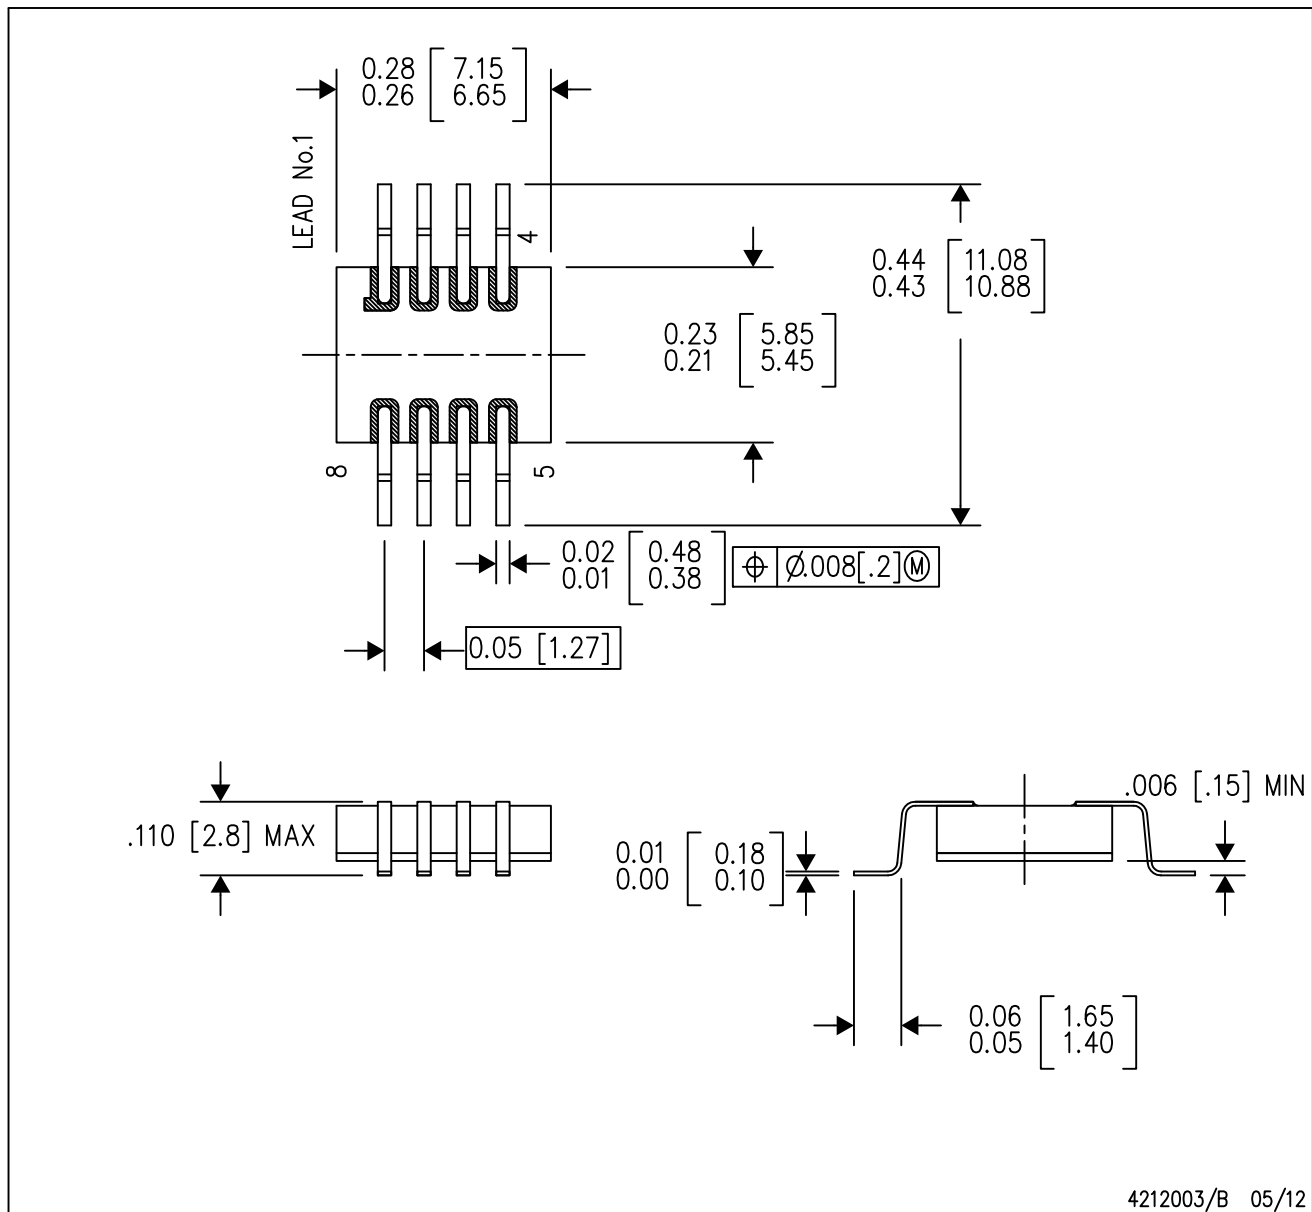

- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - This package can be hermetically sealed with a metal lid.
  - The terminals will be gold plated.
  - Lid is not connected to any lead.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2022, Texas Instruments Incorporated