

NOTES: (b)


1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY; PLATING (SEE PART NO.):
 - PLEASE ADD A for GOLD FLASH over NICKEL (PREFERRED TYPE)
 - PLEASE ADD B for 20µin HARD GOLD over min. 50µin NICKEL
 - PLEASE ADD C for 30µin HARD GOLD over min. 50µin NICKEL
4. THREADED SPACER CLIPS:
 - COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
 - PCB-HOLE: ø3.1± 0,1; PCB THICKNESS 1,6mm
5. COLLARS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
6. P.C.B. HOLE DRILLINGS ON SHEET 2
7. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
8. CONNECTOR IS PART MARKED: 163□16229X CONEC ABC (see note 3)

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND				tolerance		scale: 2:1 (5:1)
				dim. in mm		material: SEE NOTES
				date	name	title: D-SUB MALE 25pos. SOLDER PIN STRAIGHT with threaded spacer clip
				drawn 02.09.2014	Heinrich	
				appd. 03.09.2014	Lehmenkühler	
			norm	d-old	dwg no:	
			4 x b	Ä5325	02.09.2014	Heinrich
			a	Original		
			rev.	description	date	name
			CONEC ®			part no: (b) 163□16229X (see note 3)
						DIN-A3 sh: 1/2

HOLE DRILLINGS

(P.C.B. TOP SIDE)

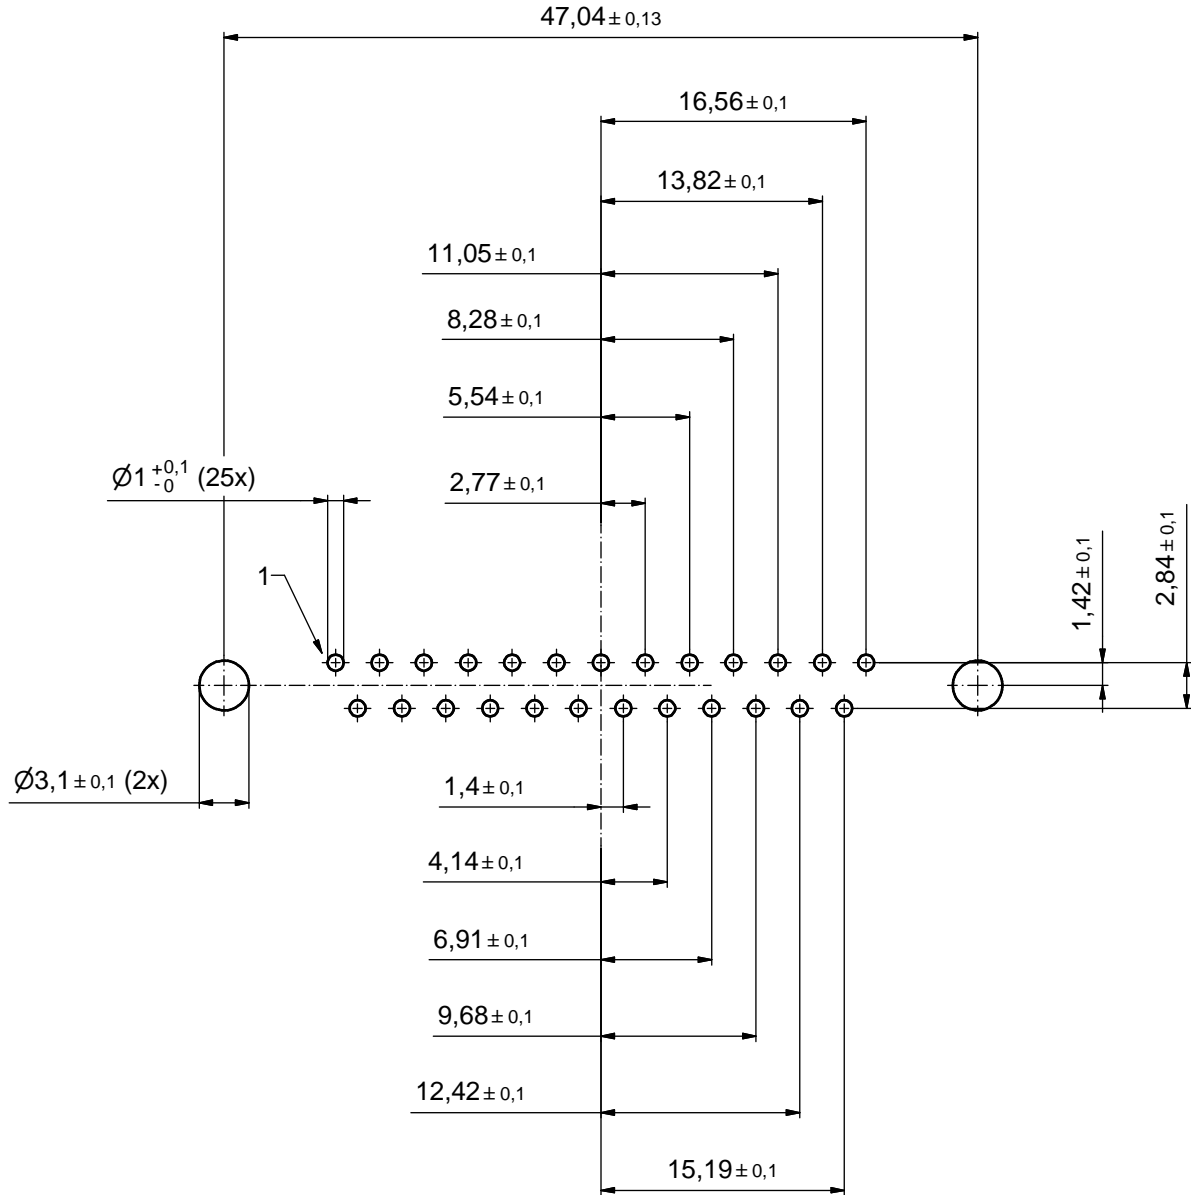

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND				tolerance		scale: 3:1
				date	name	material: SEE SHEET 1
				drawn	02.09.2014	Heinrich
				appd.	03.09.2014	Lehmenkühler
				norm		
				d-old		
				rev.	a	Original
			description			
			date			
			name			
			CONEC [®]			title:
						P.C.B. HOLE DRILLINGS D-SUB MALE 25.pos. SOLDER PIN STRAIGHT with threaded spacer clip
						dwg no:
						16K1A914
						DIN-A3
						sh: 2/2
						part no: SEE SHEET 1