



Electrical specifications

TX Band: 698-942 MHz
RX Band: 1710-2145 MHz
Insertion Loss: 2.0 dB Max
Ripple: 0.2 dB Max
Return Loss: >15 dB
Attenuation 1: 50 dB @ 1710-2145 MHz
Attenuation 2: 50 dB @ 698-942 MHz
Impedance: 50 Ω
Power Handling: 5 W


Mechanical

Dimensions: 32.0 x 26.0 x 7.5 mm

Environmental

Operating Temperature: -20 to +70 °C

Outline Drawing:

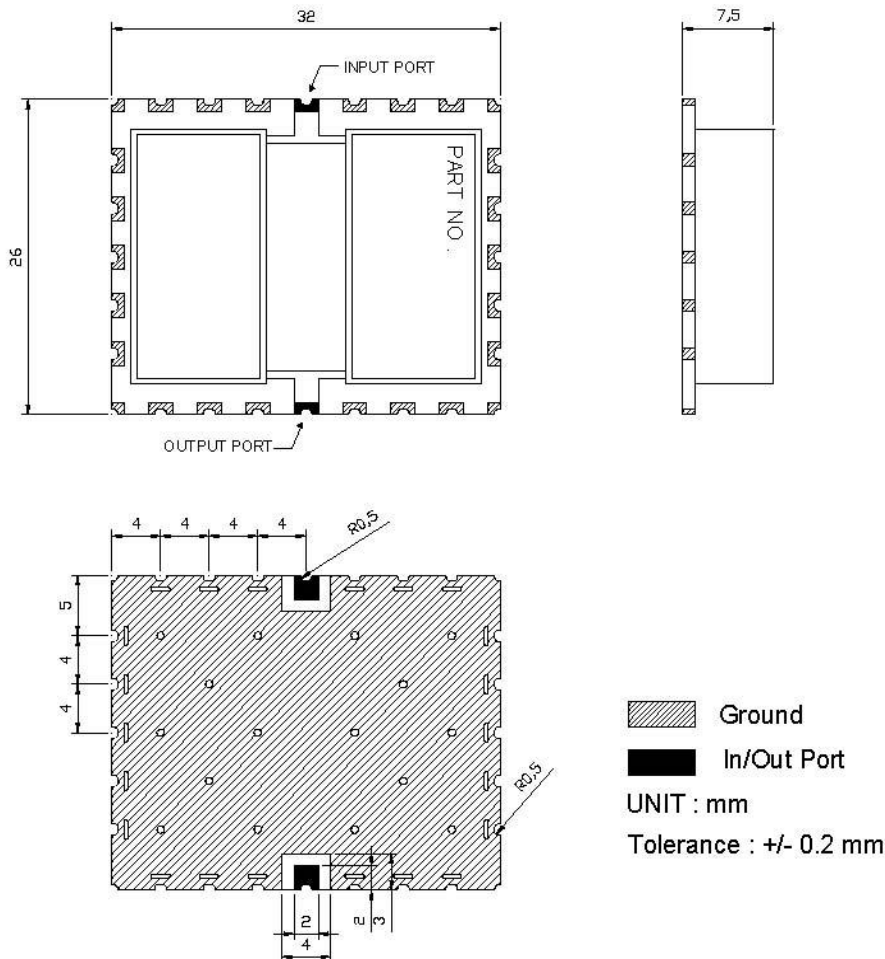



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

**698-942/1710-2145 MHz
Single In/Out Duplexer**

Part Number: AM820-1927C119



Plot:

