



## DIGITAL THREE PHASE ANGLE CONTROLLER

- ▶ Allows to set the voltage applied to different sort of loads with 3 wires, 4 wires or inside the delta wiring:
  - ▶ Resistive (Bulbs, UV and IR lamps, ovens, ...),
  - ▶ Inductive (inductors, transformers, ...),
  - ▶ Motor (motorfan speed control (60 to 100% from the nominal speed),
  - ▶ Rectified (power supplies, ...).
- ▶ Small housing, easy and ready to use.
- ▶ Large mains frequency and voltage range.
- ▶ Fully optoisolated full cycle three phase phase angle controller (balanced currents, less harmonics, ...)
- ▶ Dynamic control voltage range according to the power factor of the load.
- ▶ Softstart and softstop functions (increase lifetime expectancy of the load).
- ▶ Adjustable filter regarding fast input voltage changes (ramps).
- ▶ Motor softstarting functions to control its speed within the stable area.
- ▶ Input-output transfert characteristic linearization function (resistive load).
- ▶ Diagnostic features : Status given on LED and AC/DC switches.

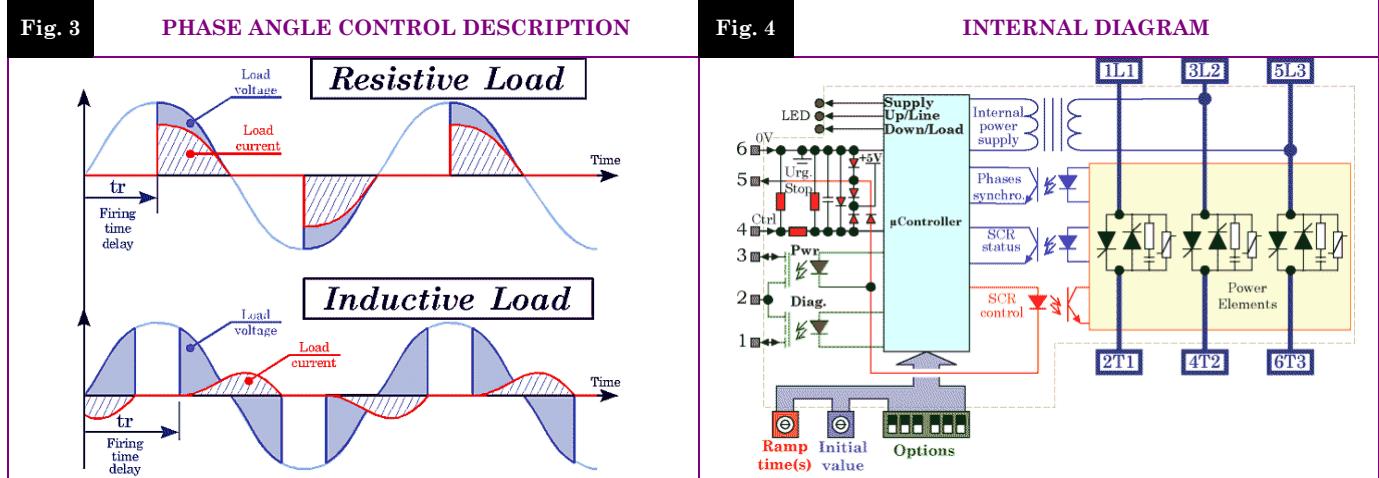

Mains Voltage	Mains Frequency	Max AC-51 Current	Max AC-53a Current	Control Input	Status Outputs	In / Out Insulation	Wire Size	Dimensions (WxHxD)	Weight
200 to 480VAC	40 to 65Hz	50A (125A) (with heatsink)	30A (with heatsink)	4-20mADC	0 to 24VDC 1A AC/DC	4kV	In=2.5mm <sup>2</sup> Out=10mm <sup>2</sup>	100x78x56,5 (mm)	500g

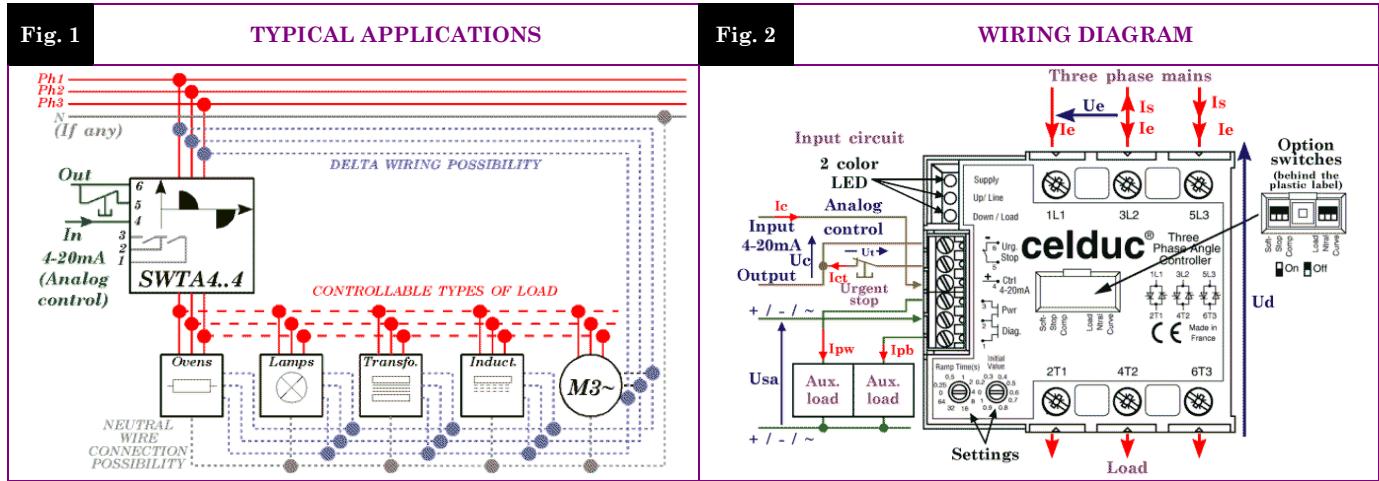

Proud to serve you

## SETTINGS

SETTINGS AND OPTIONS	Label	“Ramp Time (s)”	“Initial Value”	“Soft Stop”	“Comp”	“Load”	“Ntrl”	“Curve”
	Description	Ramp Time(s) 0.5 1 0.25 0.4 0 0.6 64 16 32 8	Initial Value 0.3 0.4 0 0.5 0.9 0.8					
Function	Ramp up time (Softstart and smooth transients)	Initial load voltage (footstep)	Ramp down time	Allows to adapt the control signal range whatever the power factor of the load	Ask the unit to make a softstart up to the max. before analog control.	Tells the unit the load star point is connected to the mains neutral	Tells the unit what kind of in-out response to use (angle or RMS voltage linearity)	
Setting possibilities	White squares = buttons Example : = all switches down (OFF) (factory setting)	Ts= 0 to 64s	Vi=0 to 100 %	   	<b>On (Up)</b>  <b>Off (Down)</b>	<b>On (Up)</b>  <b>Off (Down)</b>	<b>On (Up)</b>  <b>Off (Down)</b>	<b>On (Up)</b>  <b>Off (Down)</b>

## INPUT CHARACTERISTICS

INPUT CIRCUIT	CHARACTERISTIC	LABEL	VALUE		INFO.
	Labels		“4-20mA”	“Urg. Stop”	
Function			Analog control input		Stop the thyristor controls
Control type			DC control current		Opening the connection between 5 & 6
Terminals			4 & 6	5 & 6	
Control voltage range	I <sub>c</sub>		4-20mA	-	
Release and control threshold voltage	I <sub>cmin</sub>		4.5mA	-	
Full power threshold control voltage	I <sub>cmax</sub>		19.5mA	-	
Max. input voltage	U <sub>cmax</sub>		12VDC	6VDC	
Max. reverse voltage	-U <sub>cmax</sub>		12VDC	6VDC	
Release voltage	U <sub>t</sub>			>1.5V	
Input impedance	R <sub>e</sub>		250Ω	-	See fig. 5
Current to switch	I <sub>ct</sub>		-	20mADC	I <sub>ct</sub> =f(U <sub>t</sub> )

STATUS OUTPUTS	Labels		“Diag. “	“Pwr“	
	Terminals		1 & 2	2 & 3	
	Function		Indicates a problem detected in the circuit configuration	Indicates the load is supplied	
	Nominal operating voltage	U <sub>san</sub>	24VAC/DC		
	Operating voltage range	U <sub>sa</sub>	0->28VAC/DC		
	Max. peak voltage	U <sub>sap</sub>	60V		
	Overvoltage protection		Built-in 25V size7 varistors		
	Minimum load current	I <sub>pw/Ipb</sub>	0A		
	Maximum load current	I <sub>pw/Ipb</sub>	1A AC/DC		
	Maximum overload current	I <sub>pw/Ipb</sub>	2.4A AC/DC		
On and off state switch resistance		R <sub>on / Roff</sub>	500mΩ / 100MΩ		
On and off time delay		T <sub>on / Toff</sub>	0.5ms / 2ms		

**OUTPUT CHARACTERISTICS**

CHARACTERISTIC	LABEL	VALUE			INFO.
Mains voltage range	Ue	200 -> 480VAC			
Non-repetitive peak voltage	Uep	1200V			
Overvoltage protection	VDR	Built-in 510V size 14 varistors			
Maximum nominal currents <small>Nota : Wire cross section limited to 10mm<sup>2</sup> (50A) by the terminals</small>	Ie	Resistive I <sub>thmax</sub> AC51	Motor I <sub>emax</sub> AC53a	Motor I <sub>e</sub> AC53a	See fig. 7 for limits Values with heatsink Delta wiring : See installation manual
		50A (125A)	30A	22A	
Maximum line currents in delta wiring	ILine	87A (216A)	52A	38A	
Max motor power	Pe	15kW @400VAC star connection			
Non-repetitive peak overload current (1 cycle of 10ms)	ITSM	2000A			See fig. 8
Melting limit for choosing the protective fuses	I <sup>t</sup>	20000A <sup>2</sup> s			@10ms
Minimum load current	Iemin	100mA			
Maximum leakage current	Ielk	7mA			@400VAC 50Hz
Power factor	Pf	0->1			
Mains frequency range	F	40->65Hz			
Max. off-state voltage rise	dv/dt	500V/μs			
Protection against fast voltage transients		Buit-in RC network			
Max. current rise	di/dt	50A/μs			
On-state voltage drop	Ud	1.4V			@I <sub>th</sub>
Resistive part of the voltage drop	rt	2mΩ			@125°C
Potential part of the voltage drop	Vto	0.9V			@125°C
Maximum junction temperature	Tjmax	125°C			
Junction/case thermal resistance per power element	Rthje	0.25K/W			Total = 3 power elements
Case heatsink thermal resistance	Rthcs	-			
Product only thermal resistance vertically mounted	Rthra	4K/W			@ΔTra=60°C
Heatsink thermal time constant	Tthra	15min			@ΔTra=60°C
Inputs/power outputs insulation voltage	Uimp	4kV			
Input/status outputs insulation voltage	Uied	2.5kV			
Inputs/case insulation voltage	Uimp	4kV			
Status outputs/case insulation voltage	Uimp	4kV			
Isolation resistance	Rio	1GΩ			
Isolation capacitance	Cio	<8pF			
Storage ambient temperature	Tstg	-40->+100°C			
Operating ambient temperature	Tamb	-40->+90°C			See fig. 7
Max. heatsink temperature	Tc	100°C			

**INTERNAL POWER SUPPLY**

INTERNAL POWER SUPPLY	CHARACTERISTIC	LABEL	VALUE	INFO.
Terminals			3L2 & 5L3	
Mains voltage range	Ue		200->480VAC	
Consumption	Is		1mA typical	
Mains frequency range	F		40-65Hz	
Turn-on time	tm		100ms	

**GENERAL INFORMATION**

CONNEC- TIONS	Connections	Power	Input terminal block	
Screwdriver advised		Posidriv 2 or 0.8 x 5.5mm	0.8 x 2mm	
Min and max tightening torque		1.8->3N.m		
Number and cross section of the wires		2 x 1.5->6mm <sup>2</sup> (10mm <sup>2</sup> without ferrule)	1 x 2.5mm <sup>2</sup>	
Screwdriver for settings			0.8 x 2mm	

MISC.	Housing	UL94V0	
Mounting		Screwed	
Noise level		Low audible vibrations	
Weight		500g	

**STANDARDS**

GENERAL	Standards	EN60947-4-2 & EN60947-4-3	
	Protection level	IP2L0	
	Protection against direct touch	Accordin to V.D.E. 160 part 100 : Back hand and finger safety	
	CE marking	Yes	
	UL, cULUS and VDE approvals	Pending	

E.M.C. IMMUNITY	TYPE OF TEST	STANDARD	LEVEL	EFFECT
E.S.D. (Electrostatic discharges)	EN61000-4-2		8kV (air) 4kV (touch)	No effect
Radiated electromagnetic fields	EN61000-4-3		10V/m	No effect
Fast transients bursts	EN61000-4-4		2kV direct coupling on the power side 2kV coupling by clamp on the input side	No effect
Electric chocks	EN61000-4-5		1kV direct coupling differential mode (input and output) 2kV direct coupling common mode (input and output)	No effect
Voltage drop	EN61000-4-11		-	

E.M.C. EMISSION	Radiated and conducted disturbances	NFEN55011	The conducted or radiated disturbances generated by solid state relays depend on the wiring and load configuration. The test method recommended by the European standards and concerning electromagnetic compatibility leading to results far from reality, we decided to advise our customer in order to adapt their filtering scheme to their application. Please refer to the SVTA - SWTA installation manual.	
--------------------	-------------------------------------	-----------	---	--

## CHARACTERISTIC CURVES

Fig. 5

INPUT CHARACTERISTIC

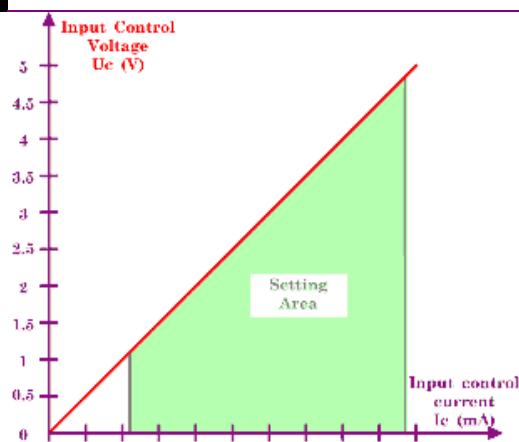


Fig. 6

CURRENT AND ON RESISTANCE VS TEMPERATURE

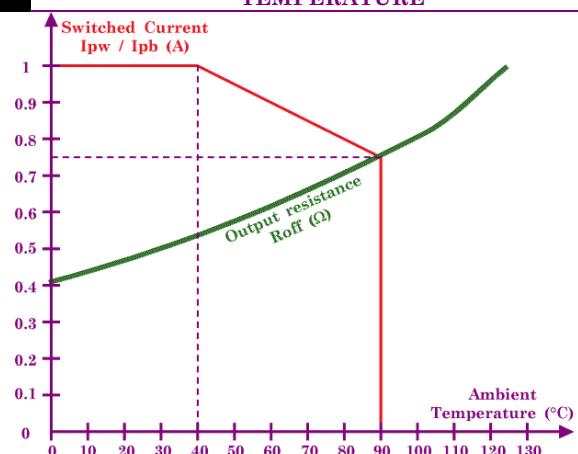


Fig. 7

POWER DISSIPATED AND LOAD CURRENT LIMIT VS TEMPERATURE


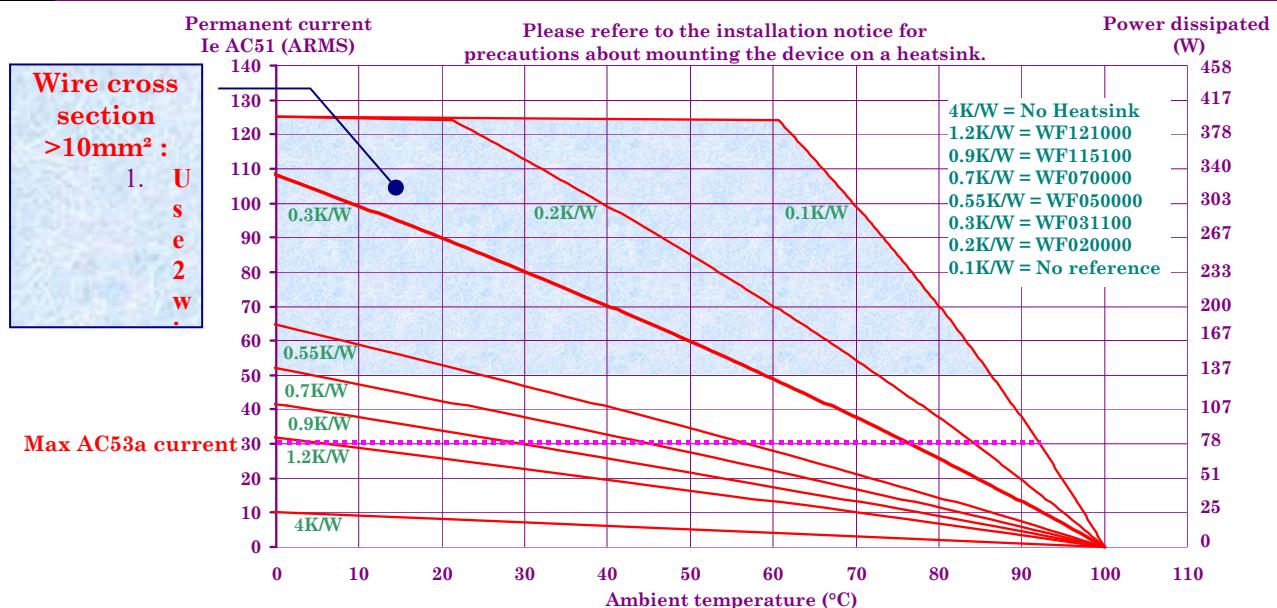


Fig. 8

CURRENT OVERLOAD CHARACTERISTIC (ITSM PER POWER ELEMENT)

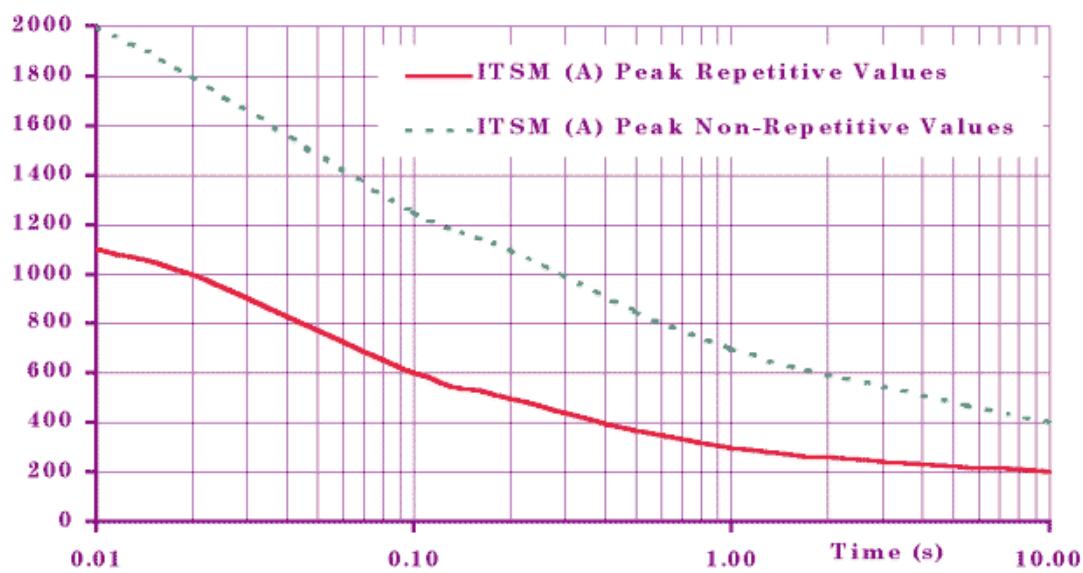

## DIMENSIONS AND ACCESSORIES

Fig. 9

DIMENSIONS

