

AMPMODU | AMPMODU Headers

TE Internal #: 4-103336-0 PCB Mount Header, Vertical, Board-to-Board, 3 Position, 2.54 mm [. 1 in] Centerline, Unshrouded, Gold, Through Hole - Press-Fit, AMPMODU Headers

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Vertical

Connector System: Board-to-Board

Number of Positions: 3

Number of Rows: 1

Features

Product Type Features

PCB Connector Assembly Type

Connector System

Header Type

PCB Mount Header

Board-to-Board

Unshrouded

Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Vertical
Number of Positions	3
Number of Rows	1
Board-to-Board Configuration	Parallel
Electrical Characteristics	
Insulation Resistance	5000 MΩ
Dielectric Withstanding Voltage (Max)	750 Vrms
Body Features	
Primary Product Color	Black
Contact Features	
Mating Square Post Dimension	.64 mm[.025 in]

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Board-to-Board, 3 Position, 2.54 mm [.1 in] Centerline, Unshrouded, Gold, Through Hole - Press-Fit, AMPMODU Headers



	100 – 200 μin
Contact Shape & Form	Square
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin-Lead
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Contact Type	Pin
Contact Current Rating (Max)	3 A
Termination Features	
Square Termination Post & Tail Dimension	.64 mm[.025 in]
Termination Post & Tail Length	6.35 mm[.25 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Mechanical Attachment	
PCB Mount Retention Type	Action/Compliant Tail
Mating Alignment	Without
PCB Mount Retention	With
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	2.54 mm[.1 in]
Housing Material	Thermoplastic
Dimensions	
PCB Thickness (Recommended)	1.57 mm[.062 in]
Usage Conditions	
Housing Temperature Rating	Standard
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Signal
Circuit Application Industry Standards	Signal
	Signal CSA, UL

PCB Mount Header, Vertical, Board-to-Board, 3 Position, 2.54 mm [.1 in] Centerline, Unshrouded, Gold, Through Hole - Press-Fit, AMPMODU Headers



UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	100
Packaging Type	Tray
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: Pb (40% in Component) Aticle Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


PCB Mount Header, Vertical, Board-to-Board, 3 Position, 2.54 mm [.1 in] Centerline, Unshrouded, Gold, Through Hole - Press-Fit, AMPMODU Headers





Also in the Series AMPMODU Headers



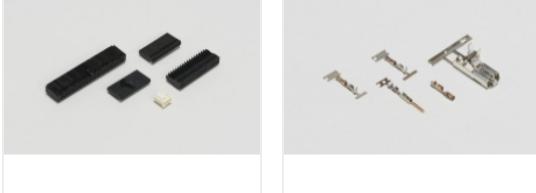

Wire-to-Board Connector AssembliesWire-to-B& Housings(5)

Wire-to-Board Connector Contacts(65)

Customers Also Bought



TE Part #147444-1 SOCKET,MIN-SPR AU-AU SER-1

Documents

Product Drawings 03 MODII HDR SRST UNSHRD A/PIN

English

CAD Files Customer View Model ENG_CVM_4-103336-0_H.3d_igs.zip

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Board-to-Board, 3 Position, 2.54 mm [.1 in] Centerline, Unshrouded, Gold, Through Hole - Press-Fit, AMPMODU Headers



English

Customer View Model ENG_CVM_4-103336-0_H.3d_stp.zip

English

Customer View Model

ENG_CVM_4-103336-0_H.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English